

LOCATION MAP

ADJOINING PROPERTIES (LANDS N/F)


- 1. HUCKELBRIDGE ARTHUR A JR HUCKELBRIDGE BEVERLY KAPP, 321 EAGLE ROAD, 36-12-014
- 2. 205 STRAFFORD AVENUE LLC 335 EAGLE ROAD, 36-11-349:005
- 3. RICHARD C & JENNIFER SARHADDI 337 EAGLE ROAD, 36-11-349:004
- 4. ALAN J SILVER, 201 STRAFFORD AVENUE 36-11-349:003
- 5. ANUJEET & TARA SAREEN 205 STRAFFORD AVE, 36-11-349
- 6. SATTERFIELD DAVID & MORRISSEY MARY ANNE, 207 STRAFFORD AVE, 36-11-349:002
- 7. THOMASON ROBERT I & THOMASON TRAUDI, 211 STRAFFORD AVENUE, 36-11-350
- 8. BROOKS JOHN W & KATHRYN R, 227 STRAFFORD AVENUE, 36-11-351
- 9. GRAY JEREMY P & CONTRERAS TERESA PAOLA 231 STRAFFORD AVE, 36-11-352
- 10. THE TRUSTEES REVOCABLE TRUST C/O HAMILTON REVOCABLE TRUST, 235 STRAFFORD AVE. 36-11-353
- 11. WHITMORE CHRISTOPHER M, 428 WEST AVE, 36-11-355
- 12. MORGAN STACEY P & THEODORE S, 424 WEST AVENUE, 36-12-002
- 13. BROWN GWENDOLYN J, 420 WEST AVE, 36-12-004
- 14. TURSI PAUL ANDREW & TURSI KATHRYN M, 416 WEST AVE, 36-12-006
- 15. MAXFIELD HONOR CHAPIN, 412 WEST AVE, 36-12-008
- 16. CAREY DAVID & ELIZABETH, 408 WEST AVE, 36-12-010
- 17. TORUNIAN MARY BETH & TORUNIAN VAHE, 404 WEST AVE, 36-12-012
- 18. HAMILTON DORRANCE H ETAL TRSTEES REVOCABLE TRUST, 225 STRAFFORD AVE, 36-11-347:001

EAGLE ROAD SUBDIVISION

PRELIMINARY SUBDIVISION & LAND DEVELOPMENT PLAN SET



MAP SHOWING FEATURES WITHIN 300' OF PROPERTY LINE



CIVIL ENGINEER: SITE ENGINEERING CONCEPTS, LLC

ATTN: ROBERT M. LAMBERT, P.E. P.O. BOX 1992 SOUTHEASTERN, PA 19399 P: (610) 240-0450 E: RLAMBERT@SITE-ENGINEERS.COM

LANDSCAPE ARCHITECT: GLACKIN THOMAS PANZAK, INC.

ATTN: BERNARD S. PANZAK, RLA PAOLI EXECUTIVE GREEN 1, SUITE 300 PAOLI, PA 19301 P: (610) 408-9011 E: BPANZAK@GLACKINPLAN.COM

APPLICANT/OWNER: THE TRÚSTEES OF THE DORRANCE HAMILTON 3/15/1996 REVOCABLE AGREEMENT OF TRUST

ATTN: CHARLES HOUDER 551 W LANCASTER AVE, SUITE 307 HAVERFORD, PA 19041 P: (610) 389-0305 E: DCH@HAVERFORDPROPERTIES.COM


DRAWING SCHEDULE

- 1. COVER SHEET
- 2. EXISTING CONDITIONS PLAN
- 3. DEMOLITION PLAN
- 4. RECORD PLAN
- 5. POST CONSTRUCTION STORMWATER PLAN
- 6. DURING CONSTRUCTION E&S
- 7. PCSM DETAILS
- 8. CONSTRUCTION DETAILS
- 9. E&S DETAILS
- 10. PROFILES

DAVID J. SANDERS

DAVID J. SANDERS, P.E. PE057436

- 11. LP-1 LANDSCAPE PLAN
- 12. LP-2 LANDSCAPE DETAILS
- 13. LI-1 LIGHTING PLAN
- 14. LI-2 LIGHTING DETAILS

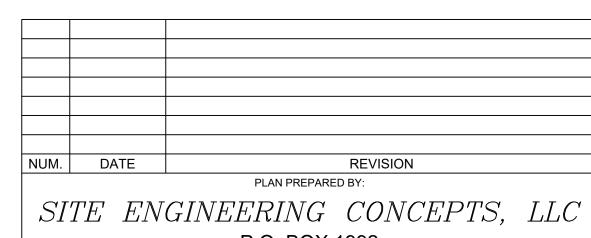

P.O. BOX 1992

SOUTHEASTERN, PA 19399 F: 610-240-0451 E:INFO@SITE-ENGINEERS.COM P: 610-240-0450

HAMILTON PROPERTIES

EAGLE ROAD **WAYNE, PA 19087** RADNOR TOWNSHIP DELAWARE COUNTY


COVER SHEET


SHEET 1 of 14


SCALE: 1" = 200'


PENNSYLVANIA


DATE: AUGUST 27, 2020

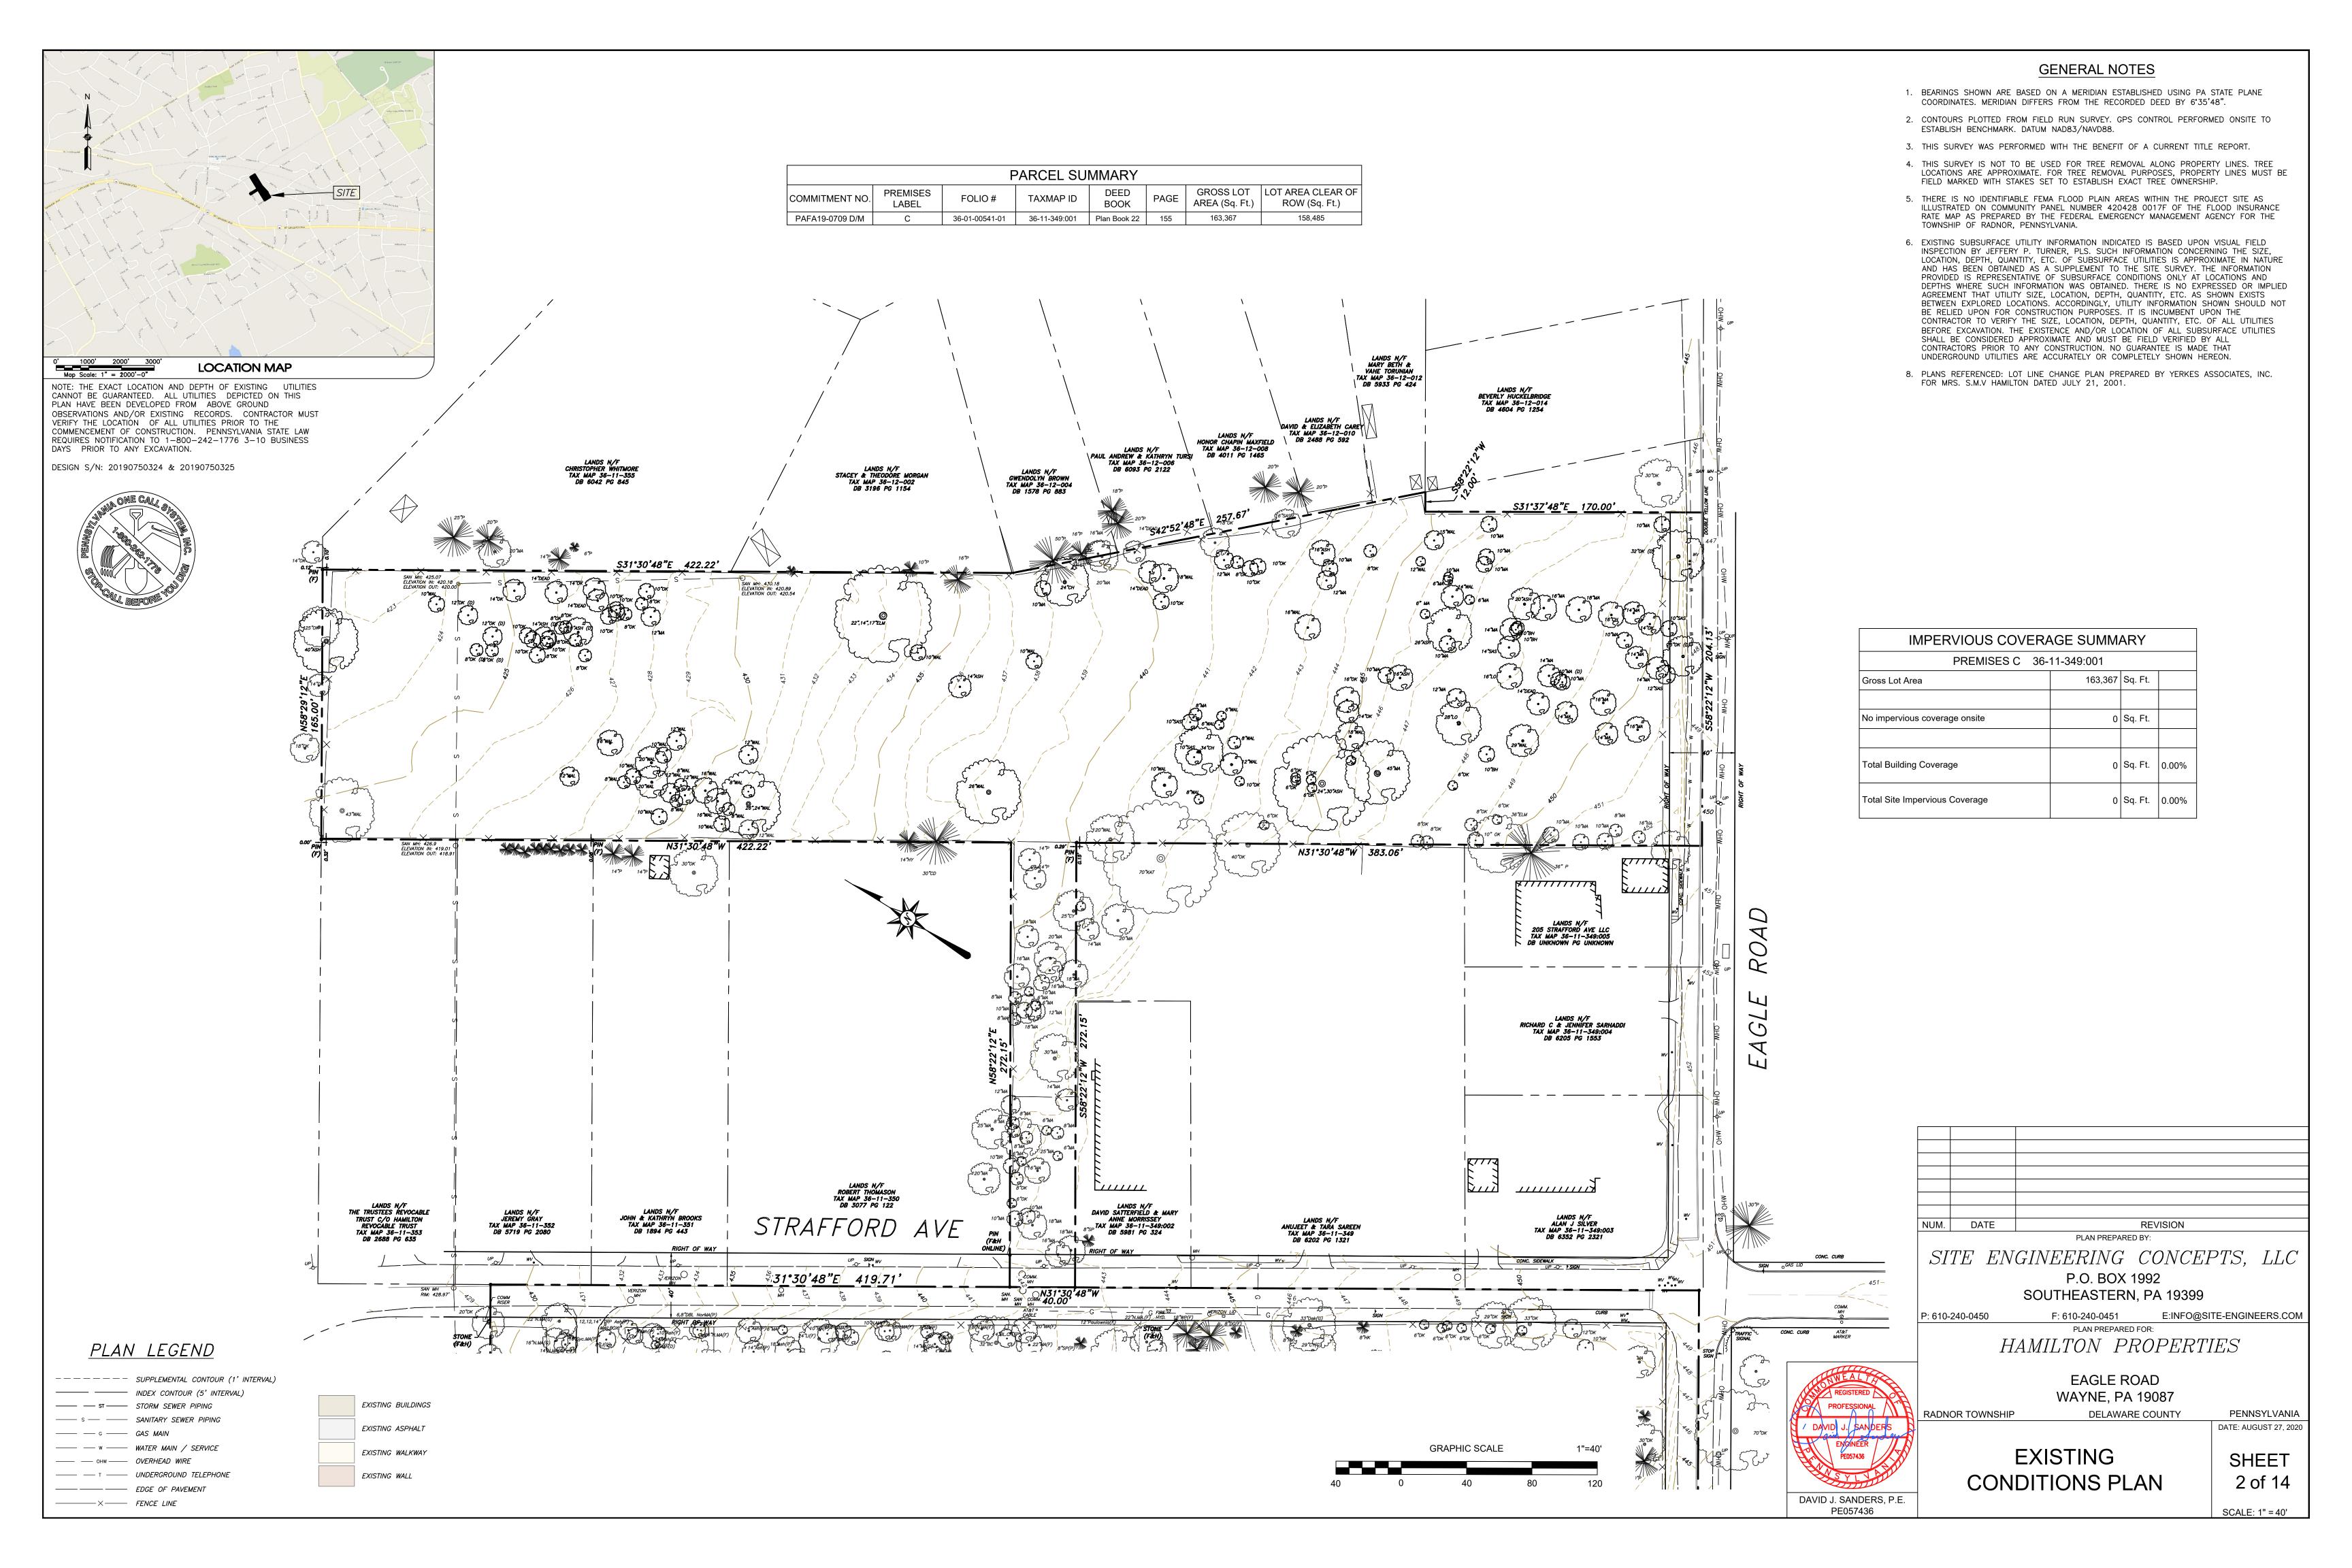


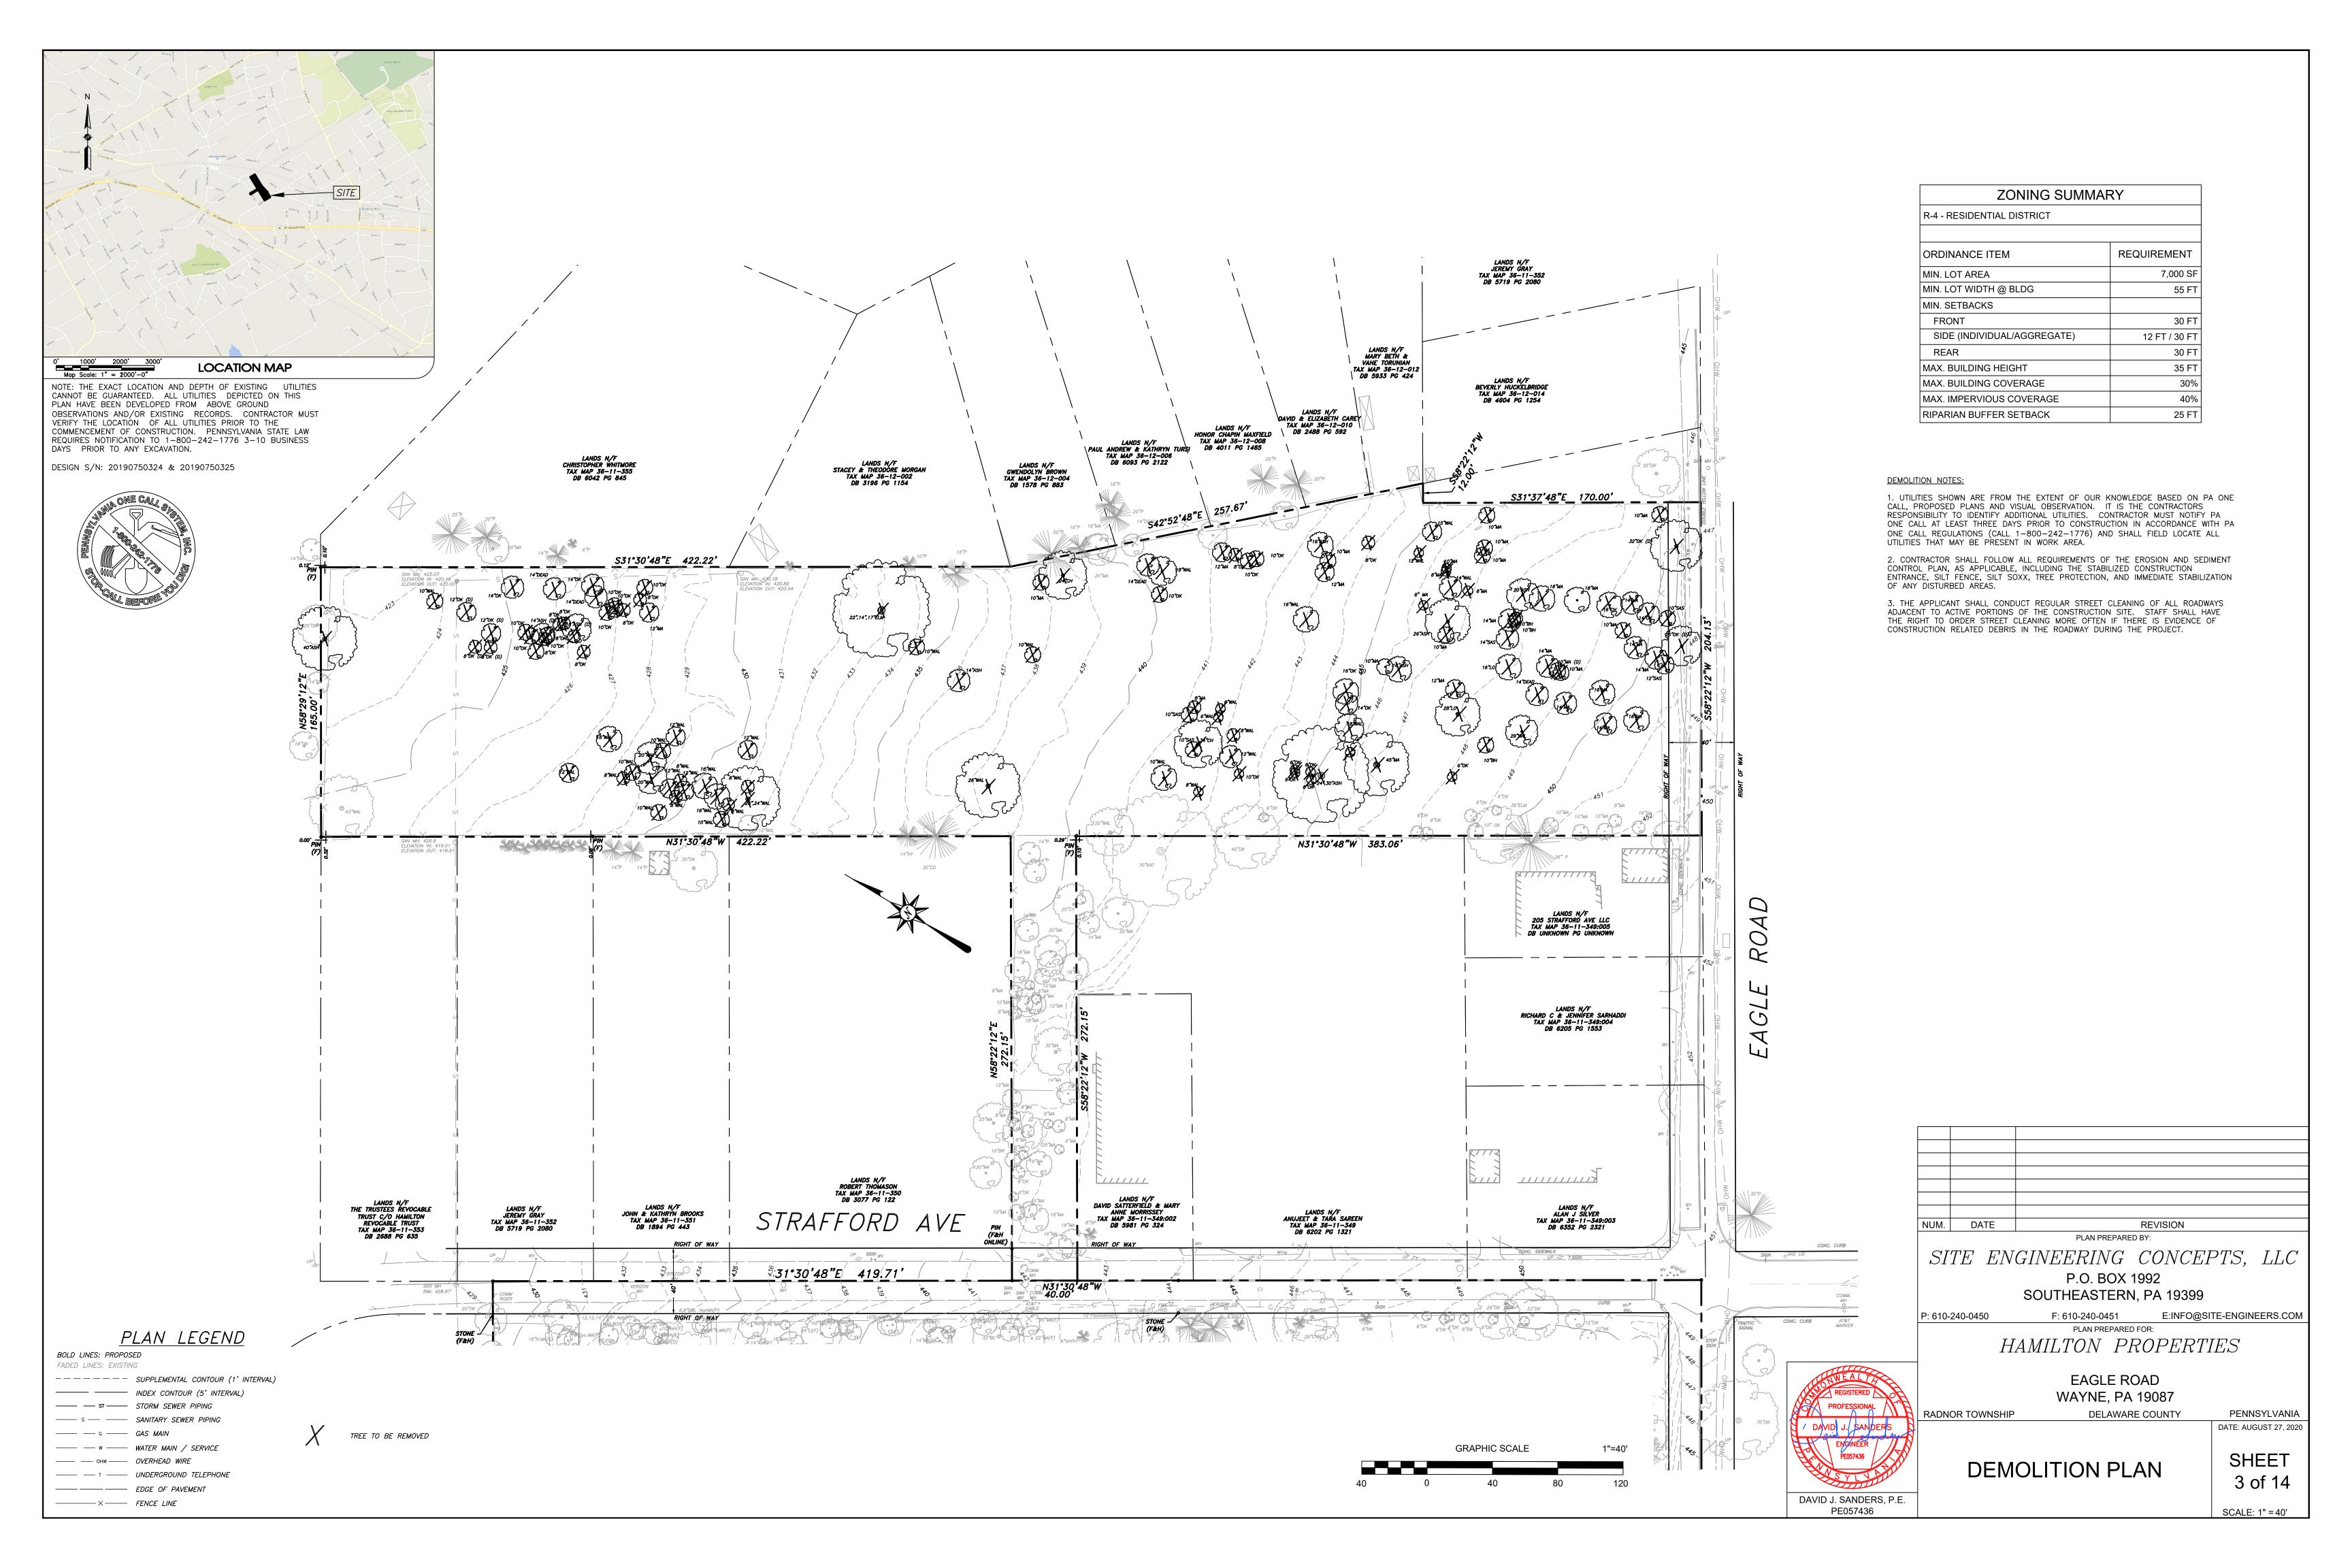


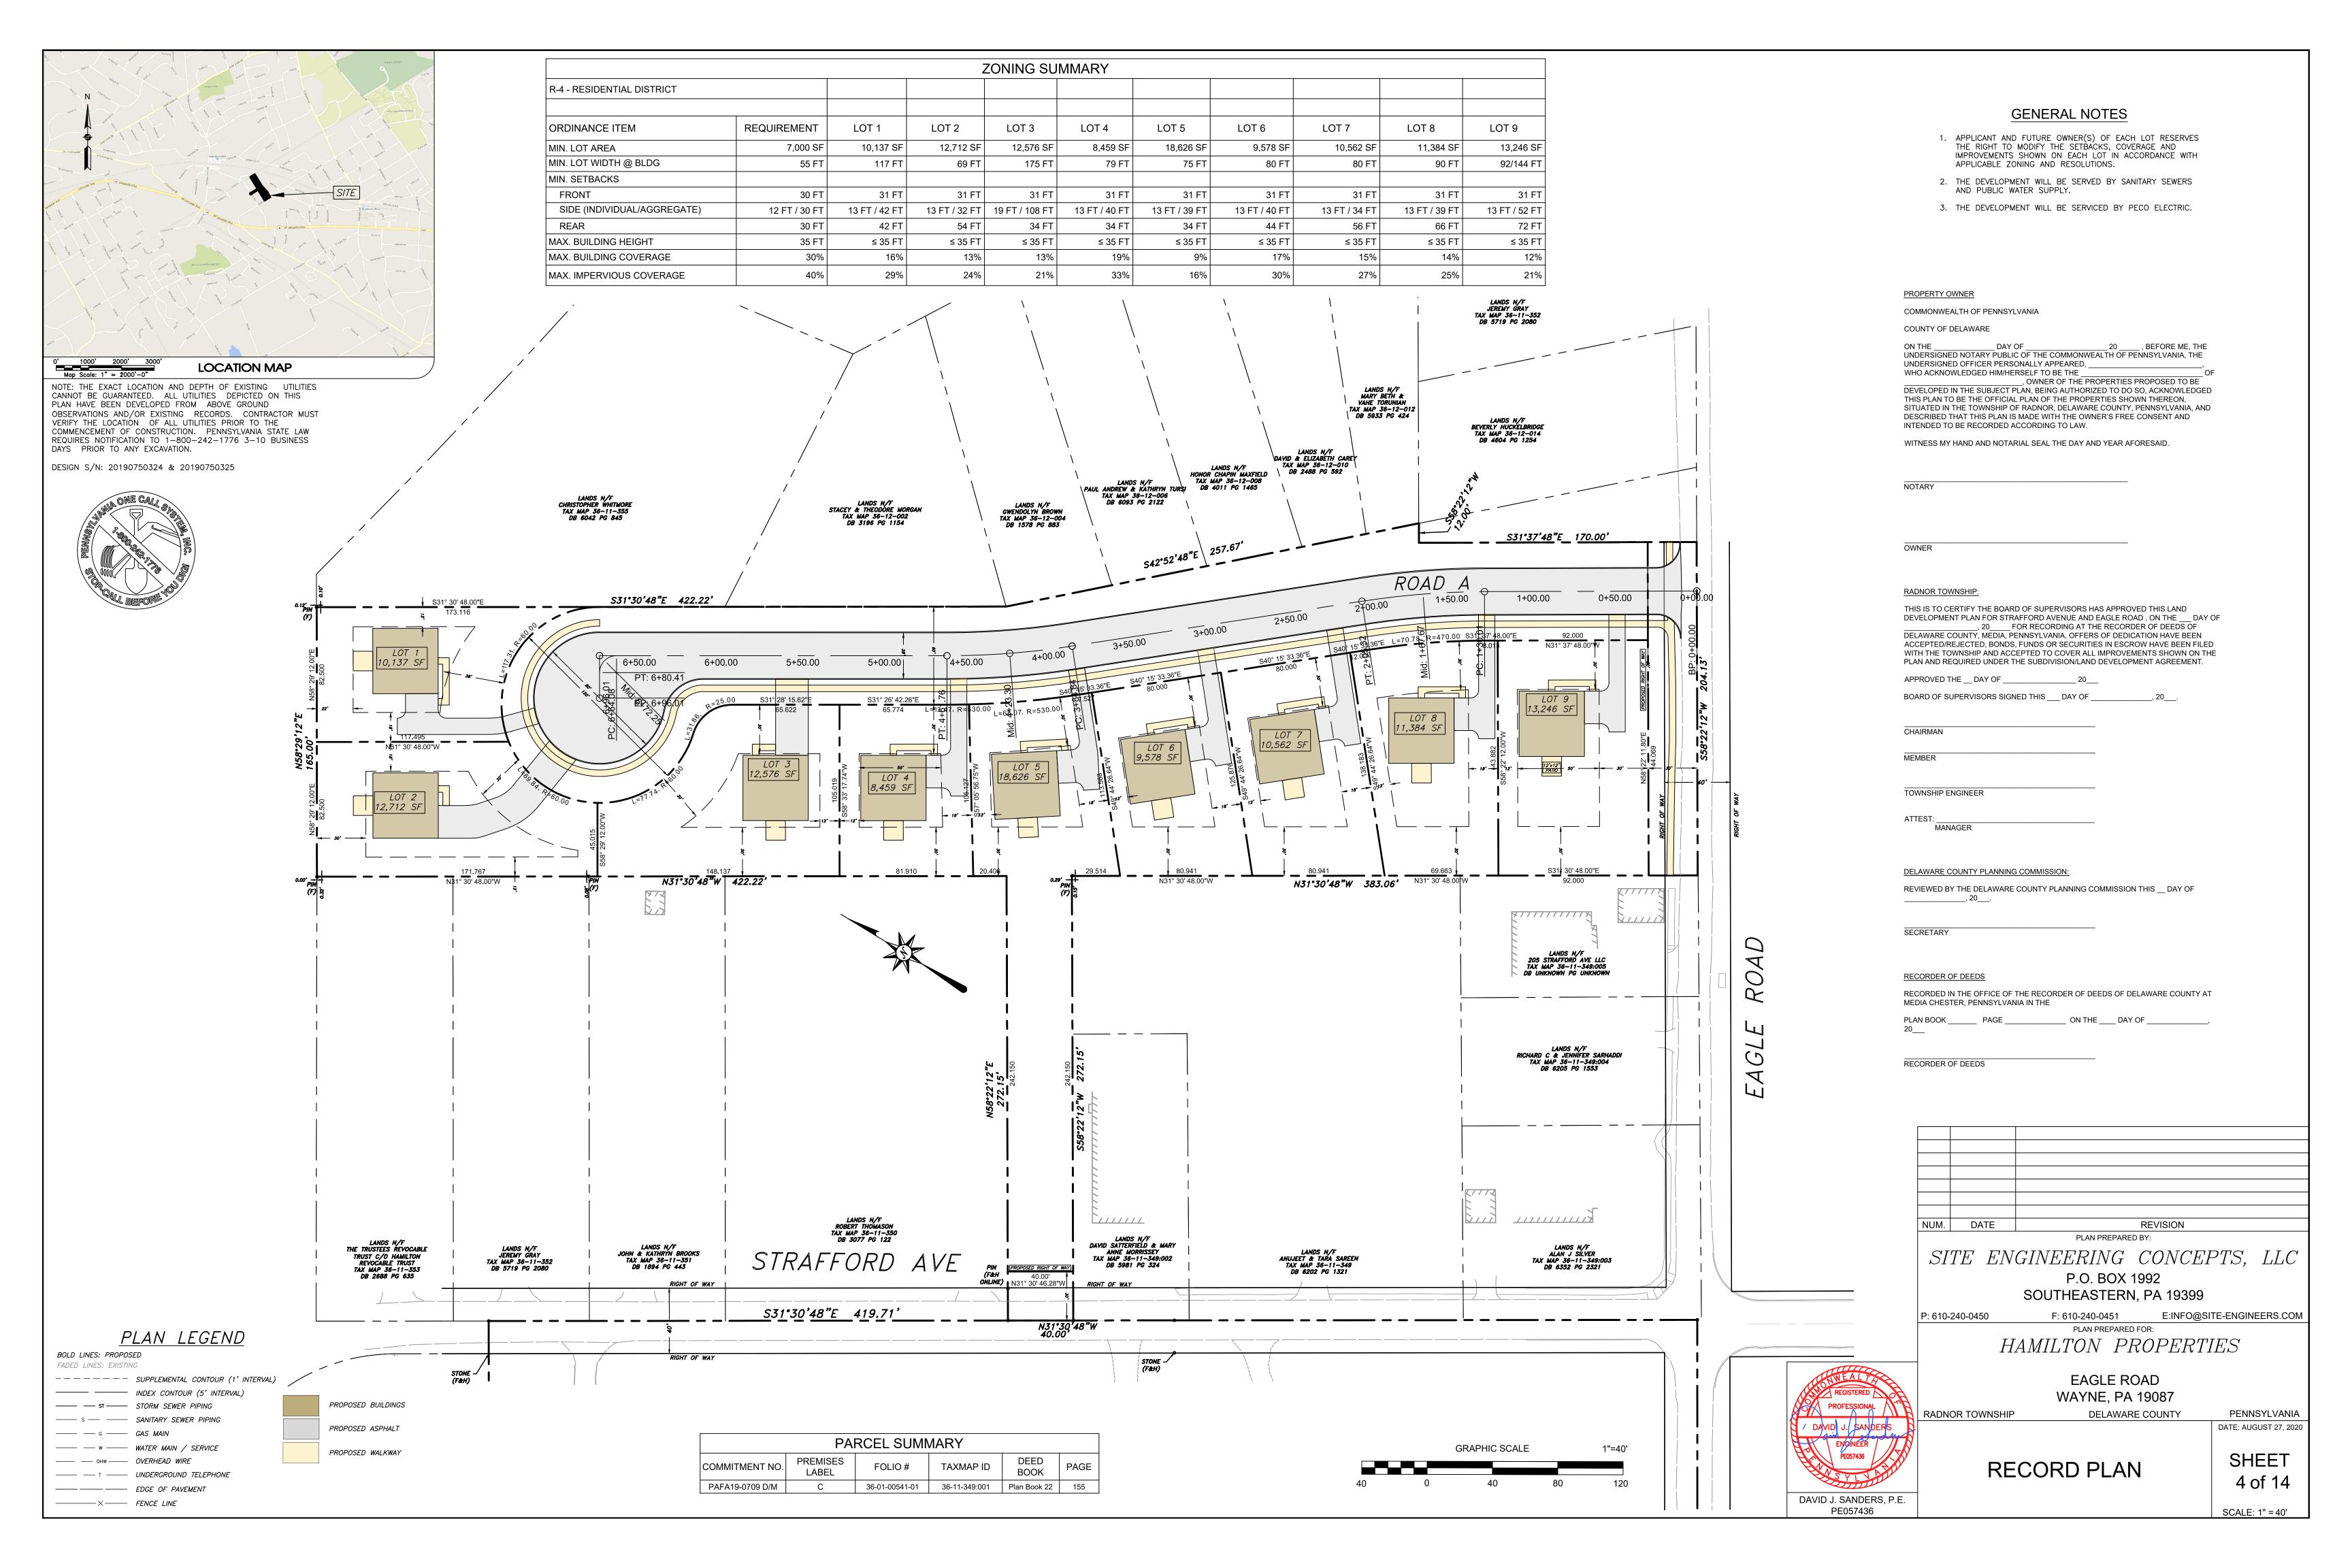


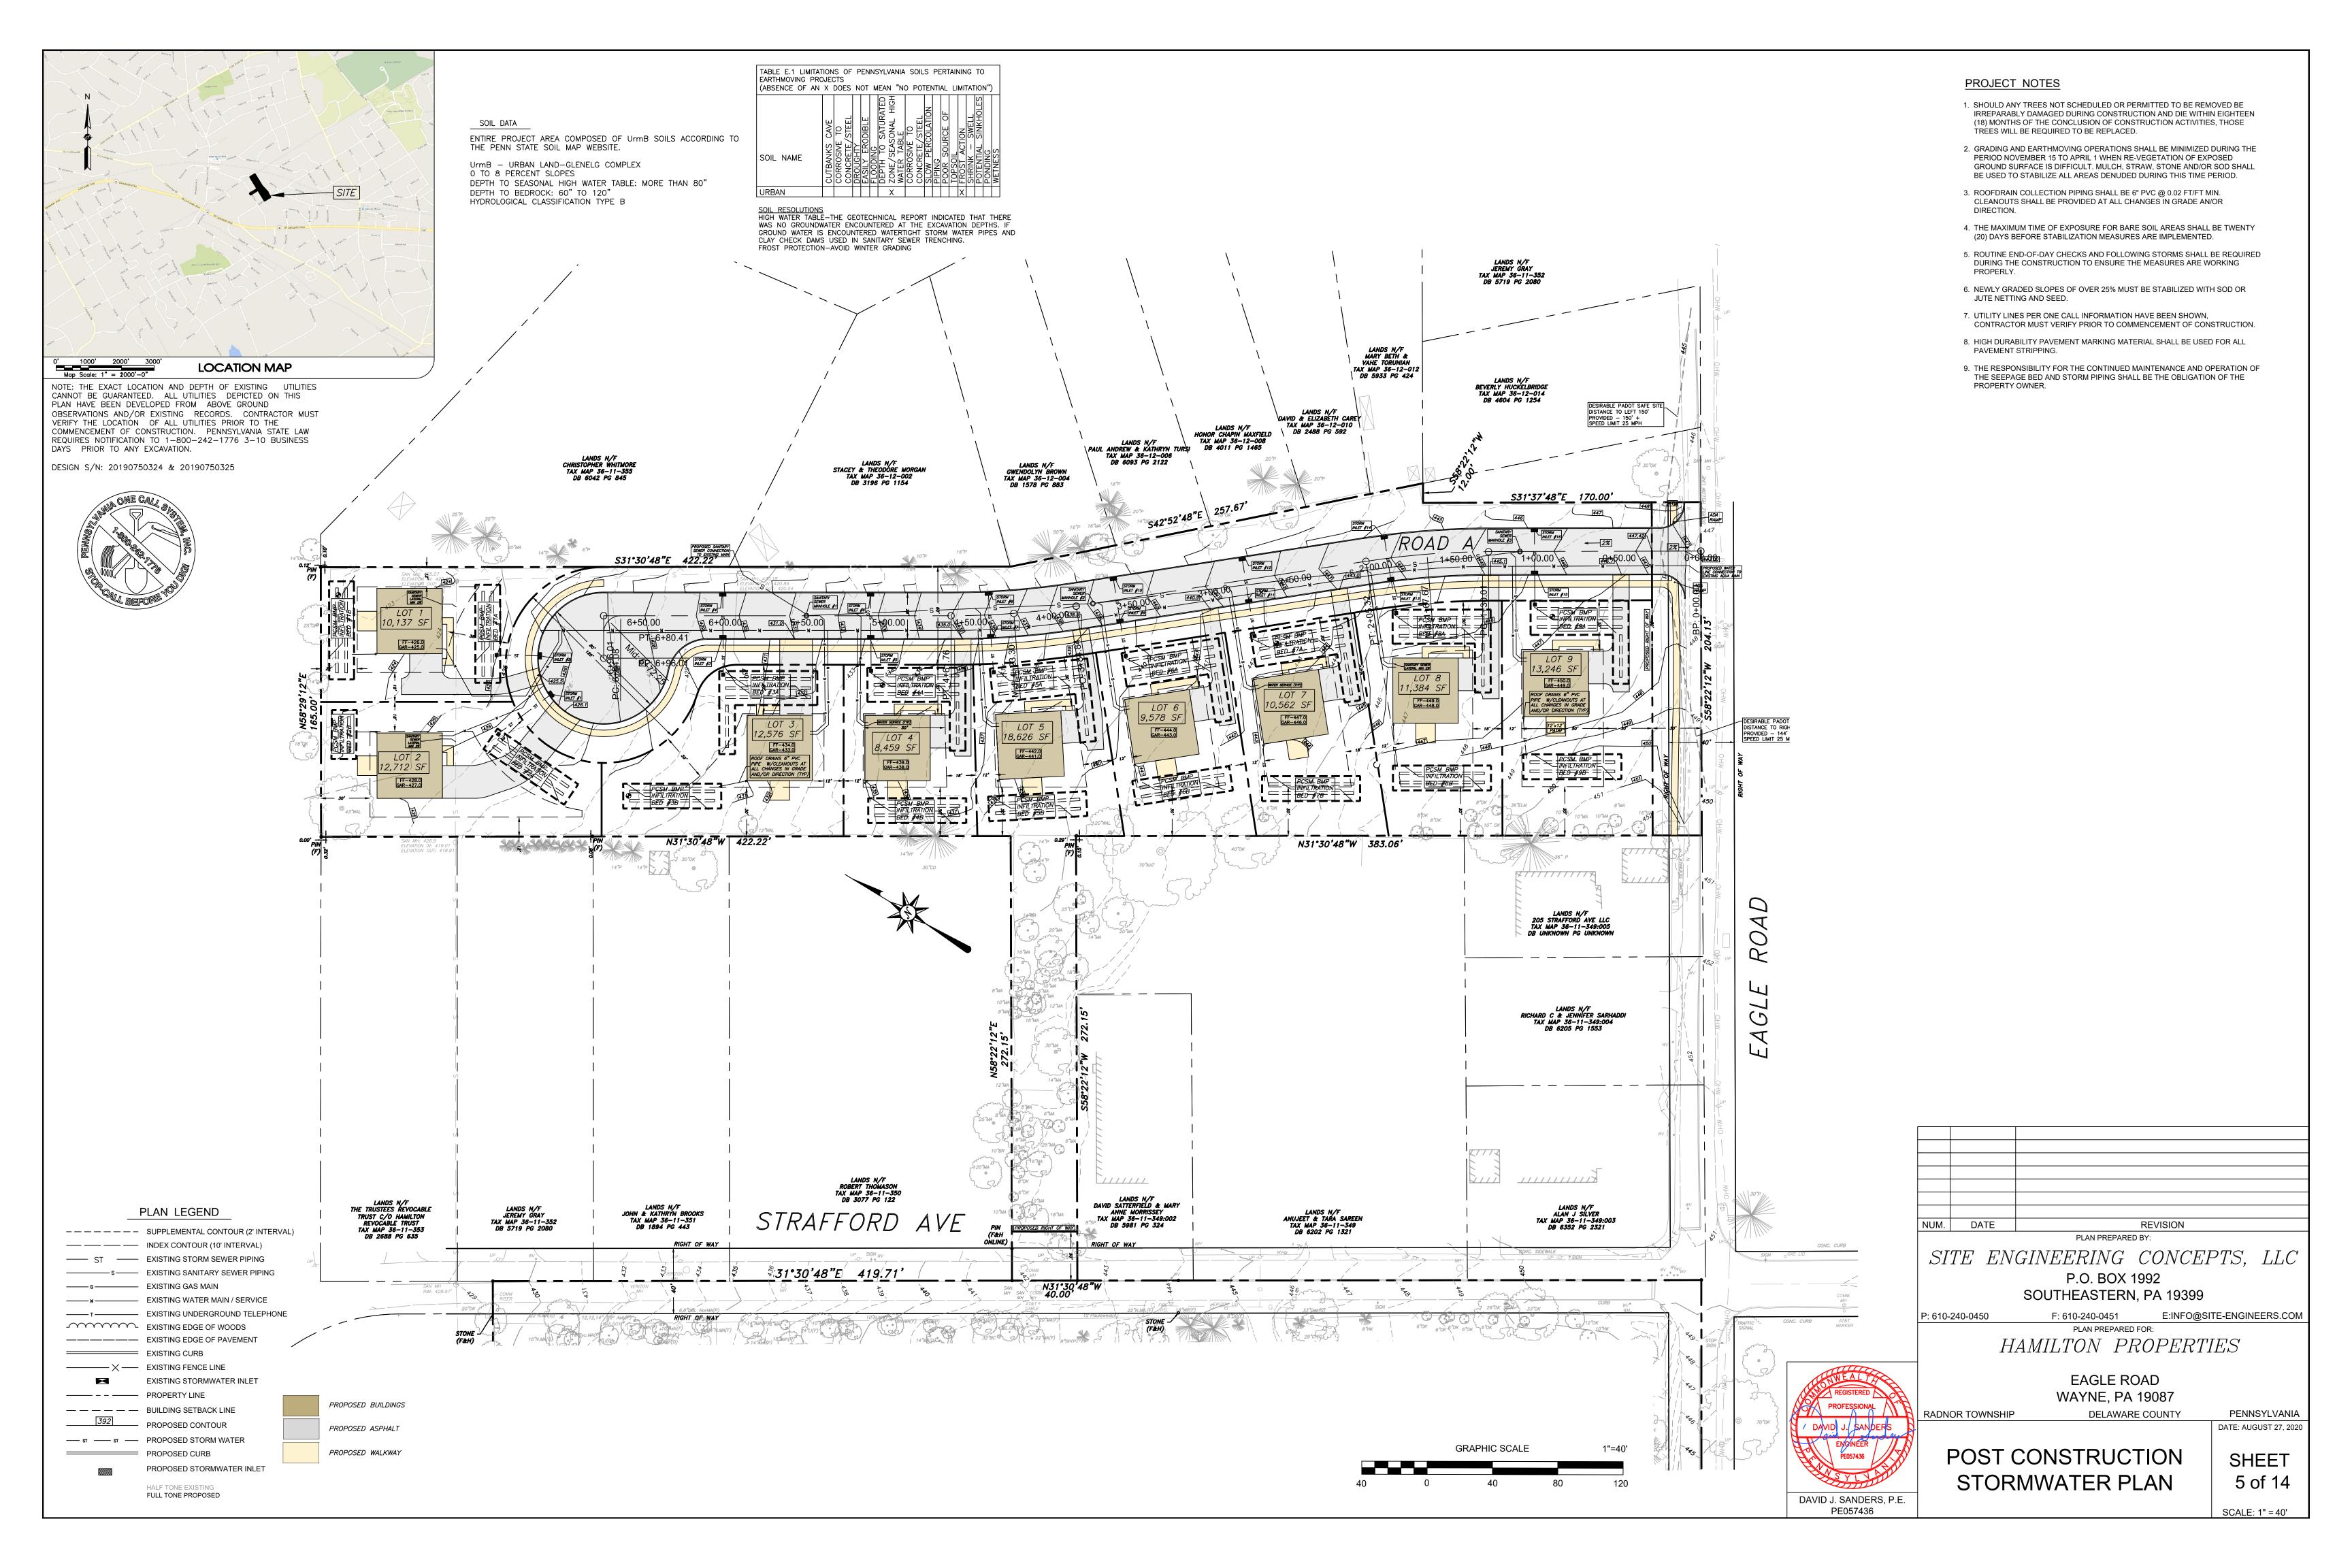


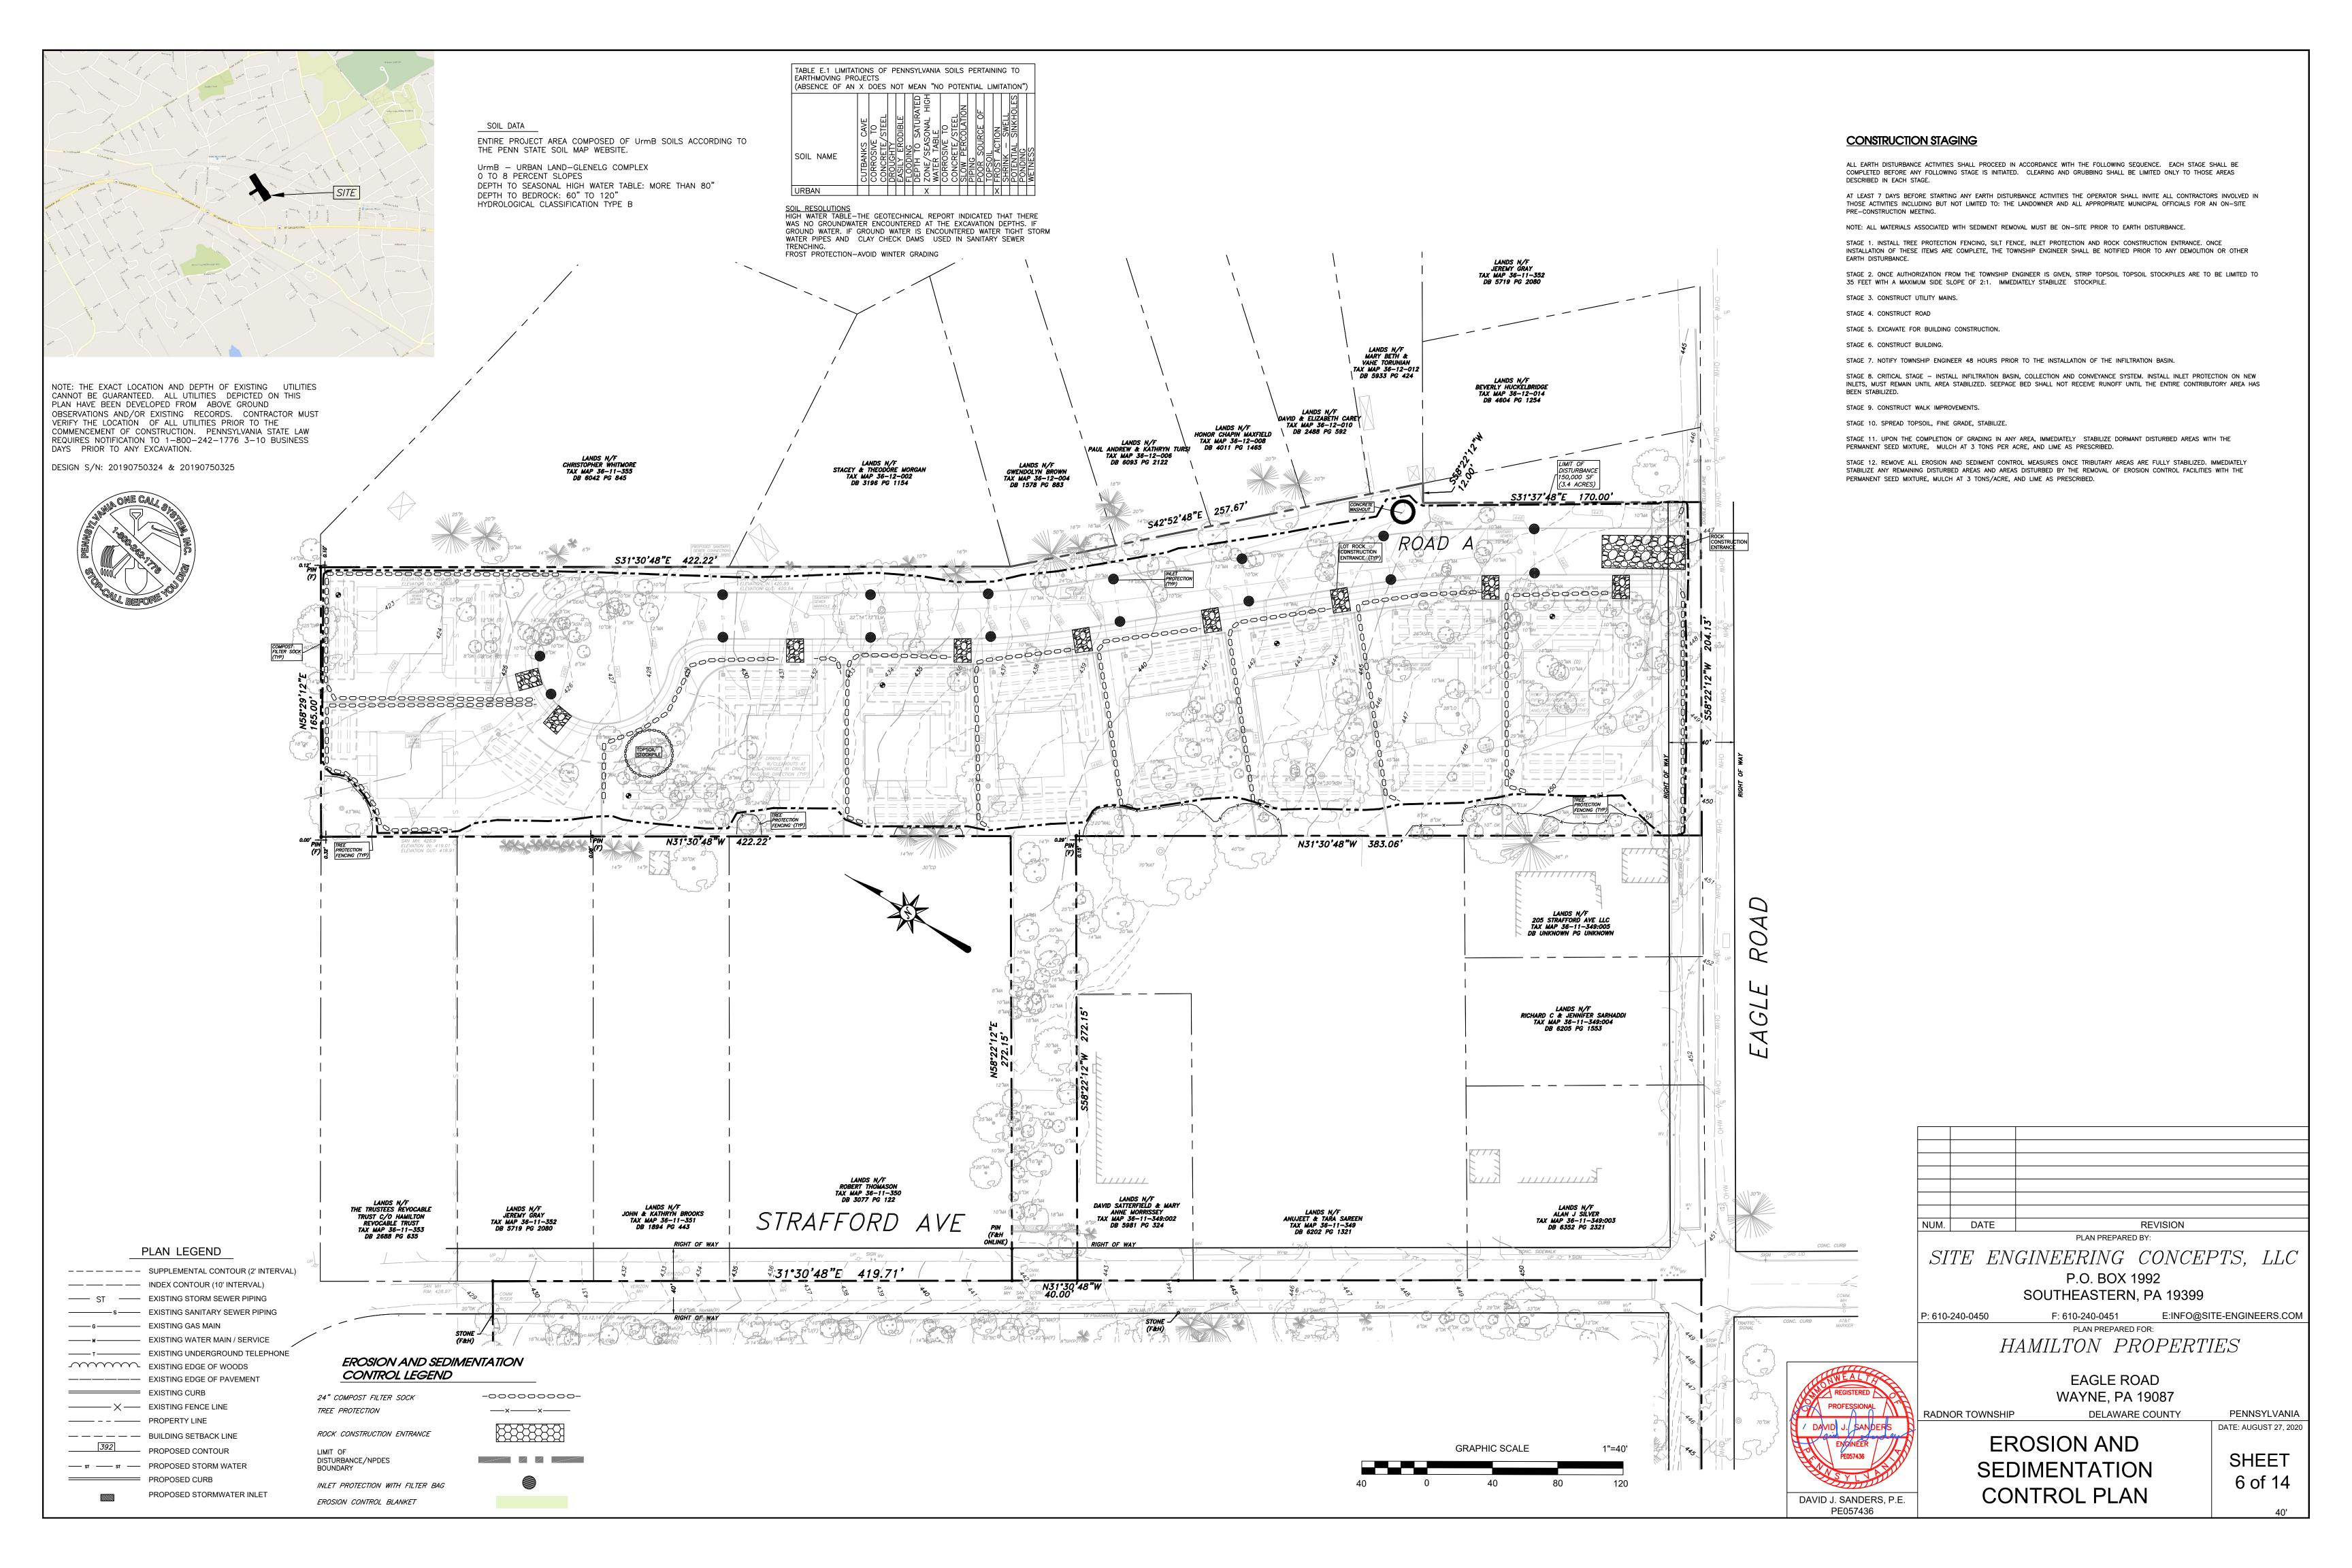

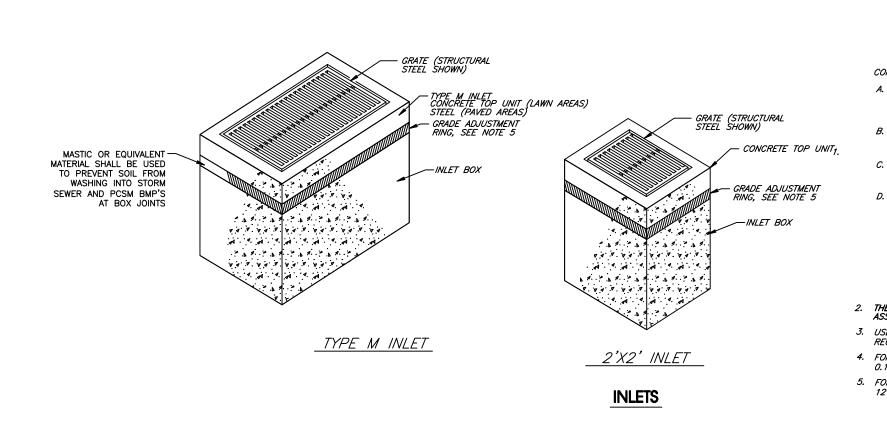


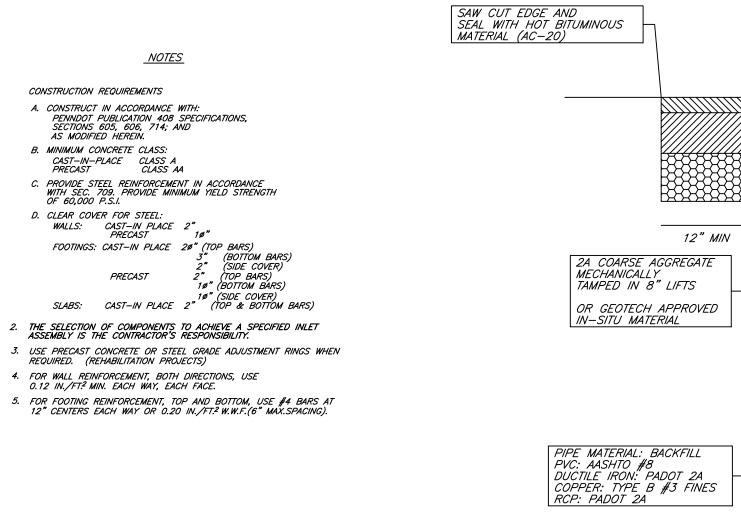


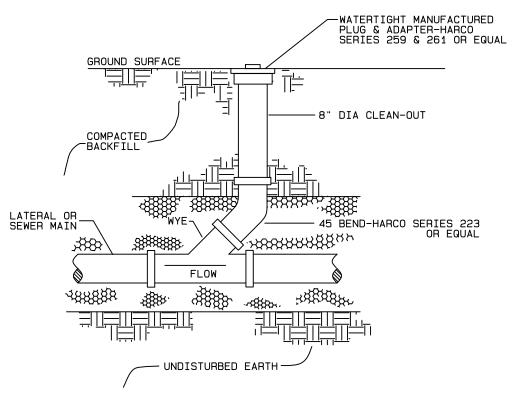


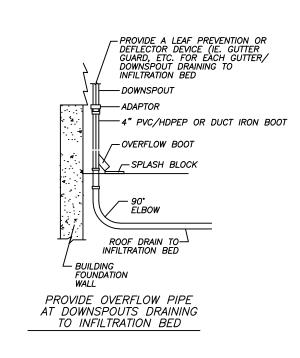

CLEANOUT - LANDSCAPE AREA

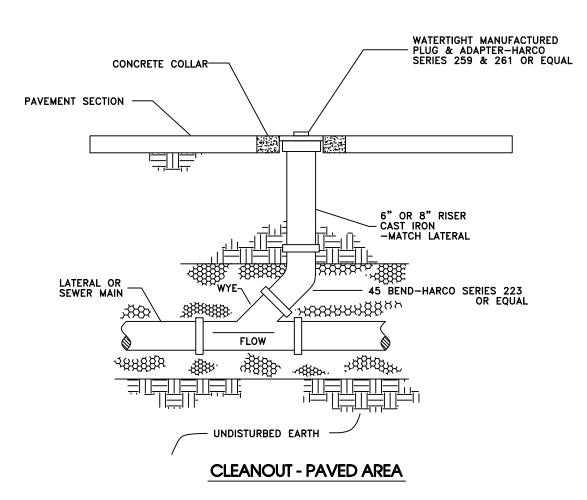

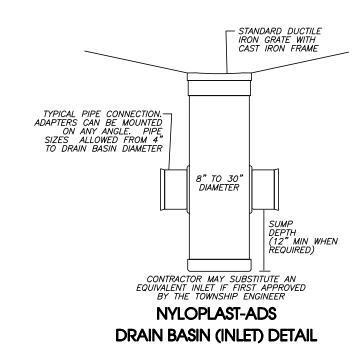


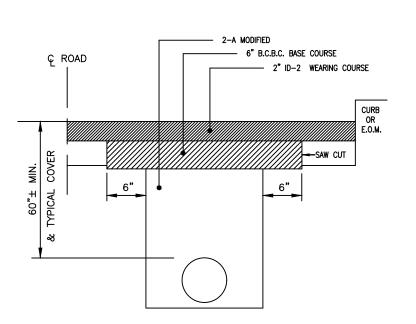

FLEXIBLE PAVEMENT RESTORATION

3" POROUS ASPHALT ____1" CHOKER COURSE PADOT 3A - 8 oz. NON-WOVEN GEOTEXTILE THE STONE COURSE SHALL BE FLOW THROUGH RATE PLACED ON A LEVEL GRADE AND 80-100 GPM/FT^2 BENCHED APPROPRIATELY SUCH -BOTTOM AND SIDES - UNCOMPACTED THAT THE FULL DEPTH OF **SUBBASE** STONE IS UTILIZED FOR INFILTRATION PURPOSES.

POROUS PAVEMENT ROAD SECTION



TYPICAL UTILITY TRENCH

PAVED AREAS LANDSCAPE AREAS

IN—SITU MATERIAL COMPACTED IN 8" LIFTS

12" MIN

VARIES

6" MIN

6" MIN

- 2. PIPE MUST HAVE PERFORATIONS NO LESS THAN 5/16" DIAMETER AND PROVIDE AN OPEN AREA OF NOT LESS THAN 3.31 SQUARE INCHES PER SQUARE FOOT OF PIPE SURFACE.

 THE FOLLOWING FORMULA DETERMINES THE # OF HOLES/LINEAR FOOT OF PIPE: [13.24 * (DIA OF PIPE IN FEET)] / [HOLE SIZE IN INCHES] ^2 , SO FOR A 8" DIA PIPE THERE MUST BE AT LEAST 90 HOLES / LINEAR FOOT
- 3. ENTIRE BED, SIDES TOP AND BOTTOM, SHALL BE WRAPPED IN SYNTHETIC INDUSTRIES NON-WOVEN #1201 OR ENGINEER APPROVED EQUAL. PROVIDE A MINIMUM 1' OVERLAP AT ALL SEAMS AND JOINTS. WHERE PROTRUSIONS OR PENETRATIONS OCCUR, GEOTEXTILE SHALL BE PERMANENTLY AFFIXED TO OBJECT.

 4. CARE SHOULD BE TAKEN IN THE PLACING OF STONE ATOP THE GEOTEXTILE SO AS

TO AVOID TEARING OR RIPPING OF THE FABRIC. STONE SHOULD NOT BE DUMPED


5. PIPES CONNECTING INTO BEDS AT POINTS OTHER THAN DRAIN BASINS SHALL HAVE A STUB CONNECTION.


INFILTRATION BED NOTES


UNTIL A 6" LAYER OF STONE IS IN PLACE.

- 1. SCARIFY BOTTOM AND SIDES OF BASIN, TAKING CARE NOT TO COMPACT SOIL.
- 2. PIPE MUST HAVE PERFORATIONS NO LESS THAN 5/16" DIAMETER AND PROVIDE AN OPEN AREA OF NOT LESS THAN 3.31 SQUARE INCHES PER SQUARE FOOT OF PIPE SURFACE.

 THE FOLLOWING FORMULA DETERMINES THE # OF HOLES/LINEAR FOOT OF PIPE: [13.24 * (DIA OF PIPE IN FEET)] / [HOLE SIZE IN INCHES] ^2, SO FOR A 72" DIA PIPE THERE MUST BE AT LEAST 814 HOLES / LINEAR FOOT
- 3. ENTIRE BED, SIDES TOP AND BOTTOM, SHALL BE WRAPPED IN SYNTHETIC INDUSTRIES NON-WOVEN #1201 OR ENGINEER APPROVED EQUAL. PROVIDE A MINIMUM 1' OVERLAP AT ALL SEAMS AND JOINTS. WHERE PROTRUSIONS OR PENETRATIONS OCCUR, GEOTEXTILE SHALL BE PERMANENTLY AFFIXED TO OBJECT.
- 4. CARE SHOULD BE TAKEN IN THE PLACING OF STONE ATOP THE GEOTEXTILE SO AS TO AVOID TEARING OR RIPPING OF THE FABRIC. STONE SHOULD NOT BE DUMPED UNTIL A 6" LAYER OF STONE IS IN PLACE.
- 5. PIPES CONNECTING INTO BEDS AT POINTS OTHER THAN DRAIN BASINS SHALL HAVE A STUB CONNECTION.
- 6. ALL CMP SHALL BE ALUMINIZED STEEL

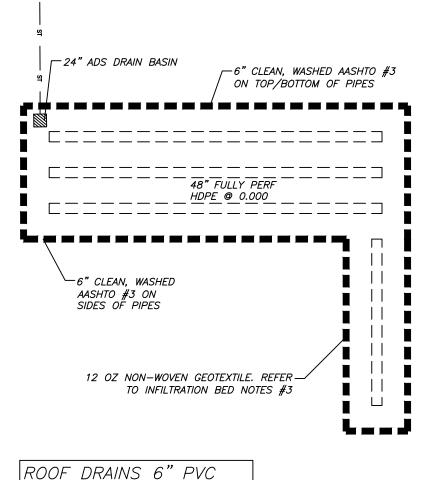

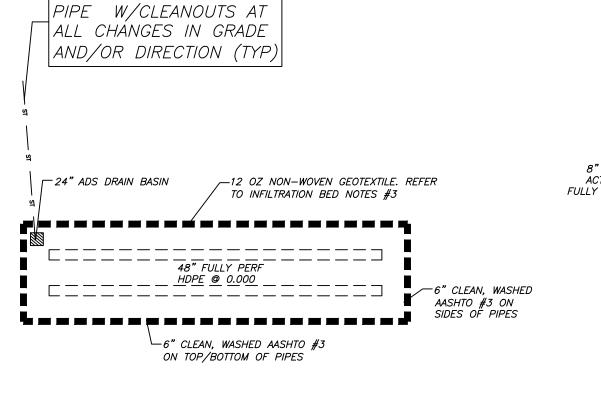

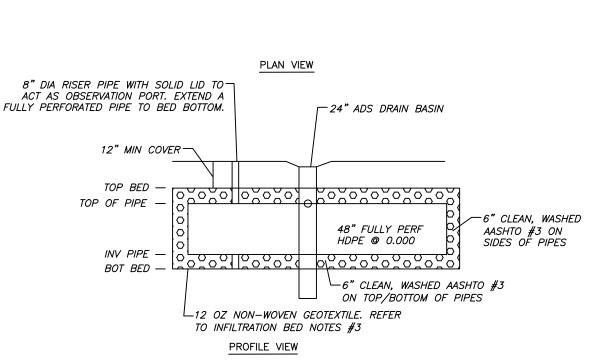

STORMWATER INFILTRATION BED DETAIL

DAVID J. SANDERS, P.E.

PE057436

PIPE STORAGE CONSTRUCTION SEQUENCE

1. EXCAVATE AREA TO PROPOSED UNCOMPACTED SUBGRADE.

- 2. PLACE LINER PER MANUFACTURER SPECIFICATIONS ON ALL SIDES OF BED.

 3. CAREFULLY PLACE STONE BEDDING TO NOT DAMAGE LINER.
- 3. CAREFULLY PLACE STONE BEDDING TO NOT DAMAGE LINER.
 4. CONSTRUCT PIPE SYSTEM AND OUTLET STRUCTURES.
 5. PLACE REMAINING STONE AROUND PIPES.
 6. PLACE TOP PORTION OF LINER.

SHORT TERM/ROUTINE MAINTENANCE OF PIPE STORAGE:


1. MAINTENANCE ACTIVITIES TO BE DONE ANNUALLY AND WITHIN 48 HRS AFTER EVERY MAJOR STORM EVENT (>1 INCH RAINFALL DEPTH).
2. KEEPING ALL DEBRIS, INCLUDING GRASS CLIPPINGS, LEAVES, AND MOTOR OIL CLEAR OF INLET AND OUTLET STRUCTURES.
3. REMOVING ANY ACCUMULATED DEBRIS.

3. REMOVING ANY ACCUMULATED DEBRIS.
4. IF STORM WATER FACILITIES DO NOT DRAIN WITHIN 48 HOURS AFTER THE LAST STORM EVENT, THEY SHALL BE INSPECTED AND THEN FIXED OR REPLACED AS DETERMINED

LONGTERM/NON-ROUTINE MAINTENANCE OF PIPE STORAGE:

- INSECTS AND/OR ODOR BECOME PROBLEMS
 STANDING WATER LASTING LONGER THAN 72 HRS
 VISIBLE SIGNS OF SEDIMENT ACCUMULATION
- 1. CLEAR INLETS/PIPES/STONE/PAVING OF DEBRIS, VACUUM, RECONSTRUCT AS
- NECESSARY.

 2. REMOVE ACCUMULATED SEDIMENT/POLLUTANTS.
- 4. RECONSTRUCT.
 5. PROVIDE FOR COMPLETION OF A WRITTEN REPORT DOCUMENTATION EACH INSPECTION AND ALL BMP REPAIR AND MAINTENANCE ACTIVITY.
 6. CATCH BASINS AND INLETS SHOULD BE INSPECTED AND CLEANED AT LEAST TWO TIMES PER YEAR AND AFTER SIGNIFICANT STORM EVENTS.
- TIMES PER YEAR AND AFTER SIGNIFICANT STORM EVENTS.
 7. IF STORM WATER FACILITIES DO NOT DRAIN AFTER STORM EVENTS, THEY SHALL
 BE INSPECTED AND THEN FIXED OR REPLACED AS DETERMINED NECESSARY. IN THE
 EVENT THE PIPE STORAGE FAILS THE SYSTEM WILL NEED TO BE COMPLETELY
 REMOVED AND REPLACED.

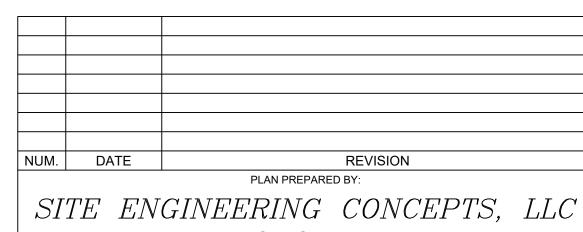

P.O. BOX 1992 SOUTHEASTERN, PA 19399

P: 610-240-0450 F: 610-240-0451 E:INFO@SITE-ENGINEERS.COM PLAN PREPARED FOR: $HAMILTON \ \ PROPERTIES$

EAGLE ROAD WAYNE, PA 19087


POST CONSTRUCTION STORMWATER DETAILS


RADNOR TOWNSHIP


TRUCTION
ATER
LS

PENNSYLVANIA
DATE: AUGUST 27, 2020
SHEET
7 of 14
NO SCALE



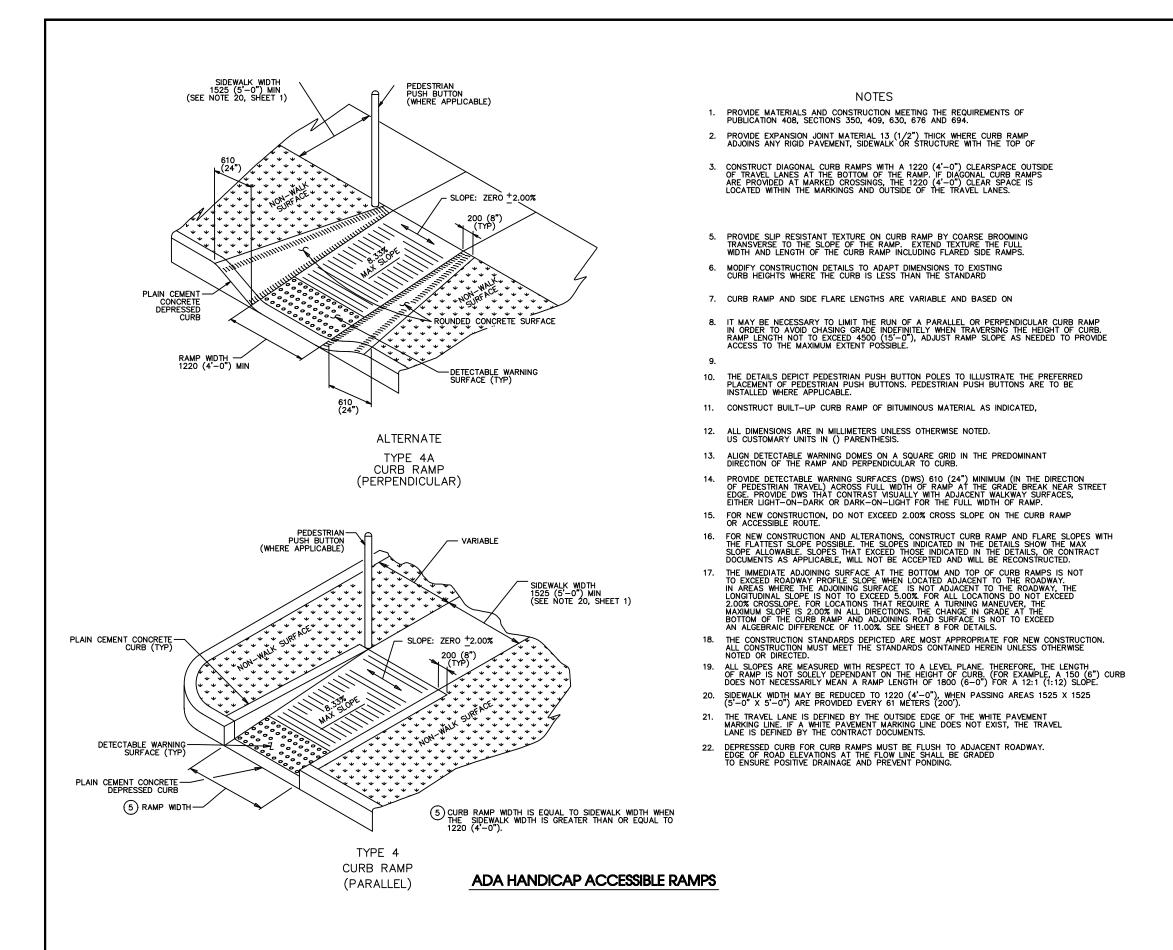


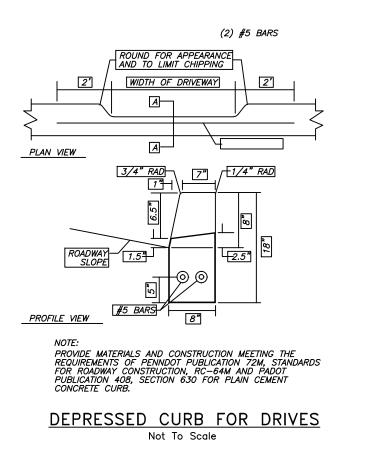

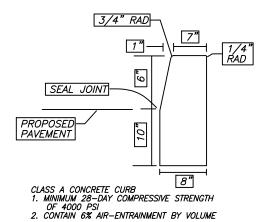



TYPICAL CURB DETAIL

Not To Scale

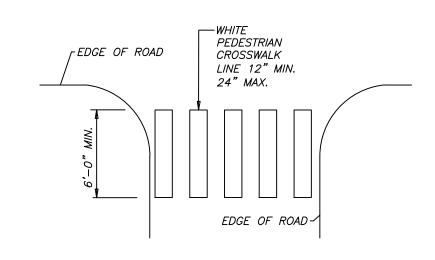



CROSSWALK DETAIL

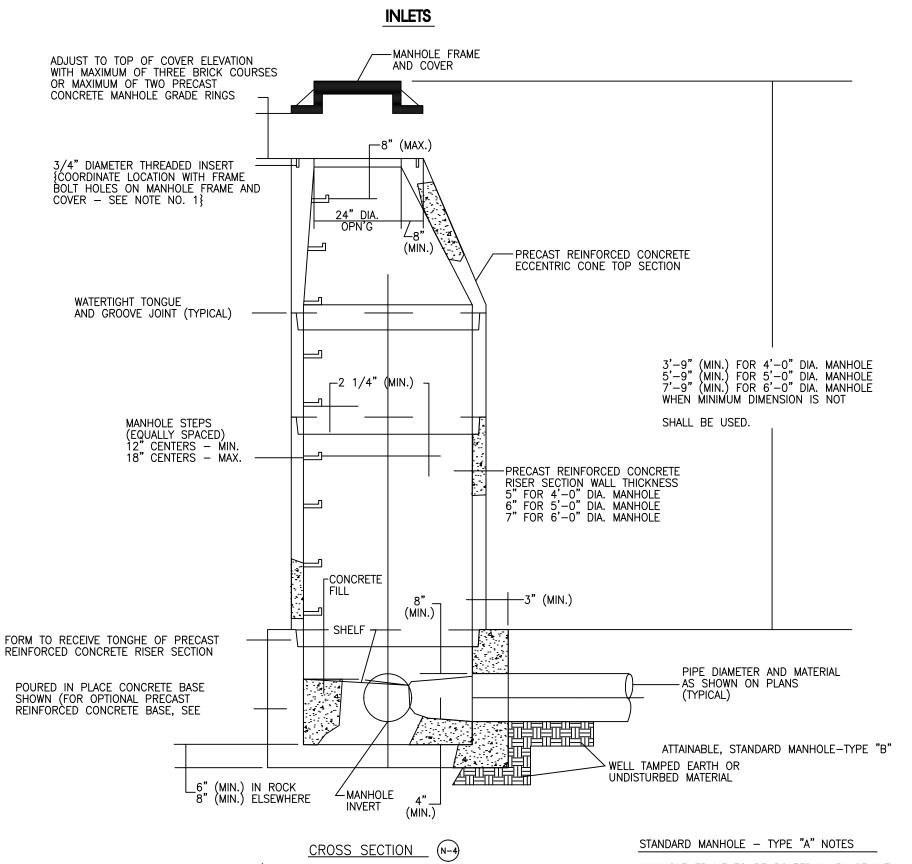

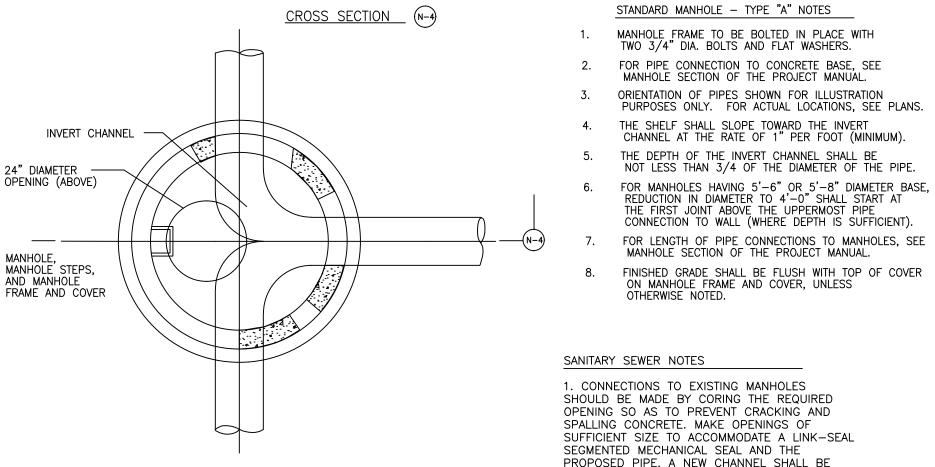


PLAN BELOW ECCENTRIC CONE TOP SECTION PRE-CAST MANHOLE

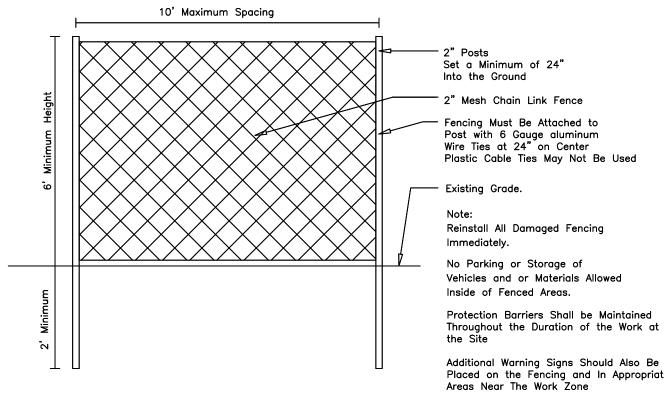

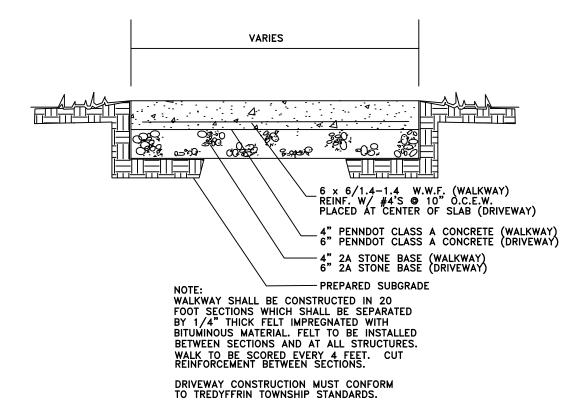

CONCRETE PAVEMENT (WALKWAY AND DRIVEWAY)

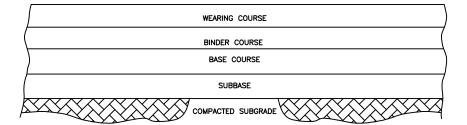


REQUIRED BITUMINOUS PAVEMENT SECTION N.T.S.

	LOCATION
DEPTH	INDIVIDUAL DRIVEWAYS
WEARING:	2"
BINDER:	NONE
SUBBASE:	8"

BITUMINOUS PAVEMENT SPECIFICATIONS, ALL SECTIONS, APPLICABLE

WEARING COURSE	SUPERPAVE, ASPHALT MIXTURE DESIGN, HMA WEARING COURSE, PG 64-22, 3 TO <10 MILLION ESALS, 9.5 MM MUX, SRL-H
BINDER COURSE	SUPERPAVE, ASPHALT MIXTURE DESIGN, HMA WEARING COURSE, PG 64-22, 10 TO <30 MILLION ESALS, 25.0 MM MUX, SRL-H

NOTE: CONSTRUCT COURSE AGGREGATE SUBBASE AND BITUMINOUS PAVEMENT IN ACCORDANCE WITH APPLICABLE SECTIONS OF PADOT PUB. 408.

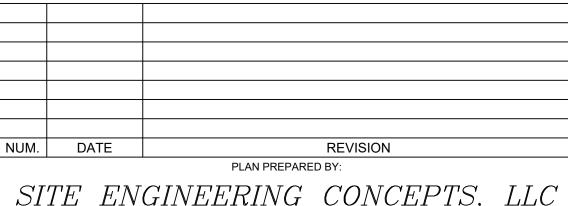

SITE ENGINEERING CONCEPTS, LLC P.O. BOX 1992

SOUTHEASTERN, PA 19399

F: 610-240-0451 E:INFO@SITE-ENGINEERS.COM P: 610-240-0450 HAMILTON PROPERTIES

DELAWARE COUNTY

EAGLE ROAD **WAYNE, PA 19087**

RADNOR TOWNSHIP

DAVID J. SANDERS, P.E.

PE057436

CONSTRUCTION **DETAILS**

SHEET 8 of 14

NO SCALE


PENNSYLVANIA

DATE: AUGUST 27, 2020

Additional Warning Signs Should Also Be Placed on the Fencing and In Appropriate Areas Near The Work Zone PROTECTIVE TREE PRESERVATION FENCE DETAIL DAVID J. SANDERS

FORMED IN THE MANHOLE TO ACCOMMODATE THE

NEW PIPE.

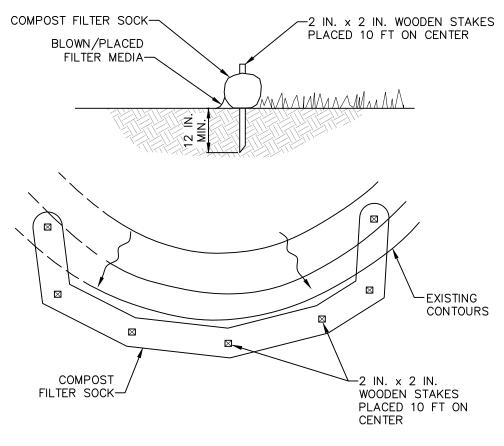

SOCK FABRIC SHALL MEET STANDARDS OF TABLE 4.1 OF THE PA DEP EROSION CONTROL MANUAL. COMPOST SHALL MEET THE STANDARDS OF TABLE 4.2 OF THE PA DEP EROSION CONTROL MANUAL

COMPOST FILTER SOCK SHALL BE PLACED AT EXISTING LEVEL GRADE. BOTH ENDS OF THE BARRIER SHALL BE EXTENDED AT LEAST 8 FEET UP SLOPE AT 45 DEGREES TO THE MAIN BARRIER ALIGNMENT. MAXIMUM SLOPE LENGTH ABOVE ANY BARRIER SHALL NOT EXCEED THAT SPECIFIED FOR THE SIZE OF THE SOCK AND THE SLOPE OF ITS TRIBUTARY AREA.

TRAFFIC SHALL NOT BE PERMITTED TO CROSS COMPOST FILTER SOCKS. ACCUMULATED SEDIMENT SHALL BE REMOVED WHEN IT REACHES 1/2 THE ABOVE GROUND HEIGHT OF THE BARRIER AND DISPOSED IN THE MANNER DESCRIBED ELSEWHERE IN THE PLAN. COMPOST FILTER SOCKS SHALL BE INSPECTED WEEKLY AND AFTER EACH RUNOFF EVENT. DAMAGED SOCKS SHALL BE REPAIRED ACCORDING TO MANUFACTURER'S SPECIFICATIONS OR


BIODEGRADABLE COMPOST FILTER SOCKS SHALL BE REPLACED AFTER 6 MONTHS; PHOTODEGRADABLE SOCKS AFTER 1 YEAR. POLYPROPYLENE SOCKS SHALL BE REPLACED ACCORDING TO MANUFACTURER'S RECOMMENDATIONS.

REPLACED WITHIN 24 HOURS OF INSPECTION.

UPON STABILIZATION OF THE AREA TRIBUTARY TO THE SOCK, STAKES SHALL BE REMOVED. THE SOCK MAY BE LEFT IN PLACE AND VEGETATED OR REMOVED. IN THE LATTER CASE, THE MESH SHALL BE CUT OPEN AND THE MULCH SPREAD AS A SOIL SUPPLEMENT.

STANDARD CONSTRUCTION DETAIL #4-1 COMPOST FILTER SOCK

NOT TO SCALE

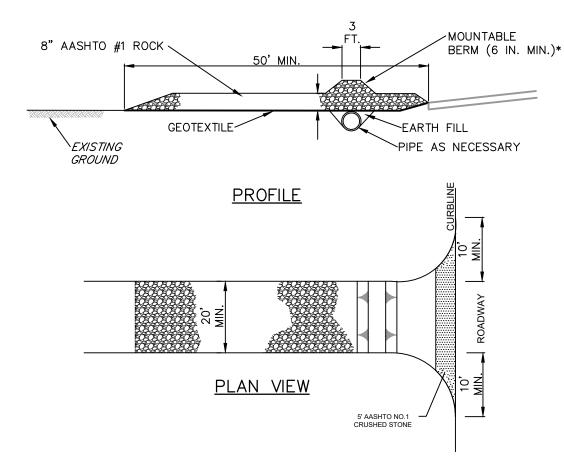

REMOVE TOPSOIL PRIOR TO INSTALLATION OF ROCK CONSTRUCTION ENTRANCE. EXTEND ROCK OVER FULL WIDTH OF ENTRANCE.


RUNOFF SHALL BE DIVERTED FROM ROADWAY TO A SUITABLE SEDIMENT REMOVAL BMP PRIOR TO ENTERING ROCK CONSTRUCTION ENTRANCE.

MOUNTABLE BERM SHALL BE INSTALLED WHEREVER OPTIONAL CULVERT PIPE IS USED AND PROPER PIPE COVER AS SPECIFIED BY MANUFACTURER IS NOT OTHERWISE PROVIDED. PIPE SHALL BE SIZED APPROPRIATELY FOR SIZE OF DITCH BEING CROSSED.

MAINTENANCE: ROCK CONSTRUCTION ENTRANCE THICKNESS SHALL BE CONSTANTLY MAINTAINED TO THE SPECIFIED DIMENSIONS BY ADDING ROCK. A STOCKPILE SHALL BE MAINTAINED ON SITE FOR THIS PURPOSE. ALL SEDIMENT DEPOSITED ON PAVED ROADWAYS SHALL BE REMOVED AND RETURNED TO THE CONSTRUCTION SITE IMMEDIATELY. IF EXCESSIVE AMOUNTS OF SEDIMENT ARE BEING DEPOSITED ON ROADWAY, EXTEND LENGTH OF ROCK CONSTRUCTION ENTRANCE BY 50 FOOT INCREMENTS UNTIL CONDITION IS ALLEVIATED OR INSTALL WASH RACK. WASHING THE ROADWAY OR SWEEPING THE DEPOSITS INTO ROADWAY DITCHES, SEWERS, CULVERTS, OR OTHER DRAINAGE COURSES IS NOT ACCEPTABLE.

STANDARD CONSTRUCTION DETAIL #3-1 **ROCK CONSTRUCTION ENTRANCE**

NOT TO SCALE

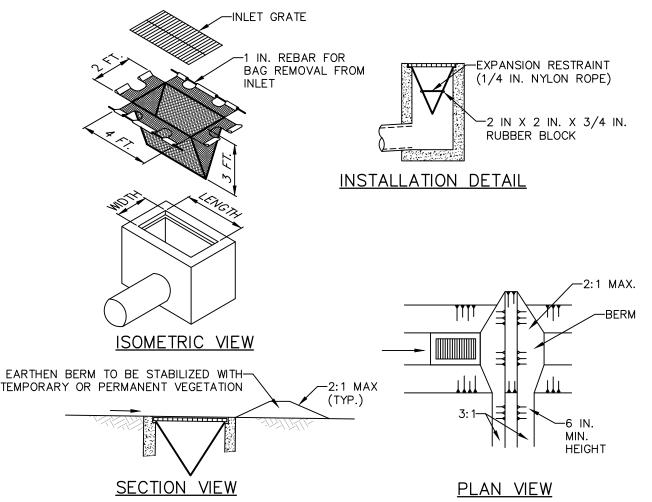

MAXIMUM DRAINAGE AREA = 1/2 ACRE.

INLET PROTECTION SHALL NOT BE REQUIRED FOR INLET TRIBUTARY TO SEDIMENT BASIN OR TRAP. BERMS SHALL BE REQUIRED FOR ALL INSTALLATIONS.


ROLLED EARTHEN BERM IN ROADWAY SHALL BE MAINTAINED UNTIL ROADWAY IS STONED. ROAD SUBBASE BERM ON ROADWAY SHALL BE MAINTAINED UNTIL ROADWAY IS PAVED. EARTHEN BERM IN CHANNEL SHALL BE MAINTAINED UNTIL PERMANENT STABILIZATION IS COMPLETED OR

AT A MINIMUM, THE FABRIC SHALL HAVE A MINIMUM GRAB TENSILE STRENGTH OF 120 LBS., A MINIMUM BURST STRENGTH OF 200 PSI, AND A MINIMUM TRAPEZOIDAL TEAR STRENGTH OF 50 LBS. FILTER BAGS SHALL BE CAPABLE OF TRAPPING ALL PARTICLES NOT PASSING A NO. 40

INLET FILTER BAGS SHALL BE INSPECTED ON A WEEKLY BASIS AND AFTER EACH RUNOFF EVENT. BAGS SHALL BE EMPTIED AND RINSED OR REPLACED WHEN HALF FULL OR WHEN FLOW CAPACITY HAS BEEN REDUCED SO AS TO CAUSE FLOODING OR BYPASSING OF THE INLET. DAMAGED OR CLOGGED BAGS SHALL BE REPLACED. A SUPPLY SHALL BE MAINTAINED ON SITE FOR REPLACEMENT OF BAGS. ALL NEEDED REPAIRS SHALL BE INITIATED IMMEDIATELY AFTER THE INSPECTION. DISPOSE ACCUMULATED SEDIMENT AS WELL AS ALL USED BAGS ACCORDING TO THE PLAN NOTES.

DO NOT USE ON MAJOR PAVED ROADWAYS WHERE PONDING MAY CAUSE TRAFFIC HAZARDS.

STANDARD CONSTRUCTION DETAIL #4-16 FILTER BAG INLET PROTECTION - TYPE M INLET

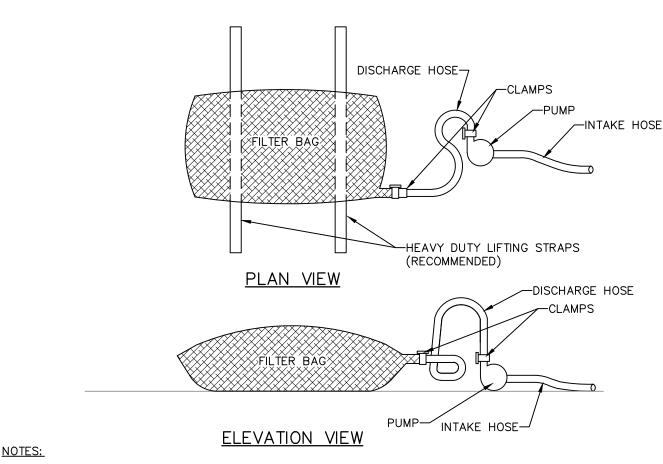

LOW VOLUME FILTER BAGS SHALL BE MADE FROM NON-WOVEN GEOTEXTILE MATERIAL SEWN WITH HIGH STRENGTH, DOUBLE STITCHED "J" TYPE SEAMS. THEY SHALL BE CAPABLE OF TRAPPING PARTICLES LARGER THAN 150 MICRONS. HIGH VOLUME FILTER BAGS SHALL BE MADE FROM WOVEN GEOTEXTILES THAT MEET THE FOLLOWING STANDARDS:

DD ODEDTV	TEGT METHOD	
PROPERTY	TEST METHOD	MINIMUM STANDARD
AVG. WIDE WIDTH STRENGTH	ASTM D-4884	60 LB/IN
GRAB TENSILE	ASTM D-4632	205 LB
PUNCTURE	ASTM D-4833	110 LB
MULLEN BURST	ASTM D-3786	350 PSI
UV RESISTANCE	ASTM D-4355	70%
AOS % RETAINED	ASTM D-4751	80 SIEVE

AND NOT RESUME UNTIL THE PROBLEM IS CORRECTED.

A SUITABLE MEANS OF ACCESSING THE BAG WITH MACHINERY REQUIRED FOR DISPOSAL PURPOSES SHALL BE PROVIDED. FILTER BAGS SHALL BE REPLACED WHEN THEY BECOME 1/2 FULL OF SEDIMENT. SPARE BAGS SHALL BE KEPT AVAILABLE FOR REPLACEMENT OF THOSE THAT HAVE FAILED OR ARE FILLED. BAGS SHALL BE PLACED ON STRAPS TO FACILITATE REMOVAL UNLESS BAGS COME WITH LIFTING STRAPS ALREADY ATTACHED.

BAGS SHALL BE LOCATED IN WELL-VEGETATED (GRASSY) AREA, AND DISCHARGE ONTO STABLE, EROSION RESISTANT AREAS. WHERE THIS IS NOT POSSIBLE, A GEÓTEXTILE UNDERLAYMENT AND FLOW PATH SHALL BE PROVIDED. BAGS MAY BE PLACED ON FILTER STONE TO INCREASE DISCHARGE CAPACITY. BAGS SHALL NOT BE PLACED ON SLOPES GREATER THAN 5%. FOR SLOPES EXCEEDING 5%, CLEAN ROCK OR OTHER NON-ERODIBLE AND NON-POLLUTING MATERIAL MAY BE PLACED UNDER THE BAG TO REDUCE SLOPE STEEPNESS.


NO DOWNSLOPE SEDIMENT BARRIER IS REQUIRED FOR MOST INSTALLATIONS. COMPOST BERM OR COMPOST FILTER SOCK SHALL BE INSTALLED BELOW BAGS LOCATED IN HQ OR EV WATERSHEDS, WITHIN 50 FEET OF ANY RECEIVING SURFACE WATER OR WHERE GRASSY AREA IS NOT AVAILABLE.

THE PUMP DISCHARGE HOSE SHALL BE INSERTED INTO THE BAGS IN THE MANNER SPECIFIED BY THE MANUFACTURER AND SECURELY CLAMPED. A PIECE OF PVC PIPE IS RECOMMENDED FOR THIS PURPOSE.

THE PUMPING RATE SHALL BE NO GREATER THAN 750 GPM OR 1/2 THE MAXIMUM SPECIFIED BY THE MANUFACTURER, WHICHEVER IS LESS. PUMP INTAKES SHALL BE FLOATING AND SCREENED. FILTER BAGS SHALL BE INSPECTED DAILY. IF ANY PROBLEM IS DETECTED, PUMPING SHALL CEASE IMMEDIATELY

> STANDARD CONSTRUCTION DETAIL #3-16 PUMPED WATER FILTER BAG

NOT TO SCALE

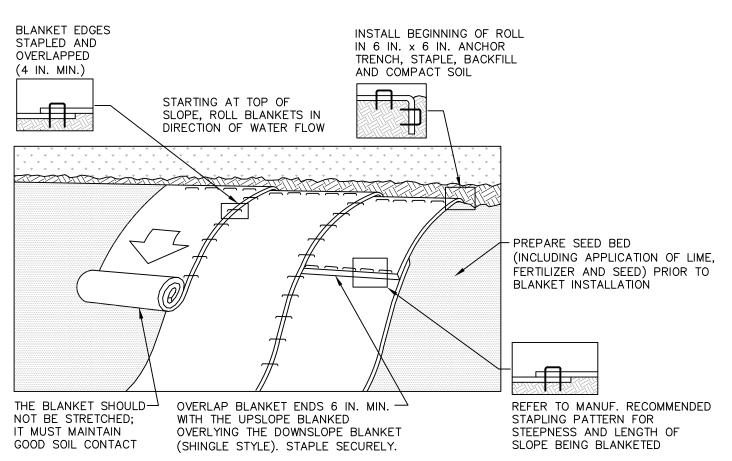

NOTES:


SEED AND SOIL AMENDMENTS SHALL BE APPLIED ACCORDING TO THE RATES IN THE PLAN DRAWINGS PRIOR TO INSTALLING THE BLANKET.


PROVIDE ANCHOR TRENCH AT TOE OF SLOPE IN SIMILAR FASHION AS AT TOP OF SLOPE. SLOPE SURFACE SHALL BE FREE OF ROCKS, CLODS, STICKS, AND GRASS.

BLANKET SHALL HAVE GOOD CONTINUOUS CONTACT WITH UNDERLYING SOIL THROUGHOUT ENTIRE LENGTH. LAY BLANKET LOOSELY AND STAKE OR STAPLE TO MAINTAIN DIRECT CONTACT WITH SOIL. DO NOT STRETCH

THE BLANKET SHALL BE STAPLED IN ACCORDANCE WITH THE MANUFACTURER'S RECOMMENDATIONS. BLANKETED AREAS SHALL BE INSPECTED WEEKLY AND AFTER EACH RUNOFF EVENT UNTIL PERENNIAL VEGETATION IS ESTABLISHED TO A MINIMUM UNIFORM 70% COVERAGE THROUGHOUT THE BLANKETED AREA. DAMAGED OR DISPLACED BLANKETS SHALL BE RESTORED OR REPLACED WITHIN 4 CALENDAR DAYS.

STANDARD CONSTRUCTION DETAIL #11-1 **EROSION CONTROL BLANKET INSTALLATION**

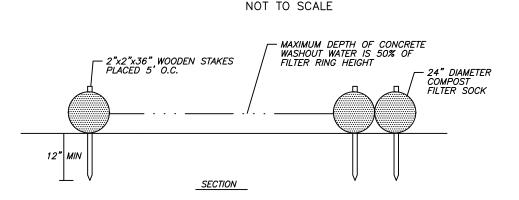

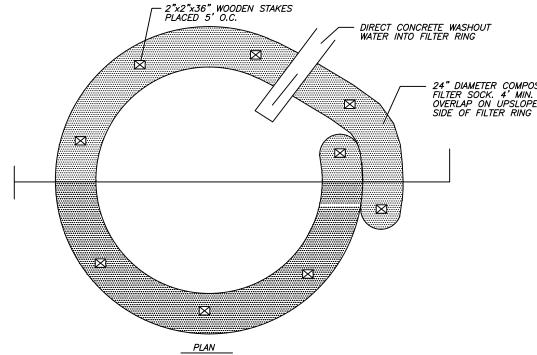

INSTALLATION NOTES:

1. A SUITABLE IMPERVIOUS GEOMEMBRANE SHALL BE PLACED AT THE LOCATION OF THE WASHOUT PRIOR TO INSTALLING THE SOCKS. CARE SHOULD BE TAKEN TO ENSURE CONTINUOUS CONTACT OF THE SOCK WITH THE GEOMEMBRANE AT ALL LOCATIONS

2. INSTALL ON FLAT GRADE FOR OPTIMUM PERFORMANCE

3. 18" DIAMETER FILTER SOCK MAY BE STACKED ONTO DOUBLE 24" DIAMETER SOCKS IN PYRAMIDAL CONFIGURATION FOR ADDED HEIGHT.

GENERAL NOTES:

1. FOR ANY PROJECT ON WHICH CONCRETE WILL BE POURED OR OTHERWISE FORMED ONSITE, A SUITABLE WASHOUT FACILITY MUST BE PROVIDED FOR CLEANING OF CHUTES, MIXERS, AND HOPPERS FOR THE DELIVERY VEHICLES UNLESS ALL DELIVERY VEHICLES WILL BE CLEANED OFFSITE.

2. UNDER NO CIRCUMSTANCES MAY WASH WATER BE ALLOWED TO ENTER ANY SURFACE WATERS.

3. WASHOUT FACILITIES MUST BE MORE THAN 50 FEET FROM STORM DRAINS, OPEN DITCHES, AND 4. NOTIFICATION MUST BE PROVIDED TO DRIVERS SO THEY ARE AWARE OF THE WASHOUT FACILITIES.

MAINTENANCE NOTES:

1. CONCRETE WASHOUT FACILITIES SHOULD BE INSPECTED DAILY. DAMAGED OR LEAKING WASHOUTS SHOULD BE DEACTIVATED AND REPAIRED OR REPLACED IMMEDIATELY.

2. ACCUMULATED MATERIALS SHOULD BE REMOVED WHEN THEY REACH 75% CAPACITY.

3. PLASTIC LINERS SHOULD BE REPLACED WITH EACH CLEANING OF THE WASHOUT FACILITY.

CONCRETE WASHOUT DETAIL (USING COMPOST SOCK)

SEEDING AND MULCHING SPECIFICATIONS

4. FOR MORE INFORMATION CONTACT: WEBSITE http://www.filtrexx.com

TEMPORARY-CESSATION OF ACTIVITY FOR 4 DAYS OR LONGER REQUIRES TEMPORARY STABILIZATION. TOPSOIL SHALL BE REPLACED IF NEEDED, REFER TO E&S NOTES FOR REQUIREMENTS

 SEEDING SHALL BE COMMON RYE GRASS APPLIED AT 45 LBS. PER ACRE
 LIMING TO BE APPLIED AT 1 TON/ACRE
 5-5-5 FERTILIZER TO BE APPLIED AT 1000 LBS/ACRE - HAY OR STRAW MULCH TO BE APPLIED AT 3 TONS/ACRE

PERMANENT

- TOPSOIL REPLACEMENT
- SEEDING SHALL BE 15% KENTUCKY BLUEGRASS, 35% KENTUCKY 31 FESCUE, 25% CHEWINGS FESCUE, 15% PERENNIAL RYE GRASS AND 10% RECLEANED REDTOP AT A RATE OF 5 LBS PER 1000 SF
- LIMING TO BE APPLIED AT 3 TONS PER ACRE
- 10-20-20 FERTILIZER TO BE APPLIED AT 1 70 TONS ACRE

HAY OR STRAW MULCH TO BE APPLIED AT 3 TONS/ACRE

THE NON-GERMINATING PERIODS ARE BETWEEN JUNE 15 THRU AUGUST 15 AND SEPTEMBER 30 THRU APRIL 15. AREAS DISTURBED DURING THESE PERIODS MUST BE LIMED, FERTILIZED, SEEDED AND MULCHED IMMEDIATELY.

EROSION CONTROL MAINTENANCE PROGRAM

TEMPORARY

TEMPORARY EROSION CONTROL FACILITIES MAINTENANCE WILL CONSIST OF INSPECTION, CLEANING, REPAIR/REPLACEMENT OF THE ON-SITE EROSION CONTROL FACILITIES THAT ARE SHOWN ON THESE EROSION AND SEDIMENTATION CONTROL PLANS. ALL EROSION AND SEDIMENTATION CONTROL FACILITIES WILL
BE CHECKED BY THE CONTRACTOR'S SITE PROJECT MANAGER ON A WEEKLY BASIS
AND AFTER EACH STORM EVENT. ALL SEDIMENT MATERIAL COLLECTED BY THE
CONTROL FACILITIES WILL BE CLEARED AND REDISTRIBUTE ON—SITE. ANY
FACILITIES FOUND TO BE DAMAGED OR MALFUNCTIONING SHALL BE REPAIRED OR REPLACED IMMEDIATELY.

EROSION AND SEDIMENTATION CONTROL NOTES

1. EROSION AND SEDIMENT BMPS MUST BE CONSTRUCTED, STABILIZED, AND FUNCTIONAL BEFORE SITE DISTURBANCE BEGINS WITHIN THE TRIBUTARY AREAS OF THOSE BMPS.

2. AFTER FINAL SITE STABILIZATION HAS BEEN ACHIEVED, TEMPORARY EROSION AND SEDIMENT BMPS MUST BE REMOVED. AREAS DISTURBED DURING REMOVAL OF THE BMPS MUST BE STABILIZED IMMEDIATELY. 3. VEHICLES AND EQUIPMENT MAY NEITHER ENTER DIRECTLY NOR EXIT DIRECTLY WITHOUT TRAVERSING A ROCK CONSTRUCTION ENTRANCE. 4. STOCKPILE HEIGHTS MUST NOT EXCEED 35 FEET. STOCKPILE SLOPES MUST BE 2:1 OR FLATTER.

6. UNTIL THE SITE IS STABILIZED, ALL EROSION AND SEDIMENT BMPS MUST BE MAINTAINED PROPERLY. MAINTENANCE MUST INCLUDE INSPECTIONS OF ALL EROSION AND SEDIMENT BMPS AFTER EACH RUNOFF EVENT AND ON A WEEKLY BASIS. ALL PREVENTATIVE AND REMEDIAL MAINTENANCE WORK, INCLUDING CLEAN OUT, REPAIR, REPLACEMENT, REGRADING, RESEEDING, REMULCHING AND RENETTING MUST BE PERFORMED IMMEDIATELY, IF EROSION AND SEDIMENT CONTROL BMPS FAIL TO PERFORM AS EXPECTED, REPLACEMENT BMPS, OR MODIFICATIONS OF THOSE INSTALLED WILL BE REQUIRED. 7. ALL SLOPES 4:1 OR STEEPER MUST UTILIZE EROSION CONTROL BLANKET (ECB) AND SEED OR SOD FOR STABILIZATION

8. UNTIL THE SITE IS STABILIZED ALL EROSION AND SEDIMENTATION BMP'S MUST BE MAINTAINED PROPERLY. MAINTENANCE MUST INCLUDE INSPECTIONS OF ALL EROSION AND SEDIMENTATION BMP'S AFTER EACH RUNOFF EVENT AND ON A WEEKLY BASIS. ALL SITE INSPECTIONS WILL BE DOCUMENTED IN AN INSPECTION LOG KEPT FOR THIS PURPOSE. THE COMPLIANCE ACTIONS AND DATE, TIME AND NAME OF PERSON CONDUCTING THE INSPECTION. THE INSPECTION LOG WILL BE KEPT ON—SITE AT ALL TIMES AND MADE AVAILABLE TO THE DISTRICT UPON REQUEST.

9. ALL PREVENTATIVE AND REMEDIAL MAINTENANCE WORK, INCLUDING CLEAN OUT, REPAIR, REPLACEMENT, REGRADING, RESEEDING, REMULCHING AND RENETTING, MUST BE PERFORMED IMMEDIATELY. IF EROSION AND SEDIMENTATION BMP'S FAIL TO PERFORM AS EXPECTED, REPLACEMENT BMP'S OR MODIFICATIONS OF THOSE INSTALLED WILL BE NEEDED. O. WHERE BMP'S ARE FOUND TO FAIL TO ALLEVIATE EROSION AND SEDIMENT POLLUTION THE PERMITTEE OR CO-PERMITTEE SHALL INCLUDE THE FOLLOWING

THE LOCATION AND SEVERITY OF THE BMP'S FAILURE AND ANY POLLUTION B. ALL STEPS TAKEN TO REDUCE, ELIMINATE AND PREVENT THE RECURRENCE OF THE NON-COMPLIANCE.
C. THE TIME FRAME TO CORRECT THE NON-COMPLIANCE, INCLUDING THE EXACT DATES WHEN THE ACTIVITY WILL RETURN TO COMPLIANCE.

11. BEFORE INITIATING ANY REVISION TO THE APPROVED EROSION AND SEDIMENT CONTROL PLAN OR REVISIONS TO OTHER PLANS WHICH AFFECT THE EFFECTIVENESS OF THE APPROVED E&S CONTROL PLAN, THE OPERATOR MUST RECEIVE APPROVAL OF THE REVISIONS FROM THE MONTGOMERY COUNTY CONSERVATION DISTRICT THE OPERATOR SHALL ASSURE THAT THE APPROVED EROSION AND SEDIMENT CONTROL PLAN IS PROPERLY AND COMPLETELY IMPLEMENTED. IMMEDIATELY UPON DISCOVERING UNFORESEEN CIRCUMSTANCES POSING THE POTENTIAL FOR ACCELERATED EROSION AND/OR SEDIMENT POLLUTION, THE OPERATOR SHALL IMPLEMENT APPROPRIATE BEST MANAGEMENT PRACTICES TO ELIMINATE POTENTIAL FOR ACCELERATED EROSION AND/OR SEDIMENT POLLUTION. 12. ALL PUMPING OF SEDIMENT—LADEN WATER, OR POTENTIALLY SEDIMENT LADEN WATER, SHALL BE THROUCH A SEDIMENT CONTROL BMP, SUCH AS A PUMPED WATER FILTER BAG DISCHARGING OVER NON—DISTURBED AREA

13. THE CONTRACTOR IS ADVISED TO BECOME THOROUGHLY FAMILIAR WITH THE PROVISIONS OF THE APPENDIX 64, EROSION CONTROL RULES AND REGULATIONS, TITLE 25, PART 1, DEPARTMENT OF ENVIRONMENTAL PROTECTION, SUBPART C, PROTECTION OF NATURAL RESOURCES, ARTICLE III, WATER RESOURCES, CHAPTER 102, EROSION CONTROL. 14. THE OPERATOR SHALL REMOVE FROM THE SITE, RECYCLE, OR DISPOSE OF ALL BUILDING MATERIALS AND WASTES IN ACCORDANCE WITH THE DEPARTMENT'S SOLID WASTE MANAGEMENT REGULATIONS ACT 25 PA CODE 260.1 ET SEQ 271.1 ET SEQ, AND 287.1 ET SEQ. THE CONTRACTOR SHALL NOT ILLEGAL BURY, DUMP OR DISCHARGE ANY BUILDING MATERIAL OR WASTE AT THE SITE.

15. A COPY OF THE APPROVED EROSION AND SEDIMENT CONTROL PLAN MUST BE AVAILABLE AT THE PROJECT SITE AT ALL TIMES. THE OPERATOR SHALL ASSURE THAT AN EROSION AND SEDIMENT CONTROL PLAN HAS BEEN PREPARED, APPROVED BY THE MONTGOMERY COUNTY CONSERVATION DISTRICT, AND IS BEING IMPLEMENTED AND MAINTAINED FOR ALL SOIL AND/OR ROCK BORROW AREAS, REGARDLESS OF THEIR LOCATIONS. 6. THE NPDES BOUNDARY IS EQUAL TO THE OUTER PERIMETER BOUNDARY OF HE SITE, AND ANY OFF—SITE AREAS WITHIN THE LIMITS OF DISTURBANCE THAT ARE HE RESPONSIBILITY OF THE DEVELOPER TO INSTALL, INCLUDING OFF—SITE FACILITIES SUCH AS UTILITIES AND ROADWAY IMPROVEMENTS.

17. AN AREA SHALL BE CONSIDERED TO HAVE ACHIEVED FINAL STABILIZATION WHEN IT HAS A MINIMUM UNIFORM 70% PERENNIAL VEGETATIVE COVER OR OTHER PERMANENT NON-VEGETATIVE COVER WITH A DENSITY SUFFICIENT TO RESIST ACCELERATED SURFACE EROSION AND SUBSURFACE CHARACTERISTICS SUFFICIENT TO RESIST SLIDING AND OTHER MOVEMENTS. IMMEDIATELY AFTER EARTH DISTURBANCE ACTIVITIES CEASE, THE OPERATOR SHALL STABILIZE ANY AREAS DISTURBED BY THE ACTIVITIES. DURING NON-GERMINATING PERIODS, MULCH MUST BE APPLIED AT THE SPECIFIED RATES. DISTURBED AREAS WHICH ARE NOT AT FINISHED GRADE AND WHICH WILL BE REDISTURBED WITHIN 1 YEAR MUST BE STABILIZED IN ACCORDANCE WITH THE TEMPORARY VEGETATIVE STABILIZATION SPECIFICATIONS. DISTURBED AREAS WHICH ARE AT FINISHED GRADE OR WHICH WILL NOT BE REDISTURBED WITHIN 1 YEAR MUST BE STABILIZED IN ACCORDANCE WITH THE PERMANENT VEGETATIVE STABILIZATION SPECS. 18. TOPSOIL REMOVED BY GRADING OPERATIONS SHALL BE REDISTRIBUTED AND STABILIZED AS QUICKLY AS POSSIBLE FOLLOWING THE COMPLETION OF THE PROJECT PHASE

19. RUNOFF CROSSING TO THE ADJACENT PROPERTY DURING THE CONSTRUCTION PHASE OF THE PROJECT SHALL BE MANAGED SO THAT THE WATER QUALITY/QUANTITY IMPACT IS MINIMIZED TO THE ADJACENT PROPERTY. DIVERSION BERMS, STONED STAGING AREAS, AND INLETS/PIPING SHALL BE PROVIDED AS NEEDED TO INSURE ACCEPTABLE CONDITIONS DURING CONSTRUCTION.

UTILITY LINE TRENCH EXCAVATION NOTES

A. LIMIT ADVANCED CLEARING AND GRUBBING OPERATIONS TO A DISTANCE EQUAL TO TWO TIMES THE LENGTH OF PIPE INSTALLATION THAT CAN BE COMPLETED IN ONE DAY.

B. WORK CREWS AND EQUIPMENT FOR TRENCHING, PLACEMENT OF PIPE, PLUG CONSTRUCTION AND BACKFILLING WILL BE SELF-CONTAINED AND SEPARATE FROM CLEARING AND GRUBBING AND SITE RESTORATION AND STABILIZATION OPERATIONS.

C. ALL SOIL EXCAVATED FROM THE TRENCH WILL BE PLACED ON THE UPHILL SIDE OF THE TRENCH.

D. LIMIT DAILY TRENCH EXCAVATION TO THE LENGTH OF PIPE PLACEMENT, PLUG INSTALLATION AND BACKFILLING THAT CAN BE COMPLETED THE SAME DAY.

E. WATER WHICH ACCUMULATES IN THE OPEN TRENCH WILL BE COMPLETELY REMOVED BY PUMPING BEFORE PIPE PLACEMENT AND/OR BACKFILLING BEGINS. WATER REMOVED FROM THE TRENCH SHALL BE PUMPED THROUGH A FILTRATION DEVICE.

F. ON THE DATE FOLLOWING PIPE PLACEMENT AND TRENCH BACKFILLING, THE DISTURBED AREA WILL BE GRADED TO FINAL CONTOURS AND IMMEDIATELY STABILIZED.

CLEAN FILL NOTES

IF THE SITE WILL NEED TO IMPORT OR EXPORT MATERIAL FROM THE SITE, THE RESPONSIBILITY FOR PERFORMING ENVIRONMENTAL DUE DILICENCE AND DETERMINATION OF CLEAN FILL WILL REST WITH BRYN MAWR COLLEGE.

APPENDIX C - STANDARD E&S PLAN NOTES

1.All earth disturbances, including clearing and grubbing as well as cuts and fills shall be done in accordance with the approved E&S plan. A copy of the approved drawings (stamped, signed and dated by the reviewing agency) must be available at the project site at all times. The reviewing agency shall be notified of any changes to the approved plan prior to implementation of those changes. The reviewing agency may require a written submittal of those changes for review and

approval at its discretion. 2. At least 7 days prior to starting any earth disturbance activities, including clearing and grubbing, the owner and/or operator shall invite all contractors, the landowner, appropriate municipal officials, the E&S plan preparer, the PCSM plan preparer, the licensed professional responsible for oversight of critical stages of implementation of the PCSM plan, and a representative from the local conservation

district to an on-site preconstruction meeting. 3. At least 3 days prior to starting any earth disturbance activities, or expanding into an area previously unmarked, the Pennsylvania One Call System Inc. shall be notified at 1-800-242-1776 for the location of existing underground utilities.

4. All earth disturbance activities shall proceed in accordance with the sequence provided on the plan drawings. Deviation from that sequence must be approved in writing from the local conservation district or by the Department prior to implementation.

5. Areas to be filled are to be cleared, grubbed, and stripped of topsoil to remove trees, vegetation, roots and other objectionable material.

6. Clearing, grubbing, and topsoil stripping shall be limited to those areas described in each stage of the construction sequence. General site clearing, grubbing and topsoil stripping may not commence in any stage or phase of the project until the E&S BMPs specified by the BMP sequence for that stage

or phase have been installed and are functioning as described in this E&S plan. 7. At no time shall construction vehicles be allowed to enter areas outside the limit of disturbance boundaries shown on the plan maps. These areas must be clearly marked and fenced off before clearing and grubbing operations begin.

8. Topsoil required for the establishment of vegetation shall be stockpiled at the location(s) shown on the plan maps(s) in the amount necessary to complete the finish grading of all exposed areas that are to be stabilized by vegetation. Each stockpile shall be protected in the manner shown on the plan drawings. Stockpile heights shall not exceed 35 feet. Stockpile slopes shall be 2H:1V or flatter. 9. Immediately upon discovering unforeseen circumstances posing the potential for accelerated erosion and/or sediment pollution, the operator shall implement appropriate best management practices to minimize the potential for erosion and sediment pollution and notify the local conservation district

and/or the regional office of the Department. 10. All building materials and wastes shall be removed from the site and recycled or disposed of in accordance with the Department's Solid Waste Management Regulations at 25 Pa. Code 260.1 et seq., 271.1, and 287.1 et. seq. No building materials or wastes or unused building materials shall be

burned, buried, dumped, or discharged at the site. 11. All off—site waste and borrow areas must have an E&S plan approved by the local conservation district or the Department fully implemented prior to being activated. 12. The contractor is responsible for ensuring that any material brought on site is clean fill. Form

FP-001 must be retained by the property owner for any fill material affected by a spill or release of a regulated substance but qualifying as clean fill due to analytical testing.

13. All pumping of water from any work area shall be done according to the procedure described in this plan, over undisturbed vegetated areas.

14. Vehicles and equipment may neither enter directly nor exit directly from lots onto 15. Until the site is stabilized, all erosion and sediment BMPs shall be maintained properly. Maintenance shall include inspections of all erosion and sediment BMPs after each runoff event and on a weekly basis. All preventative and remedial maintenance work, including clean out, repair, replacement, regrading, reseeding, remulching and renetting must be performed immediately. If the E&S BMPs fail to perform as expected, replacement BMPs, or modifications of those installed will be required. 16. A log showing dates that E&S BMPs were inspected as well as any deficiencies found and the date they were corrected shall be maintained on the site and be made available to regulatory agency

officials at the time of inspection. 17. Sediment tracked onto any public roadway or sidewalk shall be returned to the construction site by the end of each workday and disposed in the manner described in this plan. In no case shall the sediment be washed, shoveled, or swept into any roadside ditch, storm sewer, or surface water. 18. All sediment removed from BMPs shall be disposed of in the manner described on the plan drawings.

19. Areas which are to be topsoiled shall be scarified to a minimum depth of 3 to 5 inches -6 to 12 inches on compacted soils — prior to placement of topsoil. Areas to be vegetated shall have a minimum 4 inches of topsoil in place prior to seeding and mulching. Fill outslopes shall have a minimum of 2 inches of topsoil.

20. All fills shall be compacted as required to reduce erosion, slippage, settlement, subsidence or other related problems. Fill intended to support buildings, structures and conduits, etc. shall be compacted in accordance with local requirements or codes.

21. All earthen fills shall be placed in compacted layers not to exceed 9 inches in thickness. 22. Fill materials shall be free of frozen particles, brush, roots, sod, or other foreign or objectionable materials that would interfere with or prevent construction of satisfactory fills. 23. Frozen materials or soft, mucky, or highly compressible materials shall not be incorporated into fills.

24. Fill shall not be placed on saturated or frozen surfaces. 25. Seeps or springs encountered during construction shall be handled in accordance with the standard and specification for subsurface drain or other approved method. 26. All graded areas shall be permanently stabilized immediately upon reaching finished grade. Cut

21. GRADING AND EARTHMOVING OPERATIONS SHALL BE MINIMIZED DURING THE PERIOD FROM NOVEMBER 15 TO APRIL 1 WHEN RE-VEGETATION OF EXPOSED GROUND SURFACE IS DIFFICULT. MULCH, STRAW, STONE AND/OR SOD SHALL BE USED TO STABILIZE ALL AREAS DENUDED DURING THIS TIME PERIOD.

Slopes in competent bedrock and rock fills need not be vegetated. Seeded areas within 50 feet of a surface water, or as otherwise shown on the plan drawings, shall be blanketed according to the standards of this plan. standards of this plan. 27. Immediately after earth disturbance activities cease in any area or subarea of the project, the operator shall stabilize all disturbed areas. During non-germinating months, mulch or protective

blanketing shall be applied as described in the plan. Areas not at finished grade, which will be reactivated within 1 year, may be stabilized in accordance with the temporary stabilization specifications. Those areas which will not be reactivated within 1 year shall be stabilized in accordance with the permanent stabilization specifications.


28. Permanent stabilization is defined as a minimum uniform, perennial 70% vegetative cover or other permanent non-vegetative cover with a density sufficient to resist accelerated erosion. Cut and fill slopes shall be capable of resisting failure due to slumping, sliding, or other movements.

29. E&S BMPs shall remain functional as such until all areas tributary to them are permanently stabilized or until they are replaced by another BMP approved by the local conservation district or the Department.

30. Upon completion of all earth disturbance activities and permanent stabilization of all disturbed areas, the owner and/or operator shall contact the local conservation district for an inspection prior to removal/conversion of the E&S BMPs.

31. After final site stabilization has been achieved, temporary erosion and sediment BMPs must be removed or converted to permanent post construction stormwater management BMPs. Areas disturbed during removal or conversion of the BMPs shall be stabilized immediately. In order to ensure rapid revegetation of disturbed areas, such removal/conversions are to be done only during the germinating

32. Upon completion of all earth disturbance activities and permanent stabilization of all disturbed areas, the owner and/or operator shall contact the local conservation district to schedule a final inspection. 33. Failure to correctly install E&S BMPs, failure to prevent sediment-laden runoff from leaving the construction site, or failure to take immediate corrective action to resolve failure of E&S BMPs may result in administrative, civil, and/or criminal penalties being instituted by the Department as defined in Section 602 of the Pennsylvania Clean Streams Law. The Clean Streams Law provides for up to \$10,000 per day in civil penalties, up to \$10,000 in summary criminal penalties, and up to \$25,000 in misdemeanor criminal penalties for each violation.

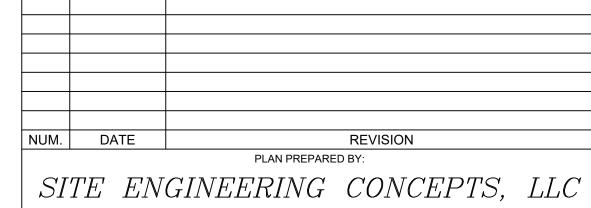

P.O. BOX 1992 SOUTHEASTERN. PA 19399

P: 610-240-0450 F: 610-240-0451

E:INFO@SITE-ENGINEERS.COM HAMILTON PROPERTIES

EAGLE ROAD **WAYNE, PA 19087**

RADNOR TOWNSHIP **DELAWARE COUNTY**

DAVID J. SANDERS

DAVID J. SANDERS, P.E PE057436


EROSION AND SEDIMENTATION CONTROL DETAILS

SHEET 9 of 14

NO SCALE

PENNSYLVANIA

DATE: AUGUST 27, 2020

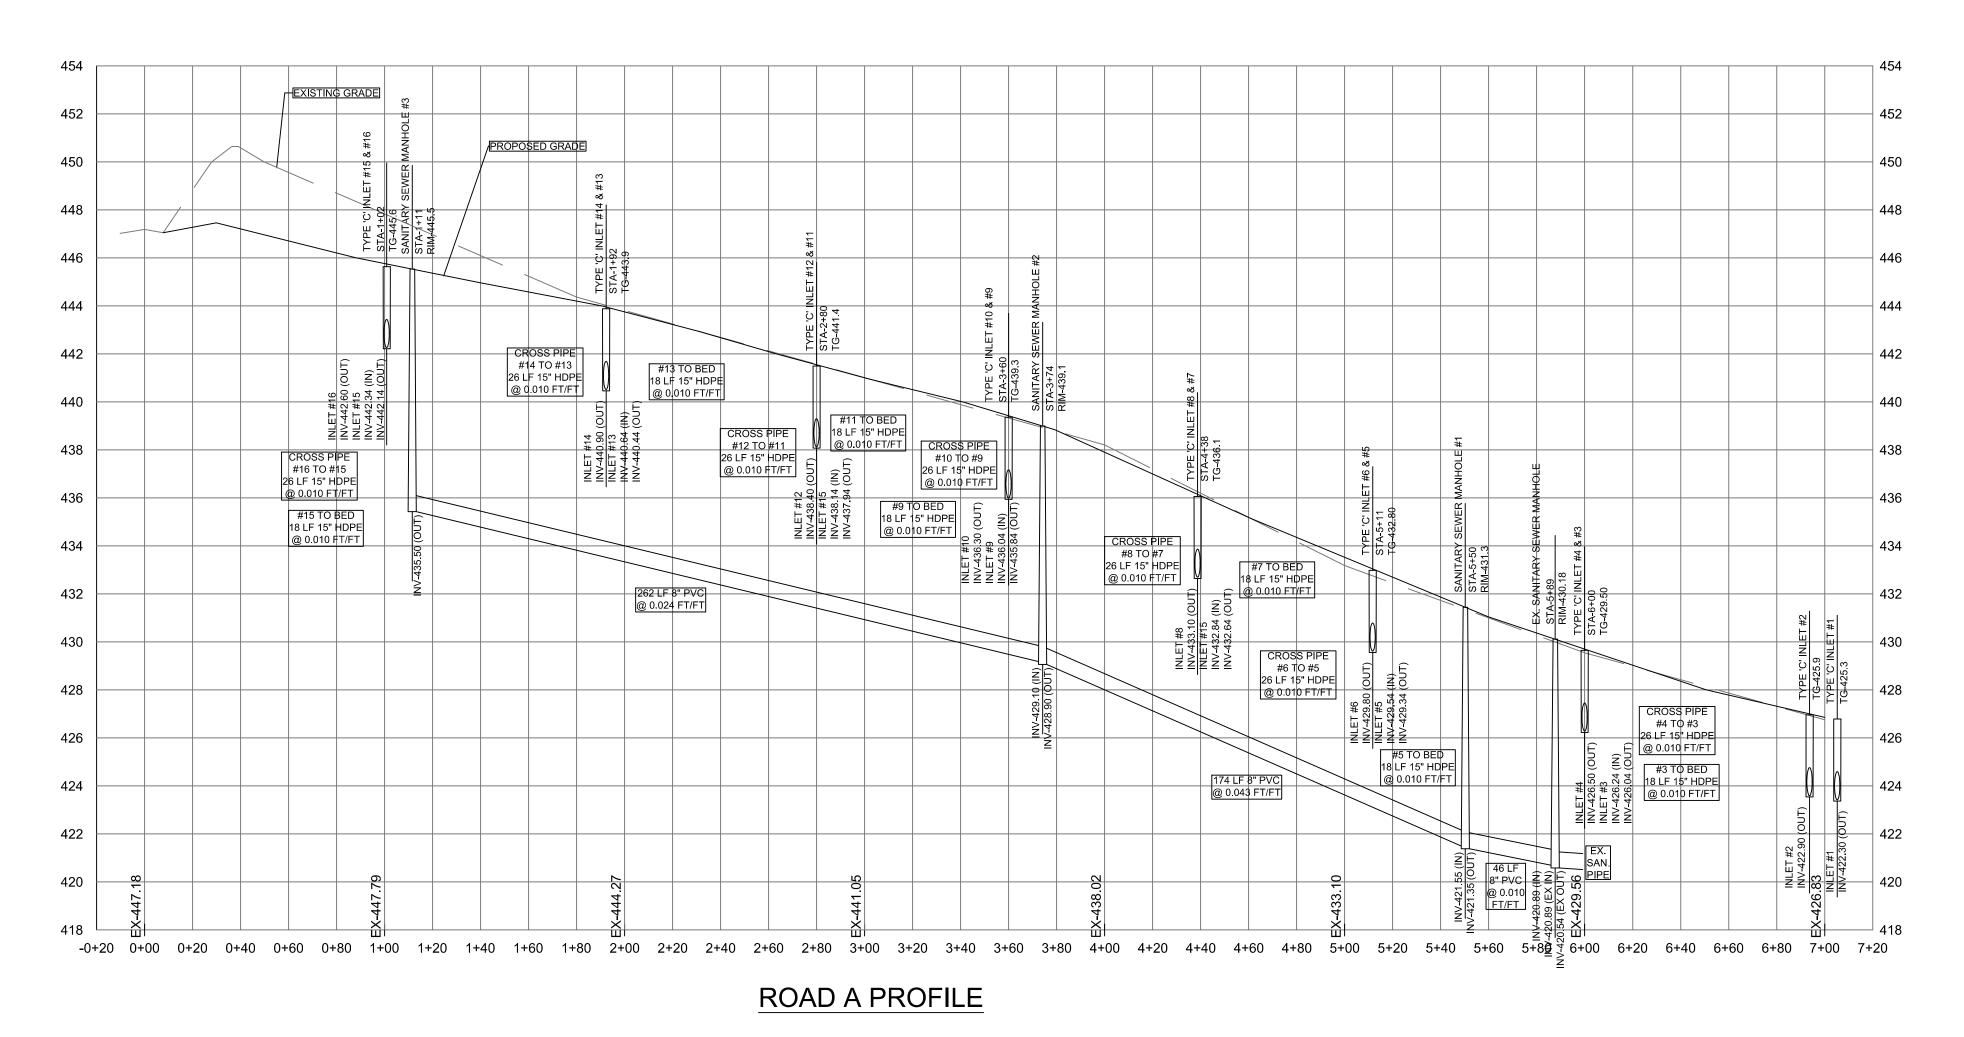

NUM. DATE PLAN PREPARED BY:

SITE ENGINEERING CONCEPTS, LLC P.O. BOX 1992

SOUTHEASTERN, PA 19399

F: 610-240-0451 E:INFO@SITE-ENGINEERS.COM
PLAN PREPARED FOR: HAMILTON PROPERTIES

EAGLE ROAD

WAYNE, PA 19087

RADNOR TOWNSHIP

DAVID J. SANDERS, P.E. PE057436

P: 610-240-0450

DELAWARE COUNTY

PROFILES

SHEET 10 of 14

SCALE: 1" = 40'

PENNSYLVANIA DATE: AUGUST 27, 2020

GENERAL NOTES:

- Base information including topography, grading, utilities, building and existing vegetation location prepared by Site Engineering Concepts, Inc. November 2019
- 3. The Landscape Architect's seal applies only to the landscape portion of this plan.
- 4. All plant material is to be field adjusted as necessary to address existing site conditions, proposed unit landscaping, and to ensure that clear sight triangles and clear sight lines are
- 5. Proposed shade trees shall not be planted over the top of any sewer or water laterals, mains or services. Sewer and water laterals, mains and services are shown on Landscape Plans for reference only. See engineers plans for location of all utilities. Utilities are shown on Landscape Plans for reference only. See
- engineers plans for location of all utilities. All trees shall be pruned as necessary to maintain required light

LEGEND:

- **EXISTING VEGETATION**
- - PROPOSED DECIDUOUS TREE




PROPOSED ORNAMENTAL TREE



PROPOSED EVERGREEN TREE



PROPOSED EVERGREEN SHRUBS



TREE PROTECTION FENCE (See engineer's plan for details.)



STREET LIGHT

COMPLIANCE WITH SECTION 255-38 Subsection B

<u> </u>	SHADE TREES	REQUIRED	PROVIDED	
	Existing local street length: 40' 1 Street tree required at intervals not less than 30' on 1 side	1	1	
	Proposed road length 1,308': 1 Street tree required at intervals not less than 30' on both sides	44	44	

COMPLIANCE WITH SECTION 255-42 (Tables 1 and 2)

	BUFFER SCREENS	LENGTH	REQUIRED	PROVIDED
CLACENT STR	Buffer screen class 'A' required between proposed Single Family Detached use and Major Collector Street.	200'	5 canopy trees7 evergreen trees	5 canopy trees 7 evergreen trees

COMPLIANCE WITH SECTION 263-4


	TREE REPLACEMENT	# TREES REMOVED	REPLACEMENTS REQUIRED	REPLACEMENTS PROVIDED
S S S	1 Replacement tree required for every 6"-18" DBH tree removed	104	104	104
200' MA OR COLLEC	3 Replacement trees required for every 19"-29" DBH tree removed (2) being large canopy trees	7	21 (14 Canopy)	21 (14 Canopy)
450	6 Replacement trees required for every 30"+ DBH tree removed (4) being large canopy trees	0	0	0
\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\		111	125 total (14 to be canopy trees)	125 total (14 to be canopy trees)


Replacement trees for hazardous and dead trees are not provided.

PLANT LIST:

	WHO WH	KEY (QTY	BOTANICAL NAME	COMMON NAME	SIZE	REMARKS		
اً ا		DECIDUOUS TREES							
	— — WHO — — — WHO	ACRB COR CORG GIBP GLTI NYSR PLAB PRYS QUB ULAP ZESG	11 2 2 7 4 7 9 8 6 5	Acer rubrum 'Bowhall' Cornus 'Rutcan' Cornus 'Rutgan' Ginkgo biloba 'Princeton Sentry' Gleditsia triacanthos v. inermis 'Shademaster' Nyssa sylvatica 'Red Rage' Platanus x acerifolia 'Bloodgood' Prunus x yedoensis 'Akebono' Quercus bicolor Ulmus americana 'Princeton' Zelkova serrata 'Green Vase'	Bowhall Red Maple Constellation Flowering Dogwood Stellar Pink Flowering Dogwood Princeton Sentry Ginkgo Shademaster Honeylocust Red Rage Black Gum Bloodgood London Planetree Akebono Yoshino Cherry Swamp White Oak Princeton Elm Green Vase Zelkova	2"-2.5" cal.	B&B		
	№	EVERGREEN TREES							
	— WHO —— —— WHO	ABC CRJY ILO PIA PIG PIO THGG	8 6 4 22 13 11 50	Abies concolor Cryptomeria japonica 'Yoshino' Ilex opaca Picea abies Picea glauca Picea orientalis Thuja plicata 'Green Giant'	White Fir Yoshino Cryptomeria American Holly Norway Spruce White Spruce Oriental Spruce Green Giant Arborvitae	8'-10' ht. 8'-10' ht. 8'-10' ht. 8'-10' ht. 8'-10' ht. 8'-10' ht. 8'-10' ht.	B&B B&B B&B B&B B&B B&B B&B		
 		JUCS PRLS VIR	14 29 23	Juniperus chinensis 'Sea Green' Prunus laurocerasus 'Schipkaensis' Viburnum rhytidophyllum	Sea Green Chinese Juniper Skip Laurel Leatherleaf Viburnum	24"-30" ht. 24"-30" ht. 24"-30" ht.	Cont. Cont. Cont.		

1. Where there is a discrepancy between the plant list and plan, the plan shall prevail.

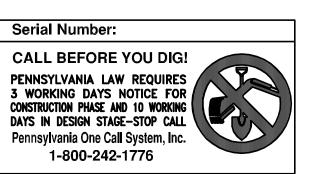

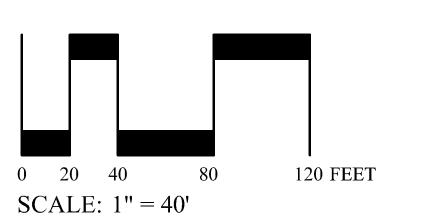




GLACKIN **THOMAS PANZAK** LAND PLANNING

> LANDSCAPE **ARCHITECTURE**

Glackin Thomas Panzak, Inc


Paoli Executive Green 1 41 Leopard Road Paoli, Pennsylvania 19301 610.408.901 Fax: 610.408.9477 E-mail: plans@glackinplan.com



[amilton

PROJECT #: 19-033 DATE: 08/27/2020 (jr)

SHEET:

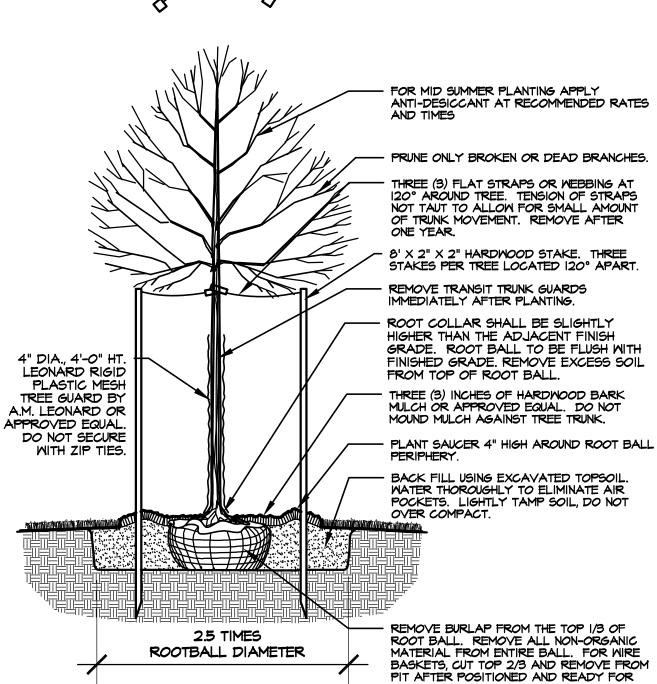

NOTES:


1. Trees with poor quality root balls or root balls that have been cracked or damaged shall be rejected.

2. Trees with central leader broken or dead shall be rejected

3. Trees that do not display the typical characteristics for their species shall be rejected.


4. Flood planting pit with water twice within 24 hours of planting.

1 DECIDUOUS TREE WITH STAKES DETAIL

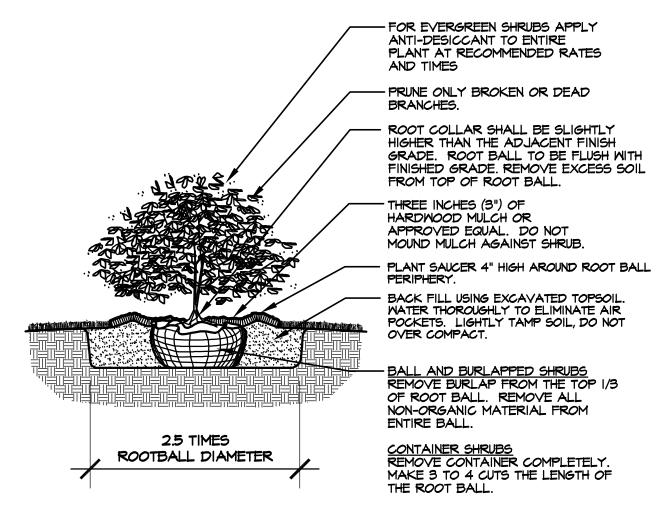

NOTE: FLOOD PLANTING PIT WITH WATER TWICE WITHIN 24 HOURS OF PLANTING.

3 SHRUB DETAIL
NTS

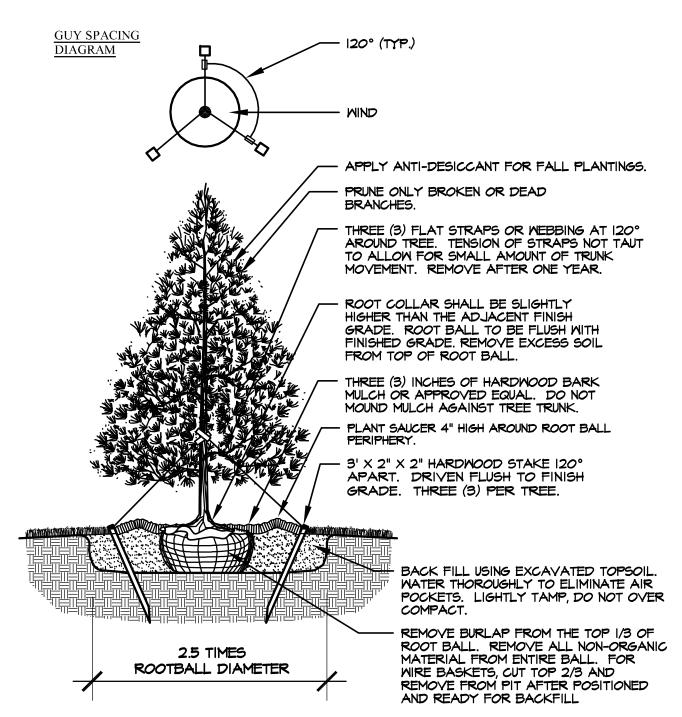

NOTES:


1. Trees with poor quality root balls or root balls that have been cracked or damaged shall be rejected.

2. Trees with central leader broken or dead shall be rejected3. Trees that do not display the typical characteristics for their species shall be rejected.

4. The owner shall be responsible for contacting the contractor, who shall right and secure any tree that leans out

5. Flood planting pit with water twice within 24 hours of planting.

2) EVERGREEN TREE WITH STAKES DETAIL

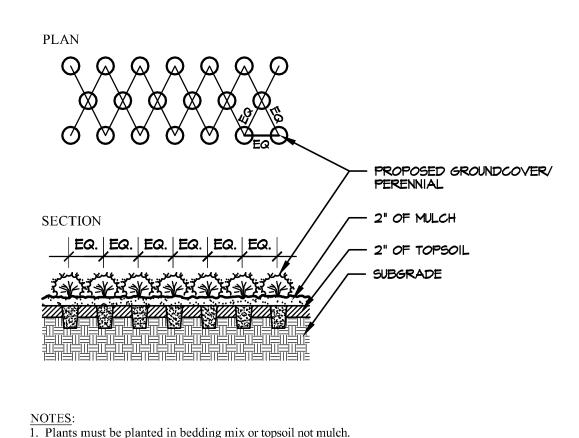

4 PLANTING DETAIL
NTS

2. See planting list for groundcover species, size, and spacing dimension.

PLANTING NOTES:

- 1. The contractor shall furnish and install all plants shown on the drawings, as specified, and in quantities indicated on the plant list.
- 2. All plants shall be nursery grown and freshly dug.
- 3. All plants shall be in accordance with The American Standard for Nursery Stock, latest edition.
 4. All plants shall be hardy under climatic conditions similar to those in the locality of the project.
- 5. Fall Digging Hazard: Any species listed below, if included on the plant list, must not be dug in the fall (October through December) because of risk to the tree's survival. Special exceptions may be granted if the owner is notified in writing and an extended warranty on these plants is agreed upon prior to digging. The following varieties should not be dug in fall: Betula, Carpinus, Celtis, Cercidiphyllum, Crataegus, Cryptomeria, Fagus, Halesia, Ilex (tree form varieties), Liquidambar, Liriodendron, Nyssa, Ostrya, Prunus, Pyrus, Quercus (except Quercus palustris), Salix weeping varieties, and Tilia tomentosa. Digging for Malus and Zelkova varieties should be avoided in fall only when in leaf.
- 6. All plants shall be typical of their species or variety and shall have a normal habit or growth. They shall be sound, healthy and vigorous, well branched and densely foliated when in leaf. They shall be certified by appropriate State and Federal authorities to be free of disease and insect pests, eggs or larvae. They shall have healthy, well-developed root systems.
- 7. Plants that do not display typical characteristics for their species shall be rejected.
- 8. Substitutions: When plants of a specified kind or size are not available within a reasonable distance, substitutions may be made upon written request by the contractor, if approved by the owner and/or municipal authority.
 9. Measurement: Dimensions of trees and shrubs shall conform to The American Standard for Nursery
- Stock, latest edition.

 10. Size: All plants shall conform to the measurement specified on the plant list, unless authorized in
- 11. Balled and burlapped plants shall be dug with firm natural balls of earth, of diameter and depth to include most of the fibrous roots. Container grown stock shall have been grown in a container long enough for the root system to have developed sufficiently to hold its soil together firm and whole. No plants shall be loose in the container.
- 12. Trees with central leader broken or dead shall be rejected

writing by the Township Arborist and the owner.

- 13. Plants with broken root balls or excessive damage to the crown shall be replaced prior to planting.14. Plants with poor quality root balls or root balls that have been cracked or damaged shall be rejected.15. Root balls of all plants shall be adequately protected at all times from sun and drying winds or frost.
- 16. Conditions detrimental to plants: The contractor shall notify the project representative in writing of all soil or drainage conditions which the contractor considers detrimental to the growth of plants. The contractor shall state the conditions and submit a proposal for correcting the conditions, including any change in cost, for review and acceptance by the project representative.
- 17. The owner or the owner's representative shall be notified prior to beginning planting operations.
 18. All planting shall be at the locations indicated on the drawings. The contractor shall be responsible for planting at the correct grades, alignment, and to the indicated layout of the planting beds.
- 19. Layout of planting: The contractor shall lay out with identifiable stakes the location of all planting beds as indicated on drawing. The layout of planting shall be approved by the project representative prior to any excavation of plant pits or plant beds.
- 20. Minor adjustments to plant locations may be necessary due to field conditions and final grading. The contractor shall notify the owner if major adjustments are required.
- 21. Install plant materials after final grades are established and prior to to planting of lawns unless otherwise acceptable to the owner.
- 22. Do not install plants when ambient temperatures may drop below 35°F or above 90°F.
- 23. Do not install plants when wind velocity exceeds 30 mph.
 24. Planting shall be done within the following dates trees, shrubs, groundcover, and perennials shall be planted September 1 through December 1, or April 15 to May 31, and only when local climatic and soil conditions favor satisfactory planting operations. Planting may be done beyond these limits only if requested in writing and approved by the Landscape Architect.
- 25. Planting operations to commence only when preceding work within the area has been completed. Proceed with and complete planting as rapidly as portions of the site become available, working within seasonal limitations.
- 26. Planting soil shall be excavated native soil from the planting pit. Planting soil shall be thoroughly mixed, with all rocks, clods and roots removed.
- 27. All trees shall be staked and guyed according to accepted industry practice, and as noted on the planting details.
- 28. Each tree and shrub shall be pruned in accordance with The American Nursery and Landscape Association Standards to preserve the natural character of the plant. All dead wood or suckers and
- all broken or badly bruised branches shall be removed.

 29. Mulch: Immediately after planting operations are completed, all trees and shrub planting pits shall be covered with a 3" (three inch) layer of double shredded hardwood bark mulch, or other material approved by the owner or the owner's representative. A granular pre-emergent weed control shall be spread prior to mulching. The limit of this mulch for deciduous trees and single evergreen trees shall be the area of the pit. For shrub and perennial beds and for evergreen tree clusters, a
- continuous, mulched bed shall be created.

 30. Trees in leaf, including evergreens, when planted shall be treated with anti-desiccant such as
- Wilt-Pruf® if planted during the months of June through September, November, and December.

 31. Weed control: All planting areas shall be free from weeds prior to the beginning of planting operation. Contact herbicide sprays should only be used as required and all manufacturer's
- specifications followed.


 32. Guarantee: All plant material shall be guaranteed by the contractor for twelve (12) months from the date of installation. The owner shall be responsible for maintenance unless otherwise agreed with contractor. It shall be the contractor's responsibility to monitor the project during the guarantee and notify the owner if problems develop with the plant material. Any material that is 25 % dead or more shall be considered dead and must be replaced at no charge. A tree shall be considered dead when the main leader has died back, or there is 25% of the crown dead.
- 33. All debris resulting from landscape contracting operations shall be cleaned up and removed from the site on a weekly basis.
- 34. Watering: Landscape contractor is responsible for watering sufficiently at the time of planting and until the job is completed, accepted and turned over to the owner.

GLACKIN THOMAS PANZAK

LAND PLANNING
LANDSCAPE
ARCHITECTURE

Glackin Thomas Panzak, Inc

Paoli Executive Green 1 Suite 300 41 Leopard Road Paoli, Pennsylvania 19301 610.408.9011 Fax: 610.408.9477 E-mail: plans@glackinplan.com



Operty
Ounty, Pennsylvania

EAGLE ROAI ADNOR TOWNSHIP, DELAWARE CC

10

 $\overline{}$

a

PROJECT #: 19-033 DATE: 08/27/2020 (jr) REV.:

SHEET:

I.P-2

Serial Number:

CALL BEFORE YOU DIG!

PENNSYLVANIA LAW REQUIRES
3 WORKING DAYS NOTICE FOR
CONSTRUCTION PHASE AND 10 WORKING
DAYS IN DESIGN STAGE-STOP CALL
Pennsylvania One Call System, Inc.
1-800-242-1776

GLACKIN

THOMAS

PANZAK

LAND PLANNING

LANDSCAPE **ARCHITECTURE**

Glackin Thomas Panzak, Inc.

Paoli Executive Green 1


Paoli, Pennsylvania 19301

E-mail: plans@glackinplan.com

41 Leopard Road

Fax: 610.408.9477

610.408.9011

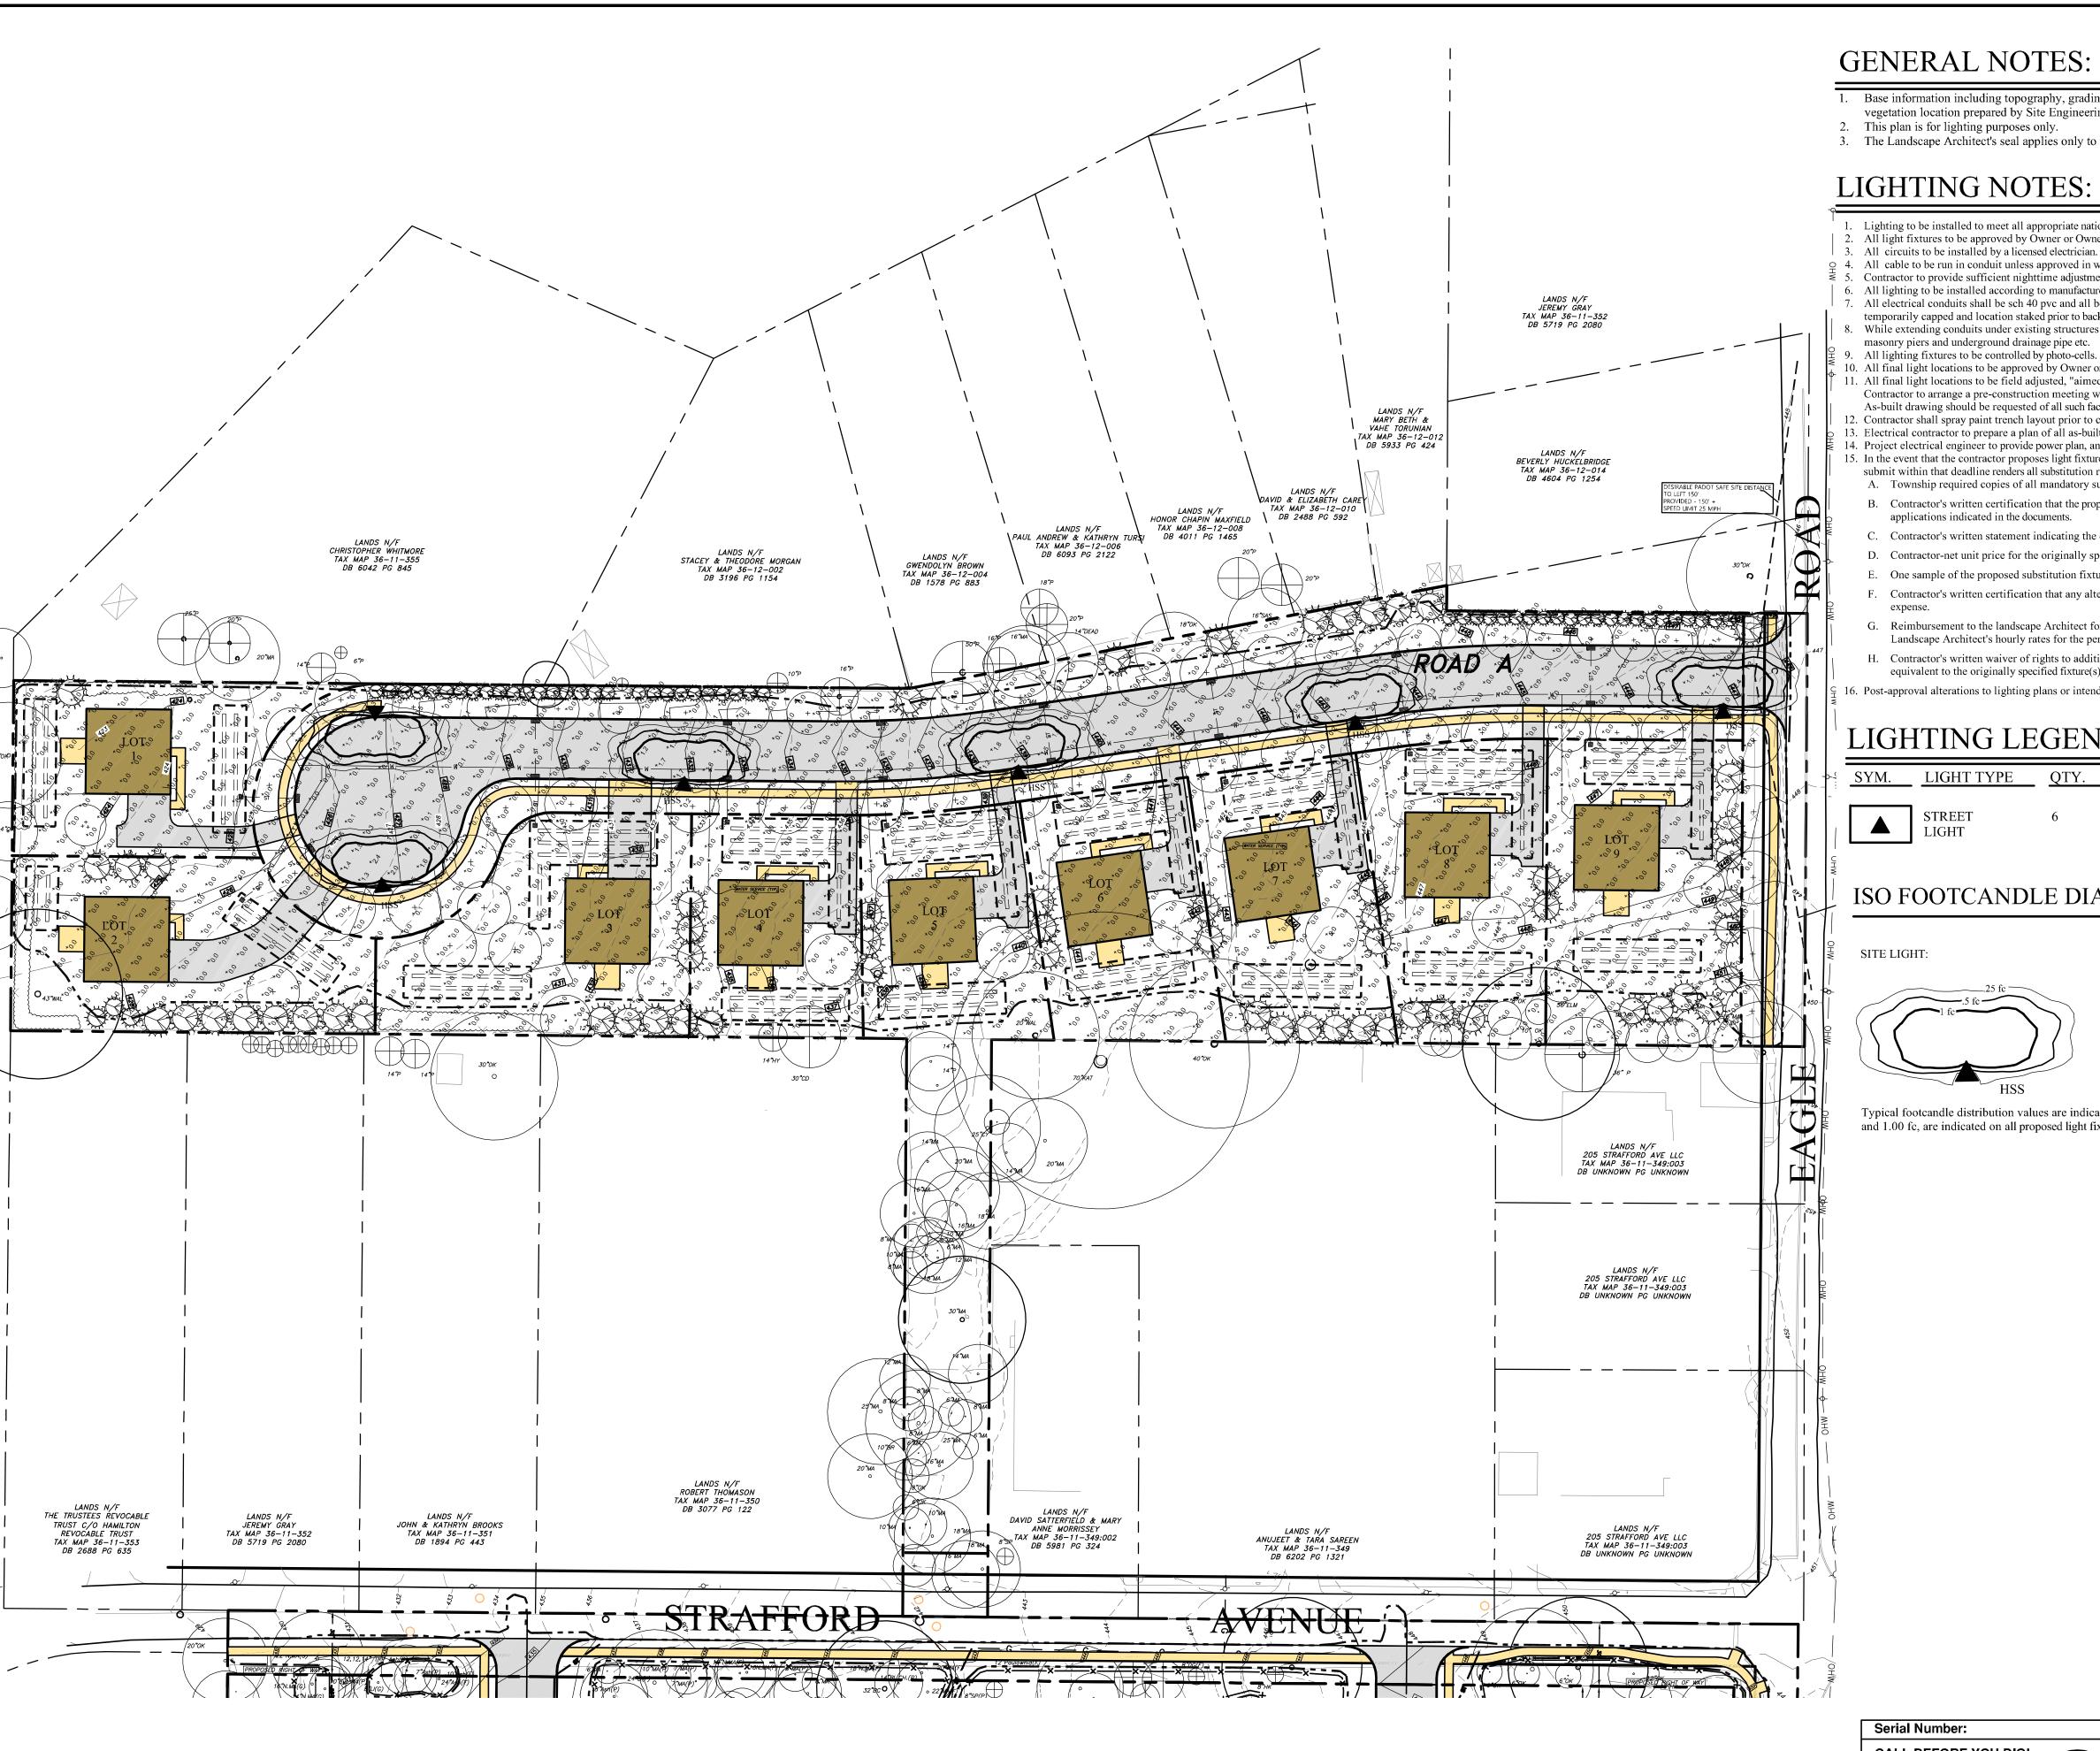

GENERAL NOTES:

- 1. Base information including topography, grading, utilities, building and existing vegetation location prepared by Site Engineering Concepts, Inc. November 2019
- 2. This plan is for lighting purposes only.
- 3. The Landscape Architect's seal applies only to the lighting portion of this plan.

LIGHTING NOTES:


- 1. Lighting to be installed to meet all appropriate national and local codes.
- 2. All light fixtures to be approved by Owner or Owner's representative.
- 3. All circuits to be installed by a licensed electrician.
- ♀ 4. All cable to be run in conduit unless approved in writing by the owner. 5. Contractor to provide sufficient nighttime adjustment to all lighting to satisfy Township requirements and Owner or Owner's representative. Fixture on/off control by circuit.
- 6. All lighting to be installed according to manufactures recommendations. 7. All electrical conduits shall be sch 40 pvc and all bends shall be "sweep" type for pulling wire. Conduit to extend beyond edge of hardscape element by 12" min. Conduit to be
- temporarily capped and location staked prior to backfilling. While extending conduits under existing structures the contractor shall be responsible for damage to existing structures such as, but not limited to, paving, irrigation, pool piping, masonry piers and underground drainage pipe etc.
- 10. All final light locations to be approved by Owner or Owner's representative. 11. All final light locations to be field adjusted, "aimed" as necessary so as to avoid shining of light into windows and doors.
- Contractor to arrange a pre-construction meeting with the owner and owners representatives including masons, and other individuals familiar with any underground facilities.
- As-built drawing should be requested of all such facilities. 12. Contractor shall spray paint trench layout prior to commencement. Owner or Owner's representative shall approve layout.
- 13. Electrical contractor to prepare a plan of all as-built underground electric runs.
- 14. Project electrical engineer to provide power plan, and ComCheck calculations as required. 15. In the event that the contractor proposes light fixture substitutions, requests must be received by the Landscape Architect for review (14) fourteen days prior to bid date. Failure to submit within that deadline renders all substitution requests void, and originally specified fixture(s) will be supplied. The contractor shall submit the following:
- A. Township required copies of all mandatory submittals for both the originally specified fixture(s) and the proposed substitution(s). B. Contractor's written certification that the proposed substitution(s) conforms to all requirements of the contract documents in every respect and is appropriate for the
- C. Contractor's written statement indicating the effect of the substitution(s) on the construction schedule compared to the schedule with the originally specified fixture(s). D. Contractor-net unit price for the originally specified fixture(s) and for the proposed substitute fixture(s).
- E. One sample of the proposed substitution fixture(s) with specified lamps and cord and plug connection for 277 volt operation.
- F. Contractor's written certification that any alterations that may result from the proposed lighting fixture substitution(s) will be designed and constructed at the contractor's
- G. Reimbursement to the landscape Architect for all time associated with review of fixture substitutions(s). Payment shall be made in advance of the review, based on the Landscape Architect's hourly rates for the personal involved in the review.
- H. Contractor's written waiver of rights to additional payment and/or time that may become necessary should the proposed substitution(s) fail to perform in a manner that is equivalent to the originally specified fixture(s).
- 6. Post-approval alterations to lighting plans or intended substitutions for approved lighting equipment shall be submitted to the Township for review and approval.

LIGHTING LEGEND:

J		SYM.	LIGHT TYPE	QTY.	MFG.	MODEL #	REMARKS
	OHW		STREET LIGHT	6	AAL	PROV2-36L-325-3K7-3-BL-HS	AAL Providence Medium, LED, Type III Optics, 3 color temperature, photocell control by circuit, 14' height, mounted on 4" AAL POLE MODEL #DB6 Fixture and Pole Finish: Black


ISO FOOTCANDLE DIAGRAM:

SITE LIGHT:

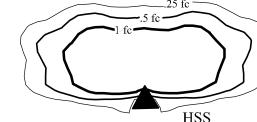

Typical footcandle distribution values are indicated in diagram. The same values, 0.25 fc, 0.50 fc and 1.00 fc, are indicated on all proposed light fixtures.




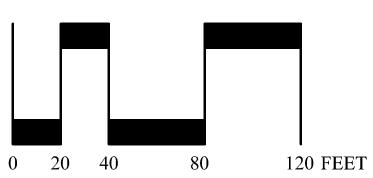





SHEET:

PROJECT #: 19-033 DATE: 08/27/2020 (jr)

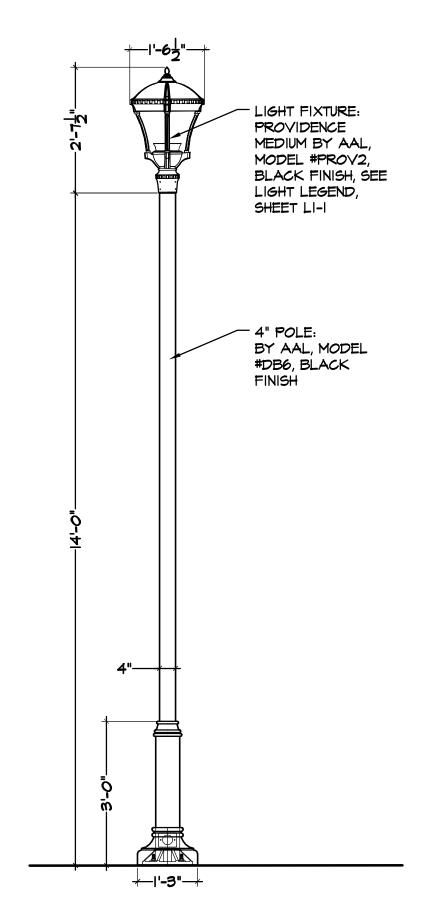

STREET LIGHT DETAIL

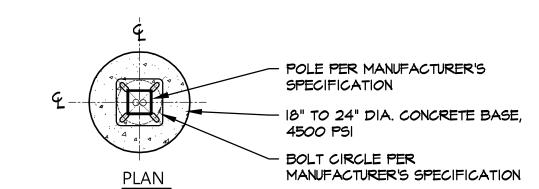

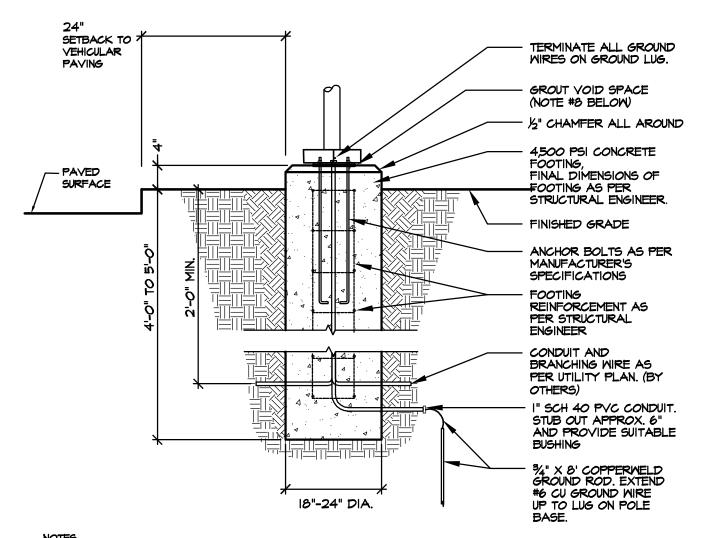

NOTES:

1. THIS DETAIL IS FOR BID AND BUDGETARY PURPOSES ONLY.

2. CONTRACTOR SHALL ENSURE DESIGN IS PREPARED BY A QUALIFIED STRUCTURAL ENGINEER CONSIDERING LIGHTING MANUFACTURER REQUIREMENTS, LOCAL WIND LOADS AND SITE SPECIFIC SOIL PARAMETERS.

A. THE STRUCTURAL ENGINEER SHALL BE NOTIFIED OF THE INTENT TO MOUNT ANYTHING ASIDE FROM THE LIGHT FIXTURE INCLUDING (BUT NOT LIMITED TO) CAMERAS, BANNERS, FLAGS, SIGNAGE, ETC. AS IT WILL IMPACT THE POLE AND FOUNDATION DESIGN. B. SOME SITE LOCATIONS AND/OR CONDITIONS MAY REQUIRE VIBRATION DAMPENING MEASURES AS

DETERMINED BY A STRUCTURAL ENGINEER.


3. ACTUAL DIAMETER AND DEPTH OF FOOTING SHALL BE DETERMINED BY THE STRUCTURAL ENGINEER. 4. ALL REBAR SHALL BE MAINTAINED AT A 3" MIN. CLEARANCE FROM SURFACES. 5. FIXTURE MUST BE GROUNDED IN ACCORDANCE WITH LOCAL CODES OR THE NATIONAL ELECTRICAL CODE.

FAILURE TO DO SO MAY RESULT IN SERIOUS PERSONAL INJURY. 6. POLES SHOULD NEVER BE ERECTED WITHOUT THE LUMINAIRE INSTALLED. WARRANTY IS VOIDED IF THE POLE IS ERECTED WITHOUT THE LUMINAIRE.

7. THE WARRANTY IS VOIDED IF THE POLE IS NOT GROUTED UNDER THE ENTIRE BASE AFTER INSTALLATION.

TYPICAL LIGHT POLE FOOTING DETAIL

Scale: 1/2"=1'-0"

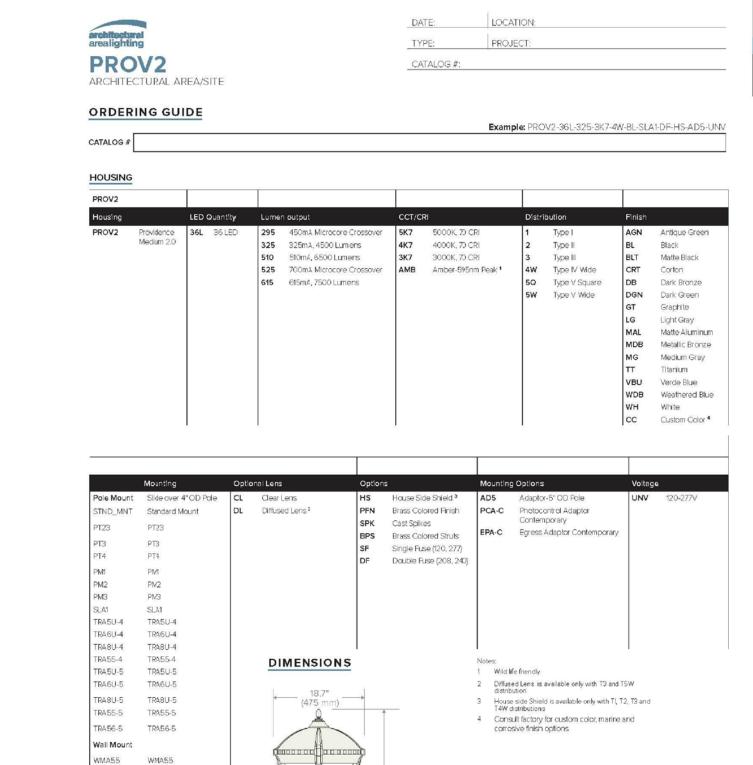

WMA56 WMA56

\STREET LIGHT CUT SHEET


GLACKIN

THOMAS PANZAK

LAND PLANNING LANDSCAPE **ARCHITECTURE**

Glackin Thomas Panzak, Inc.

Paoli Executive Green 1 41 Leopard Road Paoli, Pennsylvania 19301 610.408.9011 Fax: 610.408.9477 E-mail: plans@glackinplan.com



rop

[amilton

DATE: 08/27/2020 (jr) REV.:

SHEET:

Serial Number: **CALL BEFORE YOU DIG!** PENNSYLVANIA LAW REQUIRES
3 WORKING DAYS NOTICE FOR
CONSTRUCTION PHASE AND 10 WORKING
DAYS IN DESIGN STAGE-STOP CALL Pennsylvania One Call System, Inc. 1-800-242-1776