

**RESOLUTION NO. 2018-22
RADNOR TOWNSHIP**

**A RESOLUTION OF RADNOR TOWNSHIP, DELAWARE COUNTY,
PENNSYLVANIA, APPROVING THE PRELIMINARY PLAN OF
TRUSTEES OF THE UNIVERSITY OF PENNSYLVANIA HEALTH
SYSTEM FOR PROPERTY LOCATED AT 145 KING OF PRUSSIA
ROAD IDENTIFIED AS FOLIO #36-02-01234-00**

WHEREAS, the Trustees of the University of Pennsylvania Health Systems (“Applicant”) submitted a Preliminary Land Development Plan to demolish three existing buildings on the site, and construct three new buildings and two parking structures for mixed uses which include a mixed use medical facility, hotel, and office within the Township’s PLO Zoning District (“Property”); and

WHEREAS, the Radnor Township Planning Commission and the Delaware County Planning Commission have reviewed the Applicant’s Preliminary Plan submission; and

NOW, THEREFORE, be it hereby *RESOLVED* that the Radnor Township Board of Commissioners does hereby approve the Penn Medicine at Radnor Preliminary Land Development Plans prepared by Pennoni Associates, Inc., consisting of twenty-six (26) sheets and dated September 29, 2017, last revised January 16, 2018 (“Plan”), subject to the following Preliminary Plan Approval conditions:

1. Compliance with the correspondence of Gannett Fleming dated February 5, 2018, a copy of which is attached hereto and incorporated herein as *Exhibit “A”*.
2. Compliance with the correspondence of Gilmore & Associates dated February 6, 2018, a copy of which is attached hereto and incorporated herein as *Exhibit “B”*.
3. Applicant shall construct all road improvements as set forth on *Exhibit “C”*. The improvements set forth on *Exhibit “C”* are a revision to the list of improvements attached to the Agreement to Accept Conditions executed by the Applicant, and *Exhibit “D”* to this resolution.
4. The Applicant shall obtain all required approvals from various agencies having jurisdiction over the Project, including, but not limited to, the Pennsylvania Department of Environmental Protection, the Delaware County Conservation District, and the Pennsylvania Department of Transportation.
5. The Applicant shall execute Development, and Financial Security Agreements and Documents (including all necessary agreements, easements, deeds, and declarations), all in a form and manner established and approved by the Township Solicitor and shall post sufficient financial security in a form acceptable to the Township.

6. Applicant shall submit to the Township Engineer for review all necessary legal descriptions and construction cost estimates of the site improvements.

7. Prior to the recording of the Plan, the Applicant shall have paid, in full, all appropriate fees applicable to this project including all outstanding legal, engineering and administrative fees, as well as any other outstanding bills from the Township's professional consultants.

8. The Applicant shall comply with all other applicable Township Ordinances with respect to sewage, stormwater management, zoning, and building codes, as well as comply with all other applicable Township, County, Commonwealth, and Federal rules, regulations, codes, ordinances, and statutes.

9. Applicant shall comply with the Agreement to Accept Conditions attached hereto and incorporated herein as *Exhibit "D"*, except as modified by this preliminary plan approval resolution with respect to required road improvements.

10. Separate land development plans shall be submitted for the proposed four-story hotel, four-story office building or 47,478 square foot parking garage as shown on the plan, attached hereto and incorporated herein as *Exhibit "E"*, to ensure compliance with the overall preliminary plan approval and conditions set forth in this resolution.

IN ADDITION to the foregoing conditions of preliminary plan approval, the Board does hereby approve the following waiver request:

1. SALDO §255-21.A(6) - The Applicant requests a waiver from the requirement that final plans be on a sheet having a minimum size of 18 inches by 30 inches and a maximum size of 24 inches by 34 inches.

SO RESOLVED, at a duly convened meeting of the Board of Commissioners of Radnor Township conducted on this 12th day of February, 2018.

RADNOR TOWNSHIP

By: _____
Name: Lisa Borowski
Title: President

ATTEST: _____



Excellence Delivered As Promised

Date: February 5, 2018

To: Steve Norcini, PE Township Engineer

From: Roger Phillips, PE

cc: Kevin W. Kochanski, RLA, CZO – Director of Community Development
Peter Nelson, Esq. – Grim, Biehn, and Thatcher
Amy B. Kaminski, P.E. – Gilmore & Associates, Inc.
Patricia Sherwin – Radnor Township Engineering Department
Ray Daly – Radnor Township Codes Official

RE: 145 King of Prussia Road – Preliminary Land Development Plan
Penn Medicine – Applicant

Date Accepted: October 2, 2017

90 Day Review: December 31, 2017, extended to February 13, 2018

Gannett Fleming, Inc. has completed a review of the Preliminary Land Development Plans. We have reviewed the plans based on the contents of ordinance No. 2016-13 amending Chapter 280 Zoning, Article XV, PLO Planned Laboratory District Sections 280-62, 280-63 and 280-64. These Plans were also reviewed for conformance with Subdivision and Land Development, and other applicable codes of the Township of Radnor.

The applicant is proposing to demolish the three existing buildings on the site, and construct three new buildings and two parking structures for mixed use medical facility, hotel and office.


The applicant has indicated that a waiver will be requested from the following requirement:

1. §255-21.A(6) – A waiver is requested for the maximum plan sheet size of 24 inches by 34 inches. The plans will be reduced for recording purposes.

Penn Medicine at Radnor

Plans Prepared By: Pennoni Associates, Inc.

Dated: 09/29/2017, revised 01/16/2018, sheets CS001, CS0002, CS0200, CS1001, CS1501, CS 1701, CS 9502, CS9503, CS 9504, L100 and L400 revised 02/05/2018.



Sewage Facilities Planning

1. Final plan approval will not be granted until Planning Approval is received from the PA DEP.

Zoning

1. §280-64.G(8) – The greatest dimension in length or depth of a building (as specified in §280.64.D) may be up to 350 feet provided that: (a) the façade is constructed of brick, stone, architectural concrete, architectural metal work, or articulated glass; (b) is constructed with vertical and horizontal articulation; (c) is approved by the Township. The applicant will coordinate with the Township consultants and provide additional detail as part of the Final Land Development.

Subdivision and Land Development

1. §255.21.A(6) – Final plans shall be on a sheet having a minimum size of 18 inches by 30 inches and a maximum size of 24 inches by 34 inches, and all lettering shall be drawn as to be legible if the plan should be reduced to half size. The applicant has requested a waiver from this requirement.
2. §255-37.E – Sidewalks and pedestrian paths shall be adequately lighted, if required by the Board of Commissioners. The applicant has indicated this is under discussion with the Board of Commissioners.
3. §255-43.1.E(2) – Where, upon agreement with the applicant or developer, it is determined that the dedication of all or any portion of the land area required for park and recreation purposes is not feasible, the applicant or developer shall pay a fee in lieu of dedication of any such land to the Township. The fee for non-residential subdivisions or land developments shall be \$3,307 per 4,000 square feet of building area. The applicant has acknowledged they will submit the required fee upon Final Land Development approval.
4. §255-54.B – The central water system should be designed with adequate capacity and appropriately spaced fire hydrants for fire-fighting purposes pursuant to the specification of the National Fire Protection Association. Review and approval by the Township Engineer and the Township Fire Marshall shall be required in order to ensure that adequate fire protection is provided. We note that the applicant is working with the Township Engineer and Township Fire Marshall.



Sanitary Sewer

1. A profile of the proposed sanitary sewer must be provided. The sizes of all proposed sanitary sewer must be shown on the profile. All utilities crossing the sanitary sewer must be shown on the profile to ensure adequate clearance. This is a requirement of the Final Land Development plan and the applicant has indicated that this will be provided as part of the Final Land Development submission.

Stormwater

1. The Subsurface Infiltration Basin #1 detail calls out the chamber length as 172.50 LF whereas the basin volume credit lists the length as 166.5 LF. This discrepancy must be revised. This is a requirement of the Final Land Development plan and will be addressed as part of the Final Land Development submission.
2. The Bio-Retention Basin #2 detail shows the chamber length as 124 LF whereas the basin volume credit lists the length as 120 LF. This discrepancy must be revised. This is a requirement of the Final Land Development plan and will be addressed as part of the Final Land Development submission
3. The basin volume credit for Bio-Retention Basin 3 lists the areas for elevation 386 and 386.50 as 6,000 SF and 6,770 SF respectively. The contours on the plans show approximately 4,550 SF and 6,150 SF. This results in a difference of 527 CF of dead storage volume. This discrepancy must be revised. This is a requirement of the Final Land Development plan and will be addressed as part of the Final Land Development submission
4. The basin volume credit lists the length of infiltration trench pipe as 75 LF; however, sheets CS1501 and CS1701 call out the infiltration trench as 100 LF. This discrepancy must be revised. In addition, the Subsurface Infiltration Trench Detail shall show an overflow outlet. This is a requirement of the Final Land Development plan and will be addressed as part of the Final Land Development submission
5. The basin volume credit for Surface Detention Basin 1 lists the areas for elevation 360, 361, and 361.15 as 6,985 SF, 8,117 SF, and 8,250 SF respectively. The contours on the plans show approximately 6,280 SF, 7,290 SF, and 7,415 SF. This results in a difference of 880 CF of dead storage volume. Please revise this discrepancy. This is a requirement of the Final Land Development plan and will be addressed as part of the Final Land Development submission
6. Infiltration volume credits for water quality volume cannot be approved at this time as infiltration test has not been completed at this time due to weather conditions. This is a



requirement of the Final Land Development plan and the applicant has indicated that this will be provided as part of the Final Land Development submission.

7. Please provide permeability/infiltration rates for the permeable pavers and permeable pavement. This is a requirement of the Final Land Development plan and the applicant has indicated that this will be provided as part of the Final Land Development submission.
8. Infiltration testing results including a depth to the limiting zone must be provided. Also, please show location of test pits on the plans. This is a requirement of the Final Land Development plan and the applicant has indicated that this will be provided as part of the Final Land Development submission.
9. A profile of the proposed storm sewer must be provided. The sizes of all proposed storm sewer must be shown on the profile. All utilities crossing the storm sewer must be shown on the profile to ensure adequate clearance. This is a requirement of the Final Land Development plan and the applicant has indicated that this will be provided as part of the Final Land Development submission.
10. Stormwater calculations demonstrating that the requirements of the stormwater ordinance are met must be submitted as part of the Final Plan submission. Final approval of the stormwater management plan will be required as part of the Grading Permit process. Any revisions to the size or location of the individual structures or other features will be addressed at that time. This is a requirement of the Final Land Development plan and the applicant has indicated that this will be provided as part of the Final Land Development submission.

General

1. New deeds must be prepared and recorded at the Delaware County Court house at the time of plan recording for the consolidation of the lots. The applicant will provide and record deeds as part of the Final Land Development.
2. Detailed parking structure plans must be provided for review. The applicant will provide parking structure details as part of the Final Land Development submission.

The applicant appeared before the Planning Commission on January 9, 2018. The Planning Commission recommended approval of the preliminary land development plans and waivers noting a level of service C is recommended in conjunction with other improvements as discussed with staff.




Gannett Fleming

S. Norcini
Penn Medicine at Radnor
February 5, 2018

If you have any questions or require any additional information, please contact me.

Very truly yours,

GANNETT FLEMING, INC

A handwritten signature in black ink, appearing to read 'Roger A. Phillips', is written over the company name.

Roger A. Phillips, P.E.
Senior Project Manager





MEMORANDUM

Date: February 6, 2018

To: Steve Norcini, P.E.,
Radnor Township Engineer

From: Amy Kaminski, P.E., PTOE,
Gilmore & Associates, Inc.

cc: Kevin Kochanski, RLA, CZO –Director of Community Development
Ray Daly, Radnor Township Codes Official
Patricia Sherwin, Radnor Township Engineering Department
John Rice, Esq. – Grim, Biehn & Thatcher
Peter Nelson, Esq. – Grim, Biehn & Thatcher
Roger Phillips, P.E. – Gannett Fleming, Inc.
Damon Drummond, P.E., PTOE – Gilmore & Associates, Inc.

Reference: 145 King of Prussia Road – The University of Pennsylvania Health Systems
Radnor Township No. 2016-D-04
Preliminary Land Development Review 3
Transportation Impact Study Review 3
Radnor Township, Delaware County, PA
G&A # 15-12020

Gilmore & Associates, Inc. (G&A) has completed a transportation review for the above referenced project and offers the following transportation comments for Radnor Township consideration:

I. BACKGROUND


The University of Pennsylvania Health Systems is proposing the re-development of a 26 acre parcel, located at 145 King of Prussia Road, in Radnor Township, Delaware County. The project includes a total proposed gross floor area of 475,000 sf. The proposed development will consist of a 250,000 square foot Mixed Medical Use building with two parking structures (1,000 and 850 spaces), a four-story 150,000 square foot general office building, a four-story 75,000 square foot (120 room) hotel and an associated 850 space parking garage. The site is expected to generate a total of 731 AM peak hour trips, 583 PM peak hour trips, and 7,518 weekday trips without any trip reductions for internal or transit trips. The Average Daily Traffic in both directions of travel along King of Prussia Road is 10,283 vehicles.

II. DOCUMENTS REVIEWED

A. Preliminary Land Development Plans for Penn Medicine at Radnor, prepared for the University of Pennsylvania Health Systems, prepared by Pennoni Associates, Inc., dated September 29, 2017, last revised January 16, 2018 along with revised sheets dated February 5, 2018 as follows: CS0001 (Cover Sheet), CS0002 (Note Sheet), CS0200 (Existing Conditions Plan), CS1001 (Site Plan), CS1501 (Grading Plan), and CS1701 (Utility Plan), CS9502, CS9503, and CS9504 (Post-Construction Stormation Management Details; L100 (Tree Removals Plan) and L400 (Tree Replacement Plan).

65 East Butler Avenue | Suite 100 | New Britain, PA 18901 | Phone: 215-345-4330 | Fax: 215-345-8606

Gilmore & Associates, Inc.
Building on a Foundation of Excellence
www.gilmore-assoc.com



- B. Traffic Impact Study for Mixed Medical Facility 145 King of Prussia Road, prepared for the University of Pennsylvania Health System, prepared by Pennoni Associates, Inc., dated September 2017, last revised January 2018 along with the Level of Service C Improvements Letter addressed to Mr. Robert Zienkowski, dated February 1, 2018, revised February 6, 2018; Response letter dated January 17, 2018 prepared by Pennoni Associates, Inc.
- C. Waiver Request Letter for Penn Medicine at Radnor, prepared for Radnor Township, prepared by Pennoni Associates, Inc., dated January 17, 2018.

III. IDENTIFIED IMPROVEMENTS

- A. A bus shelter will be provided on King of Prussia Road southeast of the SEPTA Access/Northern Site Access to the extent that it is approved by SEPTA.
- B. Traffic Signal Timing Optimization at the following intersections:
 - 1. King of Prussia Road and Matson Ford Road/Park Driveway.
 - 2. King of Prussia Road and Radnor-Chester Road.
 - 3. Lancaster Avenue and I-476 SB Off-Ramp.
 - 4. Lancaster Avenue and Radnor-Chester Road.
 - 5. Lancaster Avenue and I-476 NB On-Ramp/Hillside Circle.
- C. King of Prussia Road and SEPTA Station Driveway:
 - 1. Restripe southbound King of Prussia Road to provide a dedicated left turn lane.
 - 2. Coordinate with SEPTA to construct bus shelter.
- D. King of Prussia Road and Raider Road/Site Driveway:
 - 1. Construct a new traffic signal.
 - 2. Provide left turn lanes on both approaches of King of Prussia Road.
 - 3. Widen east side of King of Prussia Road to provide two continuous northbound lanes from Lancaster Avenue to the signalized intersection at Main Site Driveway/Raider Road.
- E. King of Prussia Road and Southern Site Driveway:
 - 1. Restripe northbound King of Prussia Road to provide a shared through/right turn lane.
 - 2. Widen the east side of King of Prussia Road to provide two continuous northbound lanes from the south driveway to Main Site Driveway/Raider Road, with a transition into a dedicated right turn lane.
- F. King of Prussia Road and Lancaster Avenue (U.S. Lancaster Avenue (S.R. 30))/NB Off-Ramp:
 - Restripe the northbound I-476 off-ramp at Lancaster Avenue to provide a shared through/right turn lane.
- G. Partner with Radnor Township to install Traffic Adaptive Signal System at the following intersections:
 - 1. Lancaster Avenue (S.R. 30) & I-476 Northbound On Ramps
 - 2. Lancaster Avenue (S.R. 30) & I-476 Off Ramps /King of Prussia Road
 - 3. Lancaster Avenue (S.R. 30) & I-476 Southbound Ramps
 - 4. Lancaster Avenue (S.R. 30) & Radnor-Chester Road
 - 5. Lancaster Avenue (S.R. 30) & Radnor Financial Center Eastern Driveway

6. Lancaster Avenue (S.R. 30) & Radnor Financial Center Western Driveway
7. King of Prussia Road & Radnor-Chester Road
8. King of Prussia Road & Matson Ford Road
9. Matson Ford Road & South Centennial Drive
10. Matson Ford Road & North Centennial Drive
11. King of Prussia Road & Raider Road
12. Radnor-Chester Road & Raider Road
13. Radnor-Chester Road & Radnor Financial Center

IV. REQUESTED WAIVERS

1. §255-20.B(1)(n) – To allow an aerial photograph demonstrating existing conditions within 500 feet of the site; the applicant has subsequently withdrawn this request for a waiver and provided the required information in Sheet CS0200 *Existing Conditions Plan*.
2. §255-21.A(6) – The Applicant has requested a waiver from providing the maximum plan sheet size of 24 inches by 34 inches; the plans will be reduced for recording purposes.
3. §255-20.B(5)(d)[6][a] – A waiver is requested for the requirement that streets or intersections showing Level of Service below C shall be considered deficient and specific recommendations for elimination of these problems shall be listed. The applicant has subsequently withdrawn this request for a waiver and provided the required information in the updated February 6, 2018 letter to Mr. Robert Zienkowski. The Applicant is required to provide this in the Final Traffic Impact Study.

V. LAND DEVELOPMENT PLAN REVIEW

Subdivision and Land Development Ordinance (SALDO) comments:

1. §255-37.E – Sidewalks and pedestrian paths shall be adequately lighted, if required by the Board of Commissioners.
2. §255-37.H – Where sidewalk grades exceed 5%, a nonslip surface texture shall be used. The Final Land Development plans should provide additional details regarding any proposed walking paths or sidewalks to ensure compliance with this section.

VI. TRAFFIC IMPACT STUDY (TIS) REVIEW

We have no additional comments on the TIS.

The current preliminary plan submission is adequately completed to support preliminary approval; we recommend resolving the above comments during the Final Land Development phase of the project.

If you have any questions regarding the above, please contact this office.

ABK:DAD:kmn

PENN MEDICINE ROAD IMPROVEMENTS

- A. King of Prussia Rd & Lancaster Ave/I-476 NB Off-ramps (Improvements subject to PennDOT review and approval)
 - 1. Re-stripe northbound I-476 Offramps to provide dual left-turn lanes, dual through lanes and a dedicated right-turn lane.

- B. King of Prussia Rd & Raider Rd:
 - 1. Construct a new traffic signal at intersection
 - 2. Construct a minimum of 150' left turn lanes on both approaches of King of Prussia Rd
 - 3. Provide two northbound lanes on the northbound approach with a transition to a northbound through lane and a dedicated right turn lane at the Main Site Driveway (lane drop at Raider Road intersection)

- C. King of Prussia Rd Frontage
 - 1. Construct five (5) foot wide sidewalks along the entire property frontage on King of Prussia Road

- D. King of Prussia Road and Southern Site Access-
 - 1. Restripe and/or widen northbound King of Prussia Road to provide two northbound through lanes on the northbound departure of the intersection.
 - 2. Construct minimum 45-foot curb radii for the anticipated delivery traffic.

- E. King of Prussia Road and SEPTA Access/Northern Site Access-
 - 1. Construct a southbound King of Prussia Road left turn lane into the Northern Site Access.
 - 2. Construct a bus shelter on King of Prussia Road southeast of the SEPTA Access/Northern Site Access, to the extent that it is approved by SEPTA.
 - 3. Construct sidewalks from the site to the R-100 Station at the rear of the property.

- F. Partner with Radnor Township to install Traffic Adaptive Signal System at the following intersections, subject to PennDOT review and approval.
 - 1. Lancaster Ave & I-476 Northbound Ramps
 - 2. Lancaster Ave & I-476/King of Prussia Rd
 - 3. Lancaster Ave & I-476 Southbound ramps
 - 4. Lancaster Ave & Radnor-Chester Rd
 - 5. Lancaster Ave & Radnor Financial Center Eastern Driveway
 - 6. Lancaster Ave & Radnor Financial Center Western Driveway
 - 7. King of Prussia Road & Northern Driveway (if signalized).
 - 8. King of Prussia Rd & Radnor-Chester Rd
 - 9. King of Prussia Rd & Matson Ford Rd
 - 10. Matson Ford Rd & S. Centennial Dr
 - 11. Matson Ford Rd & N. Centennial Dr
 - 12. King of Prussia Rd & Raider Rd
 - 13. Radnor Chester Rd & Raider Rd.
 - 14. Radnor Chester Rd & Radnor Financial Center


- G. Construct a trail extension from the Southern Driveway through the existing PennDOT Right-of-Way, southeast of the site with connections to the existing Route 30 sidewalks. The location, width and composition of the path materials shall be approved by the Radnor Township Engineer.

AGREEMENT TO ACCEPT CONDITIONS
Penn Medicine at Radnor

This Agreement to Accept Conditions (“Agreement”) is made on the _____ day of _____, 2017 by and between **THE TOWNSHIP OF RADNOR**, a Home Rule municipality, with offices located at 301 Iven Avenue, Wayne, PA 19087 (hereinafter the “Township”) and the **TRUSTEES OF THE UNIVERSITY OF PENNSYLVANIA, through its operating division, the UNIVERSITY OF PENNSYLVANIA HEALTH SYSTEM**, 3400 Civic Center Boulevard, Philadelphia, PA 19104, legal owner of Folio No. 36-02-01234-00 (hereinafter the “Applicant”).

BACKGROUND OF AGREEMENT

- A. The Applicant is the legal owner of a certain parcel of land known as Delaware County Folio No. 36-02-01234-00 (hereinafter referred to as “Property”); and
- B. The Applicant has requested preliminary/final approval of a Land Development Plan for the Property, as shown on the Plan entitled “**Penn Medicine at Radnor**”, prepared by Pennoni Associates, Inc., dated September 29, 2017, consisting of sheets 1 to 26 (the “Plan”); and
- C. The Plan and Application are being reviewed by the Township Engineer the Township Planning Commission and the Delaware County Planning Commission pursuant to the Pa. Municipalities Planning Code.
- D. On December 4, 2017, the Applicant appeared before the Township Planning Commission regarding the Plan and agreed to certain conditions of land development approval relating to such Plan, including but not limited to, conditions pertaining to taxes and road improvements.



NOW THEREFORE, for good and valuable consideration, receipt of which is acknowledged, and in consideration of the mutual promises contained herein, and intending to be legally bound, the parties agree as follows:

1. The Applicant agrees that, upon preliminary land development approval the Applicant will agree as a condition of that approval that the Property will be subject to the payment of real estate taxes and business/privilege taxes imposed by Radnor Township, the Radnor Township School District, and Delaware County as long as the Applicant or any related entity operates a mixed medical/ambulatory care facility on the Property.
2. Notwithstanding any right to do so, Applicant agrees it will not seek a tax exemption from the Delaware County Board of Assessment as long as the Applicant or any related entity operates a medical facility on the Property. The foregoing covenant does not prohibit Applicant from seeking an assessment reduction based on fair market value under applicable law.
3. The Applicant agrees that as a condition of its preliminary land development plan submission it will include those traffic improvements, set forth on *Exhibit "A"*, as a condition of preliminary land development approval, provided that the same shall be subject to modification and amendment as approved by the Board of Commissioners during the land development process.
4. Applicant further agrees that if the Plan as described above is withdrawn and/or revised in the future that the terms and conditions of this Agreement to Accept Conditions will be applicable to any future revised

or new land development plans for the Property so long as Applicant or any related entity operates a mixed medical/ambulatory care facility on the Property. This agreement will not apply to the pending land development plan for office building and laboratory uses prepared by Nave Newell, Inc., dated September 3, 2014, last revised March 17, 2015 (the "2015 Plan"), nor to any other land development plan proposed under the same ordinances as the 2015 Plan.

5. Notwithstanding anything contained to the contrary herein, the parties hereby agree and acknowledge that the Township shall be under no obligation to grant any variance nor adopt any zoning amendment or modification as a result of this Agreement.

[signatures on following page]

IN WITNESS WHEREOF, the parties have hereunto caused the execution of
this Agreement this _____ day of _____, 2017.

ATTEST:


RADNOR TOWNSHIP

_____ By: _____


Legal Owner:

ATTEST:

TRUSTEES OF THE UNIVERSITY
OF PENNSYLVANIA HEALTH
SYSTEMS

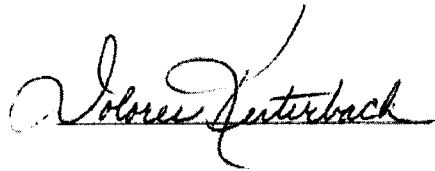

By:


Name: KEVIN B. MAHONEY
Title: BYP

ACKNOWLEDGMENT


By Developer

COMMONWEALTH OF PENNSYLVANIA :
:SS
COUNTY OF Philadelphia :

On this 11th day of December, 2017, before me a Notary Public, personally appeared Jacobs Mahoney, of *Trustees of The University of Pennsylvania Health System*, and acknowledged that the instrument to which this Acknowledgement is attached is his/her act and deed and that he/she desires the same might be recorded as such.

IN WITNESS WHEREOF, I have hereunto set my official hand and seal.

Jane A. Gallen
Notary Public



ACKNOWLEDGEMENT

By Township
COMMONWEALTH OF PENNSYLVANIA :
:
COUNTY OF :

ON THIS _____ day of _____, A.D., 2017, before me a Notary Public, personally appeared _____, President of the Board of Commissioners of Radnor Township, known to me (or satisfactorily proven) to be the person whose name is subscribed to the within instrument, and acknowledged that he/she subscribed the same for the purposes therein contained.

IN WITNESS WHEREOF, I have hereunto set my hand and official seal.

Notary Public ***(SEAL)***

EXHIBIT "A"


PENN MEDICINE ROAD IMPROVEMENTS

- A. King of Prussia Road and Lancaster Avenue (U.S. Route 30)/I-476 NB Off-Ramp-
 - i. Restripe northbound I-476 off-ramp for a shared through/right-turn lane.
- B. King of Prussia Road and Raider Road-
 - i. Construct a new traffic signal.
 - ii. Construct left turn lanes on both approaches of King of Prussia Road
- C. King of Prussia Road and Southern Site Access-
 - i. Restripe northbound King of Prussia Road to provide a shared through/ right lane
 - ii. Widen the east side of King of Prussia Road to provide two continuous northbound lanes from Lancaster Avenue to the signalized intersection at the Main Site Driveway/ Raider Road, with a transition into a dedicated right turn lane.
 - iii. Provide 45-foot curb radii (at minimum), or larger if necessary for the anticipated delivery traffic.
- D. King of Prussia Road and SEPTA Access/Northern Site Access-
 - i. Widen the roadway to 25 feet.
 - ii. Construct a southbound King of Prussia Road left turn lane into the Northern Site Access.
 - iii. Construct a bus shelter on King of Prussia Road southeast of the SEPTA Access/Northern Site Access, to the extent that it is approved by SEPTA.
 - iv. Construct sidewalks from the site to the R-100 Station at the rear of the property.
- E. King of Prussia Road-
 - i. Provide a four-lane cross section along the property's site frontage along King of Prussia Road (between the Southern Access and the Main Site Driveway/ Raider Road).
 - ii. Construct 5 foot wide sidewalks along the entire property frontage on King of Prussia Road.

F. Partner with the Township to install Traffic Adaptive Signal Coordination at the following intersections, subject to PennDOT review and approval:

- i. Route 30 & I-476 Northbound Ramps
- ii. Route 30 & I-476/King of Prussia Road.
- iii. Route 30 & I-476 Southbound Ramps.
- iv. Route 30 & Radnor-Chester Road.
- v. Route 30 & Radnor Financial Center Eastern Driveway
- vi. Route 30 & Radnor Financial Center Western Driveway
- vii. King of Prussia Road & Radnor-Chester Road.
- viii. King of Prussia Road & Matsonford Road.
- ix. Matsonford Road & South Centennial Drive.
- x. Matsonford Road & North Centennial Drive.
- xi. King of Prussia Road & Raider Road.
- xii. King of Prussia Road & Northern Driveway (if signalized).
- xiii. Radnor Chester and Raider Road
- xiv. Radnor Chester and Radnor Financial Center

G. Construct a trail extension from the Southern Driveway through the existing PennDOT Right-of-Way, southeast of the site with connections to the existing Route 30 sidewalks. The location, width and composition of the path materials shall be approved by the Radnor Township Engineer.

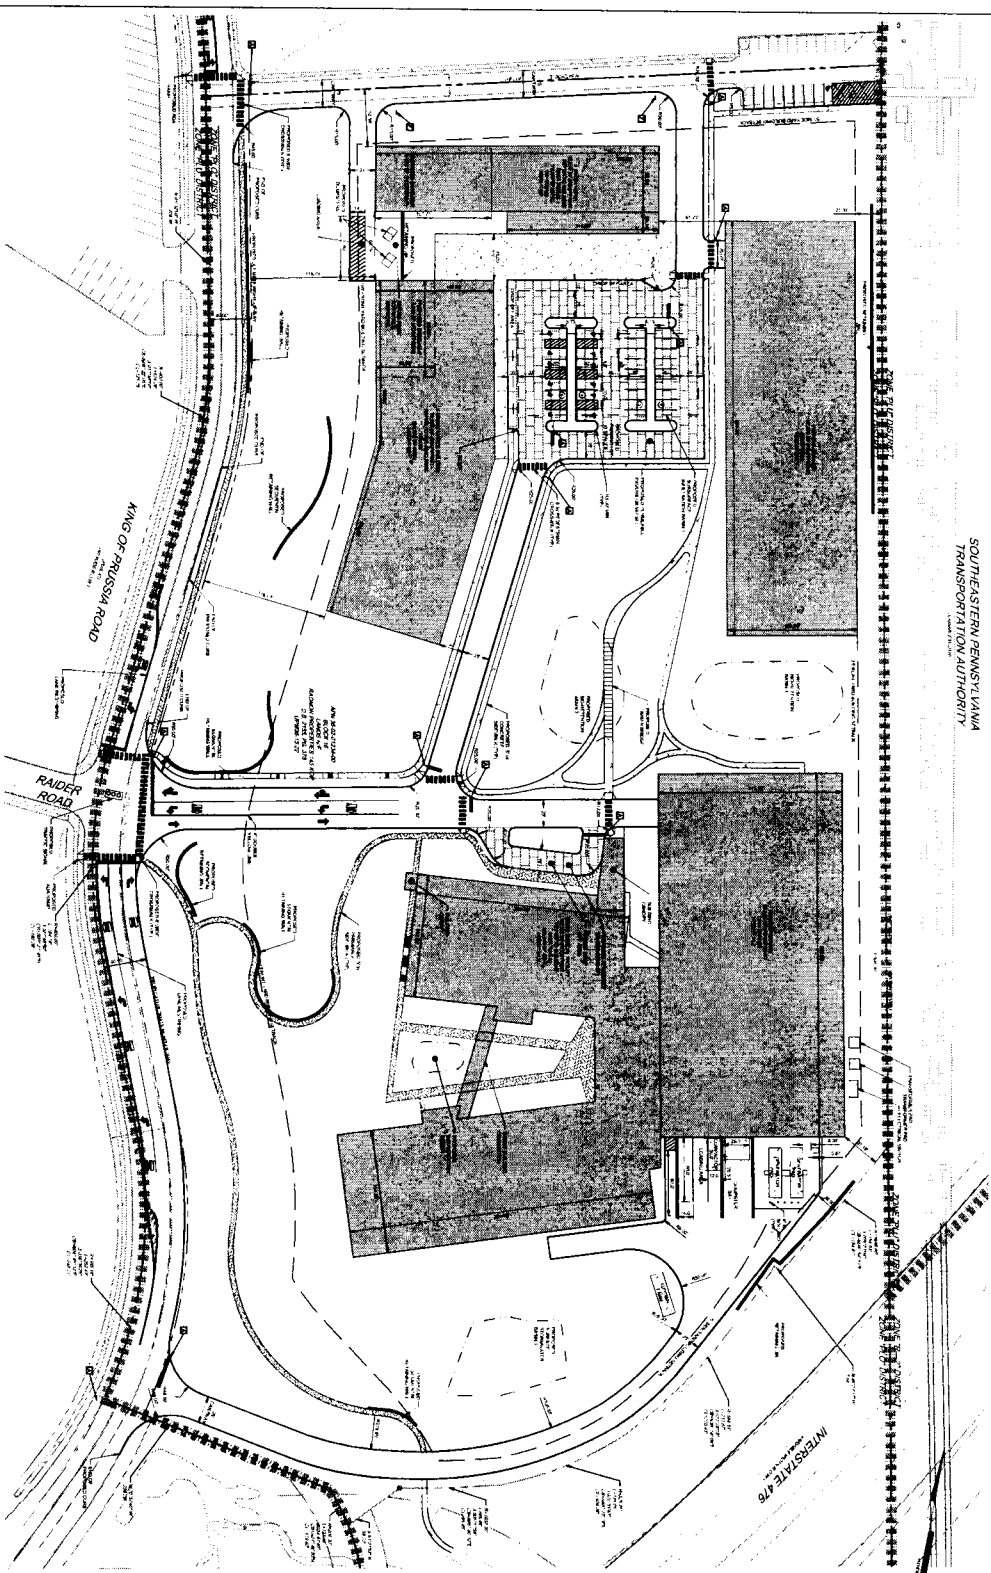

GENERAL NOTES

1. ALL DIMENSIONS ARE IN FEET AND INCHES.
2. ALL CONSTRUCTION SHALL BE IN ACCORDANCE WITH THE LATEST EDITIONS OF THE INTERNATIONAL BUILDING CODES AND THE PENNSYLVANIA DEPARTMENT OF TRANSPORTATION SPECIFICATIONS.
3. THE CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING ALL NECESSARY PERMITS AND APPROVALS FROM THE APPROPRIATE AGENCIES.
4. THE CONTRACTOR SHALL MAINTAIN ACCESS TO ALL ADJACENT PROPERTIES AND PUBLIC UTILITIES AT ALL TIMES.
5. THE CONTRACTOR SHALL PROTECT ALL EXISTING UTILITIES AND STRUCTURES TO REMAIN.
6. THE CONTRACTOR SHALL MAINTAIN ADEQUATE DRAINAGE AND EROSION CONTROL MEASURES THROUGHOUT CONSTRUCTION.
7. THE CONTRACTOR SHALL MAINTAIN ADEQUATE ACCESS TO ALL ADJACENT PROPERTIES AND PUBLIC UTILITIES AT ALL TIMES.
8. THE CONTRACTOR SHALL MAINTAIN ADEQUATE DRAINAGE AND EROSION CONTROL MEASURES THROUGHOUT CONSTRUCTION.
9. THE CONTRACTOR SHALL MAINTAIN ADEQUATE ACCESS TO ALL ADJACENT PROPERTIES AND PUBLIC UTILITIES AT ALL TIMES.
10. THE CONTRACTOR SHALL MAINTAIN ADEQUATE DRAINAGE AND EROSION CONTROL MEASURES THROUGHOUT CONSTRUCTION.

GENERAL NOTES

1. ALL DIMENSIONS ARE IN FEET AND INCHES.
2. ALL CONSTRUCTION SHALL BE IN ACCORDANCE WITH THE LATEST EDITIONS OF THE INTERNATIONAL BUILDING CODES AND THE PENNSYLVANIA DEPARTMENT OF TRANSPORTATION SPECIFICATIONS.
3. THE CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING ALL NECESSARY PERMITS AND APPROVALS FROM THE APPROPRIATE AGENCIES.
4. THE CONTRACTOR SHALL MAINTAIN ACCESS TO ALL ADJACENT PROPERTIES AND PUBLIC UTILITIES AT ALL TIMES.
5. THE CONTRACTOR SHALL PROTECT ALL EXISTING UTILITIES AND STRUCTURES TO REMAIN.
6. THE CONTRACTOR SHALL MAINTAIN ADEQUATE DRAINAGE AND EROSION CONTROL MEASURES THROUGHOUT CONSTRUCTION.
7. THE CONTRACTOR SHALL MAINTAIN ADEQUATE ACCESS TO ALL ADJACENT PROPERTIES AND PUBLIC UTILITIES AT ALL TIMES.
8. THE CONTRACTOR SHALL MAINTAIN ADEQUATE DRAINAGE AND EROSION CONTROL MEASURES THROUGHOUT CONSTRUCTION.
9. THE CONTRACTOR SHALL MAINTAIN ADEQUATE ACCESS TO ALL ADJACENT PROPERTIES AND PUBLIC UTILITIES AT ALL TIMES.
10. THE CONTRACTOR SHALL MAINTAIN ADEQUATE DRAINAGE AND EROSION CONTROL MEASURES THROUGHOUT CONSTRUCTION.

GENERAL NOTES

1. ALL DIMENSIONS ARE IN FEET AND INCHES.
2. ALL CONSTRUCTION SHALL BE IN ACCORDANCE WITH THE LATEST EDITIONS OF THE INTERNATIONAL BUILDING CODES AND THE PENNSYLVANIA DEPARTMENT OF TRANSPORTATION SPECIFICATIONS.
3. THE CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING ALL NECESSARY PERMITS AND APPROVALS FROM THE APPROPRIATE AGENCIES.
4. THE CONTRACTOR SHALL MAINTAIN ACCESS TO ALL ADJACENT PROPERTIES AND PUBLIC UTILITIES AT ALL TIMES.
5. THE CONTRACTOR SHALL PROTECT ALL EXISTING UTILITIES AND STRUCTURES TO REMAIN.
6. THE CONTRACTOR SHALL MAINTAIN ADEQUATE DRAINAGE AND EROSION CONTROL MEASURES THROUGHOUT CONSTRUCTION.
7. THE CONTRACTOR SHALL MAINTAIN ADEQUATE ACCESS TO ALL ADJACENT PROPERTIES AND PUBLIC UTILITIES AT ALL TIMES.
8. THE CONTRACTOR SHALL MAINTAIN ADEQUATE DRAINAGE AND EROSION CONTROL MEASURES THROUGHOUT CONSTRUCTION.
9. THE CONTRACTOR SHALL MAINTAIN ADEQUATE ACCESS TO ALL ADJACENT PROPERTIES AND PUBLIC UTILITIES AT ALL TIMES.
10. THE CONTRACTOR SHALL MAINTAIN ADEQUATE DRAINAGE AND EROSION CONTROL MEASURES THROUGHOUT CONSTRUCTION.

DESCRIPTION OF WORK

CONSTRUCTION OF BUILDING STRUCTURE OF RAIDER WORKS
 1. RAIDER WORKS BUILDING
 2. RAIDER WORKS BUILDING
 3. RAIDER WORKS BUILDING
 4. RAIDER WORKS BUILDING
 5. RAIDER WORKS BUILDING
 6. RAIDER WORKS BUILDING
 7. RAIDER WORKS BUILDING
 8. RAIDER WORKS BUILDING
 9. RAIDER WORKS BUILDING
 10. RAIDER WORKS BUILDING

CONTRACTOR'S CERTIFICATION



I, the undersigned, being duly qualified in the profession of architecture, hereby certify that I am the author of the design and construction documents herein, and that I am a duly licensed professional architect in the State of Pennsylvania.

DATE: _____
SIGNATURE: _____
PRINTED NAME: _____

CONTRACTOR'S CERTIFICATION

I, the undersigned, being duly qualified in the profession of architecture, hereby certify that I am the author of the design and construction documents herein, and that I am a duly licensed professional architect in the State of Pennsylvania.

DATE: _____
SIGNATURE: _____
PRINTED NAME: _____



NOT FOR CONSTRUCTION

CS-1001



SITE PLAN

DATE: 09/19/27

PROJECT: RAIDER WORKS

CLIENT: SEPTA

SCALE: AS SHOWN

John McKinley
 PROFESSIONAL ARCHITECT

RADNOR TOWNSHIP

ENGINEERING DEPARTMENT



Memorandum

To: Radnor Township Board of Commissioners

From: Stephen F. Norcini, PE, Township Engineer *SFN*

CC: Robert A. Zienkowski, Township Manager
William M. White, Assistant Manager/Director of Finance

Date: February 6, 2018

**Re: Resolution #2018-22, SALDO Application #2016-D-04 – Final;
Preliminary Land Development - 145 King of Prussia Road, Penn Medicine**

This application has been before the Board of Commissioners at Caucus and at the Sub-Committee meeting.

The applicant is proposing to construct three buildings and two structured parking garages for mixed use of hotel, office, and a medical facility.

The plans before the Board of Commissioners are recently revised based on the Caucus and Sub-Committee Meeting. Following this memorandum, the documents are broken down as follows:

- Review Letters
- Penn Medicine Road Improvements
- Sanitary Sewer
- Traffic
- Plans

The applicant is before the Board of Commissioners seeking Final Preliminary Land Development approval.

Review Letters



Gannett Fleming

*Excellence Delivered **As Promised***

Date: February 5, 2018

To: Steve Norcini, PE Township Engineer

From: Roger Phillips, PE

cc: Kevin W. Kochanski, RLA, CZO – Director of Community Development
Peter Nelson, Esq. – Grim, Biehn, and Thatcher
Amy B. Kaminski, P.E. – Gilmore & Associates, Inc.
Patricia Sherwin – Radnor Township Engineering Department
Ray Daly – Radnor Township Codes Official

RE: 145 King of Prussia Road – Preliminary Land Development Plan
Penn Medicine – Applicant

Date Accepted: October 2, 2017

90 Day Review: December 31, 2017, extended to February 13, 2018

Gannett Fleming, Inc. has completed a review of the Preliminary Land Development Plans. We have reviewed the plans based on the contents of ordinance No. 2016-13 amending Chapter 280 Zoning, Article XV, PLO Planned Laboratory District Sections 280-62, 280-63 and 280-64. These Plans were also reviewed for conformance with Subdivision and Land Development, and other applicable codes of the Township of Radnor.

The applicant is proposing to demolish the three existing buildings on the site, and construct three new buildings and two parking structures for mixed use medical facility, hotel and office.

The applicant has indicated that a waiver will be requested from the following requirement:

1. §255-21.A(6) – A waiver is requested for the maximum plan sheet size of 24 inches by 34 inches. The plans will be reduced for recording purposes.

Penn Medicine at Radnor

Plans Prepared By: Pennoni Associates, Inc.

Dated: 09/29/2017, revised 01/16/2018, sheets CS001, CS0002, CS0200, CS1001, CS1501, CS 1701, CS 9502, CS9503, CS 9504, L100 and L400 revised 02/05/2018.



Sewage Facilities Planning

1. Final plan approval will not be granted until Planning Approval is received from the PA DEP.

Zoning

1. §280-64.G(8) – The greatest dimension in length or depth of a building (as specified in §280.64.D) may be up to 350 feet provided that: (a) the façade is constructed of brick, stone, architectural concrete, architectural metal work, or articulated glass; (b) is constructed with vertical and horizontal articulation; (c) is approved by the Township. The applicant will coordinate with the Township consultants and provide additional detail as part of the Final Land Development.

Subdivision and Land Development

1. §255.21.A(6) – Final plans shall be on a sheet having a minimum size of 18 inches by 30 inches and a maximum size of 24 inches by 34 inches, and all lettering shall be drawn as to be legible if the plan should be reduced to half size. The applicant has requested a waiver from this requirement.
2. §255-37.E – Sidewalks and pedestrian paths shall be adequately lighted, if required by the Board of Commissioners. The applicant has indicated this is under discussion with the Board of Commissioners.
3. §255-43.1.E(2) – Where, upon agreement with the applicant or developer, it is determined that the dedication of all or any portion of the land area required for park and recreation purposes is not feasible, the applicant or developer shall pay a fee in lieu of dedication of any such land to the Township. The fee for non-residential subdivisions or land developments shall be \$3,307 per 4,000 square feet of building area. The applicant has acknowledged they will submit the required fee upon Final Land Development approval.
4. §255-54.B – The central water system should be designed with adequate capacity and appropriately spaced fire hydrants for fire-fighting purposes pursuant to the specification of the National Fire Protection Association. Review and approval by the Township Engineer and the Township Fire Marshall shall be required in order to ensure that adequate fire protection is provided. We note that the applicant is working with the Township Engineer and Township Fire Marshall.

Sanitary Sewer

1. A profile of the proposed sanitary sewer must be provided. The sizes of all proposed sanitary sewer must be shown on the profile. All utilities crossing the sanitary sewer must be shown on the profile to ensure adequate clearance. This is a requirement of the Final Land Development plan and the applicant has indicated that this will be provided as part of the Final Land Development submission.

Stormwater

1. The Subsurface Infiltration Basin #1 detail calls out the chamber length as 172.50 LF whereas the basin volume credit lists the length as 166.5 LF. This discrepancy must be revised. This is a requirement of the Final Land Development plan and will be addressed as part of the Final Land Development submission.
2. The Bio-Retention Basin #2 detail shows the chamber length as 124 LF whereas the basin volume credit lists the length as 120 LF. This discrepancy must be revised. This is a requirement of the Final Land Development plan and will be addressed as part of the Final Land Development submission
3. The basin volume credit for Bio-Retention Basin 3 lists the areas for elevation 386 and 386.50 as 6,000 SF and 6,770 SF respectively. The contours on the plans show approximately 4,550 SF and 6,150 SF. This results in a difference of 527 CF of dead storage volume. This discrepancy must be revised. This is a requirement of the Final Land Development plan and will be addressed as part of the Final Land Development submission
4. The basin volume credit lists the length of infiltration trench pipe as 75 LF; however, sheets CS1501 and CS1701 call out the infiltration trench as 100 LF. This discrepancy must be revised. In addition, the Subsurface Infiltration Trench Detail shall show an overflow outlet. This is a requirement of the Final Land Development plan and will be addressed as part of the Final Land Development submission
5. The basin volume credit for Surface Detention Basin 1 lists the areas for elevation 360, 361, and 361.15 as 6,985 SF, 8,117 SF, and 8,250 SF respectively. The contours on the plans show approximately 6,280 SF, 7,290 SF, and 7,415 SF. This results in a difference of 880 CF of dead storage volume. Please revise this discrepancy. This is a requirement of the Final Land Development plan and will be addressed as part of the Final Land Development submission
6. Infiltration volume credits for water quality volume cannot be approved at this time as infiltration test has not been completed at this time due to weather conditions. This is a



requirement of the Final Land Development plan and the applicant has indicated that this will be provided as part of the Final Land Development submission.

7. Please provide permeability/infiltration rates for the permeable pavers and permeable pavement. This is a requirement of the Final Land Development plan and the applicant has indicated that this will be provided as part of the Final Land Development submission.
8. Infiltration testing results including a depth to the limiting zone must be provided. Also, please show location of test pits on the plans. This is a requirement of the Final Land Development plan and the applicant has indicated that this will be provided as part of the Final Land Development submission.
9. A profile of the proposed storm sewer must be provided. The sizes of all proposed storm sewer must be shown on the profile. All utilities crossing the storm sewer must be shown on the profile to ensure adequate clearance. This is a requirement of the Final Land Development plan and the applicant has indicated that this will be provided as part of the Final Land Development submission.
10. Stormwater calculations demonstrating that the requirements of the stormwater ordinance are met must be submitted as part of the Final Plan submission. Final approval of the stormwater management plan will be required as part of the Grading Permit process. Any revisions to the size or location of the individual structures or other features will be addressed at that time. This is a requirement of the Final Land Development plan and the applicant has indicated that this will be provided as part of the Final Land Development submission.

General

1. New deeds must be prepared and recorded at the Delaware County Court house at the time of plan recording for the consolidation of the lots. The applicant will provide and record deeds as part of the Final Land Development.
2. Detailed parking structure plans must be provided for review. The applicant will provide parking structure details as part of the Final Land Development submission.

The applicant appeared before the Planning Commission on January 9, 2018. The Planning Commission recommended approval of the preliminary land development plans and waivers noting a level of service C is recommended in conjunction with other improvements as discussed with staff.



Gannett Fleming

S. Norcini
Penn Medicine at Radnor
February 5, 2018

If you have any questions or require any additional information, please contact me.

Very truly yours,

GANNETT FLEMING, INC.

A handwritten signature in blue ink, appearing to read 'Roger A. Phillips', is written over the company name.

Roger A. Phillips, P.E.
Senior Project Manager





MEMORANDUM

Date: February 6, 2018

To: Steve Norcini, P.E.,
Radnor Township Engineer

From: Amy Kaminski, P.E., PTOE,
Gilmore & Associates, Inc.

cc: Kevin Kochanski, RLA, CZO –Director of Community Development
Ray Daly, Radnor Township Codes Official
Patricia Sherwin, Radnor Township Engineering Department
John Rice, Esq. – Grim, Biehn & Thatcher
Peter Nelson, Esq. – Grim, Biehn & Thatcher
Roger Phillips, P.E. – Gannett Fleming, Inc.
Damon Drummond, P.E., PTOE – Gilmore & Associates, Inc.

Reference: 145 King of Prussia Road – The University of Pennsylvania Health Systems
Radnor Township No. 2016-D-04
Preliminary Land Development Review 3
Transportation Impact Study Review 3
Radnor Township, Delaware County, PA
G&A # 15-12020

Gilmore & Associates, Inc. (G&A) has completed a transportation review for the above referenced project and offers the following transportation comments for Radnor Township consideration:

I. BACKGROUND

The University of Pennsylvania Health Systems is proposing the re-development of a 26 acre parcel, located at 145 King of Prussia Road, in Radnor Township, Delaware County. The project includes a total proposed gross floor area of 475,000 sf. The proposed development will consist of a 250,000 square foot Mixed Medical Use building with two parking structures (1,000 and 850 spaces), a four-story 150,000 square foot general office building, a four-story 75,000 square foot (120 room) hotel and an associated 850 space parking garage. The site is expected to generate a total of 731 AM peak hour trips, 583 PM peak hour trips, and 7,518 weekday trips without any trip reductions for internal or transit trips. The Average Daily Traffic in both directions of travel along King of Prussia Road is 10,283 vehicles.

II. DOCUMENTS REVIEWED

A. Preliminary Land Development Plans for Penn Medicine at Radnor, prepared for the University of Pennsylvania Health Systems, prepared by Pennoni Associates, Inc., dated September 29, 2017, last revised January 16, 2018 along with revised sheets dated February 5, 2018 as follows: CS0001 (Cover Sheet), CS0002 (Note Sheet), CS0200 (Existing Conditions Plan), CS1001 (Site Plan), CS1501 (Grading Plan), and CS1701 (Utility Plan), CS9502, CS9503, and CS9504 (Post-Construction Stormation Management Details; L100 (Tree Removals Plan) and L400 (Tree Replacement Plan).

65 East Butler Avenue | Suite 100 | New Britain, PA 18901 | Phone: 215-345-4330 | Fax: 215-345-8606

- B. Traffic Impact Study for Mixed Medical Facility 145 King of Prussia Road, prepared for the University of Pennsylvania Health System, prepared by Pennoni Associates, Inc., dated September 2017, last revised January 2018 along with the Level of Service C Improvements Letter addressed to Mr. Robert Zienkowski, dated February 1, 2018, revised February 6, 2018; Response letter dated January 17, 2018 prepared by Pennoni Associates, Inc.
- C. Waiver Request Letter for Penn Medicine at Radnor, prepared for Radnor Township, prepared by Pennoni Associates, Inc., dated January 17, 2018.

III. IDENTIFIED IMPROVEMENTS

- A. A bus shelter will be provided on King of Prussia Road southeast of the SEPTA Access/Northern Site Access to the extent that it is approved by SEPTA.
- B. Traffic Signal Timing Optimization at the following intersections:
 - 1. King of Prussia Road and Matson Ford Road/Park Driveway.
 - 2. King of Prussia Road and Radnor-Chester Road.
 - 3. Lancaster Avenue and I-476 SB Off-Ramp.
 - 4. Lancaster Avenue and Radnor-Chester Road.
 - 5. Lancaster Avenue and I-476 NB On-Ramp/Hillside Circle.
- C. King of Prussia Road and SEPTA Station Driveway:
 - 1. Restripe southbound King of Prussia Road to provide a dedicated left turn lane.
 - 2. Coordinate with SEPTA to construct bus shelter.
- D. King of Prussia Road and Raider Road/Site Driveway:
 - 1. Construct a new traffic signal.
 - 2. Provide left turn lanes on both approaches of King of Prussia Road.
 - 3. Widen east side of King of Prussia Road to provide two continuous northbound lanes from Lancaster Avenue to the signalized intersection at Main Site Driveway/Raider Road.
- E. King of Prussia Road and Southern Site Driveway:
 - 1. Restripe northbound King of Prussia Road to provide a shared through/right turn lane.
 - 2. Widen the east side of King of Prussia Road to provide two continuous northbound lanes from the south driveway to Main Site Driveway/Raider Road, with a transition into a dedicated right turn lane.
- F. King of Prussia Road and Lancaster Avenue (U.S. Lancaster Avenue (S.R. 30))/NB Off-Ramp:
 - Restripe the northbound I-476 off-ramp at Lancaster Avenue to provide a shared through/right turn lane.
- G. Partner with Radnor Township to install Traffic Adaptive Signal System at the following intersections:
 - 1. Lancaster Avenue (S.R. 30) & I-476 Northbound On Ramps
 - 2. Lancaster Avenue (S.R. 30) & I-476 Off Ramps /King of Prussia Road
 - 3. Lancaster Avenue (S.R. 30) & I-476 Southbound Ramps
 - 4. Lancaster Avenue (S.R. 30) & Radnor-Chester Road
 - 5. Lancaster Avenue (S.R. 30) & Radnor Financial Center Eastern Driveway

6. Lancaster Avenue (S.R. 30) & Radnor Financial Center Western Driveway
7. King of Prussia Road & Radnor-Chester Road
8. King of Prussia Road & Matson Ford Road
9. Matson Ford Road & South Centennial Drive
10. Matson Ford Road & North Centennial Drive
11. King of Prussia Road & Raider Road
12. Radnor-Chester Road & Raider Road
13. Radnor-Chester Road & Radnor Financial Center

IV. REQUESTED WAIVERS

1. §255-20.B(1)(n) – To allow an aerial photograph demonstrating existing conditions within 500 feet of the site; the applicant has subsequently withdrawn this request for a waiver and provided the required information in Sheet CS0200 *Existing Conditions Plan*.
2. §255-21.A(6) – The Applicant has requested a waiver from providing the maximum plan sheet size of 24 inches by 34 inches; the plans will be reduced for recording purposes.
3. §255-20.B(5)(d)[6][a] – A waiver is requested for the requirement that streets or intersections showing Level of Service below C shall be considered deficient and specific recommendations for elimination of these problems shall be listed. The applicant has subsequently withdrawn this request for a waiver and provided the required information in the updated February 6, 2018 letter to Mr. Robert Zienkowski. The Applicant is required to provide this in the Final Traffic Impact Study.

V. LAND DEVELOPMENT PLAN REVIEW

Subdivision and Land Development Ordinance (SALDO) comments:

1. §255-37.E – Sidewalks and pedestrian paths shall be adequately lighted, if required by the Board of Commissioners.
2. §255-37.H – Where sidewalk grades exceed 5%, a nonslip surface texture shall be used. The Final Land Development plans should provide additional details regarding any proposed walking paths or sidewalks to ensure compliance with this section.

VI. TRAFFIC IMPACT STUDY (TIS) REVIEW

We have no additional comments on the TIS.

The current preliminary plan submission is adequately completed to support preliminary approval; we recommend resolving the above comments during the Final Land Development phase of the project.

If you have any questions regarding the above, please contact this office.

ABK:DAD:kmn

RADNOR TOWNSHIP

ENGINEERING DEPARTMENT



Memorandum

To: Radnor Township Board of Commissioners

From: Stephen F. Norcini, PE, Township Engineer *SFN*

CC: Robert A. Zienkowski, Township Manager
William M. White, Assistant Manager/Director of Finance

Date: January 17, 2018

Re: SALDO Application #2016-D-04 – Caucus; Preliminary Land Development - 145 King of Prussia Road, Penn Medicine

Before the Board of Commissioners will be representatives of Penn Medicine, to present plans for Preliminary Land Development, at caucus.

The applicant is proposing to construct three buildings and two structured parking garages for mixed use of hotel, office, and a medical facility. A grading permit has been issued for demolition site work, and it is anticipated that the actual demolition permit from codes will be issued soon.

The plans before the Board of Commissioners are recently revised, and have not been fully reviewed by staff and the consultants (please note the review letters in the packet are from the previous plan set). That being said, staff and the consultants have met with the applicant to discuss the revisions on the plans before the Commissioners. The Board of Commissioners and our residents will be able to read review letters from our consultants based on the revised plans prior to the applicant's attendance at the meeting requesting final Preliminary Land Development approval.

Please find attached "Penn Medicine Road Improvements", which outlines the traffic improvements the applicant has agreed to construct.

Enclosures: Penn Medicine Road Improvements
Previous Plan Reviews & Documentation
Revised Plan Set

PENN MEDICINE ROAD IMPROVEMENTS

- A. King of Prussia Road and Lancaster Avenue (U.S. Route 30)/I-476 NB Off-Ramp-
 - i. Restripe northbound I-476 off-ramp for a shared through/right-turn lane.
- B. King of Prussia Road and Raider Road-
 - i. Construct a new traffic signal.
 - ii. Construct left turn lanes on both approaches of King of Prussia Road
- C. King of Prussia Road and Southern Site Access-
 - i. Restripe northbound King of Prussia Road to provide a shared through/ right lane
 - ii. Widen the east side of King of Prussia Road to provide two continuous northbound lanes from Lancaster Avenue to the signalized intersection at the Main Site Driveway/ Raider Road, with a transition into a dedicated right turn lane.
 - iii. Provide 45-foot curb radii (at minimum), or larger if necessary for the anticipated delivery traffic.
- D. King of Prussia Road and SEPTA Access/Northern Site Access-
 - i. Widen the roadway to 25 feet.
 - ii. Construct a southbound King of Prussia Road left turn lane into the Northern Site Access.
 - iii. Construct a bus shelter on King of Prussia Road southeast of the SEPTA Access/Northern Site Access, to the extent that it is approved by SEPTA.
 - iv. Construct sidewalks from the site to the R-100 Station at the rear of the property.
- E. King of Prussia Road-
 - i. Provide a four-lane cross section along the property's site frontage along King of Prussia Road (between the Southern Access and the Main Site Driveway/ Raider Road).
 - ii. Construct 5 foot wide sidewalks along the entire property frontage on King of Prussia Road.
- F. Partner with the Township to install Traffic Adaptive Signal Coordination at the following intersections, subject to PennDOT review and approval:

- i. Route 30 & I-476 Northbound Ramps
 - ii. Route 30 & I-476/King of Prussia Road.
 - iii. Route 30 & I-476 Southbound Ramps.
 - iv. Route 30 & Radnor-Chester Road.
 - v. Route 30 & Radnor Financial Center Eastern Driveway
 - vi. Route 30 & Radnor Financial Center Western Driveway
 - vii. King of Prussia Road & Radnor-Chester Road.
 - viii. King of Prussia Road & Matsonford Road.
 - ix. Matsonford Road & South Centennial Drive.
 - x. Matsonford Road & North Centennial Drive.
 - xi. King of Prussia Road & Raider Road.
 - xii. King of Prussia Road & Northern Driveway (if signalized).
 - xiii. Radnor Chester and Raider Road
 - xiv. Radnor Chester and Radnor Financial Center
- G. Construct a trail extension from the Southern Driveway through the existing PennDOT Right-of-Way, southeast of the site with connections to the existing Route 30 sidewalks. The location, width and composition of the path materials shall be approved by the Radnor Township Engineer.



One South Church Street
Second Floor
West Chester, PA 19382
T: 610-429-8907
F: 610-429-8918

www.pennoni.com

January 17, 2018

UPHS1504

Radnor Township
Attn: Mr. Robert Zienkowski
301 Iven Ave.
Wayne, PA19087

**RE: PRELIMINARY LAND DEVELOPMENT APPLICATION
PENN MEDICINE AT RADNOR
RADNOR TOWNSHIP, DELAWARE COUNTY, PENNSYLVANIA**

Dear Mr. Zienkowski:

We are in receipt of the Township's consultants review letters, including Gilmore & Associates, Inc letter dated November 29, 2017 and Gannett Fleming's letter dated November 28, 2017. Below is a summary of the Township's consultants comments in *italics* with our responses in **bold**. Please note that we will submit revised plans based on these comments as part of the Final Land Development process.

Comments from Gannett Fleming Letter dated November 28, 2017:

Sewage Facilities Planning

1. *Final plan approval will not be granted until Planning Approval is received from the PA DEP.*

Pennoni Response: We have submitted documentation for an exemption of Sanitary Sewer Planning to Radnor Township for review. We will provide PA DEP approval once received.

Zoning

1. *§280-63.D(5) – A parking structure, when constructed as an accessory structure for the purposed of eliminating allowable surface parking is allowed. The applicant must indicate on the plans where any surface parking that is being eliminated would have been located.*

Pennoni Response: Included with this submission is an exhibit which demonstrate the surface parking to be eliminated and relocated to the parking garage. Please refer to sheet EX-24.

2. *§280-64.D(2) – The distance at the closet point between any two buildings or group of attached buildings, including accessory structures, shall not be less than 45 feet. A dimension must be added to the plan between the corner of the hotel and the corner of the office building. Plan measurements appears to indicate a separation distance of less than 45 feet.*

Pennoni Response: A dimension has been added to the site plan to show the required 45-ft separation between buildings. Please refer to sheet CS1001.

3. *§280-64.G – The Zoning Table must be revised to clearly indicated the zoning compliance requirements for each building and structure. The square footage of the buildings provided on the plan, do not*

match the square footage of the buildings located on a table subsequently provided by the applicant. This must be revised to be consistent.

Pennoni Response: A table summarizing the building areas has been added to sheet CS1001. In addition, the building areas on plan view have been updated accordingly.

4. *§280-64.G.(4) – A parking garage or parking structure may have a height of up to 55 feet so long as such parking garage or parking structure does not exceed the height of any building on the site. The mixed use medical building is proposed to be 54.5' and the parking garage next to the hotel is 54.83'. This must be revised or a variance requested.*

Pennoni Response: The parking garage height has been revised to 54.2'. Please refer to sheet CS1001.

5. *§280-64.G.(8) – The greatest dimension in length or depth of a building (as specified in §280.64.D) may be up to 350 feet provided that: (a) the façade is constructed of brick, stone, architectural concrete, architectural metal work, or articulated glass; (b) is constructed with vertical and horizontal articulation; (c) is approved by the Township. Additional information must be provided to indicate that the proposed buildings are in compliance with this section.*

Pennoni Response: We will coordinate with the Township consultants and comply as provide additional detail as part of the Final Land Development process.

6. *§280-64.G.(10) – All Mixed Use developments shall submit a Transportation Impact and Mitigation Report to the Township as part of the land development application. We note that a Traffic Impact Study was submitted.*

Pennoni Response: The Traffic Impact Study has been revised based on comments from Gilmore & Associates, Inc. outlined later in this letter.

7. *§280-70.C. – Service, utility, maintenance and storage areas, including solid waste containers, loading and unloading areas and heating, ventilating and air condition equipment, shall be screened from view from public streets and abutting properties. This may be accomplished by means of enclosing walls, stone, brick or wood fences or a buffer planting strip. Visual screening so provided shall be of sufficient density so as not to be seen through and of sufficient height to constitute an effective screen. Appropriate visual screenings must be provided.*

Pennoni Response: We will coordinate with the Township consultants and comply as provide additional detail as part of the Final Land Development process.

8. *§280-103.B(4) – The parking calculations provided must be revised to include the specific use of hotel.*

Pennoni Response: The parking table on sheet CS1001 has been updated to include the specific use of hotel.

9. *§280-112.C. – Areas of steep slopes containing slopes steeper than 14% shall be outlined as following (1) Areas containing slopes steeper than 14% but less than 20% shall be distinguished from the areas containing slopes of 20% or steeper. (2) Areas containing slopes of 20% and steeper shall be separately identified. The applicant has shown the location of these areas on the plans and has indicated that these slopes are manmade and excluded from this section.*

Pennoni Response: No comment necessary.

Subdivision and Land Development

1. §255.20.B(1)(n) – Existing principal buildings and their respective uses, and driveways on the adjacent peripheral strip; sewer lines, storm drains, culverts, bridges, utility easements, quarries, railroads and other significant man-made features within 500 feet of and within the site (this includes properties across streets). This must be provided or a waiver requested.

Pennoni Response: A waiver request has been added to sheet CS1001. In addition, an overall existing conditions plan with an aerial photograph has been added to the plan set as sheet CS0200.

2. §255.21.A(6) – Final plans shall be on a sheet having a minimum size of 18 inches by 30 inches and a maximum size of 24 inches by 34 inches, and all lettering shall be drawn as to be legible if the plan should be reduced to half size. The applicant has requested a waiver from this requirement.

Pennoni Response: A waiver request has been added to sheet CS1001.

3. §255-27.C.(1) – King of Prussia Road is designated as a major collector and has a required Right-of-Way of 80 feet, and cartway of 48 feet. The ultimate right of way shown on the plans is 65 feet.

Pennoni Response: The ultimate right-of-way shown on the plans equates to half of the required 80-ft width or 40-ft. Please refer to sheet CS1001.

4. §255-27.C.(2) – Additional right-of-way and/or cartway widths may be required by the Board of Commissioners in order to lessen traffic congestion, to secure safety from fire, panic and other dangers, to facilitate the adequate provision for transportation and other public requirements and to promote the general welfare.

Pennoni Response: Roadway improvements have been provided within the ultimate right-of-way based on discussions with Township Staff. Roadway improvements are discussed later in this letter.

5. §255-29.A.(12)(b) – The width of entrance and exit drives shall be 25 feet for two way use. The two-way drive on the Northerly side of the property is 20 feet wide. This must be revised or a waiver requested.

Pennoni Response: The plans have been revised to include 5-ft of widening for the Northerly driveway to the SEPTA station in order to provide the 25-ft cartway width. Please refer to sheet CS1001.

6. §255-29.A.(14) – No less than a five-foot radius of curvature shall be permitted for all curblines in the parking areas. The radii of all curb lines must be clearly identified on the plans.

Pennoni Response: The plans have been revised to label curb radii as needed. A note has also been added to General Note #16 on sheet CS0002 to state that the minimum curb radii shall be 5-ft unless otherwise noted.

7. §255-29.B.(1) – All parking areas shall have at least one tree 2 ½ inches minimum in caliper for every five parking spaces in single bays and one tree 2 ½ inches minimum in caliper for every 10 parking spaces in double bays. This must be clearly shown on the plans.

Pennoni Response: The Landscape plans have been revised as required.

8. §255-37.E. – Sidewalks and pedestrian paths shall be adequately lighted, if required by the Board of Commissioners.

Pennoni Response: Lighting is provided along sidewalks and pedestrian paths. We will discuss this item further with the Board of Commissioners. Please refer to sheet CS2201.

9. §255-38.A. – Within any land development or major subdivision, street trees shall be planted along all streets where suitable street trees do not exist.

Pennoni Response: The Landscape plans have been revised as required.

10. §255-38.B. – Street trees 2 ½ inches dbh at intervals of not more than 30 feet along both sides of new streets and along one or both sides of an existing street within the proposed subdivision and land development. An equivalent number may be planted in an informal arrangement subject to the approval of the Board of Commissioners.

Pennoni Response: The Landscape plans have been revised as required.

11. §255-41.H. – Outdoor collection stations shall be provided for garbage and trash removal when indoor collection is not provided. Collection stations shall be screened from view and landscaped. We note there is one collection station shown on the plans. The applicant must explain how garbage and trash removal will be provided for the hotel and office building.

Pennoni Response: Additional detail has been added to the loading areas for the hotel and office building to demonstrate the location of dumpsters. Please refer to sheet CS1001.

12. §255-43.1.E(2) – Where, upon agreement with the applicant or developer, it is determined that the dedication of all or any portion of the land area required for park and recreation purposes is not feasible, the applicant or developer shall pay a fee in lieu of dedication of any such land to the Township. The fee for non-residential subdivisions or land developments shall be \$3,307 per 4,000 square feet of building area. The applicant must conform to this section.

Pennoni Response: The required fee will be paid upon Final Land Development Approval.

13. §255-54.B – The central water system should be designed with adequate capacity and appropriately spaced fire hydrants for fire-fighting purposes pursuant to the specification of the National Fire Protection Association. Review and approval by the Township Engineer and the Township Fire Marshall shall be required in order to ensure that adequate fire protection is provided.

Pennoni Response: Water lines and fire hydrants have been depicted on the Utility Plan. We will work with the Township Engineer and Fire Marshall as needed.

1. *The applicant has indicated that sanitary sewer service is being provided to the hotel, office building and one of the parking garages. The applicant must provide sewer service to the mixed medical facility. An explanation must be provided as to why sanitary sewer service to the parking garage is provided.*

Pennoni Response: Sanitary sewer connections will be coordinated on future plans.

2. *A profile of the proposed sanitary sewer must be provided. The sizes of all proposed sanitary sewer must be shown on the profile. All utilities crossing the sanitary sewer must be shown on the profile to ensure adequate clearance.*

Pennoni Response: Profiles will be provided on Final Land Development Plans.

3. *The plans indicate that the contractor will connection to the existing sewer. It is unclear from the plans if the contractor is going to connect to a portion of the existing service lateral. If that is the case, the condition of the existing lateral must be evaluated to determine if this is acceptable.*

Pennoni Response: The plans have been revised to show a new connection to the existing sanitary sewer manhole located within King of Prussia Road.

4. *Sanitary sewer note #5 on sheet 2 of 26 must be revised to indicate that the typical cover of a sanitary sewer main must be 5 feet.*

Pennoni Response: Sanitary sewer note #4 has been revised to specify 5-ft of cover.

Storm Sewer

1. *Please provide pre-development hydrographs for POI #2 for the 1-yr through 50-yr storm events.*

Pennoni Response: The hydrographs for POI #2 have been added to the revised PCSM Report.

2. *§245-23(D)(2) – Water quality volume requirement can be accomplished by the permanent volume of a wet basin or the detained volume from other BMPs. Where appropriate, wet basins shall be utilized for water quality control and shall follow the guidelines of the BMP manuals referenced in Appendix G. The applicant is proposing soil amendment credit for the water quality volume required at POI #1, which does not meet Ordinance requirements. Please revise to meet the Ordinance requirement.*

Pennoni Response: The water quality calculations have been revised to remove the soil amendment credit.

3. *§245-27(J) - Underground stormwater management systems must be designed to store the two-through one-hundred-year storms within a pipe or other open system that will permit the inspection and maintenance of the system. The entire storm must be placed in the pipe (i.e., the stone bedding around the pipe is not to be included in the volume calculations). We note that in Section 4.3 of the stormwater management report the applicant states that the basin volume will include the storage in the rock voids. This must be revised to meet the Ordinance requirements or a waiver must be requested.*

Pennoni Response: The stormwater calculations have been revised to exclude the stone voids for subsurface basins as required.

4. *Table 10 on page 15 of the stormwater management report lists a tree credit for POI #1 water quality volume. Worksheet #5 for POI #1 in Appendix C and the Runoff Calculation in Appendix D list a soil amendment credit. Please revise this inconsistency.*

Pennoni Response: The calculations have been revised to remove the tree credit and soil amendment credits.

5. *Please provide permeability/infiltration rates for the permeable pavers and permeable pavement.*

Pennoni Response: Infiltration testing will be provided during future submissions.

6. *Infiltration testing results including a depth to the limiting zone must be provided. Also, please show location of test pits on the plans.*

Pennoni Response: Infiltration testing will be provided during future submissions.

7. *Please clarify what the stippled pattern shown in Proposed Surface Stormwater Basin 1 and Proposed Bio Retention Basin 2 on Sheet CS9001 represents.*

Pennoni Response: The hatch pattern depicts the area of the amended soil for the bio-retention basins. The hatch pattern has been labeled on the revised plans.

8. *A profile of the proposed storm sewer must be provided. The sizes of all proposed storm sewer must be shown on the profile. All utilities crossing the storm sewer must be shown on the profile to ensure adequate clearance.*

Pennoni Response: Storm sewer profiles will be provided on Final Land Development Plans.

9. *Stormwater calculations demonstrating that the requirements of the stormwater ordinance must be submitted as part of the Final Plan submission. Final approval of the stormwater management plan will be required as part of the Grading Permit process. Any revisions to the size or location of the individual structures or other features will be addressed at that time.*

Pennoni Response: All required stormwater calculations will be submitted with Final Land Development Plans.

General

1. *New deeds must be prepared and recorded at the Delaware County Court house at the time of plan recording for the consolidation of the lots.*

Pennoni Response: New deeds will be prepared and recorded as part of the Final Land Development Plan process.

2. *The Radnor Township tree protection detail must be shown on the plans.*

Pennoni Response: The tree protection detail has been added to sheet CS8502.

3. *Lighting details must be provided on the plans.*

Pennoni Response: Lighting details have been added to sheet CS6001.

4. *The height of all retaining walls must be indicated on the plans.*

Pennoni Response: Top and bottom of wall elevations have been added to the Grading Plan, sheet CS1501.

5. *Detailed parking structure plans must be provided for review.*

Pennoni Response: Parking structure plans will be provided with the Final Land Development submission.

Comments from Gilmore & Associates, Inc. Letter dated November 29, 2017:

Land Development Plan Review

A. *Subdivision and Land Development Ordinance (SALDO) comments:*

1. *§255-20.B(1)(n) – Existing principal buildings, and their respective uses, and driveways on the adjacent peripheral strip, sewer lines, storm drains, culverts, bridges, utility easements, quarries, railroads and other significant man-made features within 500 feet of and within the site shall be shown on the plans.*

Pennoni Response: A waiver request has been added to sheet CS1001.

2. *§255-20.B(5)(d)[2][a] and §255-20.B(5)(d)[6][b] Coordinate with SEPTA and revise the plans to provide an ADA accessible connection from the proposed on-site sidewalk to the existing SEPTA facilities.*

Pennoni Response: We will coordinate with SEPTA in regard to sidewalk connections from the proposed site to the existing SEPTA station at the northwest corner of the site.

3. *§255-21.A(6) – Final plans shall be on a sheet having a minimum size of 18 inches by 30 inches and a maximum size of 24 inches by 34 inches, and all lettering shall be so drawn as to be legible if the plan should be reduced to half size. The Applicant has requested a waiver from this requirement; we have no engineering objection to this request.*

Pennoni Response: A waiver request has been added to sheet CS1001.

4. *§255-27.B(3)(c) and §255-27.C(1) - King of Prussia Road is identified as a Major Collector and requires an 80' right-of-way (40' half-width) and a minimum 48' cartway width (24' half-width). The applicant proposes to provide a half-width right-of-way of 40' from the centerline of the roadway. The existing cartway width (36') is less than the minimum required cartway width (48' full width; 24' half-width) and the Applicant is required to widen the cartway for the full length of the site frontage along King of Prussia Road. Revise the plans to continue the two northbound lanes along the entire site frontage on King of Prussia Road beginning at the South Driveway and extending through and including the SEPTA/Northern site driveway.*

Pennoni Response: The plans have been revised to include widening of King of Prussia Road from the Raider Road/Main Site Driveway intersection to the southern driveway entrance to the site. The proposed ultimate right-of-way is equal to the half width of 40-ft. Please refer to sheet CS1001.

5. *§255-27.C(1) – Sidewalk shall be provided along the entire site frontage. The onsite trail doesn't provide an adequate walkway for pedestrians walking along the site frontage. If the Applicant considers and the Township agrees the sidewalks located along the west side of King of Prussia Road (along the Radnor Township School District frontage) as adequate; additional improvements should be provided as follows:*
- a. *Pedestrian crosswalks meeting the current Public Right-of-Way Accessibility Guidelines for Americans with Disabilities Act Accessibility Guidelines (PROWAG/ADAAG) requirements as indicated in PennDOT Publication 13M DM-2 Design Manual 2: Highway Design, Chapter 6; and PennDOT Publication 70M Roadway Construction Standards (RC-67) must be constructed on all approaches to the proposed traffic signal at Raider Road and at the north and south access driveways to provide adequate crossing locations.*
 - b. *Widen the sidewalks along the west side of King of Prussia Road (Radnor Township School District frontage) to five feet (5') as required by PROWAG/ADAAG or provide 5 foot by 5 foot passing areas at a 200 foot minimum interval along the length of the roadway.*

Pennoni Response: The plans have been revised based on discussions with the Township Staff to show a 5-ft sidewalk with 5-ft grass strip from the northern driveway/SEPTA entrance to main driveway/Raider Road intersection. From the main driveway/Raider Road intersection the sidewalk is proposed to meander through the site to a point on the southern driveway near the trail entrance under I-476. Please refer to sheet CS1001.

6. *§255-29.A(12)(b) – The width of entrance and exit drives shall be 25 feet for two- way use. The width of the existing SEPTA/Northern site driveway is 20 feet and must be widened to comply with this section of the ordinance or a waiver must be requested.*

Pennoni Response: As shown on the revised sheet CS1001, the northern driveway/SEPTA driveway is proposed to be widened by 5-ft.

7. *§255-29.A(14) – No less than a five-foot radius of curvature shall be permitted for all curblines in parking areas. Revise the plans to label all curb radii and provide a minimum 5' curb radii along the south end of the drop-off area behind the proposed 4- story office building.*

Pennoni Response: The plans have been revised to label curb radii as needed. A note has also been added to General Note #16 on sheet CS0002 to state that the minimum curb radii shall be 5-ft unless otherwise noted.

8. *§255-30 – Revise the plans to delineate the proposed loading stall(s) adjacent to the proposed hotel and office building.*

Pennoni Response: The plans have been revised to depict the loading stalls adjacent to the proposed hotel and office building. Please refer to sheet CS1001.

9. *§255-30.A – Identify the area adjacent to the parking garage that is east of the loading area wall and is approximately 10'x 60'. If this area is intended for loading, it must meet the requirements for this section.*

Pennoni Response: The plans have been revised to depict the loading stalls adjacent to the proposed hotel and office building. Please refer to sheet CS1001.

10. *§255-37.A – Sidewalks and pedestrian paths shall minimize pedestrian-vehicle conflicts. As a pedestrian safety precaution, include a grass verge between the curbline and the proposed sidewalk*

along the King of Prussia Road site frontage to match the existing sidewalk opposite the site.

Pennoni Response: The plans have been revised based on discussions with the Township Staff to show a 5-ft sidewalk with 5-ft grass strip from the northern driveway/SEPTA entrance to main driveway/Raider Road intersection. From the main driveway/Raider Road intersection the sidewalk is proposed to meander through the site to a point on the southern driveway near the trail entrance under I-476. Please refer to sheet CS1001.

11. *§255-37.E – Sidewalks and pedestrian paths shall be adequately lighted, if required by the Board of Commissioners. Revise the lighting plan to provide pedestrian lighting along all proposed sidewalks including along King of Prussia Road. Coordinate with the Township Engineer and Township Planner regarding lighting levels.*

Pennoni Response: Lighting is provided along sidewalks and pedestrian paths. We will discuss this item further with the Board of Commissioners. Please refer to sheet CS2201.

12. *§255-37.H – Steps or a combination of steps and ramps shall be utilized to maintain maximum grades, where necessary. Where sidewalk grades exceed 5%, a nonslip surface texture shall be used. We recommend the Applicant provide a sidewalk connection along the north side of the central access driveway opposite to the intersection of Raider Road. We understand the ADA accessible access is provided on the south side of the driveway.*

Pennoni Response: An ADA accessible route has been added south of the main entrance drive from King of Prussia Road to the site. In addition, a sidewalk with stairs has been added on the north side of the main entrance drive from King of Prussia Road to the site. Please refer to sheets CS1001 and CS1501.

13. *§255-40.F – Revise the plans to indicate the location of refuse collection stations for the proposed hotel and 4-story office building.*

Pennoni Response: Dumpster locations have been added for the proposed hotel and 4-story office building. Please refer to sheet CS1001.

B. *General Comments*

1. *We recommend the Applicant coordinate with the Township staff regarding the width and location of the proposed trail and consider providing a trail or sidewalk connection adjacent to the Southern Site Driveway from the trail to King of Prussia Road.*

Pennoni Response: The plans have been revised based on discussions with the Township Staff to show a 5-ft sidewalk with 5-ft grass strip from the northern driveway/SEPTA entrance to main driveway/Raider Road intersection. From the main driveway/Raider Road intersection the sidewalk is proposed to meander through the site to a point on the southern driveway near the trail entrance under I-476. Please refer to sheet CS1001. This walkway is proposed as porous asphalt and a detail is located on sheet CS9503.

2. *Provide a separate pavement marking and signage plan including all right-of-way lines, lane lengths, widths, bay taper lengths, lane line colors, lane line widths, etc.*

Pennoni Response: Detailed roadway improvement plans will be provided with the Final Land Development Plan submission.

3. *Provide a 24" stop bar and an R1-1 stop sign at the northern and Southern Site Driveway egresses.*

Pennoni Response: A stop bar and stop sign has been added to the northern and southern driveway

egresses. Please refer to sheet CS1001.

4. *Install R7-302 No Parking SYMBOL/ARROW signs along the Northern/SEPTA driveway. It appears this is currently being used as overflow parking and the illegal parking creates a de facto and unacceptable single travel lane.*

Pennoni Response: No parking signs have been added along the Northern/SEPTA driveway. Please refer to sheet CS1001.

5. *Revise the plans to provide a minimum 6' crosswalk as required in PennDOT Publication 111, TC-8600.*

Pennoni Response: The plans and details have been revised to show a 6-ft crosswalk. Please refer to sheets CS1001 and CS6000.

6. *Per PennDOT Publication 111, TC-8600, we recommend the Applicant provide a 4" DY centerline along the central access and Raider Road driveways extending for a minimum of 150 feet beyond the intersection of King of Prussia Road.*

Pennoni Response: The plans have been revised to show a 4" double yellow line along the main driveway to the site. Please refer to sheet CS1001.

7. *Revise the plans to include stop bars on driveway and roadway approaches to King of Prussia Road and Raider Road/Site Driveway associated with the traffic signal.*

Pennoni Response: The plans have been revised to show 24" stop bars on driveway and roadway approaches to King of Prussia Road and Raider Road/Site Driveway associated with the traffic signal.

8. *Replace any references to R7-7A with the PennDOT approved R7-302 NO PARKING SYMBOL/ARROW sign. Refer to PennDOT Publication 236 for further details.*

Pennoni Response: The plans have been revised accordingly.

9. *Replace any references to R5-3-6 with the PennDOT approved R5-101, EMERGENCY AND AUTHORIZED VEHICLES ONLY. Refer to PennDOT Publication 236 for further details.*

Pennoni Response: The plans have been revised accordingly.

10. *Sheet 2 includes symbols to assist in identifying proposed signs; however, the symbol callouts were not utilized in the plan set. Include all proposed signs on the various sheets and also include on the requested pavement marking and signage plan.*

Pennoni Response: The plans have been revised accordingly.

11. *We recommend the Applicant include one ingress and two egress lanes at the site access driveway opposite Raider Road on King of Prussia Road.*

Pennoni Response: The plans have been revised to provide a second egress lane from the site to King of Prussia Road at the main entrance. Please refer to sheet CS1001.

12. *We recommend eliminating the dedicated right-turn and left-turn lanes into the Southern Site Driveway. Due to the fact that this will be a loading area only, the auxiliary lanes may not be necessary.*

Pennoni Response: The dedicated right turn lane has been eliminated in favor of continuing the 2nd northbound through lane to Raider Road. A right turn will be permitted from this lane as on any other through lane. The dedicated left turn lane is formed from an area that would otherwise be a

median gore and provides storage for left turning delivery trucks into the site, thus providing a clear lane for through traffic on King of Prussia Road, and we recommend keeping it.

13. *Provide curb radii (at minimum) necessary for the anticipated delivery traffic at the Southern Site Driveway. A 45 foot curb radii is recommended for truck access.*

Pennoni Response: The plans have been revised to show a 45-ft radii at the southern driveway to accommodate for large vehicle movements.

14. *The fire truck turning templates should be submitted to the Fire Marshall for review.*

Pennoni Response: We will coordinate with the Fire Marshall as required.

15. *We note the Applicant is only demonstrating the use of a WB-40 truck at the SEPTA/Northern site driveway. Verify that a WB-40 truck will be the largest truck anticipated for Hotel deliveries. Consider increasing the radii to accommodate larger vehicles. If the Northern driveway will only be accommodating WB-40 trucks, the appropriate truck restriction signage will be required.*

Pennoni Response: Currently this loading dock is planned for a WB-40, we will coordinate and provide necessary signage as part of Final Land Development.

16. *Sheet 25 of 26 (CS9801):*

- a. *The northbound WB-67 movement at the Southern Site Driveway should be revised to show the truck beginning the turn entirely within the northbound right-turn lane. Increase the corner radii and/or widen the driveway as necessary to accommodate WB-67 trucks.*
- b. *At the Southern Site Driveway, show the WB-67 exiting movement onto King of Prussia Road.*
- c. *Revise the WB-67 movements to eliminate any contact with the adjacent dumpster bay walls and curblines.*
- d. *Revise the WB-67 movement to show the truck not conflicting with the compactor.*
- e. *The WB-67 movement shows the truck reversing into the generator area. Bollards are recommended around the generator area.*
- f. *Show the WB-40 exiting movement onto King of Prussia Road beginning from the loading area at the SEPTA/Northern driveway.*

Pennoni Response: The truck turning plan has been revised accordingly. Bollards have been added to the area near the generator.

17. *Sheet 26 of 26 (CS9802):*

- a. *The eastbound fire truck movement at the Raider Road site driveway should be revised to eliminate any contact with the adjacent curb and curb ramp along the patient drop-off area.*
- b. *The northbound fire truck movement at the Raider Road site driveway should be revised to show the truck beginning the turn entirely within the northbound right-turn lane.*
- c. *The northbound fire truck movement at the Southern Site Driveway should be revised to show the truck beginning the turn entirely within the northbound right-turn lane.*
- d. *Revise the fire truck movement along the Southern Site Driveway so that the truck remains completely on the roadway during the movement.*

Pennoni Response: The truck turning plan has been revised accordingly.

18. *The Applicant will be responsible for providing the following documents prior to Final Land Development approval:*

a. *Construction details related to ADA curb ramps, including spot elevations, dimensions and slopes.*

Pennoni Response: Will Comply and provide construction details for the ADA curb ramps with Final Land Development plans.

b. *Traffic Signal Construction Plans, Traffic Signal Permit Plans, Traffic Signal System Plans, and a Traffic Signal design report must be provided to the Township and PennDOT for review and approval.*

Pennoni Response: Will Comply and provide Traffic Signal Construction Plans, Traffic Signal Permit Plans, Traffic Signal System Plans, and a Traffic Signal design report with Final Land Development Plans.

c. *All new or modified signal permit plans require a completed TE-160 form and associated resolution.*

Pennoni Response: Will Comply and provide completed TE-160 form for each new or modified signal permit plan with Final Land Development Plans.

d. *The Applicant will need to coordinate with Radnor Township School District to eliminate parking along the south side of Raider Road near King of Prussia Road. The on-street parking along the south side of Raider Road effectively narrows the 30' cartway width to a 22 foot width which is inadequate to store busses and automobiles. We recommend evaluating the length of parking to be eliminated based on the results of the impending queue analysis noted under the Transportation Impact Assessment section below.*

Pennoni Response: The Applicant will coordinate with the School District regarding the elimination of existing on-street parking on Raider Road with Final Land Development Plans.

Transportation Impact Assessment (TIS) Review

A. *Subdivision and Land Development Ordinance (SALDO) comments:*

1. *§255-20.B(5)(d)[2][a] - We recommend the applicant discuss with SEPTA the installation of a bus shelter along King of Prussia Road near the corner of the Raider Road site driveway to encourage and promote transit riders. In addition, we recommend installing a bus turn out lane to minimize traffic flow disruptions along King of Prussia Road.*

Pennoni Response: Will comply. A bus shelter will be installed on King of Prussia Road southeast of the SEPTA Access/Northern Site Access, to the extent that it is approved by SEPTA.

2. *§255-20.B(5)(d)[3] Existing traffic conditions.*

a. *Traffic counts were conducted on November 18, 2015 and November 24, 2015 at some of the studied intersections. These dates were noted as early dismissal days on the Radnor School District calendar. The Applicant should provide a comparison with historical counts at these intersection indicating similar volumes or recount the intersections during a typical full day of school.*

Pennoni Response: Dismissal on an average school day in Radnor Township occurs between 2:30 and 3:30 PM (depending on the school). The PM traffic counts were collected from 4-6 PM with the system peak hour occurring from 5-6 PM. Typical dismissal occurs outside of the PM

peak period evaluated, therefore an early dismissal will not affect the traffic volumes collected. Also, the early dismissal on November 18th was for grades K-8, which did not affect Radnor High School, which is located on Raider Road.

b. *Crash Data Analysis*

- i. *The crash data provided in the body of the report and in Appendix E should be removed from the TIA and provided under separate cover.*

Pennoni Response: The crash data has been removed from the TIA and submitted under a separate cover.

- ii. *PennDOT Strike-Off-Letter (SOL) 470-09-4 Transportation Impact Study Guidelines indicates 5 years of crash data should be reviewed; the submission only provided 3 years of historical data. In addition, the crash report should include non-reportable crashes obtained from Radnor Township Police Department. The crash analysis should be revised to provide a more detailed crash data analysis as follows:*

- a) *Quantify the number of correctible reportable and non-reportable crash incidents in a rolling 12 month analysis period.*
- b) *To identify potential mitigation measures for reportable and non-reportable crashes incidents exceeding five during the rolling 12 month period.*

Pennoni Response: Will comply. 5 years of crash data has been provided along with a more detailed crash data analysis including the number of correctible reportable and non-reportable crash incidents in a rolling 12 month analysis period and potential mitigation measures for reportable and non-reportable crashes incidents exceeding five.

3. *§255-20.B(5)(d)[4] The TIA shall be updated to remove the 7% Transit Ridership reduction for the Trip Generation based on the following:*

- a. *As discussed in the ITE Trip Generation Handbook, 3rd Edition, Section 8.4.2, the national database of person trips by mode for the Transit Friendly Development (TFD) is limited. Therefore, the preferred method for estimating a transit mode share for external trips at a TFD would be through development of surveys at proxy sites. The TIA would need to be modified to identify any transit studies previously done for the existing site or any similar nearby sites (i.e., employee transit usage survey, origin/destination study, boarding/alighting at Paoli/Thorndale station, etc.).*
- b. *In accordance with the information provided in Appendix B of the ITE publication Trip Generation Manual, 9th Edition Guide and Handbook, this project's Floor Area Ratio (FAR) of 0.40 does not meet the required development intensity to utilize the minimum transit reductions identified in Tables B.2 & B.3.*
- c. *Per PennDOT Strike-off-Letter 470-09-4 Transportation Impact Study Guidelines, the Paoli/69th Street SEPTA bus route does not meet the minimum requirement of 3-4 buses per hour and 14-16 daily operation hours to justify a bus related trip reduction.*
- d. *More importantly, the agreed upon trip generation methodology for the proposed mixed medical use is based on data collected at local existing sites which inherently accounts for any transit reduction in the data collection process. If there is a 7% transit reduction, the reduction was already accounted for in the lack of a vehicle entering and exiting the local site driveways that were used to develop the trip generation rates for the Mixed Medical Use.*

Pennoni Response: Will comply.

4. *§255-20.B(5)(d)[5] Provide a traffic signal warrant analysis for the intersection of the SEPTA/Northern site driveway and King of Prussia Road.*

Pennoni Response: Will comply. The signal warrant analysis for the SEPTA/Northern site driveway and King of Prussia Road intersection has been provided.

5. *§255-20.B(5)(d)[6] All streets or intersections showing Level of Service below C shall be considered deficient and specific recommendations for elimination of these problems shall be listed. The analysis indicates the corridor along the site frontage of King of Prussia Road is congested with multiple LOS deficiencies. The roadway should be widened to accommodate additional through lanes where possible along King of Prussia Road. The Applicant should evaluate the feasibility of constructing a 4-lane or 5-lane roadway section along King of Prussia Road.*

Pennoni Response: The applicant is requesting a waiver of this requirement. According to PennDOT's "Policies and Procedures for Transportation Impact Studies" from July 2017, the overall intersection Level of Service (LOS) for existing signalized intersections in the horizon year build condition should be no worse than the intersection LOS in the horizon year in the no-build condition. If evaluation of the horizon year build condition indicates that the overall intersection LOS has dropped, the applicant will be required to mitigate the LOS if the increase in overall intersection delay is greater than 10-seconds. If the overall intersection delay increase is less than or equal to 10-seconds mitigation of the intersection will not be required. For locations where the level of service of the design horizon year no-build condition is LOS F and with development, the delay increases more than 10 seconds, the remedies shall provide an estimated delay which will be no worse than the delay for the design year without the development. The improvements recommended in the TIS result in all of the study intersection maintaining the no-build level of service or meeting the PennDOT mitigation delay requirements.

6. *§255-20.B(5)(d)[6][b] A listing of all actions to be undertaken to increase present public transportation usage and improve service, if applicable, shall be included.*

Pennoni Response: Will comply.

B. General TIA Comments

1. *The Applicant indicates a credit was applied for site trips from a previously approved plan for a 427,110 SF General Office Building (Land Use Code 710); this credit is inappropriate and should not be applied to the No-Build conditions for this study. The applicant indicates the existing facility was previously approved and could be occupied by a tenant without additional approvals; however, in our opinion, this has no bearing on the current land development application.*

Pennoni Response: The TIS includes the evaluation of the 2016 existing condition, future no-build conditions with the existing site fully occupied, and build conditions with the proposed development on the site. In PennDOT Pub 282, The Policies and Procedures for Transportation Impact Studies from July 2017 states that as a means of encouraging the redevelopment of existing site "the Department may consider permitting trips being generated by the existing development be applied to the proposed redeveloped site as a "trip credit".

2. *The report should be revised to include volume development spreadsheets for each studied intersection. We were unable to verify the No-Build and Build conditions based on the figures provided.*

Pennoni Response: Will comply. A volume development table has been provided within the appendices of the TIA.

3. *The capacity analyses should be revised to include the timings for all signalized intersections and 95 percentile queues. We were unable to verify the capacity analyses due to insufficient data.*

Pennoni Response: Will comply. The capacity analyses summary tables and text has been revised to include 95th percentile queues.

4. *The Applicant should provide a 95th percentile queue analysis to determine that adequate storage*

lengths are available at the studied intersections.

Pennoni Response: The capacity analyses summary tables and text have been revised to include 95th percentile queues.

5. *Please provide a Level of Service/Delay in tabular format for the No-Build and Build scenarios as required in PennDOT Strike-off-Letter 470-09-4. Provide No- Build and Build conditions scenarios in the same table for a comparison for each peak hour on each approach by lane movement.*

Pennoni Response: Will comply. The capacity analyses summary comparison tables have been provided that include No- Build and Build conditions scenarios in the same table for a comparison.

6. *The Applicant should provide turn lane warrant analyses for all three site driveways. Appendix H only provides an analysis for the Raider Road/Site Driveway along King of Prussia Road. In addition provide an analysis for the Raider Road (eastbound) leg at the intersection of King of Prussia Road/Raider Road.*

Pennoni Response: Will comply. Turn lane warrant analyses for all three site driveways have been included in Appendix H including an analysis for the Raider Road (eastbound) leg at the intersection of King of Prussia Road/Raider Road.

7. *Provide 2025 Build turn lane warrants to determine the maximum turn lane lengths required.*

Pennoni Response: 2025 Build turn lane warrants have been provided at study intersections.

8. *Per the Institute of Transportation Engineers (ITE) Trip Generation Manual, 3rd Edition, revise the report to include the rates/equations regarding ITE Land Use Code 710 (General Office Building) and Land Use Code 310 (Hotel). The submission only provides the rates and distribution percentages for the Mixed Medical Use Facility.*

Pennoni Response: Will comply. Table 6 has been revised to include the trip generation rates/equations for Land Uses 310(Hotel) and 710(General Office Building).

9. *Verify the speed along Matsonford Road and revise as needed.*

Pennoni Response: Will comply. The posted speed limit on Matsonford Road is 40 MPH. The TIA has been revised accordingly.

10. *Revise Figures 3 through 11 to identify the location of King of Prussia Road.*

Pennoni Response: Will comply. Figures 3 through 11 have been revised accordingly.

11. *The pedestrian and vehicle clearance interval calculations provided in Appendix L will need to be verified and updated based on the final traffic signal permit plan.*

Pennoni Response: The pedestrian and vehicle clearance calculations will be updated upon the development of a final traffic signal permit plan.

12. *The following comments pertain to discrepancies between the Manual Turning Movement counts and the Capacity Analyses provided in Appendices D, F, I & M:*

- a. *I-476/Southbound Off-Ramp & Lancaster Avenue; Revise the eastbound lane configuration to include a right-turn volume.*

Pennoni Response: The eastbound right turn from Lancaster Avenue to the I-476 SB ramp is a channelized right turn that does not reach the traffic signal and is not included in the intersection analysis.

- b. *I-476/Southbound Off-Ramp & Lancaster Avenue; Verify the westbound left volume during the 2020 No-Build PM conditions; it appears the volume should be revised from 584 to 571 vehicles.*

Pennoni Response: Will comply. The no-build volumes have been revised in accordance with

comment #3.

- c. *King of Prussia Road & Southern Site Driveway: Verify the northbound through 2020 PM Build volume; it appears the volume should be revised from 405 to 451 vehicles.*

Pennoni Response: Will comply. The build volumes have been revised in accordance with comment #3.

King of Prussia Road & Southern Site Driveway: Verify the southbound through 2025 PM Build volume; it appears the volume should be revised from 1382 to 1319 vehicles.

Pennoni Response: Will comply. The build volumes have been revised in accordance with comment #3.

King of Prussia Road & Southern Site Driveway: Verify the northbound through 2025 PM Build volume; it appears the volume should be revised from 411 to 457 vehicles.

Pennoni Response: Will comply. The build volumes have been revised in accordance with comment #3.

- d. *King of Prussia Road & Southern Site Driveway: Verify the southbound through 2025 PM Build volume; it appears the volume should be revised from 1403 to 1338 vehicles.*

Pennoni Response: Will comply. The build volumes have been revised in accordance with comment #3.

- e. *King of Prussia Road & Southern Site Driveway: Verify the northbound through 2020 AM Build volume; it appears the volume should be revised from 1544 to 1554 vehicles.*

Pennoni Response: Will comply. The build volumes have been revised in accordance with comment #3.

13. *The following comments pertain to discrepancies between the Turning Movement counts and the existing 2016 weekday volumes included in Figure 3:*

- a. *Northern Driveway and King of Prussia Road: verify the southbound PM through volume; it appears the volume should be revised from 1038 to 1046.*

Pennoni Response: Will comply. The 2016 PM southbound through volume has been revised to 1042 in Figure 3.

- b. *Southern Site Driveway and King of Prussia Road: Verify the southbound PM through volume; it appears the volume should be revised from 1011 to 1077.*

Pennoni Response: Will comply. The 2016 PM southbound through volume has been revised to 1042 in Figure 3.

- c. *Southern Site Driveway and King of Prussia Road: Verify the northbound PM through volume; it appears the volume should be revised from 337 to 292.*

Pennoni Response: Will comply. The 2016 PM northbound through volume has been revised to 292 in Figure 3.

14. *There is an existing coordinated signal system along King of Prussia Road that includes Radnor-Chester Road and Matsonford Road. Any traffic signals proposed along the site frontage should be included in the overall coordinated system. The Applicant should also investigate coordinating the Matsonford Road/King of Prussia Road signal system with the Lancaster Avenue System.*

Pennoni Response: Will comply.

15. *We recommend the Transportation Impact Study be revised to address the above comments to the satisfaction of the Township. In order to expedite the review process for the resubmission of the above,*


the Applicant should submit a response letter which addresses each of the above comments including the original comment and identify any changes made unrelated to the review.

Pennoni Response: Will comply.

I thank you in advance for your assistance on this project. Should you have any questions or need additional information please do not hesitate to contact me at (610) 422-2457 or mkissinger@pennoni.com.

Sincerely,

PENNONI ASSOCIATES INC.



Michael Kissinger, PE
Land Development Division Manager

Attachment

cc: Pat Dorris, The Trustees of the University of Pennsylvania Health Systems
David Falcone, Saul Ewing Arnstein & Lehr LLP



One South Church Street
Second Floor
West Chester, PA 19382
T: 610-429-8907
F: 610-429-8918
www.pennoni.com

January 17, 2018

UPHS1504

Radnor Township
Attn: Board of Supervisors
301 Iven Ave.
Wayne, PA19087

RE: **WAIVER REQUEST LETTER**
PENN MEDICINE AT RADNOR
RADNOR TOWNSHIP, DELAWARE COUNTY, PENNSYLVANIA

Dear Supervisors:

On behalf of the Trustees of the University of Pennsylvania Health Systems, Pennoni Associates Inc. is respectfully requesting a waiver from the following section of the Township's Subdivision and Land Development Ordinances.

1. Section 255-21.A(6): A waiver is requested for the maximum plan sheet size if 24 inches by 34 inches. The plans will be reduced for recording purposes.
2. Section 255.20.B(1): A waiver is requested for the requirement that the plans include existing principal buildings and their respective uses, and driveways on the adjacent peripheral strip: sewer lines, storm drains, culverts, bridges, utility easements, quarries, railroads and other significant man-made features within 500 feet of and within the site. We have provided an aerial photograph demonstrating the existing conditions within 500-ft of the site.
3. SECTION 255-20.B(5)(d)(6): A waiver is requested for the requirement that streets or intersections showing Level of Service below C shall be considered deficient and specific recommendations for elimination of these problems shall be listed.

I thank you in advance for your assistance on this project. Should you have any questions or need additional information please do not hesitate to contact me at (610) 422-2457 or mikissinger@pennoni.com.

Sincerely,

PENNONI ASSOCIATES INC.

Michael Kissinger, PE
Land Development Division Manager

Attachment

cc: Pat Dorris, The Trustees of the University of Pennsylvania Health Systems
David Falcone, Saul Ewing Arnstein & Lehr LLP



Gannett Fleming

*Excellence Delivered **As Promised***

Date: January 12, 2018

To: Steve Norcini, PE Township Engineer

From: Roger Phillips, PE

cc: Kevin W. Kochanski, RLA, CZO – Director of Community Development
Peter Nelson, Esq. – Grim, Biehn, and Thatcher
Amy B. Kaminski, P.E. – Gilmore & Associates, Inc.
Patricia Sherwin – Radnor Township Engineering Department
Ray Daly – Radnor Township Codes Official

RE: 145 King of Prussia Road – Preliminary Land Development Plan
Penn Medicine – Applicant

Date Accepted: October 2, 2017

90 Day Review: December 31, 2017, extended to January 31, 2018

Gannett Fleming, Inc. has completed a review of the Preliminary Land Development Plans. We have reviewed the plans based on the contents of ordinance No. 2016-13 amending Chapter 280 Zoning, Article XV, PLO Planned Laboratory District Sections 280-62, 280-63 and 280-64. These Plans were also reviewed for conformance with Subdivision and Land Development, and other applicable codes of the Township of Radnor.

The applicant is proposing to demolish the three existing buildings on the site, and construct three new buildings and two parking structures for mixed uses including a mixed use medical facility, hotel and office.

The applicant has indicated that a waiver will be requested from the following requirement:

1. §255.21.A(6) – A waiver is requested for the maximum plan sheet size of 24 inches by 34 inches. The plans will be reduced for recording purposes.

Penn Medicine at Radnor

Plans Prepared By: Pennoni Associates, Inc.

Dated: 09/29/2017

Sewage Facilities Planning

1. Final plan approval will not be granted until Planning Approval is received from the PA DEP.



Zoning

1. §280-63.D(5) – A parking structure, when constructed as an accessory structure for the purpose of eliminating allowable surface parking is allowed. The applicant must indicate on the plans where any surface parking that is being eliminated would have been located.
2. §280-64.D(2) – The distance at the closest point between any two buildings or group of attached buildings, including accessory structures, shall not be less than 45 feet. A dimension must be added to the plan between the corner of the hotel and the corner of the office building. Plan measurements appear to indicate a separation distance of less than 45 feet.
3. §280-64.G – The Zoning Table must be revised to clearly indicate the zoning compliance requirements for each building and structure. The square footage of the buildings provided on the plan, do not match the square footage of the buildings located on a table subsequently provided by the applicant. This must be revised to be consistent.
4. §280-64.G(4) – A parking garage or parking structure may have a height of up to 55 feet so long as such parking garage or parking structure does not exceed the height of any building on the site. The mixed use medical building is proposed to be 54.5' and the parking garage next to the hotel is 54.83'. This must be revised or a variance requested.
5. §280-64.G(8) – The greatest dimension in length or depth of a building (as specified in §280.64.D) may be up to 350 feet provided that: (a) the façade is constructed of brick, stone, architectural concrete, architectural metal work, or articulated glass; (b) is constructed with vertical and horizontal articulation; (c) is approved by the Township. Additional information must be provided to indicate that the proposed buildings are in compliance with this section.
6. §280-64.G(10) – All Mixed Use developments shall submit a Transportation Impact and Mitigation Report to the Township as part of the land development application. We note that a Traffic Impact Study was submitted.
7. §280-70.C – Service, utility, maintenance and storage areas, including solid waste containers, loading and unloading areas and heating, ventilating and air condition equipment, shall be screened from view from public streets and abutting properties. This may be accomplished by means of enclosing walls, stone, brick or wood fences or a buffer planting strip. Visual screening so provided shall be of sufficient density so as not to be seen through and of sufficient height to constitute an effective screen. Appropriate visual screenings must be provided.



8. §280-103.B(4) – The parking calculations provided must be revised to include the specific use of hotel.
9. §280-112.C. – Areas of steep slopes containing slopes steeper than 14% shall be outlined as following (1) Areas containing slopes steeper than 14% but less than 20% shall be distinguished from the areas containing slopes of 20% or steeper. (2) Areas containing slopes of 20% and steeper shall be separately identified. The applicant has shown the location of these areas on the plans and has indicated that these slopes are manmade and excluded from this section.

Subdivision and Land Development

1. §255.20.B(1)(n) – Existing principal buildings and their respective uses, and driveways on the adjacent peripheral strip; sewer lines, storm drains, culverts, bridges, utility easements, quarries, railroads and other significant man-made features within 500 feet of and within the site (this includes properties across streets). This must be provided or a waiver requested.
2. §255.21.A(6) – Final plans shall be on a sheet having a minimum size of 18 inches by 30 inches and a maximum size of 24 inches by 34 inches, and all lettering shall be drawn as to be legible if the plan should be reduced to half size. The applicant has requested a waiver from this requirement.
3. §255-27.C(1) – King of Prussia Road is designated as a major collector and has a required Right-of-Way of 80 feet, and cartway of 48 feet. The ultimate right of way shown on the plans is 65 feet.
4. §255-27.C(2) – Additional right-of-way and/or cartway widths may be required by the Board of Commissioners in order to lessen traffic congestion, to secure safety from fire, panic and other dangers, to facilitate the adequate provision for transportation and other public requirements and to promote the general welfare.
5. §255-29.A(12)(b) – The width of entrance and exit drives shall be 25 feet for two way use. The two-way drive on the Northerly side of the property is 20 feet wide. This must be revised or a waiver requested.
6. §255-29.A(14) – No less that a five-foot radius of curvature shall be permitted for all curblines in the parking areas. The radii of all curb lines must be clearly identified on the plans.

7. §255-29.B(1) – All parking areas shall have at least one tree 2 ½ inches minimum in caliper for every five parking spaces in single bays and one tree 2 ½ inches minimum in caliper for every 10 parking spaces in double bays. This must be clearly shown on the plans.
8. §255-37.E. – Sidewalks and pedestrian paths shall be adequately lighted, if required by the Board of Commissioners.
9. §255-38.A. – Within any land development or major subdivision, street trees shall be planted along all streets where suitable street trees do not exist.
10. §255-38.B. – Street trees 2 ½ inches dbh at intervals of not more than 30 feet along both sides of new streets and along one or both sides of an existing street within the proposed subdivision and land development. An equivalent number may be planted in an informal arrangement subject to the approval of the Board of Commissioners.
11. §255-41.H. – Outdoor collection stations shall be provided for garbage and trash removal when indoor collection is not provided. Collection stations shall be screened from view and landscaped. We note there is one collection station shown on the plans. The applicant must explain how garbage and trash removal will be provided for the hotel and office building.
12. §255-43.1.E(2) – Where, upon agreement with the applicant or developer, it is determined that the dedication of all or any portion of the land area required for park and recreation purposes is not feasible, the applicant or developer shall pay a fee in lieu of dedication of any such land to the Township. The fee for non-residential subdivisions or land developments shall be \$3,307 per 4,000 square feet of building area. The applicant must conform to this section.
13. §255-54.B – The central water system should be designed with adequate capacity and appropriately spaced fire hydrants for fire-fighting purposes pursuant to the specification of the National Fire Protection Association. Review and approval by the Township Engineer and the Township Fire Marshall shall be required in order to ensure that adequate fire protection is provided.

Sanitary Sewer

1. The applicant has indicated that sanitary sewer service is being provided to the hotel, office building and one of the parking garages. The applicant must provide sewer service to the mixed medical facility. An explanation must be provided as to why sanitary sewer service to the parking garage is provided.



2. A profile of the proposed sanitary sewer must be provided. The sizes of all proposed sanitary sewer must be shown on the profile. All utilities crossing the sanitary sewer must be shown on the profile to ensure adequate clearance.
3. The plans indicate that the contractor will connection to the existing sewer. It is unclear from the plans if the contractor is going to connect to a portion of the existing service lateral. If that is the case, the condition of the existing lateral must be evaluated to determine if this is acceptable.
4. Sanitary sewer note #5 on sheet 2 of 26 must be revised to indicate that the typical cover of a sanitary sewer main must be 5 feet.

Storm Sewer

1. Please provide pre-development hydrographs for POI #2 for the 1-yr through 50-yr storm events.
2. §245-23(D)(2) – Water quality volume requirement can be accomplished by the permanent volume of a wet basin or the detained volume from other BMPs. Where appropriate, wet basins shall be utilized for water quality control and shall follow the guidelines of the BMP manuals referenced in Appendix G. The applicant is proposing soil amendment credit for the water quality volume required at POI #1, which does not meet Ordinance requirements. Please revise to meet the Ordinance requirement.
3. §245-27(J) - Underground stormwater management systems must be designed to store the two- through one-hundred-year storms within a pipe or other open system that will permit the inspection and maintenance of the system. The entire storm must be placed in the pipe (i.e., the stone bedding around the pipe is not to be included in the volume calculations). We note that in Section 4.3 of the stormwater management report the applicant states that the basin volume will include the storage in the rock voids. This must be revised to meet the Ordinance requirements or a waiver must be requested.
4. Table 10 on page 15 of the stormwater management report lists a tree credit for POI #1 water quality volume. Worksheet #5 for POI #1 in Appendix C and the Runoff Calculation in Appendix D list a soil amendment credit. Please revise this inconsistency.
5. Please provide permeability/infiltration rates for the permeable pavers and permeable pavement.
6. Infiltration testing results including a depth to the limiting zone must be provided. Also, please show location of test pits on the plans.

7. Please clarify what the stippled pattern shown in Proposed Surface Stormwater Basin 1 and Proposed Bio Retention Basin 2 on Sheet CS9001 represents.
8. A profile of the proposed storm sewer must be provided. The sizes of all proposed storm sewer must be shown on the profile. All utilities crossing the storm sewer must be shown on the profile to ensure adequate clearance.
9. Stormwater calculations demonstrating that the requirements of the stormwater ordinance must be submitted as part of the Final Plan submission. Final approval of the stormwater management plan will be required as part of the Grading Permit process. Any revisions to the size or location of the individual structures or other features will be addressed at that time.

General

1. New deeds must be prepared and recorded at the Delaware County Court house at the time of plan recording for the consolidation of the lots.
2. The Radnor Township tree protection detail must be shown on the plans.
3. Lighting details must be provided on the plans.
4. The height of all retaining walls must be indicated on the plans.
5. Detailed parking structure plans must be provided for review.

The applicant appeared before the Planning Commission on January 9, 2018. The Planning Commission recommended approval of the preliminary land development plans and waivers noting a level of service C is recommended in conjunction with other improvements as discussed with staff.

If you have any questions or require any additional information, please contact me.

Very truly yours,

GANNETT FLEMING, INC.



Roger A. Phillips, P.E.
Senior Project Manager



SAUL EWING
ARNSTEIN
& LEHR^{LLP}

David J. Falcone
Phone: (610) 251-5752
Fax: (610) 722-3270
David.Falcone@saul.com
www.saul.com

December 19, 2017

VIA ELECTRONIC MAIL

Roger Phillips, P.E.
Gannett Fleming
PA Box 80794
Valley Forge, PA 19484

***Re: Trustees of the University of Pennsylvania
145 King of Prussia Road***

Dear Roger:

As you are aware, applicant, the Trustees of the University of Pennsylvania (the "UPenn"), submitted a Preliminary Land Development Application to the Township on September 29, 2017 (the "Application"). The Application is pending before Radnor Township. Pursuant to the Pennsylvania Municipalities Code, the governing body shall render a decision and communicate it to the applicant not later than ninety (90) days following the date of the regular meeting next following the date that the application is filed. UPenn hereby extends until January 31, 2018, the deadline for Radnor Township to act on the above-referenced Application.

Thank you for your continued help with this project. Please feel free to call me if you have any questions, or if you would like to discuss this issue further.

Very truly yours,


David J. Falcone

cc: Amy Kaminski, P.E.
Steve Norcini, P.E.
John Rice, Esquire
Mr. Robert Zienkowski
Mr. Kevin Mahoney
Mr. Patrick Dorris
Michael Kissinger, P.E.
Eric Swanson, AIA
Ms. Patricia Desmond



*Excellence Delivered **As Promised***

Date: November 28, 2017

To: Steve Norcini, PE Township Engineer

From: Roger Phillips, PE

cc: Kevin W. Kochanski, RLA, CZO – Director of Community Development
Peter Nelson, Esq. – Grim, Biehn, and Thatcher
Amy B. Kaminski, P.E. – Gilmore & Associates, Inc.
Patricia Sherwin – Radnor Township Engineering Department
Ray Daly – Radnor Township Codes Official

RE: 145 King of Prussia Road – Preliminary Land Development Plan
Penn Medicine – Applicant

Date Accepted: October 2, 2017
90 Day Review: December 31, 2017

Gannett Fleming, Inc. has completed a review of the Preliminary Land Development Plans. We have reviewed the plans based on the contents of proposed ordinance No. 2016-13 amending Chapter 280 Zoning, Article XV, PLO Planned Laboratory District Sections 280-62, 280-63 and 280-64. These Plans were also reviewed for conformance with Subdivision and Land Development, and other applicable codes of the Township of Radnor.

The applicant is proposing to demolish the three existing buildings on the site, and construct three new buildings and two parking structures for mixed uses including a mixed use medical facility, hotel and office.

The applicant has indicated that a waiver will be requested from the following requirement:

1. §255.21.A(6) – A waiver is requested for the maximum plan sheet size of 24 inches by 34 inches. The plans will be reduced for recording purposes.

Penn Medicine at Radnor

Plans Prepared By: Pennoni Associates, Inc.

Dated: 09/29/2017

Sewage Facilities Planning

1. Final plan approval will not be granted until Planning Approval is received from the PA DEP.



Zoning

1. §280-63.D(5) – A parking structure, when constructed as an accessory structure for the purposed of eliminating allowable surface parking is allowed. The applicant must indicate on the plans where any surface parking that is being eliminated would have been located.
2. §280-64.D(2) – The distance at the closet point between any two buildings or group of attached buildings, including accessory structures, shall not be less than 45 feet. A dimension must be added to the plan between the corner of the hotel and the corner of the office building. Plan measurements appears to indicate a separation distance of less than 45 feet.
3. §280-64.G – The Zoning Table must be revised to clearly indicated the zoning compliance requirements for each building and structure. The square footage of the buildings provided on the plan, do not match the square footage of the buildings located on a table subsequently provided by the applicant. This must be revised to be consistent.
4. §280-64.G.(4) – A parking garage or parking structure may have a height of up to 55 feet so long as such parking garage or parking structure does not exceed the height of any building on the site. The mixed use medical building is proposed to be 54.5’ and the parking garage next to the hotel is 54.83’. This must be revised or a variance requested.
5. §280-64.G.(8) – The greatest dimension in length or depth of a building (as specified in §280.64.D) may be up to 350 feet provided that: (a) the façade is constructed of brick, stone, architectural concrete, architectural metal work, or articulated glass; (b) is constructed with vertical and horizontal articulation; (c) is approved by the Township. Additional information must be provided to indicate that the proposed buildings are in compliance with this section.
6. §280-64.G.(10) – All Mixed Use developments shall submit a Transportation Impact and Mitigation Report to the Township as part of the land development application. We note that a Traffic Impact Study was submitted.
7. §280-70.C. – Service, utility, maintenance and storage areas, including solid waste containers, loading and unloading areas and heating, ventilating and air condition equipment, shall be screened from view from public streets and abutting properties. This may be accomplished by means of enclosing walls, stone, brick or wood fences or a buffer planting strip. Visual screening so provided shall be of sufficient density so as not to be seen through and of sufficient height to constitute an effective screen. Appropriate visual screenings must be provided.



8. §280-103.B(4) – The parking calculations provided must be revised to include the specific use of hotel.
9. §280-112.C. – Areas of steep slopes containing slopes steeper than 14% shall be outlined as following (1) Areas containing slopes steeper than 14% but less than 20% shall be distinguished from the areas containing slopes of 20% or steeper. (2) Areas containing slopes of 20% and steeper shall be separately identified. The applicant has shown the location of these areas on the plans and has indicated that these slopes are manmade and excluded from this section.

Subdivision and Land Development

1. §255.20.B(1)(n) – Existing principal buildings and their respective uses, and driveways on the adjacent peripheral strip; sewer lines, storm drains, culverts, bridges, utility easements, quarries, railroads and other significant man-made features within 500 feet of and within the site (this includes properties across streets). This must be provided or a waiver requested.
2. §255.21.A(6) – Final plans shall be on a sheet having a minimum size of 18 inches by 30 inches and a maximum size of 24 inches by 34 inches, and all lettering shall be drawn as to be legible if the plan should be reduced to half size. The applicant has requested a waiver from this requirement.
3. §255-27.C.(1) – King of Prussia Road is designated as a major collector and has a required Right-of-Way of 80 feet, and cartway of 48 feet. The ultimate right of way shown on the plans is 65 feet.
4. §255-27.C.(2) – Additional right-of-way and/or cartway widths may be required by the Board of Commissioners in order to lessen traffic congestion, to secure safety from fire, panic and other dangers, to facilitate the adequate provision for transportation and other public requirements and to promote the general welfare.
5. §255-29.A.(12)(b) – The width of entrance and exit drives shall be 25 feet for two way use. The two-way drive on the Northerly side of the property is 20 feet wide. This must be revised or a waiver requested.
6. §255-29.A.(14) – No less that a five-foot radius of curvature shall be permitted for all curblines in the parking areas. The radii of all curb lines must be clearly identified on the plans.



7. §255-29.B.(1) – All parking areas shall have at least one tree 2 ½ inches minimum in caliper for every five parking spaces in single bays and one tree 2 ½ inches minimum in caliper for every 10 parking spaces in double bays. This must be clearly shown on the plans.
8. §255-37.E. – Sidewalks and pedestrian paths shall be adequately lighted, if required by the Board of Commissioners.
9. §255-38.A. – Within any land development or major subdivision, street trees shall be planted along all streets where suitable street trees do not exist.
10. §255-38.B. – Street trees 2 ½ inches dbh at intervals of not more than 30 feet along both sides of new streets and along one or both sides of an existing street within the proposed subdivision and land development. An equivalent number may be planted in an informal arrangement subject to the approval of the Board of Commissioners.
11. §255-41.H. – Outdoor collection stations shall be provided for garbage and trash removal when indoor collection is not provided. Collection stations shall be screened from view and landscaped. We note there is one collection station shown on the plans. The applicant must explain how garbage and trash removal will be provided for the hotel and office building.
12. §255-43.1.E(2) – Where, upon agreement with the applicant or developer, it is determined that the dedication of all or any portion of the land area required for park and recreation purposes is not feasible, the applicant or developer shall pay a fee in lieu of dedication of any such land to the Township. The fee for non-residential subdivisions or land developments shall be \$3,307 per 4,000 square feet of building area. The applicant must conform to this section.
13. §255-54.B – The central water system should be designed with adequate capacity and appropriately spaced fire hydrants for fire-fighting purposes pursuant to the specification of the National Fire Protection Association. Review and approval by the Township Engineer and the Township Fire Marshall shall be required in order to ensure that adequate fire protection is provided.

Sanitary Sewer

1. The applicant has indicated that sanitary sewer service is being provided to the hotel, office building and one of the parking garages. The applicant must provide sewer service to the mixed medical facility. An explanation must be provided as to why sanitary sewer service to the parking garage is provided.



2. A profile of the proposed sanitary sewer must be provided. The sizes of all proposed sanitary sewer must be shown on the profile. All utilities crossing the sanitary sewer must be shown on the profile to ensure adequate clearance.
3. The plans indicate that the contractor will connection to the existing sewer. It is unclear from the plans if the contractor is going to connect to a portion of the existing service lateral. If that is the case, the condition of the existing lateral must be evaluated to determine if this is acceptable.
4. Sanitary sewer note #5 on sheet 2 of 26 must be revised to indicate that the typical cover of a sanitary sewer main must be 5 feet.

Storm Sewer

1. Please provide pre-development hydrographs for POI #2 for the 1-yr through 50-yr storm events.
2. §245-23(D)(2) – Water quality volume requirement can be accomplished by the permanent volume of a wet basin or the detained volume from other BMPs. Where appropriate, wet basins shall be utilized for water quality control and shall follow the guidelines of the BMP manuals referenced in Appendix G. The applicant is proposing soil amendment credit for the water quality volume required at POI #1, which does not meet Ordinance requirements. Please revise to meet the Ordinance requirement.
3. §245-27(J) - Underground stormwater management systems must be designed to store the two- through one-hundred-year storms within a pipe or other open system that will permit the inspection and maintenance of the system. The entire storm must be placed in the pipe (i.e., the stone bedding around the pipe is not to be included in the volume calculations). We note that in Section 4.3 of the stormwater management report the applicant states that the basin volume will include the storage in the rock voids. This must be revised to meet the Ordinance requirements or a waiver must be requested.
4. Table 10 on page 15 of the stormwater management report lists a tree credit for POI #1 water quality volume. Worksheet #5 for POI #1 in Appendix C and the Runoff Calculation in Appendix D list a soil amendment credit. Please revise this inconsistency.
5. Please provide permeability/infiltration rates for the permeable pavers and permeable pavement.
6. Infiltration testing results including a depth to the limiting zone must be provided. Also, please show location of test pits on the plans.



7. Please clarify what the stippled pattern shown in Proposed Surface Stormwater Basin 1 and Proposed Bio Retention Basin 2 on Sheet CS9001 represents.
8. A profile of the proposed storm sewer must be provided. The sizes of all proposed storm sewer must be shown on the profile. All utilities crossing the storm sewer must be shown on the profile to ensure adequate clearance.
9. Stormwater calculations demonstrating that the requirements of the stormwater ordinance must be submitted as part of the Final Plan submission. Final approval of the stormwater management plan will be required as part of the Grading Permit process. Any revisions to the size or location of the individual structures or other features will be addressed at that time.


General

1. New deeds must be prepared and recorded at the Delaware County Court house at the time of plan recording for the consolidation of the lots.
2. The Radnor Township tree protection detail must be shown on the plans.
3. Lighting details must be provided on the plans.
4. The height of all retaining walls must be indicated on the plans.
5. Detailed parking structure plans must be provided for review.

If you have any questions or require any additional information, please contact me.

Very truly yours,

GANNETT FLEMING, INC.

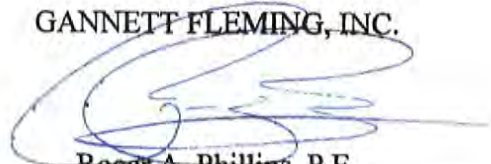

Roger A. Phillips, P.E.
Senior Project Manager





GILMORE & ASSOCIATES, INC.
ENGINEERING & CONSULTING SERVICES

MEMORANDUM

Date: November 29, 2017

To: Steve Norcini, P.E.
Radnor Township Engineer

From: Amy Kaminski, P.E., PTOE
Transportation Services Manager

cc: John Rice, Esq., Grim, Biehn & Thatcher
Peter Nelson, Esq., Grim, Biehn & Thatcher
Roger Phillips, P.E., Gannett Fleming, Inc.
Damon Drummond, P.E., PTOE, Gilmore & Associates, Inc.

Reference: 145 King of Prussia Road – The University of Pennsylvania Health Systems
Preliminary Land Development Review 1
Transportation Impact Study Review 1
Radnor Township, Delaware County, PA
G&A 15-12020

Gilmore & Associates, Inc. (G&A) has completed a transportation review for the above referenced project and offers the following transportation comments for Radnor Township consideration:

I. BACKGROUND

The University of Pennsylvania Health Systems is proposing the re-development of a 26 acre parcel, located at 145 King of Prussia Road, in Radnor Township, Delaware County. The project includes a total proposed gross floor area of 475,000 sf. The proposed development will consist of a 250,000 square foot mixed medical use building with an associated 1,000 space parking garage, a 4-story 150,000 square foot general office building, a 4-story 75,000 square foot (120 room) hotel and an associated 850 space parking garage. The site is expected to generate a total of 731 AM peak hour trips, 583 PM peak hour trips, and 7,518 weekday trips without any trip reductions for internal or transit trips. The ADT along King of Prussia Road is 10,283 vehicles per day (combined).

As reminder, the Applicant withdrew the Land Development submission on October 31, 2017; and resubmitted on November 14, 2017.

BUILDING ON A FOUNDATION OF EXCELLENCE

65 E. Butler Avenue | Suite 100 | New Britain, PA 18901
Phone: 215-345-4330 | Fax: 215-345-8606

www.gilmore-assoc.com

II. DOCUMENTS REVIEWED

- A. Preliminary Land Development Plans for Penn Medicine at Radnor, prepared for the University of Pennsylvania Health Systems, prepared by Pennoni Associates, Inc., dated September 29, 2017.
- B. Traffic Impact Study for Mixed Medical Facility 145 King of Prussia Road, prepared for the University of Pennsylvania Health System, prepared by Pennoni Associates, Inc., dated September 2017.
- C. Cover letter dated September 29, 2017 prepared by Pennoni Associates, Inc.
- D. Waiver Request Letter for Penn Medicine at Radnor, prepared for Radnor Township, prepared by Pennoni Associates, Inc., dated September 29, 2017.
- E. Subdivision and Land Development Application.
- F. Application for Act 247 Review.

III. IDENTIFIED IMPROVEMENTS

- A. Traffic Signal Timing Optimization at the following intersections:
 - 1. King of Prussia Road and Matsonford Road/Park Driveway:
 - 2. King of Prussia Road and Radnor-Chester Road:
 - 3. Lancaster Avenue and I-476 SB Off-Ramp:
 - 4. Lancaster Avenue and Radnor-Chester Road
 - 5. Lancaster Avenue and I-476 NB On-Ramp/Hillside Circle
- B. King of Prussia Road and Raider Road/Site Driveway:
 - 1. Construct a new traffic signal.
 - 2. Provide left turn lanes on both approaches of King of Prussia Road.
 - 3. Construction of a northbound King of Prussia Road right turn lane.
- C. King of Prussia Road and Southern Site Driveway:
 - 1. Restripe northbound King of Prussia Road to provide a shared through/right turn lane.
 - 2. Widen the east side of King of Prussia Road north of the Southern Site Driveway to provide two northbound receiving lanes and a taper to a single northbound lane.
- D. King of Prussia Road and Lancaster Avenue (U.S. Route 30)/NB Off-Ramp:
 - Restripe the northbound I-76 off-ramp at Lancaster Avenue to provide a shared through/right lane.

IV. LAND DEVELOPMENT PLAN REVIEW

- A. Subdivision and Land Development Ordinance (SALDO) comments:
 - 1. §255-20.B(1)(n) – Existing principal buildings, and their respective uses, and driveways on the adjacent peripheral strip, sewer lines, storm drains, culverts,

bridges, utility easements, quarries, railroads and other significant man-made features within 500 feet of and within the site shall be shown on the plans.

2. §255-20.B(5)(d)[2][a] and §255-20.B(5)(d)[6][b] Coordinate with SEPTA and revise the plans to provide an ADA accessible connection from the proposed on-site sidewalk to the existing SEPTA facilities.
3. §255-21.A(6) – Final plans shall be on a sheet having a minimum size of 18 inches by 30 inches and a maximum size of 24 inches by 34 inches, and all lettering shall be so drawn as to be legible if the plan should be reduced to half size. The Applicant has requested a waiver from this requirement; we have no engineering objection to this request.
4. §255-27.B(3)(c) and §255-27.C(1) - King of Prussia Road is identified as a Major Collector and requires an 80' right-of-way (40' half-width) and a minimum 48' cartway width (24' half-width). The applicant proposes to provide a half-width right-of-way of 40' from the centerline of the roadway. The existing cartway width (36') is less than the minimum required cartway width (48' full width; 24' half-width) and the Applicant is required to widen the cartway for the full length of the site frontage along King of Prussia Road. Revise the plans to continue the two northbound lanes along the entire site frontage on King of Prussia Road beginning at the South Driveway and extending through and including the SEPTA/Northern site driveway.
5. §255-27.C(1) – Sidewalk shall be provided along the entire site frontage. The onsite trail doesn't provide an adequate walkway for pedestrians walking along the site frontage. If the Applicant considers and the Township agrees the sidewalks located along the westside of King of Prussia Road (along the Radnor Township School District frontage) as adequate; additional improvements should be provided as follows:
 - a. Pedestrian crosswalks meeting the current Public Right-of-Way Accessibility Guidelines for Americans with Disabilities Act Accessibility Guidelines (PROWAG/ADAAG) requirements as indicated in PennDOT Publication 13M DM-2 Design Manual 2: Highway Design, Chapter 6; and PennDOT Publication 70M Roadway Construction Standards (RC-67) must be constructed on all approaches to the proposed traffic signal at Raider Road and at the north and south access driveways to provide adequate crossing locations.
 - b. Widen the sidewalks along the westside of King of Prussia Road (Radnor Township School District frontage) to five feet (5') as required by PROWAG/ADAAG or provide 5 foot by 5 foot passing areas at a 200 foot minimum interval along the length of the roadway.
6. §255-29.A(12)(b) – The width of entrance and exit drives shall be 25 feet for two-way use. The width of the existing SEPTA/Northern site driveway is 20 feet and must be widened to comply with this section of the ordinance or a waiver must be requested.

7. §255-29.A(14) – No less than a five-foot radius of curvature shall be permitted for all curblines in parking areas. Revise the plans to label all curb radii and provide a minimum 5' curb radii along the south end of the drop-off area behind the proposed 4- story office building.
8. §255-30 – Revise the plans to delineate the proposed loading stall(s) adjacent to the proposed hotel and office building.
9. §255-30.A – Identify the area adjacent to the parking garage that is east of the loading area wall and is approximately 10'x 60'. If this area is intended for loading, it must meet the requirements for this section.
10. §255-37.A – Sidewalks and pedestrian paths shall minimize pedestrian-vehicle conflicts. As a pedestrian safety precaution, include a grass verge between the curbline and the proposed sidewalk along the King of Prussia Road site frontage to match the existing sidewalk opposite the site.
11. §255-37.E – Sidewalks and pedestrian paths shall be adequately lighted, if required by the Board of Commissioners. Revise the lighting plan to provide pedestrian lighting along all proposed sidewalks including along King of Prussia Road. Coordinate with the Township Engineer and Township Planner regarding lighting levels.
12. §255-37.H – Steps or a combination of steps and ramps shall be utilized to maintain maximum grades, where necessary. Where sidewalk grades exceed 5%, a nonslip surface texture shall be used. We recommend the Applicant provide a sidewalk connection along the north side of the central access driveway opposite to the intersection of Raider Road. We understand the ADA accessible access is provided on the south side of the driveway.
13. §255-40.F – Revise the plans to indicate the location of refuse collection stations for the proposed hotel and 4-story office building.

B. General Comments

We offer the following recommendations based on a transportation review of the land development plan submission:

1. We recommend the Applicant coordinate with the Township staff regarding the width and location of the proposed trail and consider providing a trail or sidewalk connection adjacent to the Southern Site Driveway from the trail to King of Prussia Road.
2. Provide a separate pavement marking and signage plan including all right-of-way lines, lane lengths, widths, bay taper lengths, lane line colors, lane line widths, etc.
3. Provide a 24" stop bar and an R1-1 stop sign at the northern and Southern Site Driveway egresses.

4. Install R7-302 No Parking SYMBOL/ARROW signs along the Northern/SEPTA driveway. It appears this is currently being used as overflow parking and the illegal parking creates a de facto and unacceptable single travel lane.
5. Revise the plans to provide a minimum 6' crosswalk as required in PennDOT Publication 111, TC-8600.
6. Per PennDOT Publication 111, TC-8600, we recommend the Applicant provide a 4" DY centerline along the central access and Raider Road driveways extending for a minimum of 150 feet beyond the intersection of King of Prussia Road.
7. Revise the plans to include stop bars on driveway and roadway approaches to King of Prussia Road and Raider Road/Site Driveway associated with the traffic signal.
8. Replace any references to R7-7A with the PennDOT approved R7-302 NO PARKING SYMBOL/ARROW sign. Refer to PennDOT Publication 236 for further details.
9. Replace any references to R5-3-6 with the PennDOT approved R5-101, EMERGENCY AND AUTHORIZED VEHICLES ONLY. Refer to PennDOT Publication 236 for further details.
10. Sheet 2 includes symbols to assist in identifying proposed signs; however, the symbol callouts were not utilized in the plan set. Include all proposed signs on the various sheets and also include on the requested pavement marking and signage plan.
11. We recommend the Applicant include one ingress and two egress lanes at the site access driveway opposite Raider Road on King of Prussia Road.
12. We recommend eliminating the dedicated right-turn and left-turn lanes into the Southern Site Driveway. Due to the fact that this will be a loading area only, the auxiliary lanes may not be necessary.
13. Provide curb radii (at minimum) necessary for the anticipated delivery traffic at the Southern Site Driveway. A 45 foot curb radii is recommended for truck access.
14. The fire truck turning templates should be submitted to the Fire Marshall for review.
15. We note the Applicant is only demonstrating the use of a WB-40 truck at the SEPTA/Northern site driveway. Verify that a WB-40 truck will be the largest truck anticipated for Hotel deliveries. Consider increasing the radii to accommodate larger vehicles. If the Northern driveway will only be accommodating WB-40 trucks, the appropriate truck restriction signage will be required.
16. Sheet 25 of 26 (CS9801):

- a. The northbound WB-67 movement at the Southern Site Driveway should be revised to show the truck beginning the turn entirely within the northbound right-turn lane. Increase the corner radii and/or widen the driveway as necessary to accommodate WB-67 trucks.
 - b. At the Southern Site Driveway, show the WB-67 exiting movement onto King of Prussia Road.
 - c. Revise the WB-67 movements to eliminate any contact with the adjacent dumpster bay walls and curblines.
 - d. Revise the WB-67 movement to show the truck not conflicting with the compactor.
 - e. The WB-67 movement shows the truck reversing into the generator area. Bollards are recommended around the generator area.
 - f. Show the WB-40 exiting movement onto King of Prussia Road beginning from the loading area at the SEPTA/Northern driveway.
17. Sheet 26 of 26 (CS9802):
 - a. The eastbound fire truck movement at the Raider Road site driveway should be revised to eliminate any contact with the adjacent curb and curb ramp along the patient drop-off area.
 - b. The northbound fire truck movement at the Raider Road site driveway should be revised to show the truck beginning the turn entirely within the northbound right-turn lane.
 - c. The northbound fire truck movement at the Southern Site Driveway should be revised to show the truck beginning the turn entirely within the northbound right-turn lane.
 - d. Revise the fire truck movement along the Southern Site Driveway so that the truck remains completely on the roadway during the movement.
18. The Applicant will be responsible for providing the following documents prior to Final Land Development approval:
 - a. Construction details related to ADA curb ramps, including spot elevations, dimensions and slopes.
 - b. Traffic Signal Construction Plans, Traffic Signal Permit Plans, Traffic Signal System Plans, and a Traffic Signal design report must be provided to the Township and PennDOT for review and approval.
 - c. All new or modified signal permit plans require a completed TE-160 form and associated resolution.
 - d. The Applicant will need to coordinate with Radnor Township School District to eliminate parking along the south side of Raider Road near King of Prussia Road. The onstreet parking along the south side of Raider Road effectively narrows the 30' cartway width to a 22 foot width which is inadequate to store busses and automobiles. We recommend evaluating the length of parking to be eliminated based on the results of

the impending queue analysis noted under the Transportation Impact Assessment section below.

V. TRANSPORTATION IMPACT ASSESSMENT (TIA) REVIEW

A. Subdivision and Land Development Ordinance (SALDO) comments:

1. §255-20.B(5)(d)[2][a] - We recommend the applicant discuss with SEPTA the installation of a bus shelter along King of Prussia Road near the corner of the Raider Road site driveway to encourage and promote transit riders. In addition, we recommend installing a bus turn out lane to minimize traffic flow disruptions along King of Prussia Road.
2. §255-20.B(5)(d)[3] Existing traffic conditions.
 - a. Traffic counts were conducted on November 18, 2015 and November 24, 2015 at some of the studied intersections. These dates were noted as early dismissal days on the Radnor School District calendar. The Applicant should provide a comparison with historical counts at these intersection indicating similar volumes or recount the intersections during a typical full day of school.
 - b. Crash Data Analysis
 - i. The crash data provided in the body of the report and in Appendix E should be removed from the TIA and provided under separate cover.
 - ii. PennDOT Strike-Off-Letter (SOL) 470-09-4 *Transportation Impact Study Guidelines* indicates 5 years of crash data should be reviewed; the submission only provided 3 years of historical data. In addition, the crash report should include non-reportable crashes obtained from Radnor Township Police Department. The crash analysis should be revised to provide a more detailed crash data analysis as follows:
 - a) Quantify the number of correctible reportable and non-reportable crash incidents in a rolling 12 month analysis period.
 - b) To identify potential mitigation measures for reportable and non-reportable crashes incidents exceeding five during the rolling 12 month period.
3. §255-20.B(5)(d)[4] The TIA shall be updated to remove the 7% Transit Ridership reduction for the Trip Generation based on the following:
 - a. As discussed in the *ITE Trip Generation Handbook, 3rd Edition*, Section 8.4.2, the national database of person trips by mode for the Transit Friendly Development (TFD) is limited. Therefore, the preferred method for estimating a transit mode share for external trips at a TFD would be through development of surveys at proxy sites. The TIA would need to be modified to identify any transit studies previously done for the existing site or any similar nearby sites (i.e., employee transit usage survey, origin/destination study, boarding/alighting at Paoli/Thorndale station, etc.).
 - b. In accordance with the information provided in Appendix B of the ITE publication *Trip Generation Manual, 9th Edition Guide and Handbook*, this

project's Floor Area Ratio (FAR) of 0.40 does not meet the required development intensity to utilize the minimum transit reductions identified in Tables B.2 & B.3.

- c. Per PennDOT Strike-off-Letter 470-09-4 *Transportation Impact Study Guidelines*, the Paoli/69th Street SEPTA bus route does not meet the minimum requirement of 3-4 buses per hour and 14-16 daily operation hours to justify a bus related trip reduction.
 - d. More importantly, the agreed upon trip generation methodology for the proposed mixed medical use is based on data collected at local existing sites which inherently accounts for any transit reduction in the data collection process. If there is a 7% transit reduction, the reduction was already accounted for in the lack of a vehicle entering and exiting the local site driveways that were used to develop the trip generation rates for the Mixed Medical Use.
4. §255-20.B(5)(d)[5] Provide a traffic signal warrant analysis for the intersection of the SEPTA/Northern site driveway and King of Prussia Road.
 5. §255-20.B(5)(d)[6] All streets or intersections showing Level of Service below C shall be considered deficient and specific recommendations for elimination of these problems shall be listed. The analysis indicates the corridor along the site frontage of King of Prussia Road is congested with multiple LOS deficiencies. The roadway should be widened to accommodate additional through lanes where possible along King of Prussia Road. The Applicant should evaluate the feasibility of constructing a 4-lane or 5-lane roadway section along King of Prussia Road.
 6. §255-20.B(5)(d)[6][b] A listing of all actions to be undertaken to increase present public transportation usage and improve service, if applicable, shall be included.

B. General TIA Comments

1. The Applicant indicates a credit was applied for site trips from a previously approved plan for a 427,110 SF General Office Building (Land Use Code 710); this credit is inappropriate and should not be applied to the No-Build conditions for this study. The applicant indicates the existing facility was previously approved and could be occupied by a tenant without additional approvals; however, in our opinion, this has no bearing on the current land development application.
2. The report should be revised to include volume development spreadsheets for each studied intersection. We were unable to verify the No-Build and Build conditions based on the figures provided.
3. The capacity analyses should be revised to include the timings for all signalized intersections and 95 percentile queues. We were unable to verify the capacity analyses due to insufficient data.
4. The Applicant should provide a 95th percentile queue analysis to determine that adequate storage lengths are available at the studied intersections.

5. Please provide a Level of Service/Delay in tabular format for the No-Build and Build scenarios as required in PennDOT Strike-off-Letter 470-09-4. Provide No-Build and Build conditions scenarios in the same table for a comparison for each peak hour on each approach by lane movement.
6. The Applicant should provide turn lane warrant analyses for all three site driveways. Appendix H only provides an analysis for the Raider Road/Site Driveway along King of Prussia Road. In addition provide an analysis for the Raider Road (eastbound) leg at the intersection of King of Prussia Road/Raider Road.
7. Provide 2025 Build turn lane warrants to determine the maximum turn lane lengths required.
8. Per the Institute of Transportation Engineers (ITE) Trip Generation Manual, 3rd Edition, revise the report to include the rates/equations regarding ITE Land Use Code 710 (General Office Building) and Land Use Code 310 (Hotel). The submission only provides the rates and distribution percentages for the Mixed Medical Use Facility.
9. Verify the speed along Matsonford Road and revise as needed.
10. Revise Figures 3 through 11 to identify the location of King of Prussia Road.
11. The pedestrian and vehicle clearance interval calculations provided in Appendix L will need to be verified and updated based on the final traffic signal permit plan.
12. The following comments pertain to discrepancies between the Manual Turning Movement counts and the Capacity Analyses provided in Appendices D, F, I & M:
 - a. I-476/Southbound Off-Ramp & Lancaster Avenue: Revise the eastbound lane configuration to include a right-turn volume.
 - b. I-476/Southbound Off-Ramp & Lancaster Avenue: Verify the westbound left volume during the 2020 No-Build PM conditions; it appears the volume should be revised from 584 to 571 vehicles.
 - c. King of Prussia Road & Southern Site Driveway: Verify the northbound through 2020 PM Build volume; it appears the volume should be revised from 405 to 451 vehicles.
 - d. King of Prussia Road & Southern Site Driveway: Verify the southbound through 2025 PM Build volume; it appears the volume should be revised from 1382 to 1319 vehicles.
 - e. King of Prussia Road & Southern Site Driveway: Verify the northbound through 2025 PM Build volume; it appears the volume should be revised from 411 to 457 vehicles.

- f. King of Prussia Road & Southern Site Driveway: Verify the southbound through 2025 PM Build volume; it appears the volume should be revised from 1403 to 1338 vehicles.
 - g. King of Prussia Road & Southern Site Driveway: Verify the northbound through 2020 AM Build volume; it appears the volume should be revised from 1544 to 1554 vehicles.
13. The following comments pertain to discrepancies between the Turning Movement counts and the existing 2016 weekday volumes included in Figure 3:
- a. Northern Driveway and King of Prussia Road: verify the southbound PM through volume; it appears the volume should be revised from 1038 to 1046.
 - b. Southern Site Driveway and King of Prussia Road: Verify the southbound PM through volume; it appears the volume should be revised from 1011 to 1077.
 - c. Southern Site Driveway and King of Prussia Road: Verify the northbound PM through volume; it appears the volume should be revised from 337 to 293.
14. There is an existing coordinated signal system along King of Prussia Road that includes Radnor-Chester Road and Matsonford Road. Any traffic signals proposed along the site frontage should be included in the overall coordinated system. The Applicant should also investigate coordinating the Matsonford Road/King of Prussia Road signal system with the Lancaster Avenue System.
15. We recommend the Transportation Impact Study be revised to address the above comments to the satisfaction of the Township. In order to expedite the review process for the resubmission of the above, the Applicant should submit a response letter which addresses each of the above comments including the original comment and identify any changes made unrelated to the review.

If you have any questions regarding the above, please contact this office.

ABK:DAD:las



DELAWARE COUNTY PLANNING COMMISSION

COURT HOUSE/GOVERNMENT CENTER
201 W. Front St. Media, PA 19063

COUNCIL

MARIO J. CIVERA, JR.
CHAIRMAN

COLLEEN P. MORRONE
VICE CHAIRMAN

JOHN P. McBLAIN
DAVID J. WHITE
MICHAEL F. CULP

Office Location: Toal Building, 2nd & Orange Sts., Media, PA 19063
Phone: (610) 891-5200 **FAX:** (610) 891-5203
E-mail: planning_department@co.delaware.pa.us

LINDA F. HILL
DIRECTOR

November 16, 2017

Mr. Robert A. Zienkowski
Radnor Township
301 Iven Avenue
Wayne, PA 19087-5297

RE: Name of Dev't: Penn Medicine at Radnor
DCPD File No.: 34-845-78-92-08-14-17
Developer: The Trustees of the University of
Pennsylvania
Location: East side of King of Prussia Road,
approximately 400' north of Lancaster
Avenue
Recv'd in DCPD: October 17, 2017

Dear Mr. Zienkowski:

In accordance with the provisions of Section 502 of the Pennsylvania Municipalities Planning Code, the above described proposal has been sent to the Delaware County Planning Commission for review. At a meeting held on November 16, 2017, the Commission took action as shown in the recommendation of the attached review.

Please refer to the DCPD file number shown above in any future communications related to this application.

Very truly yours,

Linda F. Hill
Director

cc: The Trustees of the University of Pennsylvania
Pennoni Associates, Inc.



DCPD

DELAWARE COUNTY PLANNING DEPARTMENT

Court House/ Government Center, 201 W. Front St., Media, PA 19063
Office Location: Toal Building, 2nd & Orange Sts., Media, PA 19063
Phone: (610) 891-5200 FAX: (610) 891-5203
E-mail: planning_department@co.delaware.pa.us

Date: November 16, 2017
File No.: 34-845-78-92-08-14-17

PLAN TITLE: Penn Medicine at Radnor

DATE OF PLAN: September 29, 2017

OWNER OR AGENT: The Trustees of the University of Pennsylvania

LOCATION: East side of King of Prussia Road, approximately 400' north of Lancaster Avenue

MUNICIPALITY: Radnor Township

TYPE OF REVIEW: Subdivision and land development

ZONING DISTRICT: PLO

SUBDIVISION ORDINANCE: Local

PROPOSAL: Subdivision: Incorporate two lots totaling 18.71 acres into one lot
Land development: Develop 475,000 sq. ft. of mixed-use development

UTILITIES: Public

RECOMMENDATIONS: Subdivision: Approval
Land development: Approval, with consideration given to staff comments

STAFF REVIEW BY: Michael A. Leventry



Date: November 16, 2017
File No.: 34-845-78-92-08-14-17

REMARKS:

PREVIOUS ACTION

A plan for the site was last reviewed by the Delaware County Planning Commission at its meeting on October 16, 2014, as a land development. The applicant proposed to redevelop the site with four buildings totaling 550,441 sq. ft. The Commission recommended revise and resubmit.

CURRENT PROPOSAL

The applicant currently proposes to demolish the buildings that exist on the site and redevelop with a 475,000 sq. ft. mixed-use development that is to include office, medical offices, ambulatory care, and parking.

SITE CHARACTERISTICS

The site currently contains a mix of uses that primarily include office and institutional.

APPLICABLE ZONING

The proposal is located within the PLO district and is subject to applicable regulations set forth in the Township zoning code.

COMPLIANCE

The proposal appears to comply with the PLO district provisions.

SEWAGE FACILITIES

The developer should contact the Pennsylvania Department of Environmental Protection regarding the need for sewage facilities planning approval.

Date: November 16, 2017
File No.: 34-845-78-92-08-14-17

REMARKS (continued):

The Township should confirm receipt of any necessary Pennsylvania Department of Environmental Protection planning approval prior to final approval.

STORMWATER MANAGEMENT

The Township Engineer must verify the adequacy of all proposed stormwater management facilities.

TRANSPORTATION COMMENTS

The applicant should provide financial incentives for employees to take transit, car pool, bicycle, or walk to the site. This would reduce the number of parking spaces needed, reduce the applicant's cost to construct and maintain parking facilities, mitigate stormwater runoff, and improve employee health (consistent with a health care provider's mission). The applicant should consider providing pervious pavement to reduce stormwater runoff.

The Township should request that SEPTA (Mark Cassel 215-580-7947) place a bus stop at the proposed main entrance to the site (at the proposed sidewalk on King of Prussia Road) for the convenience of bus riders. Currently, the nearest bus stop is at the northern end of the site at the entrance drive to the High Speed Line station. The Township should also consider installing passenger shelters at the bus stops for rider security, weather protection, and advertising revenue for the Township.

The applicant should provide bicycle parking facilities so employees and visitors can bike to the site. The bicycle parking, such as inverted "U" bike docks, should secure bicycles by their frames, rather than only by their wheels.

Date: November 16, 2017
File No.: 34-845-78-92-08-14-17

REMARKS (continued):

The applicant proposes to construct a sidewalk to King of Prussia Road. This sidewalk should be extended to the intersection of the applicant's entrance road and Raider Road, where a traffic signal is proposed. A continental/zebra style crosswalk should be installed across King of Prussia Road at this location, as it would improve safety for bus riders at the new bus stop.

RECORDING

In accordance with Section 513(a) of the Pennsylvania Municipalities Planning Code (MPC), final plans must be recorded within ninety (90) days of municipal approval.



DELAWARE COUNTY PLANNING DEPARTMENT

COURT HOUSE/GOVERNMENT CENTER
201 W. Front St. Media, PA 19063

COUNCIL

MARIO J. CIVERA, JR.
CHAIRMAN

COLLEEN P. MORRONE
VICE CHAIRMAN

JOHN P. McBLAIN
DAVID J. WHITE
MICHAEL F. CULP

Office Location: Toal Building, 2nd & Orange Sts., Media, PA 19063
Phone: (610) 891-5200 **FAX:** (610) 891-5203
E-mail: planning_department@co.delaware.pa.us

LINDA F. HILL
DIRECTOR

October 26, 2017

Mr. Robert A. Zienkowski
Radnor Township
301 Iven Avenue
Wayne, PA 19087-5297

RE: Title: Penn Medicine at Radnor
Applicant(s): The Trustees of the University of Pennsylvania
File Number: 34-845-78-92-08-14-17
Meeting Date: 11/16/2017
Municipality: Radnor Township
Location: East side of King of Prussia Road, approximately
400' north of Lancaster Avenue
Received: 10/17/2017

Dear Mr. Zienkowski,

This is to acknowledge receipt of the above referenced application for review and report. The Commission has tentatively scheduled consideration of the application for its public meeting on the date shown above at 4:00 p.m. in the Government Center Building, (Room 100), Court House Complex, Media, PA. Attendance is not required but is welcomed. If you have any questions concerning this matter, please contact Dennis De Rosa at (610) 891-5222.

NOTE: In order to avoid processing delays, the DCPD file number shown above MUST be provided in any transactions with the county regarding this or future applications related to this location.

Very truly yours,

Linda F. Hill
Director

cc: The Trustees of the University of Pennsylvania
Pennoni Associates, Inc.





PENNONI ASSOCIATES INC.
CONSULTING ENGINEERS

One South Church Street
 2nd Floor

West Chester, PA 19382

Tel: 610 - 429 - 8907

Fax: 610 - 429 - 8918

LETTER OF TRANSMITTAL

TO: Radnor Township
 301 Iven Avenue
 Wayne, PA 19087

DATE	09/29/17	JOB NO.	UPHS1504
ATTENTION	Mr. Robert Zienkowski		
RE:	Penn Medicine at Radnor		

WE ARE SENDING YOU Attached Under separate cover via Hand delivered the following items:
 Shop Drawings Prints Plans Samples Specifications
 Copy of Letter Change Order _____

LIST OF ITEMS TRANSMITTED			
COPIES	DATE	NO:	DESCRIPTION
1	09/29/17	1	Cover Letter
1	09/29/17	1	Waiver Request Letter
1	-	2	Radnor Township Application
1	-	2	Delaware County Planning Commission Application
1	-	2	Checks for Application Fees
26	09/29/17	28	Preliminary Land Development Plans (full size)
7	09/29/17	28	Preliminary Land Development Plans (half size)
2	09/29/17	-	PCSM Report
2		-	Traffic Impact Study
2	-	8	Deed of Property
2	04/10/15	142	Commitment for Title Insurance
10	-	-	Thumb drives with all documents

THESE ARE TRANSMITTED as checked below:

<input checked="" type="checkbox"/> For approval	<input type="checkbox"/> Approved as submitted	<input type="checkbox"/> Resubmit _____ copies for approval
<input type="checkbox"/> For your use	<input type="checkbox"/> Approved as noted	<input type="checkbox"/> Submit _____ copies for distribution
<input type="checkbox"/> As requested	<input type="checkbox"/> Returned for corrections	<input type="checkbox"/> Return _____ corrected prints
<input type="checkbox"/> For review and comment	<input type="checkbox"/> _____	
<input type="checkbox"/> FOR BIDS DUE _____	<input type="checkbox"/> PRINTS RETURNED AFTER LOAN TO US	

REMARKS

COPY TO file

SIGNED: Christopher Poterjoy, PE

If enclosures are not as noted, kindly notify us at once.

September 29, 2017

UPHS1504

Radnor Township
Attn: Mr. Robert Zienkowski
301 Iven Ave.
Wayne, PA19087

**RE: PRELIMINARY LAND DEVELOPMENT APPLICATION
PENN MEDICINE AT RADNOR
RADNOR TOWNSHIP, DELAWARE COUNTY, PENNSYLVANIA**

Dear Mr. Zienkowski:

On behalf of the Trustees of the University of Pennsylvania Health Systems, Pennoni Associates Inc. is submitting the attached plans, reports and documentation for consideration of a Preliminary Land Development approval. As you are aware, The Trustees of the University of Pennsylvania Health Systems are proposing the re-development of 145 King of Prussia Road. The development will involve the demolition of existing buildings and construction of a mixed-use facility including a mixed medical use facility, office and hotel. Two parking garages are proposed in conjunction with a surface parking lot. The site has been designed based on the draft Ordinance No. 2016-13 amending the Chapter 280, Article XV of the Radnor Township Code.

I thank you in advance for your assistance on this project. Should you have any questions or need additional information please do not hesitate to contact me at (610) 422-2459 or cpoterjoy@pennoni.com.

Sincerely,

PENNONI ASSOCIATES INC.



Christopher Poterjoy, PE
Project Engineer

Attachment

cc: Pat Dorris, The Trustees of the University of Pennsylvania Health Systems
David Falcone, Saul Ewing Arnstein & Lehr LLP

September 29, 2017

UPHS1504

Radnor Township
Attn: Board of Supervisors
301 Iven Ave.
Wayne, PA19087

**RE: WAIVER REQUEST LETTER
PENN MEDICINE AT RADNOR
RADNOR TOWNSHIP, DELAWARE COUNTY, PENNSYLVANIA**

Dear Supervisors:

On behalf of the Trustees of the University of Pennsylvania Health Systems, Pennoni Associates Inc. is respectfully requesting a waiver from the following section of the Township's Subdivision and Land Development Ordinances.

1. Section 255-21.A(6)

A waiver is requested for the maximum plan sheet size if 24 inches by 34 inches. The plans will be reduced for recording purposes.

I thank you in advance for your assistance on this project. Should you have any questions or need additional information please do not hesitate to contact me at (610) 422-2459 or cpoterjoy@pennoni.com.

Sincerely,

PENNONI ASSOCIATES INC.



Christopher Poterjoy, PE
Project Engineer

Attachment

cc: Pat Dorris, The Trustees of the University of Pennsylvania Health Systems
David Falcone, Saul Ewing Arnstein & Lehr LLP

DELAWARE COUNTY PLANNING COMMISSION

APPLICATION FOR ACT 247 REVIEW

Incomplete applications will be returned and will not be considered "received" until all required information is provided.

Please type or print legibly

DEVELOPER/APPLICANT

Name The Trustees of the University of Pennsylvania; Attn: Pat Dorris E-mail _____

Address 3400 Spruce Street; Philadelphia, PA 19104 Phone _____

Name of Development Penn Medicina at Radnor

Municipality Radnor Township

ARCHITECT, ENGINEER, OR SURVEYOR

Name of Firm Pennoni Associates Inc. Phone 610-422-2459

Address One South Church St.; 2nd Floor; West Chester, PA 19382

Contact Christopher Poterjoy E-mail cpoterjoy@pennoni.com

Type of Review	Plan Status	Utilities		Environmental Characteristics
		Existing	Proposed	
<input type="checkbox"/> Zoning Change	<input type="checkbox"/> Sketch	<input checked="" type="checkbox"/> Public Sewerage	<input type="checkbox"/> Public Sewerage	
<input checked="" type="checkbox"/> Land Development	<input checked="" type="checkbox"/> Preliminary	<input type="checkbox"/> Private Sewerage	<input type="checkbox"/> Private Sewerage	<input type="checkbox"/> Wetlands
<input type="checkbox"/> Subdivision	<input type="checkbox"/> Final	<input checked="" type="checkbox"/> Public Water	<input type="checkbox"/> Public Water	<input type="checkbox"/> Floodplain
<input type="checkbox"/> PRD	<input type="checkbox"/> Tentative	<input type="checkbox"/> Private Water	<input type="checkbox"/> Private Water	<input type="checkbox"/> Steep Slopes

Zoning District PL0

Tax Map # / /

Tax Folio # 36 / 02 / 01234 / 00

STATEMENT OF INTENT
WRITING "SEE ATTACHED PLAN" IS NOT ACCEPTABLE.


Existing and/or Proposed Use of Site/Buildings:

The site contains 3 existing buildings which will be demolished

3 new buildings and 2 new parking structures proposed. A total of 475,000-sf of gross floor area between the 3 buildings. The site is a mixed use with uses including
a Mixed Use Medical Facility, Hotel, and Office.

Total Site Area 18.71 Acres
Size of All Existing Buildings 120,365 (footprint) Square Feet
Size of All Proposed Buildings 120,105 (footprint) Square Feet
Size of Buildings to be Demolished 120,355 (footprint) Square Feet

Patrick Dorris
Print Developer's Name


Developer's Signature

MUNICIPAL SECTION
ALL APPLICATIONS AND THEIR CONTENT ARE A MUNICIPAL RESPONSIBILITY.

Local Planning Commission Regular Meeting _____

Local Governing Body Regular Meeting _____

Municipal request for DCPD staff comments prior to DCPC meeting, to meet municipal meeting date:

Actual Date Needed _____

IMPORTANT: If previously submitted, show assigned DCPD File # _____

Print Name and Title of Designated Municipal Official _____ Phone Number _____

Official's Signature _____ Date _____

FOR DCPD USE ONLY

Review Fee: Check # _____ Amount \$ _____ Date Received _____

Applications with original signatures must be submitted to DCPD.

RADNOR TOWNSHIP
301 IVEN AVE
WAYNE PA 19087
P) 610 688-5600
F) 610 971-0450
WWW.RADNOR.COM

SUBDIVISION ~ LAND DEVELOPMENT

Location of Property 145 King of Prussia Road

Zoning District PLO - Planned Laboratory - Application No. _____
Office District (Twp. Use)

Fee \$5,150.00 Ward No. 2 Is property in HARB District no

Applicant: (Choose one) Owner x Equitable Owner _____

Name Trustees of the University of Pennsylvania Health Systems; Attn: Pat Dorris

Address 3400 Spruce Street; Philadelphia, PA 19104

Telephone _____ Fax _____ Cell _____

Email _____

Designer: (Choose one) Engineer x Surveyor _____

Name Pennoni Associates Inc.; Michael Kissinger

Address One South Church St.; 2nd Floor; West Chester, PA 19382

Telephone (610) 422-2459 Fax (610) 429-8918

Email mkissinger@pennoni.com

Area of property 18.71 Area of disturbance 18.71

Number of proposed buildings 5 Proposed use of property Mixed Use

Number of proposed lots 1

Plan Status: Sketch Plan _____ Preliminary x Final _____ Revised _____

Are there any requirements of Chapter 255 (SALDO) that are not in compliance with?

Are there any requirements of Chapter 255 (SALDO) not being adhered to?
Explain the reason for noncompliance.


N/A

Are there any infringements of Chapter 280 (Zoning), and if so what and why?
Pending zoning amendment

Individual/Corporation/Partnership Name

I do hereby certify that I am the owner, equitable owner or authorized representative of the property which is the subject of this application.

Signature



Print Name Patrick Dorris

By filing this application, you are hereby granting permission to Township officials to visit the site for review purposes.

NOTE: All requirements of Chapter 255 (Subdivision of Lane) of the Code of the Township of Radnor must be complied with whether or not indicated in this application.

Prepared By:
Erik F. Williams, Esq.
Saul Ewing LLP
1500 Market Street, 38th Floor
Philadelphia, PA 19102

RD BK05648-1676 DT-DEED
2015026773 06/02/2015 03:13:55 PM:1
RCD FEE: \$112.50 POL SUB TAX: \$525,000.00 ST TAX: \$350,000.00



When Recorded
Record and Return To:
Land Services USA, Inc.
1835 Market Street, Suite 420
Philadelphia, PA 19103
File No: *PAS 715-1804 JLS*

Folio Number: 36-02-01234-00

SPECIAL WARRANTY DEED

*Document dated May 27, 2015 yet made effective as of May 29, 2015

THIS SPECIAL WARRANTY DEED, made as of this 29th day of May, 2015, by and between **BMR-145 KING OF PRUSSIA ROAD LP**, a Delaware limited partnership, as grantor ("Grantor"), and **THE TRUSTEES OF THE UNIVERSITY OF PENNSYLVANIA, AS OWNER AND OPERATOR OF THE UNIVERSITY OF PENNSYLVANIA HEALTH SYSTEM**, a Pennsylvania non-profit corporation, as grantee ("Grantee") and provides as follows:

WITNESSETH

That in consideration of the sum of Thirty-Five Million Dollars (\$35,000,000), in hand paid, the receipt whereof is hereby acknowledged, Grantor does grant and convey to the Grantee, in fee simple the lands and property, together with all improvements located on the property commonly known as 145 King of Prussia Road, Radnor, Pennsylvania, and situated and lying in Delaware County, Pennsylvania, and described on Exhibit A attached hereto (the "Property").

TOGETHER with all the buildings, improvements, rights, privileges, advantages, hereditaments and appurtenances to the same belonging or otherwise appertaining, and the reversions and remainders, rents, issues and profits thereof; and all the estate, right, title, interest, property, claim and demand whatsoever of the Grantor as well at law as in equity, of, in and to the same.

TO HAVE AND TO HOLD the Property, together with all rights, privileges and advantages thereunto belonging or appertaining to the Grantee, its successors and assigns, forever.

SUBJECT to all covenants, conditions, restrictions, easements, agreements, encumbrances, rights of way and reservations of record and all matters discoverable by a current survey of the Property insofar as they affect the Property or any part thereof.

Exhibit A to Special Warranty Deed

Legal Description

PREMISES "A"

ALL THAT CERTAIN tract of land, Hereditaments and Appurtenances, SITUATE in Radnor Township, Delaware County, Commonwealth of Pennsylvania and described according to an ALTA/ACSM Land Title Survey prepared for The Rubenstein Company, L.P. by Bock & Clark's National Surveyors Network as #4200400832, dated July 14, 2004 as more fully described as follows, to wit:

BEGINNING at a point on the title line in Lancaster Avenue (being also known as Lincoln Highway (Route 30), width varies), said point being at the distance of 3501.89 feet measured Southeasterly along the title line in Lancaster Avenue from its intersection with the title line in Radnor - Chester Road, thence from said point of beginning along lands now or formerly of PA. D.O.T. the 5 following courses and distances: (1) on a line curving to the left with a radius of 161.52 feet the arc distance of 123.76 feet, the chord of said curved line extending North 4 degrees 39 minutes 05 seconds West 120.76 feet to a point of tangency, (2) North 26 degrees 36 minutes 10 seconds West 181.79 feet to a point of curve, (3) on a line curving to the right with a radius of 700.0 feet the arc distance of 198.16 feet, the chord of said curved line extending North 18 degrees 29 minutes 35 seconds West 197.50 feet to a point of tangency, (4) North 10 degrees 23 minutes West 39.35 feet to a point of curve, (5) on a line curving to the left with a radius of 200.0 feet the arc distance of 121.46 feet, the chord of said curved line extending North 27 degrees 46 minutes 50 seconds West 119.60 feet to a point of tangency; thence North 45 degrees 10 minutes 40 seconds West 83.08 feet to a point of curve; thence on a line curving to the right with a radius of 350.0 feet the arc distance of 193.24 feet; the chord of said curved line extending North 29 degrees 21 minutes 40 seconds West 190.79 feet to a point of tangency in the bed of King of Prussia Road; thence North 13 degrees 32 minutes 40 seconds West 246.94 feet to a point of curve in the centerline of King of Prussia Road (50 feet wide); thence along said line the 4 following courses and distances; (1) on a line curving to the right with a radius of 400.0 feet the arc distance of 194.18 feet, the chord of said curved line extending North 00 degrees 21 minutes 45 seconds East 192.28 feet to a point of tangency, (2) North 14 degrees 16 minutes 10 seconds East 258.06 feet to a point of curve, (3) on a line curving to the left with a radius of 400.0 feet the arc distance of 124.29 feet, the chord of said curved line extending North 5 degrees 22 minutes 05 seconds East 123.79 feet to a point of tangency, (4) North 3 degrees 32 minutes West 228.16 feet to a spike; thence leaving King of Prussia Road and extending along lands now or formerly of Radnor Racquet Club, North 84 degrees 29 minutes 30 seconds East 631.651 feet to an iron pin in line of lands now or formerly of S.E.P.T.A.; thence along said lands the 3 following courses and distances, (1) South 2 degrees 55 minutes East, 1675.84 feet to a point (2) South 87 degrees 05 minutes West 10.0 feet to a point, (3) South 2 degrees 55 minutes East 390.96 feet to a point in the title line in Lancaster Avenue aforesaid; and thence along the title line in Lancaster Avenue North 69 degrees 58 minutes West 382.45 feet to the place of beginning.

PREMISES "B"

ALL THAT CERTAIN tract of land, Hereditaments and Appurtenances, SITUATE in Radnor Township, Delaware County, Commonwealth of Pennsylvania, and described according to an ALTA/ACSM Land Title Survey Plan prepared for The Rubenstein Company, L.P., by Yerkes Associates Inc., Consulting Engineers and Surveyors dated 11/8/2000, as follows, to wit BEGINNING at an iron pin at an interior corner of lands now or formerly of PA D.O.T. said point being located the 5 following courses and distances along said lands of PA D.O.T. from a point on the title line in Lancaster Avenue (the point of beginning of Premises "A": (1) on a line curving to the left with a radius of 161.52 feet the arc distance of 123.76 feet the chord of said curved line extending North 4 degrees 39 minutes 05 seconds West 120.786 feet to a point, (2) thence North 26 degrees 36 minutes 10 seconds West 181.79 feet to a point, (3) thence on a line curving to the right with a radius of 700.0 feet the arc distance of 198.16 feet the chord of said curved line extending North 18 degrees 29 minutes 35 seconds West 197.50 feet to a point, (4) thence North 10 degrees 23 minutes West 39.35 feet to a point, and (5) thence on a line curving to the left with a radius of 200.0 feet the arc distance of 84.83 feet the chord of said curved line extending North 22 degrees 32 minutes 03 seconds West 84.20 feet to the point and place of beginning, thence from said point and place of beginning, along lands of said PA D.O.T. North 70 degrees 32 minutes 40 seconds West 226.29 feet to a spike in the middle line of King of Prussia Road (50 feet wide); thence along the middle line of said King of Prussia Road on a line curving to the left with a radius of 395.18 feet the arc distance of 252.62 feet the chord of said curved line extending North 4 degrees 46 minute 11 seconds East 248.34 feet to a point on the Southwesterly line of Premises "A"; thence along said line South 13 degrees 32 minutes 40 seconds East 72.0 feet to a point, thence along the same, on a line curving to the left with a radius of 350.0 feet the arc distance of 193.24 feet the chord of said curved line extending South 29 degrees 21 minutes 40 seconds East 190.79 feet to a point, thence along the same South 45 degrees 10 minutes 40 seconds East 83.08 feet to a point; thence along the same, on a line curving to the right with a radius of 200.0 feet the arc distance of 36.63 feet the chord of said curved line extending South 39 degrees 55 minutes 52 seconds East 36.58 feet to the first mentioned point and place of beginning.

PARCEL "C" (Easement Parcel)

TOGETHER with all the rights and benefits set forth in those certain Agreements each dated January 20, 1956 and recorded in the Delaware County Recorder of Deeds Office in Deed Book 2137 page 548 and in Deed Book 2137 page 551 as modified by that certain Agreement dated December 10, 1965 and recorded in the Delaware County Recorder of Deeds Office in Deed Book 2227 page 592.

PARCEL "D" (Easement Parcel)

ALSO TOGETHER WITH all the rights and benefits conferred in the certain Indenture dated June 24, 1946 and recorded in the Delaware County Recorder of Deeds Office in Deed Book 1278 page 499.

PARCEL "E" (Easement Parcel)

ALSO TOGETHER WITH all the rights and benefits conferred in that certain Indenture dated April 7, 1953 and recorded in the Delaware County Recorder of Deeds Office in Deed Book 1573 page 567.

PARCEL #36-02-01234-00

BEING the same premises which Wyeth-Ayerst Pharmaceuticals, Inc., a New York Corporation, by Indenture bearing date the 6th day of April A.D. 2001 and recorded in the Office of the Recorder of Deeds in and for the County of Delaware, aforesaid, in Volume 2155 page 378 &c., granted and conveyed unto Radnor Properties-145 KOP, L.P., a Delaware Limited Partnership, in fee.

AND Grantor covenants that Grantor will warrant specially the Property hereby conveyed and will only forever warrant and defend the Property, and any part thereof, unto the Grantee, its heirs, personal representatives and assigns, against the lawful claims and demands of the Grantor and all those persons claiming by, through or under Grantor, but not otherwise.


[Signature Page Follows]

IN WITNESS WHEREOF, Grantor has caused this Special Warranty Deed to be properly executed and sealed the day and year first above written.


GRANTOR:

BMR-145 KING OF PRUSSIA ROAD LP,
a Delaware limited partnership

By: BMR-145 King of Prussia Road GP LLC,
a Delaware limited liability company,
its general partner

By:  _____ (SEAL)
Name: Kevin M. Simonsen
Title: Sr. VP, Real Estate Legal

SIGNED AND DELIVERED in the presence of

 _____ (SEAL)
Name: _____
Title: _____

[Notary block follows]

CALIFORNIA ALL-PURPOSE ACKNOWLEDGMENT

CIVIL CODE § 1189

A notary public or other officer completing this certificate verifies only the identity of the individual who signed the document to which this certificate is attached, and not the truthfulness, accuracy, or validity of that document.

State of California)
County of San Diego)


On May 27, 2015 before me, Fern M. Kissel, Notary Public
Date Here Insert Name and Title of the Officer

personally appeared Kevin M. Simonsen
Name(s) of Signer(s)

who proved to me on the basis of satisfactory evidence to be the person(s) whose name(s) is/are subscribed to the within instrument and acknowledged to me that he/she/they executed the same in his/her/their authorized capacity(ies), and that by his/her/their signature(s) on the instrument the person(s); or the entity upon behalf of which the person(s) acted, executed the instrument.

I certify under PENALTY OF PERJURY under the laws of the State of California that the foregoing paragraph is true and correct.

WITNESS my hand and official seal.



Signature Fern M. Kissel
Signature of Notary Public

Place Notary Seal Above

OPTIONAL

Though this section is optional, completing this information can deter alteration of the document or fraudulent reattachment of this form to an unintended document.

Description of Attached Document

Title or Type of Document: _____ Document Date: _____
Number of Pages: _____ Signer(s) Other Than Named Above: _____


Capacity(ies) Claimed by Signer(s)

Signer's Name: _____
 Corporate Officer — Title(s): _____
 Partner — Limited General
 Individual Attorney in Fact
 Trustee Guardian or Conservator
 Other: _____
Signer Is Representing: _____

Signer's Name: _____
 Corporate Officer — Title(s): _____
 Partner — Limited General
 Individual Attorney in Fact
 Trustee Guardian or Conservator
 Other: _____
Signer Is Representing: _____

I HEREBY CERTIFY that the precise address of the within Grantee is:

3451 Walnut Street
The Franklin Building, Suite 737
Philadelphia, PA 19104

By:  (SEAL)
Name: Ralph W. Muller
Title: Chief Executive Officer
(On behalf of Grantee)

Penn Medicine Road Improvements

PENN MEDICINE ROAD IMPROVEMENTS

- A. King of Prussia Road and Lancaster Avenue (U.S. Route 30)/I-476 NB Off-Ramp-
 - i. Restripe northbound I-476 off-ramp for a shared through/right-turn lane.
- B. King of Prussia Road and Raider Road-
 - i. Construct a new traffic signal.
 - ii. Construct left turn lanes on both approaches of King of Prussia Road
- C. King of Prussia Road and Southern Site Access-
 - i. Restripe northbound King of Prussia Road to provide a shared through/ right lane
 - ii. Widen the east side of King of Prussia Road to provide two continuous northbound lanes from Lancaster Avenue to the signalized intersection at the Main Site Driveway/ Raider Road, with a transition into a dedicated right turn lane.
 - iii. Provide 45-foot curb radii (at minimum), or larger if necessary for the anticipated delivery traffic.
- D. King of Prussia Road and SEPTA Access/Northern Site Access-
 - i. Widen the roadway to 25 feet.
 - ii. Construct a southbound King of Prussia Road left turn lane into the Northern Site Access.
 - iii. Construct a bus shelter on King of Prussia Road southeast of the SEPTA Access/Northern Site Access, to the extent that it is approved by SEPTA.
 - iv. Construct sidewalks from the site to the R-100 Station at the rear of the property.
- E. King of Prussia Road-
 - i. Provide a four-lane cross section along the property's site frontage along King of Prussia Road (between the Southern Access and the Main Site Driveway/ Raider Road).
 - ii. Construct 5 foot wide sidewalks along the entire property frontage on King of Prussia Road.
- F. Partner with the Township to install Traffic Adaptive Signal Coordination at the following intersections, subject to PennDOT review and approval:

- i. Route 30 & I-476 Northbound Ramps
 - ii. Route 30 & I-476/King of Prussia Road.
 - iii. Route 30 & I-476 Southbound Ramps.
 - iv. Route 30 & Radnor-Chester Road.
 - v. Route 30 & Radnor Financial Center Eastern Driveway
 - vi. Route 30 & Radnor Financial Center Western Driveway
 - vii. King of Prussia Road & Radnor-Chester Road.
 - viii. King of Prussia Road & Matsonford Road.
 - ix. Matsonford Road & South Centennial Drive.
 - x. Matsonford Road & North Centennial Drive.
 - xi. King of Prussia Road & Raider Road.
 - xii. King of Prussia Road & Northern Driveway (if signalized).
 - xiii. Radnor Chester and Raider Road
 - xiv. Radnor Chester and Radnor Financial Center
- G. Construct a trail extension from the Southern Driveway through the existing PennDOT Right-of-Way, southeast of the site with connections to the existing Route 30 sidewalks. The location, width and composition of the path materials shall be approved by the Radnor Township Engineer.

Sanitary Sewer



Gannett Fleming

*Excellence Delivered **As Promised***

MEMORANDUM

Date: January 26, 2018

To: Stephen Norcini, PE – Township Engineer

From: Roger Phillips, PE

RE: Penn Medicine at Radnor
Sewage Facilities Planning Module Flow

We have reviewed the Sewage Module Exemption Request for “Penn Medicine at Radnor” prepared by Pennoni Associates Inc., dated December 9, 2016 and revised January 23, 2017. The applicant has provided historical wastewater flow information for the Bio-Med facility and also flow projections for the proposed uses on the site. The applicant has also provided a copy of the Industrial Wastewater Permit from DELCORA that permitted 100,000 gpd of sewage from this site. We believe this permit is irrelevant to determine existing flows because the 100,000 gpd is a permit maximum and not actual flows discharged.

Flow data for the previous uses (Bio-Med) have been provided for 2010, 2011, 2012 and portions of 2009, 2013 and 2014. The average daily flow from historical flow information is 63,383 gpd. Data from 2014 was excluded from the flow calculations since Bio-Med was ramping down their production and vacating the buildings.

The applicant has based the proposed flows for the Penn Medicine building on data from the existing Penn Medicine Radnor Facility. It was determined that the existing building utilized 0.08 gpd/sf. The proposed Penn Medicine Facility building is anticipated to be 250,000 sf. The flow for the proposed Penn Medicine building would be 20,000 gpd (250,000 sf x 0.08 gpd/sf).

The proposed flow for the office building use determined by utilizing the DEP flow of 10 gpd/employee. The number of employees was determined by assuming 1 employee per 75 sf of building area. The proposed office building is 150,000 sf, and the corresponding proposed flow would be 20,000 gpd. We believe that this projection higher than anticipated for flow since the 75 sf of building area per person does not take into account walkways, common areas, etc. The planning module submission indicates that there will be 2,000 employees in the office building.

The proposed flow for the hotel is based on existing water data provided for a similar hotel use. Based on the analysis provided the proposed flow would be 13,560 gpd.

The applicant has proposed total flows for this project of 53,630 gpd. This is less than the historical flow of 63,383 gpd.

If you have any questions, please contact me.



LISA BOROWSKI
President

LUCAS A. CLARK, ESQ.
Vice President

JAKE ABEL

RICHARD F. BOOKER, ESQ.

SEAN FARHY

JOHN NAGLE



RADNOR TOWNSHIP
301 IVEN AVENUE
WAYNE, PENNSYLVANIA 19087-5297

Phone (610) 688-5600
Fax (610) 971-0450
www.radnor.com

ROBERT A. ZIENKOWSKI
Township Manager
Township Secretary

JOHN B. RICE, ESQ.
Solicitor

KATHRYN GARTLAND
Treasurer

January 25, 2018

Ms. Stefanie Rittenhouse
Sewage Planning Specialist
Pennsylvania Department of Environmental Protection
Southeast Regional Office
2 East Main Street
Norristown, PA 19401

Re: 145 King of Prussia Road, Radnor Township, Delaware County, Pennsylvania
Penn Medicine at Radnor, Sewage Facilities Planning Module Application Mailer

Dear Ms. Rittenhouse:

The Township and its consultant have reviewed the methodology to determine the above referenced project's estimated flows of 53,630 gallons per day. There is adequate capacity to receive and convey the estimated flow of 53,630 gallons per day, and the waste load from the project will not create a hydraulic overload, organic overload, or a five-year projected overload.

Sincerely,

Stephen F. Norcini, PE
Township Engineer
Radnor Township
snorcini@radnor.org
610-688-5600, ext. 130

CC: Robert A. Zienkowski, Township Manager
Roger Phillips, PE, Gannett Fleming, Incorporated
Michael Kissinger, PE, Pennoni Associates, Incorporated

1. Development Information

Name of Development Penn Medicine at Radnor
Developer Name University of Pennsylvania Health Systems
Address 3400 Spurce Street
Philadelphia, PA 19104
Telephone #
Email

2. Location of Development

a. County Delaware
b. Municipality Radnor Township
c. Address or Coordinates 145 King of Prussia Road;
Wayne, PA 19087
d. Tax Parcel # 36-02-0123-00
e. USGS Quad Name Norristown, PA
inches up 7.3 over 14.3
from bottom right corner of map.
f. Located in a High Quality/Exceptional Value watershed?
Yes No

3. Type of Development Proposed (check appropriate box)

Residential Multi-Residential
Describe
Commercial Institutional
Describe Demolish existing office/research campus and
construct 250,000-sf Ambulatory Care Building, 150,000-sf
Office Building and 120 room Hotel.
Brownfield Site Redevelopment
Other (specify)

4. Size

a. # of lots 1 # of EDUs 0 (no increase)
b. # of lots since 5/15/72 1
c. Development Acreage 26
d. Remaining Acreage 0

5. Sewage Flows 0 (no increase) gpd

6. Proposed Sewage Disposal Method (check applicable boxes)

Sewerage System
Existing (connection only) New (extension)
Public Private
Pump Station(s)/Force Main Gravity
Name of existing system being extended
Radnor Township
Interceptor Name Darby Creek
Treatment Facility Name City of Philadelphia's
Southwest Wastewater Treatment Plant
NPDES Permit # PA0026671
Construction of Treatment Facility
With Stream Discharge
With Land Application (not including IRSIS)
Other
Repair?
Name of waterbody where point of discharge is proposed
(if stream discharge)

Onlot Sewage Disposal Systems
Individual onlot system(s) (including IRSIS)
Community onlot system
Large-Volume onlot system
Retaining tanks
Number of Holding Tanks
Number of Privies

7. Request Sewage Facilities Planning Module forms in electronic format

8. Request for Planning Exemption

Protection of rare, endangered or threatened species
Check one:
The "PNDI Project Environmental Review Receipt" is attached.
or
A completed "PNDI Project Planning & Environmental Review Form," (PNDI Form) is attached. I request DEP staff to complete the required PNDI search for my project. I realize that my planning exemption will be considered incomplete and that the DEP processing of my planning exemption request will be delayed, until a "PNDI Project Environmental Review Receipt" and all supporting documentation from jurisdictional agencies (when necessary) is/are received by DEP.

Applicant or Consultant Initials

Plot Plan Attached Site Reports Attached

c. Onlot Disposal Systems

(1) I certify that the Official Plan shows this area as an onlot service area.

Signature of Municipal Official Date

Name (Print) Title

Municipality (must be same as in 2.b.)

Telephone #

(2) I certify that each lot in this subdivision has been tested and is suitable for both a primary and replacement sewage disposal system.

Signature of SEO Date

Name (Print) Certification #

Telephone #

(3) I certify that each lot in this subdivision is at least 1 acre in size

Signature of Project Applicant/Agent Date

d. Public Sewerage Service (i.e., ownership by municipality or authority)

Based upon written documentation, I certify that the facilities proposed for use have capacity and that no overload exists or is projected within 5 years. (Attach documents.)

Signature of Municipal Official Date

Name (Print) Title

Municipality (must be same as in 2.b.)

Telephone # 610-688-5600 ext 130

Radnor Twp.
Delaware County, Pa
301 Iren Avenue
Wayne Pa 19087

December 9, 2016 – revised January 23, 2017

UPHS1504

Mr. Steve Norcini
Radnor Township
301 Iven Avenue
Wayne, PA 19087

**RE: SEWAGE MODULE EXEMPTION REQUEST
PENN MEDICINE AT RADNOR
145 KING OF PRUSSIA ROAD
RADNOR TOWNSHIP, DELAWARE COUNTY, PA**

Dear Mr. Norcini:

On behalf of the Trustees of the University of Pennsylvania Health System (UPHS), Pennoni is submitting a sewage planning module exemption for the above referenced project. UPHS is proposing the redevelopment of an existing 26-acre parcel, located at 145 King of Prussia Road in Radnor. The project site was formerly owned and operated by Bio-Med. Attached is a copy of Bio-Meds Industrial Wastewater Permit, which allowed the release of 100,000 gpd of sewage from the site.

Background/Existing Use:

The project site was formerly owned and operated by Bio-Med as a pharmaceutical research/manufacturing facility. During 2014 Bio-Med began ramping down their production and vacated the building in December 2014. Since December 2014 the building has been vacant. Due to the nature of the facility an Industrial Wastewater Permit was obtained for the site and is attached for reference. This permit allowed the release of 100,000 gpd of sewage from the site. In addition to the Industrial Wastewater Permit, please find quarterly monitoring reports prepared by IES Engineers and submitted to DELCORA as part of the monitoring required by the Industrial Wastewater Permit. As part of the reporting, meter reads were provided on a weekly basis. We are providing reports for Quarter 4 of 2009, Quarter 2 of 2010, Quarter 4 of 2013 and Quarter 4 of 2014. Additional flow data was provided by DELCORA for the remainder of 2010, 2011 and 2012. Based on the summarized data and discussions with DELCORA and PA DEP, we have excluded the 2014 flow data from our calculations, as this data is not representative of the previous sanitary flows. We have summarized the available data and determined an average daily flow of 63,383-gpd.

Proposed Use:

UPHS proposes to re-develop the 26-acre parcel to construct a new 250,000-sf Building for their use, a new 150,000-sf Office Building, and a new 120 room Hotel. UPHS proposed to relocate their practice from 250 King of Prussia Road to this new facility at 145 King of Prussia Road upon completion of the project. The following is a summary of the flow calculations for the various uses.

Penn Medicine Building:

Pennoni has reviewed existing water data from the existing Penn Medicine Radnor facility located at 250 King of Prussia Road. Based on this data, we have determined that the average sanitary flow per square-foot of building for that facility is 0.08 gpd/sf. A summary of this determination is included with the attached calculations. This average sanitary flow per square-foot of building was then applied to the new site to determine the flow associated with the new Penn Medicine Building (total of 250,000-sf at 0.08 gpd/sf), which is equivalent to 20,070-gpd.

Office Building:

A flow was calculated for the office building by utilizing the DEP flow of 10 gpd/employee. The number of employees was determined assuming 1 employee per 75 sf of building area. The office flow was determined to be 20,000 gpd (2,000 employees at 10 gpd/employee).

Hotel Building:

Existing water data was analyzed for a similar hotel use. The data was analyzed based on water usage during a twelve (12) month period. For the purposes of calculations, we have assumed an average occupancy of 80% for the twelve-month period. Water bills and a summary table are attached for your review. Based on our analysis the daily flow rate for this 96-room hotel is 10,889 gpd or 113 gpd/room. This average rate per room was then applied to the new site to determine the flow associated with the new 120 room hotel (120 rooms at 113 gpd/room), which is equivalent to 13,560 gpd.

The total combined flow for the site is equal to 53,630 gpd. Based on Radnor Township's criteria of 1 EDU equals 262.5 gpd, the flow from the project site of 53,630 gpd is equal to 206 EDUs. The existing site's Industrial Wastewater Permit which allowed for 100,000 gpd; however, based on our calculations had an average daily flow of 63,383-gpd or 241 EDUs, which is greater than the proposed flow. Please refer to the attached calculations for additional information.

The PA DEP Sewage Facilities Planning Module Application mailer and EDU Calculation have been completed for the project and are attached for your review. After reviewing the attached calculations, can you provide a letter stating that "there is adequate capacity to receive flows from the project and that the additional wasteload from the project will not create a hydraulic or organic overload or a 5-year projected overload." In addition, please sign the attached Sanitary Sewer Mailer, line 8.d and return to our office.

Should you have any questions or comments, concerning this matter, please do not hesitate to call me at (610) 422-2459 or email at cpoterjoy@pennoni.com. I would like to thank you in advance for your help with this project.

Sincerely,

PENNONI ASSOCIATES INC.



Christopher Poterjoy, PE
Project Engineer

CRP/crp

Attachments

cc: Roger Phillips, Gannett Fleming
Dave Adams, RHM
Stefanie Rittenhouse, PA DEP
William Cervino, Springfield Township
Susan Guisinger-Colon, McCormick Taylor
Ed Bothwell, DELCORA
Charles Catania, Catania Engineering Associates, Inc.

Pennoni Associates Inc.JOB NO.: **UPHS1504**

Consulting Engineers

SHEET: 1 of 1

DATE:

1/23/2017

PROJECT: **Penn Medicine - Radnor**

BY: CRP

SUBJECT: **Sewage Flow Calculations**

CHK'D

Scope: Prepare ACT 537 Sewerage Facilities Planning Module Mailer for the proposed development at 145 King of Prussia Road. The project is for the re-development of the 26-acre parcel to include an Ambulatory Care Building, Office Building and Hotel.

Approach: Determine water use consumption at a similar facility, per dwelling unit, and apply to the proposed project. Assumption that the Water Usage equals the sewer usage.

Previous Water Usage: 100,000 gpd per Wastewater Discharge Permit No. 2DC-09-01

Assume 1 employee per 75-sf

Assume 1 EDU = 262.5-gpd

Previous Flow = 63,383-gpd (241 EDU)

	Average Daily Usage (gpd/sf or gpd/employee)	Average Number of Employees	Number of Rooms	Proposed Building Area (sf)	Proposed Average Daily Usage (gpd)	Proposed Average Daily Usage (EDU)
Penn Medicine	0.08	-	-	250,000	20,070	77
Office Building	10.00	2,000	-	150,000	20,000	77
Hotel Building	113.00	-	120	75,000	13,560	52
Totals				475,000	53,630	206

1. Development Information

Name of Development Penn Medicine at Radnor
Developer Name University of Pennsylvania Health Systems
Address 3400 Spurce Street
Philadelphia, PA 19104
Telephone #
Email

2. Location of Development

a. County Delaware
b. Municipality Radnor Township
c. Address or Coordinates 145 King of Prussia Road; Wayne, PA 19087
d. Tax Parcel # 36-02-0123-00
e. USGS Quad Name Norristown, PA
inches up 7.3 over 14.3
from bottom right corner of map.
f. Located in a High Quality/Exceptional Value watershed?
Yes No

3. Type of Development Proposed (check appropriate box)

Residential Multi-Residential
Describe
Commercial Institutional
Describe Demolish existing office/research campus and construct 250,000-sf Ambulatory Care Building, 150,000-sf Office Building and 120 room Hotel.
Brownfield Site Redevelopment
Other (specify)

4. Size

a. # of lots 1 # of EDUs 0 (no increase)
b. # of lots since 5/15/72 1
c. Development Acreage 26
d. Remaining Acreage 0

5. Sewage Flows 0 (no increase) gpd

6. Proposed Sewage Disposal Method (check applicable boxes)

Sewerage System
Existing (connection only) New (extension)
Public Private
Pump Station(s)/Force Main Gravity
Name of existing system being extended
Radnor Township
Interceptor Name Darby Creek
Treatment Facility Name City of Philadelphia's Southwest Wastewater Treatment Plant
NPDES Permit # PA0026671
Construction of Treatment Facility
With Stream Discharge
With Land Application (not including IRSIS)
Other
Repair?
Name of waterbody where point of discharge is proposed (if stream discharge)

Onlot Sewage Disposal Systems (check appropriate box)
Individual onlot system(s) (including IRSIS)
Community onlot system
Large-Volume onlot system
Retaining tanks
Number of Holding Tanks
Number of Privies

7. Request Sewage Facilities Planning Module forms in electronic format

8. Request for Planning Exemption

Protection of rare, endangered or threatened species
Check one:
The "PNDI Project Environmental Review Receipt" is attached.
or
A completed "PNDI Project Planning & Environmental Review Form," (PNDI Form) is attached. I request DEP staff to complete the required PNDI search for my project. I realize that my planning exemption will be considered incomplete and that the DEP processing of my planning exemption request will be delayed, until a "PNDI Project Environmental Review Receipt" and all supporting documentation from jurisdictional agencies (when necessary) is/are received by DEP.

Applicant or Consultant Initials

Plot Plan Attached Site Reports Attached

c. Onlot Disposal Systems

I certify that the Official Plan shows this area as an onlot service area.

(Signature of Municipal Official) Date

Name (Print) Title

Municipality (must be same as in 2.b.)

Telephone #

I certify that each lot in this subdivision has been tested and is suitable for both a primary and replacement sewage disposal system.

(Signature of SEO) Date

Name (Print) Certification #

Telephone #

I certify that each lot in this subdivision is at least 1 acre in size

(Signature of Project Applicant/Agent) Date

d. Public Sewerage Service (i.e., ownership by municipality or authority)

Based upon written documentation, I certify that the facilities proposed for use have capacity and that no overload exists or is projected within 5 years. (Attach documents.)

(Signature of Municipal Official) Date

Name (Print) Title

Municipality (must be same as in 2.b.)

Telephone # _____


Return Correspondence/Forms to:

DEPARTMENT OF ENVIRONMENTAL PROTECTION

DEP USE	
Components Sent	
Onlot Disposal	<input type="checkbox"/>
Collection and Treatment	<input type="checkbox"/>
Planning Agency Review	<input type="checkbox"/>
Exempt from Planning	<input type="checkbox"/>
Code	_____
Date	_____

"Fold Here"



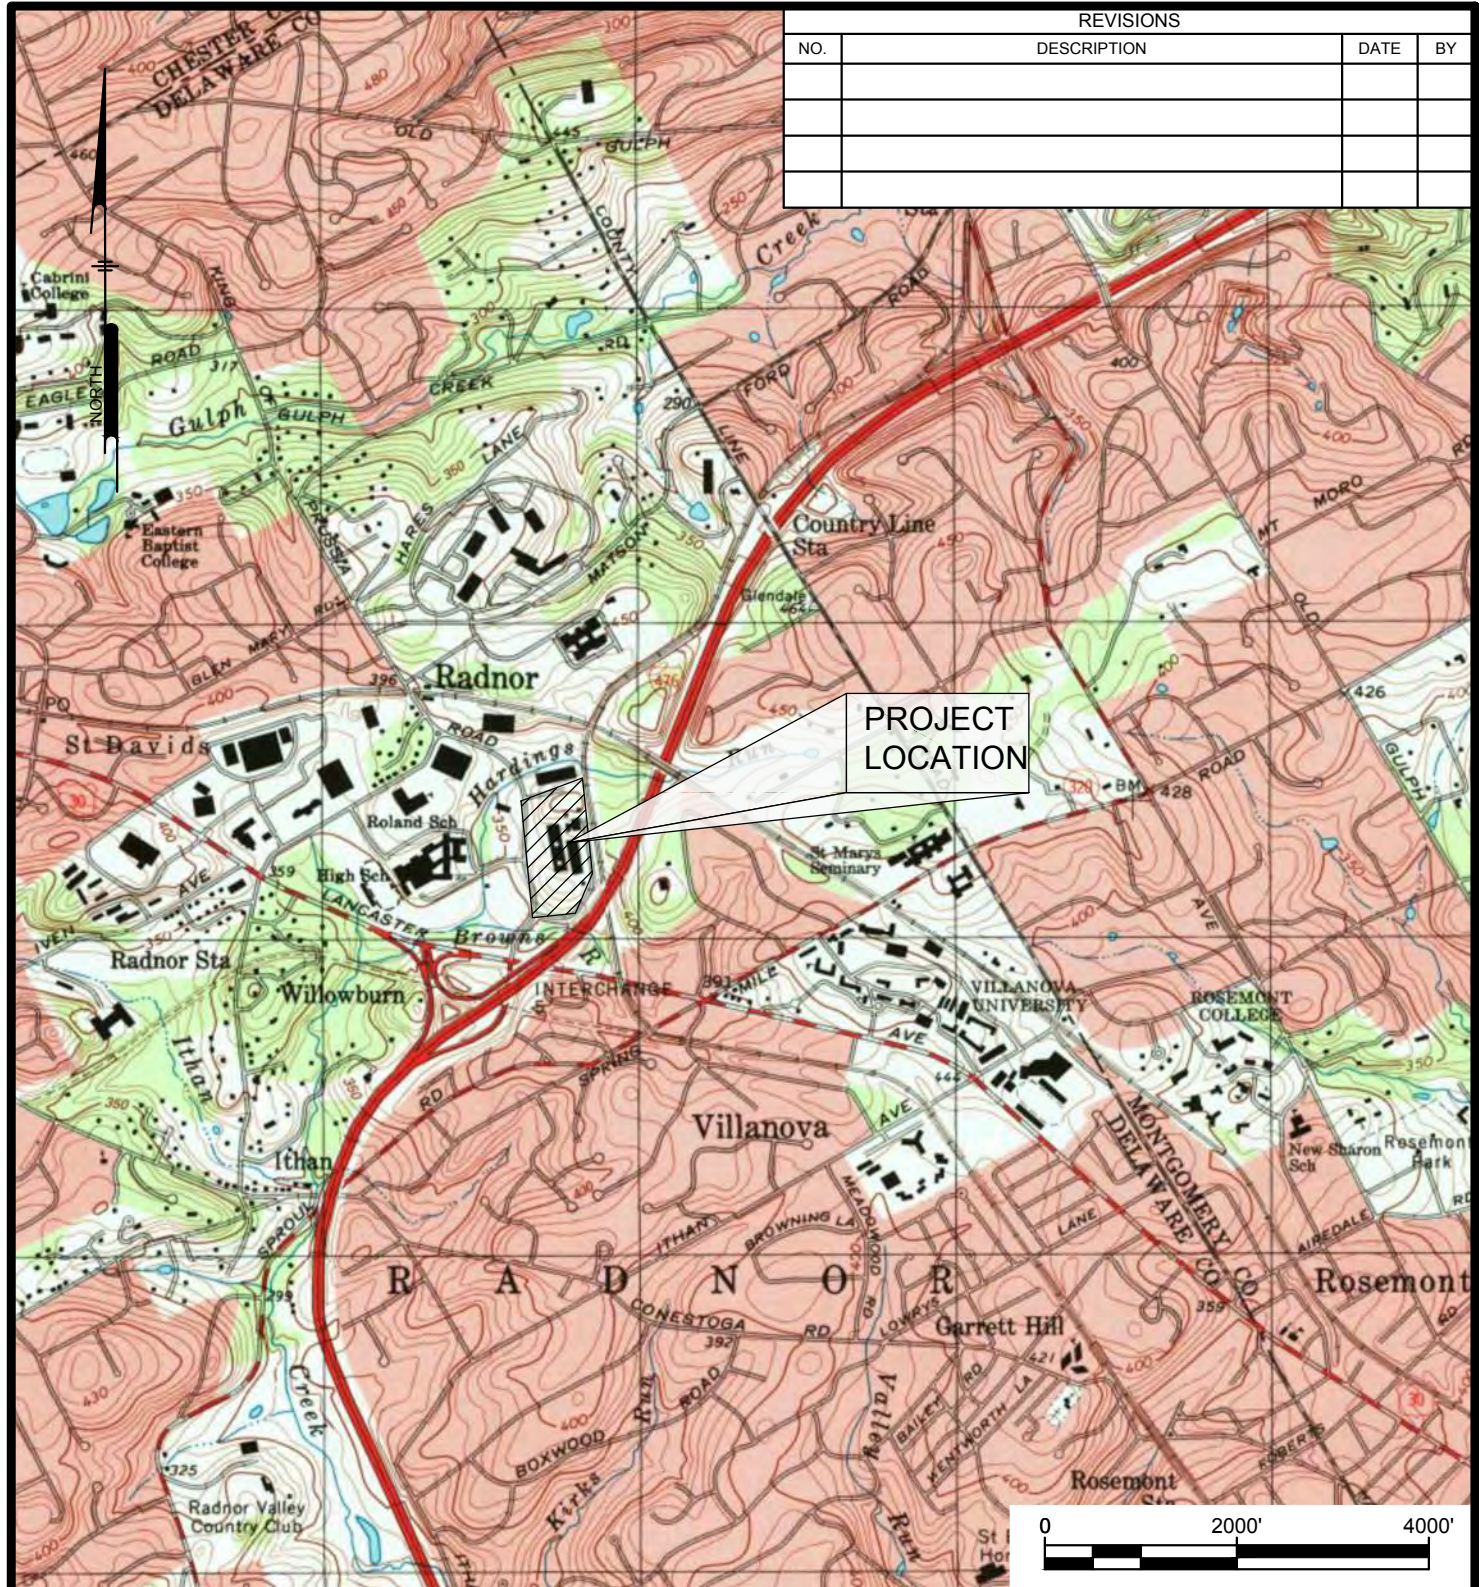

REVISIONS			
NO.	DESCRIPTION	DATE	BY

R:\PROJECTS\UPHS\UPHS1504-145 KING OF PRUSSIA ROAD\DESIGN_PUBLISH\LOCATION MAP.DWG
 PLOTTED: 3/18/2016 8:49:08 AM, BY: MICHAEL LOFTUS, PLOTSTYLE: PENNONI NCS.STB, PROJECT STATUS: ---



PENNONI ASSOCIATES INC.
 One South Church Street, 2nd Floor
 West Chester, PA 19382
 T 610.429.8907 F 610.429.8918

ALL DOCUMENTS PREPARED BY PENNONI ASSOCIATES ARE INSTRUMENTS OF SERVICE IN RESPECT OF THE PROJECT. THEY ARE NOT INTENDED OR REPRESENTED TO BE SUITABLE FOR REUSE BY OWNER OR OTHERS ON THE EXTENSIONS OF THE PROJECT OR ON ANY OTHER PROJECT. ANY REUSE WITHOUT WRITTEN VERIFICATION OR ADAPTATION BY PENNONI ASSOCIATES FOR THE SPECIFIC PURPOSE INTENDED WILL BE AT OWNERS SOLE RISK AND WITHOUT LIABILITY OR LEGAL EXPOSURE TO PENNONI ASSOCIATES; AND OWNER SHALL INDEMNIFY AND HOLD HARMLESS PENNONI ASSOCIATES FROM ALL CLAIMS, DAMAGES, LOSSES AND EXPENSES ARISING OUT OF OR RESULTING THEREFROM.

PENN MEDICINE AT RADNOR
 145 KING OF PRUSSIA ROAD
 WAYNE, PA

LOCATION MAP

UNIVERSITY OF PENNSYLVANIA HEALTH SYSTEMS
 3400 SPRUCE STREET
 PHILADELPHIA, PA 19104

PROJECT	UPHS1504
DATE	2016-03-18
DRAWING SCALE	1"=2000'
DRAWN BY	MBL
APPROVED BY	CRP

MAP-1

SHEET 1 OF 1

1. PROJECT INFORMATION

Project Name: **UPHS1504**

Date of review: **8/24/2015 9:22:06 AM**

Project Category: **Development, New public/community development (school, library, church, museum)**

Project Area: **18.5 acres**

County: **Delaware** Township/Municipality: **Radnor**

Quadrangle Name: **NORRISTOWN** ~ ZIP Code: **19087**

Decimal Degrees: **40.040240 N, -75.354651 W**

Degrees Minutes Seconds: **40° 2' 24.9" N, -75° 21' 16.7" W**



2. SEARCH RESULTS

Agency	Results	Response
PA Game Commission	No Known Impact	No Further Review Required
PA Department of Conservation and Natural Resources	No Known Impact	No Further Review Required
PA Fish and Boat Commission	No Known Impact	No Further Review Required
U.S. Fish and Wildlife Service	No Known Impact	No Further Review Required

As summarized above, Pennsylvania Natural Diversity Inventory (PNDI) records indicate no known impacts to threatened and endangered species and/or special concern species and resources within the project area. Therefore, based on the information you provided, no further coordination is required with the jurisdictional agencies. This response does not reflect potential agency concerns regarding impacts to other ecological resources, such as wetlands.

Note that regardless of PNDI search results, projects requiring a Chapter 105 DEP individual permit or GP 5, 6, 7, 8, 9 or 11 in certain counties (Adams, Berks, Bucks, Carbon, Chester, Cumberland, Delaware, Lancaster, Lebanon, Lehigh, Monroe, Montgomery, Northampton, Schuylkill and York) must comply with the bog turtle habitat screening requirements of the PASPGP.

3. AGENCY COMMENTS

Regardless of whether a DEP permit is necessary for this proposed project, any potential impacts to threatened and endangered species and/or special concern species and resources must be resolved with the appropriate jurisdictional agency. In some cases, a permit or authorization from the jurisdictional agency may be needed if adverse impacts to these species and habitats cannot be avoided.

These agency determinations and responses are **valid for two years** (from the date of the review), and are based on the project information that was provided, including the exact project location; the project type, description, and features; and any responses to questions that were generated during this search. If any of the following change: 1) project location, 2) project size or configuration, 3) project type, or 4) responses to the questions that were asked during the online review, the results of this review are not valid, and the review must be searched again via the PNDI Environmental Review Tool and resubmitted to the jurisdictional agencies. The PNDI tool is a primary screening tool, and a desktop review may reveal more or fewer impacts than what is listed on this PNDI receipt. The jurisdictional agencies **strongly advise against** conducting surveys for the species listed on the receipt prior to consultation with the agencies.

PA Game Commission

RESPONSE: No Impact is anticipated to threatened and endangered species and/or special concern species and resources.

PA Department of Conservation and Natural Resources

RESPONSE: No Impact is anticipated to threatened and endangered species and/or special concern species and resources.

PA Fish and Boat Commission

RESPONSE: No Impact is anticipated to threatened and endangered species and/or special concern species and resources.

U.S. Fish and Wildlife Service

RESPONSE: No impacts to **federally** listed or proposed species are anticipated. Therefore, no further consultation/coordination under the Endangered Species Act (87 Stat. 884, as amended; 16 U.S.C. 1531 *et seq.*) is required. Because no take of federally listed species is anticipated, none is authorized. This response does not reflect potential Fish and Wildlife Service concerns under the Fish and Wildlife Coordination Act or other authorities.

4. DEP INFORMATION

The Pa Department of Environmental Protection (DEP) requires that a signed copy of this receipt, along with any required documentation from jurisdictional agencies concerning resolution of potential impacts, be submitted with applications for permits requiring PNDI review. For cases where a "Potential Impact" to threatened and endangered species has been identified before the application has been submitted to DEP, the application should not be submitted until the impact has been resolved. For cases where "Potential Impact" to special

concern species and resources has been identified before the application has been submitted, the application should be submitted to DEP along with the PNDI receipt. The PNDI Receipt should also be submitted to the appropriate agency according to directions on the PNDI Receipt. DEP and the jurisdictional agency will work together to resolve the potential impact(s). See the DEP PNDI policy at <http://www.naturalheritage.state.pa.us>.



5. ADDITIONAL INFORMATION

The PNDI environmental review website is a **preliminary** screening tool. There are often delays in updating species status classifications. Because the proposed status represents the best available information regarding the conservation status of the species, state jurisdictional agency staff give the proposed statuses at least the same consideration as the current legal status. If surveys or further information reveal that a threatened and endangered and/or special concern species and resources exist in your project area, contact the appropriate jurisdictional agency/agencies immediately to identify and resolve any impacts.

For a list of species known to occur in the county where your project is located, please see the species lists by county found on the PA Natural Heritage Program (PNHP) home page (www.naturalheritage.state.pa.us). Also note that the PNDI Environmental Review Tool only contains information about species occurrences that have actually been reported to the PNHP.

6. AGENCY CONTACT INFORMATION

PA Department of Conservation and Natural Resources

Bureau of Forestry, Ecological Services Section
400 Market Street, PO Box 8552, Harrisburg, PA.
17105-8552
Fax:(717) 772-0271

U.S. Fish and Wildlife Service

Pennsylvania Field Office
110 Radnor Rd; Suite 101, State College, PA 16801
NO Faxes Please.

PA Fish and Boat Commission

Division of Environmental Services
450 Robinson Lane, Bellefonte, PA. 16823-7437
NO Faxes Please

PA Game Commission

Bureau of Wildlife Habitat Management
Division of Environmental Planning and Habitat Protection
2001 Elmerton Avenue, Harrisburg, PA. 17110-9797
Fax:(717) 787-6957

7. PROJECT CONTACT INFORMATION

Name: Christopher Poterjoy, PE

Company/Business Name: Pennoni Associates Inc.

Address: One South Church St.; 2nd Floor


City, State, Zip: West Chester, PA 19382

Phone: (610) 422-2459 Fax: (610) 429-8918

Email: cpoterjoy@pennoni.com

8. CERTIFICATION

I certify that ALL of the project information contained in this receipt (including project location, project size/configuration, project type, answers to questions) is true, accurate and complete. In addition, if the project type, location, size or configuration changes, or if the answers to any questions that were asked during this online review change, I agree to re-do the online environmental review.



applicant/project proponent signature

8/24/2015

date

SEM



DELAWARE COUNTY REGIONAL WATER QUALITY CONTROL AUTHORITY
P.O. Box 999 • Chester, PA 19016-0999

WASTEWATER DISCHARGE PERMIT

Permit No. **2DC-09-01**

In accordance with the provisions of the DELCORA Standards, Rules, and Regulations of 1991, Resolution No. 91-03 and 91-04, or as amended,

BMR-145 King of Prussia Road, LP (Permittee)
1205 Westlakes Drive
Suite 240
Radnor, Pennsylvania 19087


is hereby authorized to discharge industrial wastewater from the above identified facility into the DELCORA sewer system in accordance with effluent limitations, monitoring requirements, and other conditions set forth in this permit.

All discharges authorized herein shall be consistent with the terms and conditions of this permit. The discharge of any pollutant identified in this permit more frequently than or at a level in excess of that authorized shall constitute a violation of the permit.

This permit will be reopened and modified by DELCORA to incorporate any new or revised Federal, State, or Local Pretreatment Standards or requirements. Modified permits will be reissued according to Section 321 of Resolution No. 91-03.

This permit shall become effective on **October 5, 2006** and shall expire at midnight on **October 4, 2010**.

The Permittee shall not discharge after the date of expiration. If the Permittee wishes to continue to discharge after this expiration date, an application must be filed for reissuing of this permit in accordance with the requirement of Section 319 of Resolution No. 91-03, a minimum of 180 days prior to the expiration date.

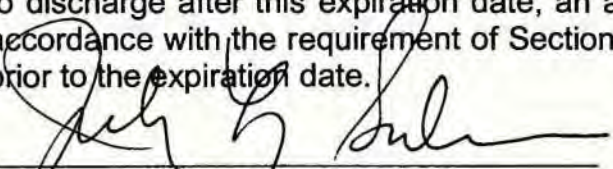

Signature

Executive Director
Title

Joseph L. Salvucci
Name (Typed)

9-29-06
Date

- | | | | |
|--|--|--|--|
| ADMINISTRATION | CUSTOMER SERVICE/BILLING | PURCHASING & STORES | PLANT & MAINTENANCE |
| <input type="checkbox"/> 610-876-5523 | <input type="checkbox"/> 610-876-5526 | <input type="checkbox"/> 610-876-5523 | <input type="checkbox"/> 610-876-5523 |
| <input type="checkbox"/> FAX: 610-876-2728 | <input type="checkbox"/> FAX: 610-876-1460 | <input type="checkbox"/> FAX: 610-497-7959 | <input type="checkbox"/> FAX: 610-497-7950 |

DEFINITION OF TERMS AND ABBREVIATIONS

Accidental Discharge - Any unpermitted or non-routine discharge of pollutants into the sewer system, which may be intentional or unintentional in nature or cause problems to the POTW.

Authority - DELCORA, The Delaware County Regional Water Quality Control Authority, including agents or persons authorized to act on its behalf.

B.O.D.₅ - 5-Day Biochemical Oxygen Demand as outlined in 40 CFR 136.

B.O.D.₂₀ - 20-Day Biochemical Oxygen Demand with nitrogenous demand inhibited, also called First Stage Oxygen Demand (FSOD).

BTEX - Benzene, Toluene, Ethylbenzene and Xylenes.

Bypass - The intentional diversion of wastestreams from any portion of an Industrial User's pretreatment facility.

City - City of Philadelphia Water Department

COD - Chemical Oxygen Demand as outlined in 40 CFR 136.

Composite Sample - A sample prepared by combining discrete samples collected from the wastestream either at periodic time intervals or in proportion to the wastestream flow. The frequency of discrete sample collection is variable.

· **24 HC** - 24-hour composite sample, either time or flow proportional.

CTAS - Cobalt thiocyanate active substances, also called nonionic surfactants.

Daily Maximum - The maximum allowable discharge of a pollutant into the sewer system during a calendar day. Where expressed in units of mass, it is the total mass discharged in one day. Where expressed in concentration, it is the arithmetic average of that pollutant from all measurements taken that day.

F.O.G. - Fats, oils and greases, listed as oil and grease in 40 CFR 136 for purposes of analysis.

GPD - Gallons per day.

Grab Sample - An individual, discrete sample collected from a wastestream on a one-time basis, in 15 minutes or less, and with no regard to the volume of flow of the wastestream.

Industrial Wastewater - The liquid or water-borne wastes from industrial or manufacturing processes. Unless specifically stated otherwise, this term shall not include sanitary sewage or sanitary wastewater components.

Monthly Average - The arithmetic mean of the values for effluent samples collected over a calendar month. Sum of the values divided by the number of samples. In the case of flow, it is the total flow for the month divided by the number of days discharged.

MBAS - Methylene blue active substances, also called Anionic Surfactants.

MGD -Millions of gallons per day.

NAICS – North American Industry Classification System

Peak Daily Rate -The maximum allowable flow of wastewater to the sewer system in a calendar day.

Priority Pollutants - Metals, Base/Neutral Organics, Acid Organics, Volatile Organics, Pesticides/PCB's, Cyanide and Phenol as listed by the EPA.

- Metals -antimony, arsenic, beryllium, cadmium, chromium, copper, lead, mercury, nickel, selenium, silver, thallium and zinc.
- Acid/Base/Neutral Organics - organic compounds extractable.
- Volatile Organics – also called purgable organics.

Process Wastewater - Any water which during manufacturing or processing, comes into direct contact with or results from the production or use of: any raw material, intermediate product, finished product, by-product, or waste product. It can be discharged continuously, intermittently, or as a batch.

PWD – Philadelphia Water Department

Shall - Mandatory requirement.

SIC - Standard Industrial Classification as listed in the Standard Industrial Classification Manual issued by the U.S. Government Printing Office.

Slug Discharge - Any discharge of a non-routine, episodic nature including but not limited to an accidental spill or non-customary batch discharge, which could cause a violation of the prohibited discharge standards of Section 202 (A) (1) – (8) of DELCORA's Standards Rules.

TDS – Total dissolved solids, also listed as filterable residue.

TSS – Total suspended solids, also listed as nonfilterable residue. That which is retained during laboratory filtering per 40 CFR 136.

TKN – Total Kjeldahl Nitrogen.

TOX – Total halogenated organics as listed in Appendix A of 40 CFR 136.

TPH – Total petroleum hydrocarbons.

All terms used in this permit which are not defined in this section are taken to have the same meaning as that in the Delcora Standards, Rules, and Regulations of 1991, Delcora Resolution No. 91-03.

PART I - EFFLUENT LIMITATIONS

A. During the period of October 5, 2006 to October 4, 2010 the Permittee is authorized to discharge processed wastewater from _____ to the DELCORA sewer system through the outfall(s) listed below:

<u>OUTFALL</u>	<u>DESCRIPTION</u>
001	Research Building connection at manhole along King of Prussia Road as noted in Site Plan, L-1-774 submitted with application.

B. During the period of October 5, 2006 to October 4, 2010 the process discharge(s) through Outfall 001 shall comply with all applicable Federal, State and Local Statutes, Ordinances and Regulations, including Resolution No. 91-04 and the following effluent limitations:

EFFLUENT LIMITATIONS

<u>PARAMETER</u>	<u>MONTHLY AVERAGE RATE (GPD)</u>	<u>PEAK DAILY RATE (GPD)</u>	<u>DAILY MAXIMUM (µCi/mL)</u>
Flow	100,000	120,000	
pH			(1)
Radioactive Materials:			
Tritium (H ₃)			1x10 ⁻²
Carbon-14			3x10 ⁻⁴
Iodine-125			2x10 ⁻⁵
Chromium-51			5x10 ⁻³
Phosphorous-32			9x10 ⁻⁵
Sulfur-35			1x10 ⁻³
Indium-111			6x10 ⁻⁴

NOTES:

(1) The pH shall not be less than 5.5 nor greater than 12.0 standard units (S.U.) at any time.

PART II - MONITORING REQUIREMENTS

- A. From the period of October 5, 2006 to October 4, 2010 the Permittee shall monitor Outfall 001 for the following:

<u>Parameter</u>	<u>Sample Location</u>	<u>Measurement Frequency</u>	<u>Sample Type</u>
Flow	---	Continuous	Meter (1)
pH	(2)	1x/Week	Grab
TSS	(2)	1x/Month	10 HC (3)
BOD ₅	(2)	1x/Month	10 HC (3)
Tritium (H ₃)	(2)	1x/Month	10 HC (3) (4)
Carbon-14	(2)	1x/Month	10 HC (3) (4)
Iodine-125	(2)	1x/Month	10 HC (3) (4)
Chromium-51	(2)	1x/Month	10 HC (3) (4)
Phosphorus-32	(2)	1x/Month	10 HC (3) (4)
Sulfur-35	(2)	1x/Month	10 HC (3) (4)
Indium – 111	(2)	1x/Month	10 HC (3) (4)

NOTES:

- (1) The meter shall be the incoming water meter for the entire facility. It shall be calibrated once per year and a certification of accuracy filed no later than January 28th for the previous year. The flow shall be read and recorded on a weekly basis.
 - (2) Samples shall be collected from a manhole outside the research building, which contains only that buildings discharge, before mixing with any other discharge.
 - (3) A 10-hour (7:00 a.m. – 5:00 p.m.) shall be collected with an automatic sampling device capable of collecting at least one (1) sample per hour and maintaining sample temperatures at 4°C.
 - (4) In lieu of composite samplings for radioisotopes, BMR-145 King of Prussia LP may have Centocor, Inc. (tenant), report daily disposal limits and records of all radioactive isotopes discharged, measured against an internal standard that does not exceed 1/10 of the Nuclear Regulatory limit on a monthly basis to DELCORA. BMR-145 King of Prussia LP must be in compliance with the effluent limitations.
- B. All handling and preservation of collected samples and laboratory analyses of samples shall be performed in accordance with 40 CFR Part 136 and amendments thereto unless specified otherwise in the monitoring conditions of this permit.

PART III - OPERATION & MAINTENANCE OF POLLUTION CONTROLS

A. Pretreatment Facilities and Control Structure Provisions.

Where deemed necessary to comply with applicable regulations and the terms of this permit, Permittee shall provide suitable pretreatment facilities. They shall be planned, designed, constructed, owned, operated, and maintained by the Permittee at his expense and shall be located for ease of inspection and cleaning.

A summary of the pretreatment system(s) to be provided by Permittee follows:

Acid Neutralization Tank for research building (laboratory sink discharge).

Adhere to all Nuclear Regulatory Commission (NRC) regulations concerning radionuclide disposal in accordance with the permittee's NRC License.

It is Permittee's responsibility to effectively manage these facilities. Failure to do so constitutes a violation of DELCORA's regulations and is subject to enforcement as cited therein.

The Permittee shall also provide a suitable control structure for the inspection, observation, sampling, and flow measurement of Permittee's industrial contribution. The control structure shall be safe, accessible at all times, secure from unauthorized tampering, and continuously operated and maintained at Permittee's expense. In addition to being compatible with all of Permittee's monitoring requirements, the control structure shall be of suitable capabilities so as to accommodate the installation of DELCORA's monitoring equipment.

In addition, the following monitoring and control equipment shall be provided:

1. The Permittee shall install and maintain at its expense suitable (totalizing) flow meter(s) of design and manufacture acceptable to DELCORA which will continuously monitor rates of flow and/or volumes of wastewater being discharged to the DELCORA Wastewater Management System.
2. The Permittee shall incorporate a lockable isolation device as a means to sever access to the system satisfactory to DELCORA.

B. Duty to Halt or Reduce Activity.

Upon reduction, loss or failure of the Permittee's pretreatment facility, the Permittee shall, to the extent necessary to maintain compliance with its permit, control production or all discharges or both until operation of the pretreatment facility is restored or an alternative method of treatment is provided. This requirement applies, for example, when the primary source of power for the pretreatment facility fails or is reduced.

C. Bypass of Treatment Facilities.

- (1) Bypass is prohibited unless it is unavoidable to prevent loss of life, personal injury or severe property damage or no feasible alternatives exist.

(2) Bypass not exceeding limitations. The Permittee may allow any bypass to occur which does not cause effluent limitations to be exceeded, but only if it is also for essential maintenance or to assure efficient pretreatment facility operation.

(3) Notification of bypass:

- (a) Anticipated bypass. If the Permittee knows in advance of the need for a bypass, it shall submit prior written notice, at least ten (10) days before the date of the bypass, to DELCORA and the Philadelphia Water Department.
- (b) Unanticipated bypass. The Permittee shall immediately notify DELCORA and the Philadelphia Water Department and submit a written notice to the POTW within 5 days. This report shall specify:
 - (i) A description of the bypass, and its cause, including its duration;
 - (ii) Whether the bypass has been corrected; and
 - (iii) The steps being taken or to be taken to reduce, eliminate and prevent a reoccurrence of the bypass.

PART IV - REPORTING REQUIREMENTS

A. Self-Monitoring Reports

Monitoring results obtained shall be summarized and reported on an Industrial User Monitoring Form on a **quarterly** basis. The reports are due on the twenty-eighth (28th) of the month following the period covered by the report. The written report shall be certified and signed by an Authorized Representative of the Industrial User. Contents of the report are defined under Part II, Section A of this permit.

1. Where the Permittee contracts sample analyses (in satisfaction of monitoring requirements), a copy of the laboratory report showing results, methods used, and signature(s) shall be included with the self-monitoring report. It is the Permittee's responsibility to ensure contract laboratory compliance with Part II, Section B of this permit.
2. Where the Permittee performs sample analyses in satisfaction of monitoring requirements, the Permittee shall ensure compliance with Part II, Section B of this permit.
3. The monthly monitoring report shall include a statement as to whether or not Industrial User has achieved compliance with Federal and local pretreatment limits.
4. If Industrial User has not achieved compliance with all limits, the monthly monitoring report shall;
 - a. Provide an explanation for failure to achieve compliance; and

- b. A proposed corrective plan, including milestone dates, shall be submitted to and approved by DELCORA and, should a compliance schedule be necessary, it shall be appended to this Permit as Part VI.
 5. If Industrial User's manufacturing process ceases to involve a pollutant parameter listed in Part I a principal or executive officer of Industrial User may so certify to this fact on an annual basis. Upon approval of this certification by DELCORA, testing and reporting for that parameter shall be limited to once per 6 months.
 6. Industrial User shall notify the Authority of any changes in production which exceed twenty percent (20%) of the production units used in calculating production based limits, if applicable.
 7. Monitoring reports shall be based upon data obtained through appropriate sampling and analysis performed during the period covered by the report, which is representative of conditions occurring during the reporting period.
- B. If the Permittee monitors any pollutant more frequently than required by this permit, using test procedures approved under 40 CFR Part 136 or as specified in this permit, the results of such monitoring shall be included in the calculation and results shall be reported in the report and submitted to DELCORA.

C. Automatic Resampling

If the results of the Permittee's wastewater analysis indicate a effluent limit exceedance has occurred, the Permittee must:

1. Inform DELCORA of the violation within 24 hours of awareness of result; and
2. Repeat the sampling and pollutant analysis and submit, in writing, the results of this second analysis within thirty (30) days of becoming aware of the first violation. The industrial user is not required to resample if:
 - (A) The Control Authority performs sampling at the industrial user at a frequency of at least once per month.
 - (B) The Control Authority performs sampling at the industrial user between the time when the user performs the initial sampling and the time when the user receives the results of this sampling.

D. Potential Problems for POTW (Accidental or Intentional Discharge)

1. The Permittee shall notify DELCORA immediately upon the occurrence of an intentional or uncontrolled discharge that may cause problems to the POTW or that does or may violate permit conditions. Notification shall be by telephone at (610)876-5523, extension 213 from 8:30 a.m. to 4:30 p.m., and (610)876-5523, extension 214, 24 hours a day, and to Philadelphia Water Department at (215)686-4514, 24 hours a

day. The notification shall include location of discharge, date and time thereof, type of waste, including concentration and volume, and corrective action taken.

Within five (5) days following such a discharge, the Permittee shall submit to DELCORA a detailed written report. The report shall specify:

- a. Description and cause of the slug loading or unintentional discharge or problem discharge, and the impact on the Permittee's compliance status. The description should also include location of discharge, type, concentration and volume of waste.
- b. Duration of noncompliance, including exact dates and times of noncompliance, and if the noncompliance continues, the time by which compliance is reasonably expected to occur.
- c. All steps taken or to be taken to reduce, eliminate, and prevent recurrence of such a slug loading, intentional discharge, problem discharge or other conditions of noncompliance.

E. Facility Changes

The Permittee shall give notice to DELCORA 90 days prior to any facility expansion, production increase process modifications or other changes which result in new or substantially increased discharges or a change in the nature of the discharge.

F. Signatory Requirements

- (1) All applications, correspondence, reports and self-monitoring reports shall be signed and certified:
 - a) In the case of a corporation, a president, secretary, treasurer or vice president of the corporation in charge of a principle business function or any other person who performs similar policy-making or decision-making functions for the corporation; or the manager of one or more manufacturing, production or operation facilities employing more than 250 persons or having gross annual sales or expenditures exceeding \$25 million (in second-quarter 1980 dollars), if authority to sign documents has been assigned or delegated to the manager in accordance with corporate procedures; or
 - b) For a partnership or sole proprietorship: by a general partner or the proprietor, respectively; or
 - c) For a government entity: by the administrator, chairman, director, or principal executive responsible for operation at the facility.
- (2) All applications, correspondence, reports, and self-monitoring reports may be signed by a duly authorized representative of the person described above. A person is a duly authorized representative only if:
 - a) The authorization is made in writing by a person described in Section F (1), above;

- b) The authorization specified either an individual or a position having responsibility for the overall operation of the regulated facility or activity, such as the position of plant manager, superintendent, or position of equivalent responsibility, or having overall responsibility for environmental matters. (A duly authorized representative may thus be either a named individual or any individual occupying a named position.)

(3) Certification. All applications and reports shall contain the following certification:

" I certify under penalty of law that this document and all attachments were prepared under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gather and evaluate the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information, the information submitted is, to the best of my knowledge and belief, true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fines and imprisonment for knowing violations."

G. All reports required by this permit shall be submitted to DELCORA and Philadelphia Water Department at the following addresses:

Delaware County Regional Water Quality Control Authority (DELCORA)
Post Office Box 999
Chester, Pennsylvania 19016
Attention: Laboratory & Pretreatment Manager
Or By Courier Service:
100 E. 5th Street, Chester, PA 19016

and

Philadelphia Water Department
9001 State Road
Philadelphia, Pennsylvania 19136
Attention: Joseph Cerrone

PART V - GENERAL CONDITIONS

A. Re-opener Clause

This permit will be reopened and modified by DELCORA to incorporate any new or revised Federal, State, or Local Pretreatment Standards or requirements. Modified permits will be reissued according to Section 321 of Resolution No. 91-03.

B. Non-Transferability

A Wastewater Discharge Permit issued for industrial usage of the system shall not be reassigned or transferred or sold to a new owner, new user, or different premises without the express written consent of DELCORA. The industrial user must provide at least 30 days advance written notice to DELCORA.

C. Site Access

DELCORA personnel shall be admitted to any site which contributes wastewater to the DELCORA Wastewater Management System for the purpose of inspection, record examination, monitoring, sampling, enforcement or any other form of surveillance deemed necessary in determining a User's compliance with these Standards, Rules and Regulations, including securing copies of any relevant documents or other information.

DELCORA shall exert every effort to be reasonable in the exercise of this provision including, where feasible, scheduling such access during times when the site is normally occupied. However, this shall not preclude the Authority from securing entrance upon minimal notification at unusual times regardless of site occupancy if there is urgent cause for such admittance, or if reasons for access are not consistent with advance notice. In either case, whether scheduled or unannounced, site access shall not be unduly withheld; the presentation of suitable credentials shall entitle the bearer prompt site admittance. It shall be the User's responsibility to incorporate this requirement with any applicable security procedures employed so that prompt admittance for the performance of these specific responsibilities will not be impeded.

D. Retention of Records

The Permittee shall retain records of all monitoring information, including all calibration and maintenance records and all original strip chart recordings for continuous monitoring instrumentation, copies of all reports required by this permit as well as; 1) The date, exact place, method and time of sampling and the names of the person or persons taking the samples. 2) The dates analysis were performed, 3) Who performed the analysis 4) The analytical techniques / methods used and the results of such analysis and records of all data used to complete the application for this permit, for a period of at least three (3) years from the date of the sample, measurement, report or application. This period may be extended by request of DELCORA at any time.

E. Severability

The provisions of this permit are severable. If any provision of this permit, or the application of any provision of this permit to any circumstances, is held invalid, the application of such provision to other circumstances, and the remainder of this permit, shall not be affected thereby.

F. Duty to Comply

The Permittee must comply with all conditions of this permit. Failure to comply with the requirements of this permit may be grounds for administrative action, or enforcement proceedings including civil or criminal penalties, injunctive relief, and summary abatements.

G. Penalties for Violations of Permit Conditions

DELCORA's Resolution No. 91-03 provides that any person who violates a permit condition is subject to a civil penalty of up to \$25,000.00 per day, per violation, up to the maximum penalty or fine allowable by law. Any person who willfully or negligently violates permit conditions is subject to a fine of up to \$25,000.00 per day, per violation, or by imprisonment, or both.

DELCORA may further require Industrial User to take corrective steps to achieve compliance. These penalties do not relieve Industrial User from any other civil or criminal penalties which may be leveled under federal, state or local laws or DELCORA's Wastewater Control Regulations.

For any accidental or slug discharge, DELCORA may assess Industrial User all costs incurred by DELCORA and/or PWD, including but not limited to remediation costs, legal fees, and penalties incurred by DELCORA and/or PWD under federal, state or local law. Additionally, all penalties under federal, state or local law incurred by DELCORA as a direct result of any violation of this Permit may be assessed against the Industrial User.

Within fifteen (15) days from DELCORA's notice of failure to fulfill any condition of the Permit, Industrial User shall provide both DELCORA and PWD with an explanation of the failure. Within thirty (30) days Industrial User shall submit a proposed plan to achieve compliance with the condition, if necessary.

H. Spill Prevention Plan

Within three (3) months of the effective date of this Permit, Industrial User shall submit to DELCORA for DELCORA's written approval an accidental spill prevention plan ("spill plan") specifying processes to eliminate or minimize any accidental or slug discharges. DELCORA's written approval of a spill plan shall not relieve Industrial User of any liability under Federal, state or local law. The spill plan shall contain, at a minimum, the following elements:

- (a) Description of discharge practices, including routine and non-routine batch discharges;
- (b) Description of stored chemicals;
- (c) Procedures for promptly notifying Delcora of slug discharges as defined under 40 CFR Section 403.5(b), with procedures for follow-up written notification within five (5) days;
- (d) Any necessary procedures to prevent accidental spills, including maintenance of storage areas, handling and transfer of materials; loading and unloading operations, and control of plant site runoff;
- (e) Any necessary measures for building containment structures or equipment;
- (f) Any necessary measures to assure the integrity of storage vessels and piping;
- (g) Any necessary measures for controlling toxic organic pollutants (including solvents);
- (h) Any necessary procedures and equipment for emergency response;
- (i) Any necessary follow-up practices to limit the damage suffered by the treatment plant or its environment.

I. Proper Disposal of Pretreatment Sludges and Spent Chemicals and Hazardous Waste

An Industrial User must dispose of a hazardous sludge and spent chemicals in accordance with any applicable laws including but not limited to Section 405 of the Clean Water Act and

Subtitles C and D of the Resources Conservation and Recovery Act ("RCRA"). The user must notify DELCORA in the event of a discharge of a substance which, if otherwise disposed of, would be a hazardous waste under 40 CFR 261.

J. Confidentiality

An Industrial User may assert confidentiality claims in accordance with 40 CFR Part 403.14 by designating business information as such. DELCORA and PWD will maintain reasonably designated information as confidential from third parties except for federal or state agencies. In the event of a third party request for access to confidential business information, the Industrial User shall indemnify and defend DELCORA and PWD or the claim of confidentiality shall be deemed waived.

K. Dilution

The Industrial User shall not increase the use of potable or process water or, in any way, attempt to dilute an effluent as a partial or complete substitute for adequate treatment to achieve compliance with the limitations contained in this permit.

L. Revocation of Permit

- (1) This Permit may be modified, revoked and reissued, or terminated for good cause including, but not limited to, the following:
 - (a) To incorporate any new or revised federal, state, or local pretreatment standards or requirements;
 - (b) Material or substantial alterations or additions to Industrial Users operation which were not covered in the effective permit;
 - (c) A change in any condition that requires either a temporary or permanent reduction or elimination of the authorized discharge;
 - (d) Information indicating that the permitted discharge poses a threat to DELCORA's collection and treatment systems, plant personnel or the receiving waters;
 - (e) Violation of any terms or conditions of this Permit;
 - (f) Obtaining this Permit by misrepresentation or failure to disclose fully all relevant facts; or
 - (g) Upon request of the Industrial User, provided such request does not create a violation of any existing applicable requirements, standards, laws or rules and regulations.
- (2) The filing of a request by an Industrial User for a permit modification, revocation and reissuance, or termination, or a notification of planned changes or anticipated noncompliance, does not stay any permit condition.

PART VI – NOTES & REVISIONS

9/28/06: Name change from Bio Med Realty to current

PART VI - COMPLIANCE SCHEDULE

None

Acknowledgement of Permit Receipt: (This in no way states or implies contractual agreement.)

By: BMR-145 King of Prussia Road GP LLC,
Permittee's General Partner



Permittee Signature

Kent Griffin

Full Name of Signatory (Typed)

Chief Financial Officer

Title of Signatory (Typed)

10/6/06

Date

Pennoni Associates Inc.	JOB NO.: UPHS1504		
Consulting Engineers	SHEET: 1 of 1	DATE:	11/16/2016
PROJECT Penn Medicine - Radnor	BY: CRP		
SUBJECT: Sewage Flow Calculations	CHK'D		

Year	Average Flow (gpd)
2009	66,433
2010	69,085
2011	62,193
2012	59,640
2013	59,563
2014	39,713
Total Average (2009 to 2013)	63,383

* Excludes 2014 data

Pennoni Associates Inc.JOB NO.: **UPHS1504**

Consulting Engineers

SHEET: 1 of 1

DATE:

11/16/2016

PROJECT: **Penn Medicine - Radnor**

BY: CRP

SUBJECT: **Sewage Flow Calculations**

CHK'D

2009 Q4 Results

Date Range		Number Days in Period	Total Flow (gal)	Total Flow (gpd)
1/6/2009	1/13/2009	7.00	340,220.00	48,602.86
1/13/2009	1/20/2009	7.00	361,930.00	51,704.29
1/20/2009	1/27/2009	7.00	354,440.00	50,634.29
1/27/2009	2/3/2009	7.00	357,370.00	51,052.86
2/3/2009	2/10/2009	7.00	488,640.00	69,805.71
2/10/2009	2/17/2009	7.00	253,100.00	36,157.14
2/17/2009	2/24/2009	7.00	373,160.00	53,308.57
2/24/2009	3/3/2009	7.00	424,960.00	60,708.57
3/3/2009	3/10/2009	7.00	420,940.00	60,134.29
3/10/2009	3/17/2009	7.00	479,210.00	68,458.57
3/17/2009	3/24/2009	7.00	438,020.00	62,574.29
3/24/2009	3/31/2009	7.00	521,770.00	74,538.57
3/31/2009	4/7/2009	7.00	337,770.00	48,252.86
4/7/2009	4/14/2009	7.00	424,900.00	60,700.00
4/14/2009	4/21/2009	7.00	601,130.00	85,875.71
4/21/2009	4/28/2009	7.00	425,660.00	60,808.57
4/28/2009	5/5/2009	7.00	494,390.00	70,627.14
5/5/2009	5/12/2009	7.00	510,270.00	72,895.71
5/12/2009	5/19/2009	7.00	540,730.00	77,247.14
5/19/2009	5/27/2009	8.00	512,590.00	64,073.75
5/27/2009	6/2/2009	6.00	507,050.00	84,508.33
6/2/2009	6/9/2009	7.00	525,220.00	75,031.43
6/9/2009	6/15/2009	6.00	496,480.00	82,746.67
6/15/2009	6/23/2009	8.00	672,320.00	84,040.00
6/23/2009	6/30/2009	7.00	460,260.00	65,751.43
6/30/2009	7/7/2009	7.00	623,830.00	89,118.57
7/7/2009	7/14/2009	7.00	607,690.00	86,812.86
7/14/2009	7/21/2009	7.00	592,440.00	84,634.29
7/21/2009	7/28/2009	7.00	620,050.00	88,578.57
7/28/2009	8/4/2009	7.00	664,970.00	94,995.71
8/4/2009	8/11/2009	7.00	639,000.00	91,285.71
8/11/2009	8/18/2009	7.00	795,180.00	113,597.14
8/18/2009	8/25/2009	7.00	502,500.00	71,785.71
8/25/2009	9/1/2009	7.00	556,190.00	79,455.71
9/1/2009	9/8/2009	7.00	473,370.00	67,624.29
9/8/2009	9/15/2009	7.00	498,460.00	71,208.57
9/15/2009	9/22/2009	7.00	550,600.00	78,657.14
9/22/2009	9/29/2009	7.00	468,000.00	66,857.14
9/29/2009	10/6/2009	7.00	454,140.00	64,877.14
10/6/2009	10/13/2009	7.00	385,800.00	55,114.29
10/13/2009	10/20/2009	7.00	423,360.00	60,480.00
10/20/2009	10/27/2009	7.00	426,480.00	60,925.71
10/27/2009	11/3/2009	7.00	445,690.00	63,670.00
11/3/2009	11/12/2009	9.00	516,500.00	57,388.89
11/12/2009	11/17/2009	5.00	320,210.00	64,042.00
11/17/2009	12/1/2009	14.00	349,590.00	24,970.71
12/1/2009	12/9/2009	8.00	410,090.00	51,261.25
12/9/2009	12/16/2009	7.00	362,820.00	51,831.43
12/16/2009	12/22/2009	6.00	362,830.00	60,471.67
12/22/2009	12/29/2009	7.00	385,680.00	55,097.14
12/29/2009	1/5/2010	7.00	423,580.00	60,511.43
		364.00	24,181,580.00	66,432.91

Pennoni Associates Inc.JOB NO.: **UPHS1504**

Consulting Engineers

SHEET: 1 of 1

DATE:

11/16/2016

PROJECT: **Penn Medicine - Radnor**

BY: CRP

SUBJECT: **Sewage Flow Calculations**

CHK'D

2010 Q2 Results

Date Range		Number Days in Period	Total Flow (gal)	Total Flow (gpd)
1/5/2010	1/12/2010	7.00	423,580.00	60,511.43
1/12/2010	1/19/2010	7.00	412,800.00	58,971.43
1/19/2010	1/26/2010	7.00	414,790.00	59,255.71
1/26/2010	2/2/2010	7.00	488,230.00	69,747.14
2/2/2010	2/9/2010	7.00	324,600.00	46,371.43
2/9/2010	2/16/2010	7.00	416,520.00	59,502.86
2/16/2010	2/23/2010	7.00	355,310.00	50,758.57
2/23/2010	3/2/2010	7.00	616,710.00	88,101.43
3/2/2010	3/9/2010	7.00	35,590.00	5,084.29
3/9/2010	3/16/2010	7.00	447,980.00	63,997.14
3/16/2010	3/23/2010	7.00	341,300.00	48,757.14
3/23/2010	3/30/2010	7.00	539,200.00	77,028.57
3/30/2010	4/6/2010	7.00	408,300.00	58,328.57
4/6/2010	4/13/2010	7.00	385,340.00	55,048.57
4/13/2010	4/20/2010	7.00	386,800.00	55,257.14
4/20/2010	4/27/2010	7.00	459,830.00	65,690.00
4/27/2010	5/5/2010	8.00	425,050.00	53,131.25
5/5/2010	5/11/2010	6.00	403,670.00	67,278.33
5/11/2010	5/18/2010	7.00	444,520.00	63,502.86
5/18/2010	5/25/2010	7.00	541,860.00	77,408.57
5/25/2010	6/1/2010	7.00	600,990.00	85,855.71
6/1/2010	6/8/2010	7.00	610,730.00	87,247.14
6/8/2010	6/15/2010	7.00	633,950.00	90,564.29
6/15/2010	6/22/2010	7.00	595,970.00	85,138.57
6/22/2010	6/29/2010	7.00	661,100.00	94,442.86
6/29/2010	7/6/2010	7.00	822,030.00	117,432.86
7/6/2010	7/13/10	7.00	464,330.00	66,332.86
7/13/2010	7/20/10	7.00	787,970.00	112,567.14
7/20/2010	7/27/10	7.00	661,940.00	94,562.86
7/27/2010	8/3/10	7.00	712,890.00	101,841.43
8/3/2010	8/10/10	7.00	869,820.00	124,260.00
8/10/2010	8/17/10	7.00	716,830.00	102,404.29
8/17/2010	8/24/10	7.00	603,470.00	86,210.00
8/24/2010	8/31/10	7.00	662,390.00	94,627.14
8/31/2010	9/7/10	7.00	622,030.00	88,861.43
9/7/2010	9/14/10	7.00	346,100.00	49,442.86
9/14/2010	9/21/10	7.00	653,700.00	93,385.71
9/21/2010	9/28/10	7.00	438,600.00	62,657.14
9/28/2010	10/5/10	7.00	445,000.00	63,571.43
10/5/2010	10/12/10	7.00	403,100.00	57,585.71
10/12/2010	10/19/10	7.00	392,900.00	56,128.57
10/19/2010	10/26/10	7.00	409,040.00	58,434.29
10/26/2010	11/2/10	7.00	342,730.00	48,961.43
11/2/2010	11/9/10	7.00	362,220.00	51,745.71
11/9/2010	11/16/10	7.00	348,840.00	49,834.29
11/16/2010	11/23/10	7.00	367,660.00	52,522.86
11/23/2010	11/30/10	7.00	399,270.00	57,038.57
11/30/2010	12/7/10	7.00	383,720.00	54,817.14
12/7/2010	12/14/10	7.00	358,770.00	51,252.86
12/14/2010	12/21/10	7.00	356,790.00	50,970.00
12/21/2010	12/28/10	7.00	356,600.00	50,942.86
		357.00	24,663,460.00	69,085.32

Pennoni Associates Inc.JOB NO.: **UPHS1504**

Consulting Engineers

SHEET: 1 of 1

DATE:

11/16/2016

PROJECT: **Penn Medicine - Radnor**

BY: CRP

SUBJECT: **Sewage Flow Calculations**

CHK'D

2011 Q4 Results

Date Range		Number Days in Period	Total Flow (gal)	Total Flow (gpd)
12/28/2010	1/4/11	7.00	411,080.00	58,725.71
1/4/2011	1/11/11	7.00	410,550.00	58,650.00
1/11/2011	1/18/11	7.00	405,700.00	57,957.14
1/18/2011	1/25/11	7.00	369,500.00	52,785.71
1/25/2011	2/3/11	9.00	421,180.00	46,797.78
2/3/2011	2/8/11	5.00	393,380.00	78,676.00
2/8/2011	2/15/11	7.00	396,820.00	56,688.57
2/15/2011	2/22/11	7.00	409,710.00	58,530.00
2/22/2011	3/1/11	7.00	367,690.00	52,527.14
3/1/2011	3/8/11	7.00	381,120.00	54,445.71
3/8/2011	3/15/11	7.00	328,350.00	46,907.14
3/15/2011	3/22/11	7.00	297,390.00	42,484.29
3/22/2011	3/30/11	8.00	456,630.00	57,078.75
3/30/2011	4/5/11	6.00	326,290.00	54,381.67
4/5/2011	4/12/11	7.00	421,570.00	60,224.29
4/12/2011	4/19/11	7.00	373,410.00	53,344.29
4/19/2011	4/26/11	7.00	346,470.00	49,495.71
4/26/2011	5/3/11	7.00	346,470.00	49,495.71
5/3/2011	5/10/11	7.00	380,390.00	54,341.43
5/10/2011	5/17/11	7.00	381,760.00	54,537.14
5/17/2011	5/24/11	7.00	498,680.00	71,240.00
5/24/2011	5/31/11	7.00	526,840.00	75,262.86
5/31/2011	6/7/11	7.00	526,450.00	75,207.14
6/7/2011	6/14/11	7.00	537,830.00	76,832.86
6/14/2011	6/21/11	7.00	655,590.00	93,655.71
6/21/2011	6/28/11	7.00	464,340.00	66,334.29
6/28/2011	7/5/11	7.00	595,220.00	85,031.43
7/5/2011	7/12/11	7.00	626,240.00	89,462.86
7/12/2011	7/19/11	7.00	676,260.00	96,608.57
7/19/2011	7/26/11	7.00	609,400.00	87,057.14
7/26/2011	8/2/11	7.00	602,880.00	86,125.71
8/2/2011	8/9/11	7.00	493,650.00	70,521.43
8/9/2011	8/16/11	7.00	506,020.00	72,288.57
8/16/2011	8/23/11	7.00	461,220.00	65,888.57
8/23/2011	8/30/11	7.00	470,530.00	67,218.57
8/30/2011	9/6/11	7.00	455,640.00	65,091.43
9/6/2011	9/13/11	7.00	349,800.00	49,971.43
9/13/2011	9/20/11	7.00	451,500.00	64,500.00
9/20/2011	9/27/11	7.00	357,290.00	51,041.43
9/27/2011	10/4/11	7.00	401,120.00	57,302.86
10/4/2011	10/11/11	7.00	396,840.00	56,691.43
10/11/2011	10/18/11	7.00	376,630.00	53,804.29
10/18/2011	10/25/11	7.00	401,540.00	57,362.86
10/25/2011	11/1/11	7.00	390,040.00	55,720.00
11/1/2011	11/8/11	7.00	406,580.00	58,082.86
11/8/2011	11/15/11	7.00	376,070.00	53,724.29
11/15/2011	11/22/11	7.00	376,070.00	53,724.29
11/22/2011	11/29/11	7.00	393,660.00	56,237.14
11/29/2011	12/6/11	7.00	435,690.00	62,241.43
12/6/2011	12/13/11	7.00	435,590.00	62,227.14
12/13/2011	12/20/11	7.00	349,020.00	49,860.00
12/20/2011	12/27/11	7.00	408,630.00	58,375.71
		364.00	22,638,320.00	62,193.19

Pennoni Associates Inc.

Consulting Engineers

JOB NO.: **UPHS1504**

SHEET: 1 of 1

DATE:

11/16/2016

PROJECT: **Penn Medicine - Radnor**

BY: CRP

SUBJECT: **Sewage Flow Calculations**

CHK'D

2012 Q4 Results

Date Range		Number Days in Period	Total Flow (gal)	Total Flow (gpd)
12/27/2011	1/3/12	7.00	317,110.00	45,301.43
1/3/2012	1/10/12	7.00	460,760.00	65,822.86
1/10/2012	1/17/12	7.00	287,220.00	41,031.43
1/17/2012	1/24/12	7.00	377,620.00	53,945.71
1/24/2012	1/31/12	7.00	401,340.00	57,334.29
1/31/2012	2/7/12	7.00	360,450.00	51,492.86
2/7/2012	2/14/12	7.00	414,770.00	59,252.86
2/14/2012	2/21/12	7.00	316,650.00	45,235.71
2/21/2012	2/28/12	7.00	396,290.00	56,612.86
2/28/2012	3/6/12	7.00	417,020.00	59,574.29
3/6/2012	3/13/12	7.00	379,700.00	54,242.86
3/13/2012	3/20/12	7.00	388,940.00	55,562.86
3/20/2012	3/27/12	7.00	376,480.00	53,782.86
3/27/2012	5/1/12	35.00	388,590.00	11,102.57
5/1/2012	5/8/12	7.00	388,590.00	55,512.86
5/8/2012	5/15/12	7.00	409,080.00	58,440.00
5/15/2012	5/22/12	7.00	402,330.00	57,475.71
5/22/2012	5/29/12	7.00	359,020.00	51,288.57
5/29/2012	6/5/12	7.00	505,580.00	72,225.71
6/5/2012	6/12/12	7.00	575,270.00	82,181.43
6/12/2012	6/19/12	7.00	797,760.00	113,965.71
6/19/2012	6/26/12	7.00	654,120.00	93,445.71
6/26/2012	7/3/12	7.00	654,120.00	93,445.71
7/3/2012	7/10/12	7.00	686,990.00	98,141.43
7/10/2012	7/17/12	7.00	649,030.00	92,718.57
7/17/2012	7/24/12	7.00	433,400.00	61,914.29
7/24/2012	7/31/12	7.00	592,430.00	84,632.86
7/31/12	8/7/12	7.00	587,240.00	83,891.43
8/7/2012	8/14/12	7.00	537,260.00	76,751.43
8/14/2012	8/21/12	7.00	631,380.00	90,197.14
8/21/2012	8/28/12	7.00	519,710.00	74,244.29
8/28/2012	9/4/12	7.00	500,200.00	71,457.14
9/4/2012	9/11/12	7.00	447,700.00	63,957.14
9/11/2012	9/18/12	7.00	581,190.00	83,027.14
9/18/2012	9/25/12	7.00	557,350.00	79,621.43
9/25/2012	10/2/12	7.00	569,720.00	81,388.57
10/2/2012	10/9/12	7.00	435,380.00	62,197.14
10/9/2012	10/16/12	7.00	370,640.00	52,948.57
10/16/2012	10/23/12	7.00	360,130.00	51,447.14
10/23/2012	10/30/12	7.00	314,760.00	44,965.71
10/30/2012	11/6/12	7.00	493,460.00	70,494.29
11/6/2012	11/13/12	7.00	339,470.00	48,495.71
11/13/2012	11/20/12	7.00	374,300.00	53,471.43
11/20/2012	11/27/12	7.00	326,040.00	46,577.14
11/27/2012	12/4/12	7.00	348,510.00	49,787.14
12/4/2012	12/11/12	7.00	378,580.00	54,082.86
12/11/2012	12/18/12	7.00	338,470.00	48,352.86
12/18/2012	12/25/12	7.00	306,800.00	43,828.57
		364.00	21,708,950.00	59,639.97

Pennoni Associates Inc.JOB NO.: **UPHS1504**

Consulting Engineers

SHEET: 1 of 1

DATE:

11/16/2016

PROJECT **Penn Medicine - Radnor**

BY: CRP

SUBJECT: **Sewage Flow Calculations**

CHK'D

2013 Q4 Results

Date Range		Number Days in Period	Total Flow (gal)	Total Flow (gpd)
12/25/2012	1/1/2013	7.00	318,150.00	45,450.00
1/1/2013	1/8/2013	7.00	331,680.00	47,382.86
1/8/2013	1/15/2013	7.00	417,190.00	59,598.57
1/15/2013	1/22/2013	7.00	195,310.00	27,901.43
1/22/2013	1/29/2013	7.00	309,120.00	44,160.00
1/29/2013	2/5/2013	7.00	284,200.00	40,600.00
2/5/2013	2/12/2013	7.00	454,360.00	64,908.57
2/12/2013	2/19/2013	7.00	214,570.00	30,652.86
2/19/2013	2/26/2013	7.00	322,030.00	46,004.29
2/26/2013	3/5/2013	7.00	319,690.00	45,670.00
3/5/2013	3/12/2013	7.00	342,360.00	48,908.57
3/12/2013	3/19/2013	7.00	302,860.00	43,265.71
3/19/2013	3/26/2013	7.00	306,290.00	43,755.71
3/26/2013	4/2/2013	7.00	376,270.00	53,752.86
4/2/2013	4/9/2013	7.00	359,490.00	51,355.71
4/9/2013	4/16/2013	7.00	426,900.00	60,985.71
4/16/2013	4/23/2013	7.00	320,630.00	45,804.29
4/23/2013	4/30/2013	7.00	369,050.00	52,721.43
4/30/2013	5/7/2013	7.00	342,460.00	48,922.86
5/7/2013	5/14/2013	7.00	397,390.00	56,770.00
5/14/2013	5/21/2013	7.00	426,080.00	60,868.57
5/21/2013	5/28/2013	7.00	587,720.00	83,960.00
5/28/2013	6/4/2013	7.00	431,700.00	61,671.43
6/4/2013	6/11/2013	7.00	449,810.00	64,258.57
6/11/2013	6/18/2013	7.00	459,690.00	65,670.00
6/18/2013	6/25/2013	7.00	435,360.00	62,194.29
6/25/2013	7/2/2013	7.00	521,620.00	74,517.14
7/2/2013	7/11/2013	9.00	1,633,580.00	181,508.89
7/11/2013	7/16/2013	5.00	2,068,800.00	413,760.00
7/16/2013	7/23/2013	7.00	512,430.00	73,204.29
7/23/2013	7/30/2013	7.00	265,790.00	37,970.00
7/30/2013	8/6/2013	7.00	433,750.00	61,964.29
8/6/2013	8/13/2013	7.00	293,570.00	41,938.57
8/13/2013	8/20/2013	7.00	401,810.00	57,401.43
8/20/2013	8/27/2013	7.00	386,030.00	55,147.14
8/27/2013	9/3/2013	7.00	365,260.00	52,180.00
9/3/2013	9/10/2013	7.00	370,900.00	52,985.71
9/10/2013	9/17/2013	7.00	297,010.00	42,430.00
9/17/2013	9/24/2013	7.00	308,210.00	44,030.00
9/24/2013	10/1/2013	7.00	401,520.00	57,360.00
10/1/2013	10/8/2013	7.00	307,520.00	43,931.43
10/8/2013	10/15/2013	7.00	292,040.00	41,720.00
10/15/2013	10/22/2013	7.00	340,370.00	48,624.29
10/22/2013	10/30/2013	8.00	359,250.00	44,906.25
10/30/2013	11/5/2013	6.00	219,960.00	36,660.00
11/5/2013	11/12/2013	7.00	296,780.00	42,397.14
11/12/2013	11/19/2013	7.00	317,790.00	45,398.57
11/19/2013	11/26/2013	7.00	261,880.00	37,411.43
11/26/2013	12/3/2013	7.00	273,830.00	39,118.57
		343.00	20,430,060.00	59,562.86

Pennoni Associates Inc.JOB NO.: **UPHS1504**

Consulting Engineers

SHEET: 1 of 1

DATE:

11/16/2016

PROJECT **Penn Medicine - Radnor**


BY: CRP

SUBJECT: **Sewage Flow Calculations**

CHK'D

2014 Q4 Results

Date Range		Number Days in Period	Total Flow (gal)	Total Flow (gpd)
12/31/2013	1/7/2014	7.00	333,360.00	47,622.86
1/7/2014	1/14/2014	7.00	346,160.00	49,451.43
1/14/2014	1/21/2014	7.00	424,430.00	60,632.86
1/21/2014	1/28/2014	7.00	576,350.00	82,335.71
1/28/2014	2/4/2014	7.00	381,580.00	54,511.43
2/4/2014	2/11/2014	7.00	322,530.00	46,075.71
2/11/2014	2/18/2014	7.00	324,060.00	46,294.29
2/18/2014	2/25/2014	7.00	306,050.00	43,721.43
2/25/2014	3/4/2014	7.00	316,740.00	45,248.57
3/4/2014	3/11/2014	7.00	330,670.00	47,238.57
3/11/2014	3/18/2014	7.00	331,390.00	47,341.43
3/18/2014	3/25/2014	7.00	287,630.00	41,090.00
3/25/2014	4/1/2014	7.00	303,600.00	43,371.43
4/1/2014	4/8/2014	7.00	290,930.00	41,561.43
4/8/2014	4/15/2014	7.00	291,520.00	41,645.71
4/15/2014	4/22/2014	7.00	241,430.00	34,490.00
4/22/2014	4/29/2014	7.00	203,960.00	29,137.14
4/29/2014	5/6/2014	7.00	208,970.00	29,852.86
5/6/2014	5/13/2014	7.00	230,980.00	32,997.14
5/13/2014	5/20/2014	7.00	240,080.00	34,297.14
5/20/2014	5/27/2014	7.00	184,900.00	26,414.29
5/27/2014	6/3/2014	7.00	252,440.00	36,062.86
6/3/2014	6/10/2014	7.00	229,970.00	32,852.86
6/10/2014	6/17/2014	7.00	275,170.00	39,310.00
6/17/2014	6/23/2014	6.00	269,370.00	44,895.00
6/23/2014	7/1/2014	8.00	384,800.00	48,100.00
7/1/2014	7/8/2014	7.00	267,340.00	38,191.43
7/8/2014	7/15/2014	7.00	300,780.00	42,968.57
7/15/2014	7/22/2014	7.00	263,960.00	37,708.57
7/22/2014	7/29/2014	7.00	255,720.00	36,531.43
7/29/2014	8/5/2014	7.00	259,560.00	37,080.00
8/5/2014	8/12/2014	7.00	511,360.00	73,051.43
8/12/2014	8/19/2014	7.00	520,570.00	74,367.14
8/19/2014	8/26/2014	7.00	528,190.00	75,455.71
8/26/2014	9/2/2014	7.00	161,880.00	23,125.71
9/2/2014	9/9/2014	7.00	307,780.00	43,968.57
9/9/2014	9/16/2014	7.00	194,550.00	27,792.86
9/16/2014	9/23/2014	7.00	181,080.00	25,868.57
9/23/2014	9/30/2014	7.00	187,310.00	26,758.57
9/30/2014	10/7/2014	7.00	215,610.00	30,801.43
10/7/2014	10/14/2014	7.00	107,130.00	15,304.29
10/14/2014	10/21/2014	7.00	38,200.00	5,457.14
10/21/2014	10/28/2014	7.00	38,150.00	5,450.00
10/28/2014	11/4/2014	7.00	3,290.00	470.00
		308.00	12,231,530.00	39,712.76



January 20, 2010

CERTIFIED MAIL; RETURN RECEIPT REQUESTED

Certification No. 7009-1410-0002-1279-2595

Mr. Christopher C. Flannery
Laboratory & Pretreatment Manager
Delaware County Regional Water Quality Control Authority
P.O. Box 999
Chester, Pennsylvania 19016-0999

Subject: 2009 Fourth Quarter Report
BioMed Realty Trust, Inc.
145 King Of Prussia Road
IES Project No. EHS09687.01

Dear Mr. Flannery:

On behalf of BioMed Realty Trust, Inc. (BMR), IES Engineers is pleased to submit the 2009 Fourth Quarter Report from BMR's 145 King of Prussia Road facility. The report includes all analytical data with a chain of custody from a contract laboratory, individual data including flow and pH levels taken on an individual day. Also, attached for your review is a report from Centocor regarding the Radioisotope usage during the Fourth Quarter of 2009.


If you have any questions or need any additional information, please feel free to contact me or Ms. Maureen Delaney of BMR at (610) 647-9590.

Very truly yours,


Gwendolyn K. Supplee
Project Manager

Attachment(s)

cc: M. Delaney, BMR
C. Geanopulos, BMR
K. Turner, Centocor
J. Yaroch, IES



January 20, 2010

CERTIFIED MAIL; RETURN RECEIPT REQUESTED

Certified No. 7009-1410-0002-1279-2588

Mr. Joseph Cerrone
Philadelphia Water Department
9001 State Road
Chester, Pennsylvania 19136

Subject: 2009 Fourth Quarter Report
BioMed Realty Trust, Inc.
145 King Of Prussia Road
IES Project No. EHS09687.01

Dear Mr. Cerrone:

On behalf of BioMed Realty Trust, Inc. (BMR), IES Engineers is pleased to submit the 2009 Fourth Quarter Report from BMR's 145 King of Prussia Road facility. The report includes all analytical data with a chain of custody from a contract laboratory, individual data including flow and pH levels taken on an individual day. Also, attached for your review is a report from Centocor regarding the Radioisotope usage during the Fourth Quarter of 2009.

If you have any questions or need any additional information, please feel free to contact me or Ms. Maureen Delaney of BMR at (610) 647-9590.

Very truly yours,

Gwendolyn K. Supplee
Project Manager

Attachment(s)

cc: M. Delaney, BMR
C. Geanopulos, BMR
K. Turner, Centocor
J. Yaroch, IES

ATTACHMENT 1
CERTIFICATION STATEMENT

Certification Statement, 2009 4th Quarter Wastewater Report:

“I certify under penalty of law that this document and all attachments were prepared under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gather and evaluate the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information, the information submitted is, to best of my knowledge and belief, true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility fines and imprisonment for knowing violations.”

Michael Bodendorf, Director – Real Estate Operations
Name/Title


Signature

7/15/10
Date

ATTACHMENT 2
2009 Fourth Quarter Report

Biomed Realty Trust
145 King of Prussia Road
Radnor, PA 19087

Monthly Ph Level - 2009

<u>Date</u>	<u>Jan</u>	<u>Water Flow</u>	<u>Actual</u>	<u>Actual</u>	<u>Date</u>	<u>Feb</u>	<u>Water Flow</u>	<u>Actual</u>	<u>Actual</u>
		<u>Week of:</u>	<u>Usage</u>	<u>Usage</u>			<u>Week of:</u>	<u>Usage</u>	<u>Usage</u>
			<u>Meter #1</u>	<u>Meter #2</u>				<u>Meter #1</u>	<u>Meter #2</u>
1/6/2009	7.92	12/30/08-1/6/09	89977	289671	2/3/2009	8.27	1/27/09-2/3/09	98980	341037
1/13/2009	8.36	1/6/09-1/13/09	92102	302443	2/10/2009	8.34	2/3/09-2/10/09	102204	357661
1/20/2009	9.69	1/13/09-1/20/09	94431	315346	2/17/2009	8.50	2/10/09-2/17/09	103810	366911
1/27/2009	8.24	1/20/09-1/27/09	96691	328190	2/24/2009	8.37	2/17/09-2/24/09	106251	379817

<u>Date</u>	<u>March</u>	<u>Water Flow</u>	<u>Actual</u>	<u>Actual</u>	<u>Date</u>	<u>April</u>	<u>Water Flow</u>	<u>Actual</u>	<u>Actual</u>
		<u>Week of:</u>	<u>Usage</u>	<u>Usage</u>			<u>Week of:</u>	<u>Usage</u>	<u>Usage</u>
			<u>Meter #1</u>	<u>Meter #2</u>				<u>Meter #1</u>	<u>Meter #2</u>
3/3/2009	8.69	2/24/09-3/3/09	109210	392723	4/7/2009	7.69	3/31/09-4/7/09	124714	457454
3/10/2009	8.17	3/3/09-3/10/09	112104	405877	4/14/2009	8.26	4/7/09-4/14/09	128959	470822
3/17/2009	8.42	3/10/09-3/17/09	115534	419498	4/21/2009	7.93	4/14/09-4/21/09	131917	483732
3/24/2009	7.36	3/17/09-3/24/09	118663	432010	4/28/2009	7.98	4/21/09-4/28/09	136586	497155
3/31/2009	7.81	3/24/09-3/31/09	122593	444887					

<u>Date</u>	<u>May</u>	<u>Water Flow</u>	<u>Actual</u>	<u>Actual</u>	<u>Date</u>	<u>June</u>	<u>Water Flow</u>	<u>Actual</u>	<u>Actual</u>
		<u>Week of:</u>	<u>Usage</u>	<u>Usage</u>			<u>Week of:</u>	<u>Usage</u>	<u>Usage</u>
			<u>Meter #1</u>	<u>Meter #2</u>				<u>Meter #1</u>	<u>Meter #2</u>
5/5/2009	8.98	4/28/09-5/5/09	139626	509321	6/2/2009	7.78	5/27/09-6/2/09	155094	560439
5/12/2009	8.68	5/5/09-5/12/09	143291	522110	6/9/2009	7.78	6/2/09-6/9/09	158886	573224
5/19/2009	8.06	5/12/09-5/19/09	147110	534947	6/16/2009	7.98	6/9/09-6/15/09	162860	586006
5/27/2009	8.24	5/19/09-5/27/09	151296	547160	6/23/2009	8.11	6/16/09-6/23/09	166551	598774
					6/30/2009	7.85	6/23/09-6/30/09	171816	613356

Biomed Realty Trust
145 King of Prussia Road
Radnor, PA 19087

<u>Date</u>	<u>July</u>	<u>Water Flow</u> <u>Week of:</u>
7/7/2009	7.98	6/30/09-7/7/09
7/14/2009	7.97	7/7/09-7/14/09
7/21/2009	8.13	7/14/09-7/21/09
7/28/2009	8.26	7/21/09-7/28/09

<u>Actual Usage</u> <u>Meter #1</u>	<u>Actual Usage</u> <u>Meter #2</u>
175335	624192
180308	636845
185120	649494
189780	662138

<u>Date</u>	<u>Aug</u>
8/4/2009	8.10
8/11/2009	8.26
8/18/2009	7.83
8/25/2009	7.99

<u>Water Flow</u> <u>Week of:</u>	<u>Actual Usage</u> <u>Meter #1</u>	<u>Actual Usage</u> <u>Meter #2</u>
7/28/09-8/4/09	194714	674803
8/4/09-8/11/09	200091	687530
8/11/09-8/18/09	205231	700030
8/18/09-8/25/09	211752	714338

<u>Date</u>	<u>Sept</u>	<u>Water Flow</u> <u>Week of:</u>
9/1/2009	7.50	8/25/09-9/1/09
9/8/2009	7.78	9/1/09-9/8/09
9/15/2009	7.99	9/8/09-9/15/09
9/22/2009	8.16	9/15/09-9/22/09
9/29/2009	7.86	9/22/09-9/29/09

<u>Actual Usage</u> <u>Meter #1</u>	<u>Actual Usage</u> <u>Meter #2</u>
215698	725128
219983	737897
223453	750534
227165	763260
231402	775950

<u>Date</u>	<u>Oct</u>
10/6/2009	7.76
10/13/2009	8.07
10/20/2009	7.51
10/27/2009	7.24

<u>Water Flow</u> <u>Week of:</u>	<u>Actual Usage</u> <u>Meter #1</u>	<u>Actual Usage</u> <u>Meter #2</u>
9/29/09-10/6/09	234807	788700
10/6/09-10/13/09	238076	801424
10/13/09-10/20/09	240664	814124
10/20/09-10/27/09	243686	826240

<u>Date</u>	<u>Nov</u>	<u>Water Flow</u> <u>Week of:</u>
11/3/2009	7.34	10/27/09-11/3/09
11/12/2009	7.15	11/3/09-11/12/09
11/17/2009	8.01	11/12/09-11/17/09
11/24/2009	7.56	11/17/09-11/24/09

<u>Actual Usage</u> <u>Meter #1</u>	<u>Actual Usage</u> <u>Meter #2</u>
246584	839908
249766	852657
253464	867327
255577	878218

<u>Date</u>	<u>Dec</u>
12/1/2009	7.84
12/9/2009	8.26
12/16/2009	6.61
12/22/2009	6.48
12/29/2009	6.35
1/5/2010	6.52

<u>Water Flow</u> <u>Week of:</u>	<u>Actual Usage</u> <u>Meter #1</u>	<u>Actual Usage</u> <u>Meter #2</u>
11/24/09-12/01/09	257808	890867
12/01/09-12/09/09	261272	905848
12/09/09-12/16/09	264100	918577
12/16/09-12/22/09	266524	930619
12/22/09-12/29/09	268948	942662
12/29/09-1/5/10	271500	955710

BioMed Realty Trust, Inc
 145 King of Prussia Road
 Radnor, PA 19087

Actual Monthly Flow - 2009

Date Range	Meter #1	Meter #2	Total Flow
1/6/09-1/13/09	212,500	127,720	340,220
1/13/09-1/20/09	282,800	129,030	362,830
1/20/09-1/27/09	228,900	126,440	354,440
1/27/09-2/3/09	228,900	128,470	357,370
2/3/09-2/10/09	322,400	166,240	488,640
2/10/09-2/17/09	160,600	92,500	253,100
2/17/09-2/24/09	244,100	129,060	373,160
2/24/09-3/3/09	295,900	129,060	424,960
3/3/09-3/10/09	289,400	131,540	420,940
3/10/09-3/17/09	343,000	136,210	479,210
3/17/09-3/24/09	312,900	129,100	438,020
3/24/09-3/31/09	393,000	128,770	521,770
3/31/09-4/7/09	212,100	125,670	337,770
4/7/09-4/14/09	295,800	129,100	424,960
4/14/09-4/21/09	466,900	134,230	601,130
4/21/09-4/28/09	301,900	121,660	425,660
4/28/09-5/5/09	368,800	127,890	494,390
5/5/09-5/12/09	381,900	128,370	510,270
5/12/09-5/19/09	418,600	122,130	540,730
5/19/09-5/27/09	379,800	132,790	607,690
5/27/09-6/2/09	379,800	127,820	607,690
6/2/09-6/9/09	397,400	127,820	525,220
6/9/09-6/15/09	369,100	127,820	496,780
6/16/09-6/23/09	526,500	145,820	672,320
6/23/09-6/30/09	381,900	108,360	460,000
6/30/09-7/7/09	497,300	126,530	623,830
7/7/09-7/14/09	481,200	126,490	607,690
7/14/09-7/21/09	466,900	126,440	592,440
7/21/09-7/28/09	493,400	125,000	424,960
7/28/09-8/4/09	537,700	127,270	664,970
8/4/09-8/11/09	514,000	125,000	639,000
8/11/09-8/18/09	652,100	143,080	795,180
8/18/09-8/25/09	394,600	127,820	607,690
8/25/09-9/1/09	428,500	127,500	556,190
9/1/09-9/8/09	347,000	126,370	473,370
9/8/09-9/15/09	371,200	127,260	498,460
9/15/09-9/22/09	423,700	126,900	550,600
9/22/09-9/29/09	340,500	127,500	468,000
9/29/09-10/6/09	326,900	127,240	454,140
10/6/09-10/13/09	282,800	127,200	385,600
10/13/09-10/20/09	302,200	121,160	423,360
10/20/09-10/27/09	282,800	136,680	426,480
10/27/09-11/3/09	318,200	127,490	445,690
11/3/09-11/12/09	369,800	146,700	516,500
11/12/09-11/17/09	211,300	108,910	320,210
11/24/09-12/01/09	223,100	120,430	349,590
12/01/09-12/09/09	282,800	127,260	410,090
12/09/09-12/16/09	282,800	120,420	362,820
12/16/09-12/22/09	282,800	120,430	362,830
12/22/09-12/29/09	282,800	130,480	385,680
12/29/09-1/5/10	293,600	129,980	423,580



TINA GEANOPULOS
 BIOMED REALTY TRUST, INC.
 1205 WESTLAKES DRIVE
 SUITE 240
 BERWYN, PA 19312

Regarding:

ERIN SHEA
 BMR
 145 KING OF PRUSSIA ROAD
 RADNOR, PA 19087

Account No: AC0171, BIOMED REALTY TRUST, INC.
 Project No: AC0171, BIOMED REALTY TRUST, INC.

P.O. No:
 PWSID No:

Inv. No: 1139910

Sample Number L3123234-1	Sample Description EFFLUENT 10 HR COMPOSITE 0700-1700 Received Temp: 37 F Iced (Y/N): Y	Samp. Date/Time/Temp 10/06/09 05:00pm NA F	Sampled by Kenneth L. Tanner, QC Laboratories
-----------------------------	---	---	--

Parameter	Method	Result	RLs	Test Date, Time, Analyst
GENERAL CHEMISTRY				
BIOCHEMICAL OXYGEN DEMAND	SM 5210B	132 mg/l	77.6 mg/l	10/08/09 12:07AM GAP
TOTAL SUSPENDED SOLIDS	SM 2540D	98.0 mg/l	2.00 mg/l	10/08/09 07:35AM GLE

Sample Number L3123234-2	Sample Description EFFLUENT GRAB Received Temp: 37 F Iced (Y/N): Y	Samp. Date/Time/Temp 10/07/09 12:10pm NA F	Sampled by Kenneth L. Tanner, QC Laboratories
-----------------------------	--	---	--

Parameter	Method	Result	RLs	Test Date, Time, Analyst
FIELD SERVICES				
FIELD TEMPERATURE CELSIUS	SM 2550B	23.8 Deg. C	0.5 Deg. C	10/07/09 12:10PM KLT
FLOW		0.0292 mgd		10/07/09 12:10PM KLT
PH FIELD	SM 4500H+B	7.36 units	units	10/07/09 12:10PM KLT

- A result of "ND" indicates the concentration of the analyte tested was either not detected or below the RLs.
- Definitions: ND=not detected; NEG=negative; POS=positive; COL=colonies; RLs=laboratory reporting limits; L/A=laboratory accident; TNTC=too numerous to count
- A result marked with "DRY" indicates that the result was calculated and reported on a dry weight basis.
- All analysis, except field tests are conducted in Southampton, PA unless otherwise identified.
- The test "ph lab" is analyzed upon receipt at the laboratory, the result will not be suitable for regulatory purposes.
- The reported results relate only to the samples.
- QC NELAP ID's: PA 09-00131, NJ PA166, FL E87954, NY 11223, CT PH-0768, DE PA-018, KY 90228, MD 206, EPA PA00018. Bioassay: PA 09-03574, NJ PA034, FL E87953, KS E10373, SC 89020001.
- QC STATE ID's: Wind Gap, NJ PA001, PA 48-01334; E RUTHERFORD NJ02015; Vineland NJ06005; Reading PA 06-03543.
- All samples are collected as "grab" samples unless otherwise identified.
- MCL= is the EPA recommended "maximum contaminant level" for a parameter. PLS=customer specific permit limits.
- The test results meet all requirements of NELAC unless otherwise specified.
- The report shall not be reproduced except in full without the written consent of the laboratory.

Thomas J. Hines
 Thomas J. Hines, President

QC Laboratories

Analytical Report



Account No: AC0171, BIOMED REALTY TRUST, INC.
Project No: AC0171, BIOMED REALTY TRUST, INC.

P.O. No:
PWSID No:

Inv. No: 1139910

Regulatory authorities are assessing substantial fines for testing omissions. Please track your sample collections and results on a weekly, monthly, or quarterly basis to ensure compliance. QC's internet program 'LIVE ACCESS' will provide you with real-time access to collection dates and results. Please contact Customer Service for further information on acquiring LIVE ACCESS.

Thomas J. Hines
Thomas J. Hines, President

ERIN SHEA
BMR
145 KING OF PRUSSIA ROAD
RADNOR, PA 19087
(610)647-9590

PickSheet: P3123234
Cust: AC0171
Schd: 37686
MONDAY
Project Name: BIONED REALTY TRUST, INC.
Start Date: 03/08/04 Stop Date:
MUST SET UP COMPOSITE FROM 7AM TO 5PM PER PERMIT
REQUIREMENTS

Route: 86 KEN TANNER LANDFILLS / DISCHARGES, ETC.
X: -75.35579 Y: 40.0401

Printed on: 09/16/09
Sample
10-7-09
Date
Time
By
Temp. °F °F App.

Temp	Site	Initials	Iced?
37 °F	QC	PJ	YES NO
°F			YES NO

	BR	CL	PH
3123234-1 EFFLUENT 10 HR COMPOSITE 0700-1700 BOD 5, CHAIN OF CUSTODY RET, ISCO SAMPLER, TSS			
3123234-2 EFFLUENT GRAB CHAIN OF CUSTODY RET, FLD TEMP C, FLOW, PH FLD			

_____ Ascorbic/HCL Vials # _____ HCL Vials
 # _____ Na2-S2-O3
 # _____ Na OH/Zn acetate pH
 # _____ HNO3 pH
 # _____ H2-SO4 pH
 # _____ NaOH pH
 # _____ Unpreserved # _____ HCL pH

Dept.	Relinquished To	Time	Date

Dept.	Relinquished By	Time	Date

Hours of Operation:
M: 07:00-18:00 T: 07:00-18:00 W: 07:00-18:00 Th: 07:00-18:00 F: 07:00-18:00 St: - Sn: -

Comments:
SUB PO'S:

QC Laboratories

CHAIN OF CUSTODY

1205 Industrial Blvd.
 Southampton, PA 18966-0514
 Phone: 215-355-3900
 Fax: 215-355-7231

Client/Acct. No. BMC
 Address _____
 Sampling Site Address: (if different) _____
 City/State/Zip King of Prussia, PA
 Phone/Fax _____
 P.O. No. _____
 Client Contact Erin Shea
 QC Contact _____

Lab LIMS No: _____
LAB USE ONLY:
 # Ascorbic/HCl Vials # HCl Vials
 # Na₂S₂O₃ _____
 # Na OH/Zn acetate pH _____
 # HNO₃ pH _____
 # H₂SO₄ pH _____
 # NaOH pH _____
 # Unpreserved 194
 # HCl pH _____
 # Temp control 194 ID# _____

MATRIX CODES
 DW: DRINKING WATER
 GW: GROUND WATER
 WW: WASTEWATER
 SO: SOIL
 SL: SLUDGE
 OL: OIL
 SOL: NON SOIL SOLID
 MI: MISCELLANEOUS
 X: OTHER

PROJECT	FIELD ID	Date	Military Time	Collection	SCUBA	Matrix Code	Number of Containers														
							Total	H	H	N	Z	U	B	B	B	B	B				
A	31232341	Eff 10/6/08	1700	W	1	W	1														
B	- 2 Eff grab	10/7/09	1210	W	0	W	0														
ANALYSIS REQUESTED																					
Temp - 23.8, pH - 7.36, Flu - 0.2912 mg/d																					

SAMPLED BY: (Name/Company) KTR
 Verbal/fax data due: _____
 Hardcopy due: _____
 Please call for pricing and availability on rush (<14-21 day) turnaround and on all but standard format.
 Report Format: Standard Forms Standard + CC NJ Reduced Disk
 Field Parameters Analyzed By: _____
 Sig: _____
 Date/Time: 10/7/08

SAMPLE CUSTODY EXCHANGES MUST BE DOCUMENTED BELOW. USE FULL LEGAL SIGNATURE, DATE AND MILITARY TIME (24 HOUR CLOCK, I.E. 8AM IS 0800, 4 PM IS 1600)

RELINQUISHED BY	DATE	TIME	RECEIVED BY	DATE	TIME	DELIVERY METHOD:	Custody Seal Number
1. <u>[Signature]</u>	10/7/09	1400	1. <u>[Signature]</u>	10/7/09	1400	<input type="checkbox"/> UPS <input type="checkbox"/> FEDEX <input type="checkbox"/> OTHER	
RELINQUISHED BY	DATE	TIME	RECEIVED BY	DATE	TIME	COMMENTS:	
2. _____	DATE	TIME	2. _____	DATE	TIME		
RELINQUISHED BY	DATE	TIME	RECEIVED BY	DATE	TIME		
3. _____	DATE	TIME	3. _____	DATE	TIME		
RELINQUISHED BY	DATE	TIME	RECEIVED BY	DATE	TIME		
4. _____	DATE	TIME	4. _____	DATE	TIME		
RELINQUISHED BY	DATE	TIME	RECEIVED BY	DATE	TIME		
5. _____	DATE	TIME	5. _____	DATE	TIME	Hazardous: yes / no	

For example to aid completion, see reverse side.

SAMPLING DOCUMENTATION FORM

Customer Number: B ACO171

QC Field Technician: KLT

Compositor ID: _____

Date/Time Installed: 10-6-09 070
Custody Seal/Lock Installed: Yes No _____

Date/Time Extracted: 10-6-09 1700
Custody Seal/Lock Intact: Yes No _____

Sample Type:

Grab: Yes

Composite: 8HR _____ 12 HR _____ 24 HR _____

Shift 10

Program: Minutes/ML 15/100

Total Vol. Collected: ML 2901

Site Description	Location	Diagram
	<u>manhole top of Hill</u>	

Sampling Notes:

Grab Sample Iced: Yes _____ No

Composite Sample Iced: Yes No _____

Decon Performed: Yes No _____

Field Test Performed Onsite: Yes No _____

Customer Authorization MA

Date 10-7-09



TINA GEANOPULOS
 BIOMED REALTY TRUST, INC.
 1205 WESTLAKES DRIVE
 SUITE 240
 BERWYN, PA 19312

Regarding:

ERIN SHEA
 BMR
 145 KING OF PRUSSIA ROAD
 RADNOR, PA 19087

Account No: ACO171, BIOMED REALTY TRUST, INC.
 Project No: ACO171, BIOMED REALTY TRUST, INC.

P.O. No:
 PWSID No:

Inv. No: 1147688

Sample Number L3149311-1 Sample Description EFFLUENT 10 HR COMPOSITE 0700-1700
 Received Temp: 37 F Iced (Y/N): Y Samp. Date/Time/Temp 11/04/09 05:00pm NA F Sampled by Kenneth L. Tanner, QC Laboratories

Parameter	Method	Result	RLs	Test Date, Time, Analyst
GENERAL CHEMISTRY				
BIOCHEMICAL OXYGEN DEMAND	SM 5210B	47.6 mg/l	13.8 mg/l	11/05/09 08:53PM LS
TOTAL SUSPENDED SOLIDS	SM 2540D	75.4 mg/l	2.00 mg/l	11/09/09 08:50AM GLE

Sample Number L3149311-2 Sample Description EFFLUENT GRAB
 Received Temp: 37 F Iced (Y/N): Y Samp. Date/Time/Temp 11/05/09 12:40pm NA F Sampled by Kenneth L. Tanner, QC Laboratories

Parameter	Method	Result	RLs	Test Date, Time, Analyst
FIELD SERVICES				
FIELD TEMPERATURE CELSIUS	SM 2550B	18.5 Deg. C	0.5 Deg. C	11/05/09 12:40PM KLT
FLOW		0.0279 mgd		11/05/09 12:40PM KLT
PH FIELD	SM 4500H+B	8.37 units	units	11/05/09 12:40PM KLT

L3149311-1:
 1. BOD samples reported on this day were based on an initial acceptable GGA. Subsequent GGA were outside the acceptance limits, low. Sample results may or may not be biased.

- A result of "ND" indicates the concentration of the analyte tested was either not detected or below the RLs.
- Definitions: ND=not detected; NEG=negative; POS=positive; COL=colonies; RLs=laboratory reporting limits; L/A=laboratory accident; TNTC=too numerous to count
- A result marked with "DRY" indicates that the result was calculated and reported on a dry weight basis.
- All analysis, except field tests are conducted in Southampton, PA unless otherwise identified.
- The test "pH lab" is analyzed upon receipt at the laboratory, the result will not be suitable for regulatory purposes.
- The reported results relate only to the samples.
- QC NELAP ID's: PA 09-00131, NJ PA166, FL E87954, NY 11223, CT PH-0768, DE PA-018, KY 90228, MD 206, EPA PA00018, Bioassay: PA 09-03574, NJ PA034, FL E87953, KS E10373, SC 89020001.

Thomas J. Hines
 Thomas J. Hines, President

QC Laboratories

Analytical Report



Account No: AC0171, BIOMED REALTY TRUST, INC.
Project No: AC0171, BIOMED REALTY TRUST, INC.

P.O. No:
PWSID No:

Inv. No: 1147688



-
- QC STATE ID's: Wind Gap, NJ PA001, PA 48-01334; E RUTHERFORD NJ02015; Vineland NJ06005; Reading PA 06-03543.
 - All samples are collected as "grab" samples unless otherwise identified.
 - MCL= is the EPA recommended "maximum contaminant level" for a parameter. PLs=customer specific permit limits.
 - The test results meet all requirements of NELAC unless otherwise specified.
 - The report shall not be reproduced except in full without the written consent of the laboratory.
- Regulatory authorities are assessing substantial fines for testing omissions. Please track your sample collections and results on a weekly, monthly, or quarterly basis to ensure compliance. QC's internet program 'LIVE ACCESS' will provide you with real-time access to collection dates and results. Please contact Customer Service for further information on acquiring LIVE ACCESS.

ERIN SHEA
 BMR
 145 KING OF PRUSSIA ROAD
 RADNOR, PA 19087
 (610)647-9590
 PickSheet: P3149311 P.O. #: MONDAY 11/02/09 - 11/30/09 Printed on: 10/16/09
 Cust: AC0171 Project Name: BIONED-REALTY-TRUST, INC.
 Schd: 37686 Start Date: 03/08/04 Stop Date:
 MUST SET UP COMPOSITE FROM 7AM TO 5PM PER PERMIT REQUIREMENTS

Temp	Site	Initials	Iced?
36 °F	QC	Kt	YES NO
°F			YES NO

Route: 86 KEN TANNER LANDFILLS / DISCHARGES, ETC.

X: -75.35579 Y: 40.0401

	BR	CL	PH
3149311-1 EFFLUENT 10 HR COMPOSITE 0700-1700 BOD 5, CHAIN OF CUSTODY RET, ISCO SAMPLER, TSS 			
3149311-2 EFFLUENT GRAB CHAIN OF CUSTODY RET, FLD TEMP C, FLOW, PH FLD 			

_____ Ascorbic/HCL Vials # _____ HCL Vials
 # _____ Na2-S2-O3
 # _____ Na OH/Zn acetate pH
 # _____ HNO3 pH
 # _____ H2-SO4 pH
 # _____ NaOH pH
 # _____ Unpreserved # _____ HCL pH

Dept.	Relinquished To	Time	Date

Dept.	Relinquished By	Time	Date

Hours of Operation: M: 07:00-18:00 T: 07:00-18:00 W: 07:00-18:00 Th: 07:00-18:00 F: 07:00-18:00 St: - Sn: -
 Comments:
 SUB P0'S:



1205 Industrial Blvd. Phone: 215-355-3900
Southampton, PA 18966-0514 Fax: 215-355-7231

Client/Acct. No. BMB

Address

City/State/Zip Radnor

Phone/Fax

Client Contact Erin Shea

CHAIN OF CUSTODY

Page ___ of ___

Bill to/Report to: (if different)

Sampling Site Address: (if different)

P.O. No.

QC Contact

PROJECT

Collection

GRAMP

Number of Containers

H	C	H	H	H	H	H	H	H	H
1	1	1	1	1	1	1	1	1	1
Total									

Matrix Code

Date

Military Time

11-409 1700

11-509 1240

W

W

MATRIX CODES

- DW: DRINKING WATER
- GW: GROUND WATER
- WW: WASTEWATER
- SO: SOIL
- SL: SLUDGE
- OIL: OIL
- SOL: NON SOIL SOLID
- MI: MISCELLANEOUS
- X: OTHER

LAB USE ONLY:

___ Ascorbic/HCl Vials # ___ HCl Vials

___ Na₂S₂O₃

___ Na OH/Zn acetate pH

___ HNO₃ pH

___ H₂SO₄ pH

___ NaOH pH

1 Unpreserved plat

___ HCl pH

37 Temp control KI ID#

ANALYSIS REQUESTED

BOD5, TSS

Temp - 18.5 pH - 8.37 Flow - 0.2788

SAMPLED BY: (Name/Company)

QC

Verbal/fax data due: ___/___/___

Hardcopy due: ___/___/___

Please call for pricing and availability on rush (<14-21 day) turnaround and on all but standard format.

Report Format: Standard Forms

Standard + QC NJ Reduced Disk

Field Parameters Analyzed By:

Sig: [Signature]

Date/Time: 11-5-09

DELIVERY METHOD: UPS FEDEX OTHER

DELIVERY TIME: 1500 TIME

COMMENTS:

REINQUISHED BY SAMPLER

1 DATE 11-5-09 TIME 1500

REINQUISHED BY

2 DATE RECEIVED BY

3 DATE RECEIVED BY

4 DATE RECEIVED BY

5 DATE RECEIVED BY

Hazardous: yes / no

Custody Seal Number

For example to aid completion, see reverse side.

FINAL REPORT

SAMPLING DOCUMENTATION FORM

Customer Number: AC0171

QC Field Technician: KLT

Compositor ID: _____

Date/Time Installed: 11-4-09 0700
Custody Seal/Lock Installed: Yes No

Date/Time Extracted: 11-5-09 1700
Custody Seal/Lock Intact: Yes No

Sample Type:

Grab: Yes

Composite: 8HR _____ 12 HR _____ 24 HR _____

Shift 10 hr

Program: Minutes/ML 15/100

Total Vol. Collected: ML 2 gal

Site Description	Location	Diagram
	<u>manhole top of H117</u>	

Sampling Notes:

Grab Sample Iced: Yes No
Composite Sample Iced: Yes No
Decon Performed: Yes No
Field Test Performed Onsite: Yes No

Customer Authorization MA
Date 11-5-09



TINA GEANOPULOS
 BIOMED REALTY TRUST, INC.
 1205 WESTLAKES DRIVE
 SUITE 240
 BERWYN, PA 19312

Regarding:

ERIN SHEA
 BMR
 145 KING OF PRUSSIA ROAD
 RADNOR, PA 19087

Account No: ACO171, BIOMED REALTY TRUST, INC.
 Project No: ACO171, BIOMED REALTY TRUST, INC.

P.O. No:
 PWSID No:

Inv. No: 1168367

Sample Number	Sample Description	Samp. Date/Time/Temp	Sampled by
L3177733-1	EFFLUENT 10 HR COMPOSITE 0700-1700 Received Temp: 34 F Iced (Y/N): Y	12/08/09 05:00pm NA F	Kenneth L. Tanner, QC Laboratories

Parameter	Method	Result	RLs	Test Date, Time, Analyst
GENERAL CHEMISTRY				
BIOCHEMICAL OXYGEN DEMAND	SM 5210B	85.1 mg/l	30.4 mg/l	12/10/09 05:54PM LS
TOTAL SUSPENDED SOLIDS	SM 2540D	72.0 mg/l	2.00 mg/l	12/11/09 10:05AM GLE

Sample Number	Sample Description	Samp. Date/Time/Temp	Sampled by
L3177733-2	EFFLUENT GRAB Received Temp: 34 F Iced (Y/N): Y	12/09/09 12:15pm NA F	Kenneth L. Tanner, QC Laboratories

Parameter	Method	Result	RLs	Test Date, Time, Analyst
FIELD SERVICES				
FIELD TEMPERATURE CELSIUS	SM 2550B	17.1 Deg. C	0.5 Deg. C	12/09/09 12:15PM KLT
FLOW		0.0292 mgd		12/09/09 12:15PM KLT
PH FIELD	SM 4500H+B	8.04 units	units	12/09/09 12:15PM KLT

L3177733-1:

1. For BOD test on this day, the batch water blank depletion (0.56 mg/L) exceeded the SOP criteria (0.3 mg/l). Batch control samples were within range.

- A result of "ND" indicates the concentration of the analyte tested was either not detected or below the RLs.
- Definitions: ND=not detected; NEG=negative; POS=positive; COL=colonies; RLs=laboratory reporting limits; L/A=laboratory accident; TNTC=too numerous to count
- A result marked with "DRY" indicates that the result was calculated and reported on a dry weight basis.
- All analysis, except field tests are conducted in Southampton, PA unless otherwise identified.
- The test "pH lab" is analyzed upon receipt at the laboratory, the result will not be suitable for regulatory purposes.
- The reported results relate only to the samples.
- QC NELAP ID's: PA 09-00131, NJ PA166, FL E87954, NY 11223, CT PH-0768, DE PA-018, KY 90228, MD 206, EPA PA00018, Bioassay: PA 09-03574, NJ PA034, FL E87953, KS E10373, SC 89020001.

Thomas J. Hines
 Thomas J. Hines, President

QC Laboratories

Analytical Report



Account No: AC0171, BIOMED REALTY TRUST, INC.
Project No: AC0171, BIOMED REALTY TRUST, INC.

P.O. No:
PWSID No:

Inv. No: 1168367

-
- QC STATE ID's: Wind Gap, NJ PA001, PA 48-01334; E RUTHERFORD NJ02015; Vineland NJ06005; Reading PA 06-03543.
 - All samples are collected as "grab" samples unless otherwise identified.
 - MCL= is the EPA recommended "maximum contaminant level" for a parameter. PLs=customer specific permit limits.
 - The test results meet all requirements of NELAC unless otherwise specified.
 - The report shall not be reproduced except in full without the written consent of the laboratory.
- Regulatory authorities are assessing substantial fines for testing omissions. Please track your sample collections and results on a weekly, monthly, or quarterly basis to ensure compliance. QC's internet program 'LIVE ACCESS' will provide you with real-time access to collection dates and results. Please contact Customer Service for further information on acquiring LIVE ACCESS.

IRIN SHEA
 MFR
 45 KING OF PRUSSIA ROAD
 ADNOR, PA 19087
 610)647-9590

PickSheet: P3177733
 Cust: AC0171
 Schd: 37686

P.O. #: MONDAY
 Project Name: BIONED REALTY TRUST, INC.
 Start Date: 03/08/04 Stop Date:
 MUST SET UP COMPOSITE FROM 7AM TO 5PM PER PERMIT
 REQUIREMENTS

12/07/09 - 12/31/09

Printed on: 11/18/09

Sample	Collect	Received	Tested	Complete
Date 179.09				
Time				
By				
Temp. °F	°F	°F	°F	°F App.

X: -75.35579

Y: 40.0401

Temp	Site	Initials	Iced?
36 °F	U	RJ	YES NO
°F			YES NO

Route: 86 KEN TANNER LANDFILLS / DISCHARGES, ETC.

BR	CL	PH

3177733-1 EFFLUENT 10 HR COMPOSITE 0700-1700
 BOD 5, CHAIN OF CUSTODY RET, ISCO SAMPLER, TSS

3177733-2 EFFLUENT GRAB
 CHAIN OF CUSTODY RET, FLD TEMP C, FLOW, PH FLD

#	Ascorbic/HCL Vials	#	HCL Vials
#	Na2-S2-O3		
#	Na OH/Zn acetate pH		
#	HNO3 pH		
#	H2-SO4 pH		
#	NaOH pH		
#	Unpreserved	#	HCL pH

Dept.	Relinquished To	Time	Date

Dept.	Relinquished By	Time	Date

Hours of Operation: 07:00-18:00 T: 07:00-18:00 W: 07:00-18:00 Th: 07:00-18:00 F: 07:00-18:00 St: - Sn: -

Comments:

SUB P.O.'S:



1205 Industrial Blvd. Phone: 215-355-3900
Southampton, PA 18966-0514 Fax: 215-355-7231

Client/Acct. No. QMR

Address

City/State/Zip Radnor, PA

Phone/Fax

Client Contact Erin Shea

PROJECT

FIELD ID

3177733-1 Eff. 10/10/09

-2 Effluent grab

CHAIN OF CUSTODY

Page of

Bill to/Report to: (if different)

Sampling Site Address: (if different)

P.O. No.

QC Contact

G R A B	C O M P	Matrix Code	Number of Containers																				
			Total	H ₂	H	C	I	S	O	H	C	P											
		WW	1																				
		WU	0																				

Collection

Date

Military Time

12/8/09

1700

17901

1215

1

0

Lab LIMS No: L3177733.

LAB USE ONLY:

- # Ascorbic/HCl Vials # HCl Vials
- # Na₂S₂O₃
- # Na OH/Zn acetate pH
- # HNO₃ pH
- # H₂SO₄ pH
- # NaOH pH
- # Unpreserved P19t.
- # HCl pH
- # 340 Temp control QC TABLICE

ANALYSIS REQUESTED

BOOS, TSS

Temp 17.1° Ph - 8.04 Flow - 0.2922 m3/d

MATRIX CODES

- DW: DRINKING WATER
- GW: GROUND WATER
- WW: WASTEWATER
- SO: SOIL
- SL: SLUDGE
- OIL: OIL
- SOL: NON SOIL SOLID
- MI: MISCELLANEOUS
- X: OTHER

Field pH, Temp (C or F), DO, Cl₂, S. Cond. etc.

SAMPLED BY: (Name/Company) QCL Kentures

Verbal/fax data due: / /

Hardcopy due: / /

Please call for pricing and availability on rush (<14-21 day) turnaround and on all but standard format.

Field Parameters Analyzed By: [Signature]

Date/Time: 12-9-09

Big: [Signature]

SAMPLE CUSTODY EXCHANGES MUST BE DOCUMENTED BELOW. USE FULL LEGAL SIGNATURE, DATE AND MILITARY TIME (24 HOUR CLOCK, I.E. 3AM IS 0800, 4 PM IS 1600).

RELINQUISHED BY	DATE	TIME	RECEIVED BY	DATE	TIME	DELIVERY METHOD: <input type="checkbox"/> QC COURIER <input type="checkbox"/> CLIENT	Custody Seal Number
1 <u>[Signature]</u>	<u>12/9/09</u>	<u>1450</u>	<u>1</u>	<u>12/9/09</u>	<u>1700</u>		
2 <u>[Signature]</u>	<u>12/9/09</u>	<u>1850</u>	<u>2</u>	<u>12/9/09</u>	<u>1850</u>		
3			<u>3</u>				
4			<u>4</u>				
5			<u>5</u>				

COMMENTS:

36°F V KFTD
Hazardous: yes/no

For example to sid completion, see reverse side.

Inter-Laboratory Transport Form

Coolers for Transport to Southampton from Vineland

Cooler ID No.	To be completed by person sealing coolers	Custody Seal No.	Date	Time	Initials	Temp. in °C	Southampton use only	Iced Y/N
03	12-9-9-1		12-9-9	1630	MJO	30		Y
55	-2					30		Y
33	-3					34		Y
08	-4					38		Y
2	-5					37		Y
2204	-6					40		Y
17294	-7							X
3	-8					39		Y
505	-9							X
80	-10							X
66	-11							X
61	-12							X

Please Note the Following:

Individual sample chains of custody must accompany this form.

Upon receipt and login at QC Laboratories, Southampton, PA., attach a copy of this form to each sample chain of custody.

Once a cooler is sealed, custody seals may not be broken until samples are received at the Southampton laboratory.

If a temperature blank is not received with a cooler, enter "X" in the Temp. column corresponding to that cooler.

An "X" in the "Iced" column indicates cooler was not received by Sample Custody and may have gone directly to Water Micro, Food, or Dairy labs.

Southampton Laboratory use only

Custody seals intact upon receipt? Y / N

List ID of any seal found broken upon receipt below:


Initials: **LAB**

A full legal signature is required. Record all times in military time (24-HR Clock: 4:00 PM = 1600)

Relinquished by: <i>[Signature]</i>	Date: 12/9/07	Time: 1850	Received by: <i>[Signature]</i>	Date: 12/9/07	Time: 1850
Relinquished by:	Date:	Time:	Received by:	Date:	Time:
Relinquished by:	Date:	Time:	Received by:	Date:	Time:
Relinquished by:	Date:	Time:	Received by:	Date:	Time:

ATTACHMENT 3

2009 Fourth Quarter Radioisotope Usage



July 28, 2010

OVERNIGHT DELIVERY

Fed. Ex No. 7937 6927 4153

Mr. Mark C. Smithgall
Laboratory & Pretreatment Manager
Delaware County Regional Water Quality Control Authority
100 East 5th Street
Chester, PA 19013-4508

Subject: 2010 Second Quarter Report
BioMed Realty Trust, Inc.
145 King Of Prussia Road
Industrial Discharge Permit No. 2DC-09-01
IES Project No. EHS10687.01

Dear Mr. Smithgall:

On behalf of BioMed Realty Trust, Inc. (BMR), IES Engineers is pleased to submit the 2010 Second Quarter Report from BMR's 145 King of Prussia Road facility. This report is being submitted in accordance with Industrial Discharge Permit No. 2DC-09-01, issued on October 5, 2006.


The Second Quarter Report includes:

- Analytical Laboratory Results from QC Laboratories
- Analytical Laboratory Chain-of-Custody Sheets
- Individual data including flow and pH levels taken on an individual day

Also attached for your review is a report from Centocor regarding the Radioisotope usage during the Second Quarter of 2010.


If you have any questions or need any additional information, please feel free to contact me or Ms. Christina Geanopulos of BMR at 858-207-5924.

Very truly yours,


Jennifer Yaroach
Project Scientist

Attachment(s)

cc: C. Geanopulos, BMR
K. Turner, Centocor
B. Schlosser, IES



July 28, 2010

OVERNIGHT DELIVERY

Fed. Ex. No. 7988 9303 9626

Mr. Joseph Cerrone
Philadelphia Water Department
9001 State Road
Chester, Pennsylvania 19136

Subject: 2010 Second Quarter Report
BioMed Realty Trust, Inc.
145 King Of Prussia Road
Industrial Discharge Permit No. 2DC-09-01
IES Project No. EHS10687.01

Dear Mr. Cerrone:

On behalf of BioMed Realty Trust, Inc. (BMR), IES Engineers is pleased to submit the 2010 Second Quarter Report from BMR's 145 King of Prussia Road facility. This report is being submitted in accordance with Industrial Discharge Permit No. 2DC-09-01, issued on October 5, 2006.


The Second Quarter Report includes:

- Analytical Laboratory Results from QC Laboratories
- Analytical Laboratory Chain-of-Custody Sheets
- Individual data including flow and pH levels taken on an individual day

Also attached for your review is a report from Centocor regarding the Radioisotope usage during the Second Quarter of 2010.

If you have any questions or need any additional information, please feel free to contact me or Ms. Christina Geanopulos of BMR at 858-207-5924.

Very truly yours,


Jennifer Yaroch
Project Scientist

Attachment(s)

cc: C. Geanopulos, BMR
K. Turner, Centocor
B. Schlosser, IES

ATTACHMENT 1
CERTIFICATION STATEMENT

Certification Statement, 2010 2nd Quarter Wastewater Report:

"I certify under penalty of law that this document and all attachments were prepared under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gather and evaluate the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information, the information submitted is, to best of my knowledge and belief, true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility fines and imprisonment for knowing violations."

Michael Bodendorf, Director - Real Estate Operations
Name/Title

Signature



Date

7/26/10

ATTACHMENT 2
2010 SECOND QUARTER REPORT

BioMed Realty Trust
145 King of Prussia Road
Radnor, PA 19087

Monthly pH Level - 2010

Date	Jan	Water Flow Week of:	Actual Usage		Feb	Water Flow Week of:	Actual Usage	
			Meter #1	Meter #2			Meter #1	Meter #2
1/5/2010	6.52	12/29/09-1/5/10	271500	955710	8.20	1/26/10-2/2/10	282777	1016880
1/12/2010	7.51	1/5/10-1/12/10	274436	968708	8.21	2/2/10-2/9/10	285596	1021150
1/19/2010	7.35	1/12/10-1/19/10	277266	981688	8.59	2/9/10-2/16/10	288415	1034612
1/26/2010	6.71	1/19/10-1/26/10	280123	994597	7.90	2/16/10-2/23/10	291295	1041343

Date	March	Water Flow Week of:	Actual Usage		April	Water Flow Week of:	Actual Usage	
			Meter #1	Meter #2			Meter #1	Meter #2
3/2/2010	7.59	2/23/10-3/2/10	295682	1059144	7.25	3/30/10-4/6/10	306602	1127181
3/9/2010	7.83	3/2/10-3/9/10	295733	1062193	7.34	4/6/10-4/13/10	310070	1136069
3/16/2010	7.53	3/9/10-3/16/10	297955	1084771	6.85	4/13/10-4/20/10	312646	1148843
3/23/2010	7.20	3/16/10-3/23/10	300087	1097581	7.24	4/20/10-4/27/10	315241	1161573
3/30/2010	7.50	3/23/10-3/30/10	303999	1112381				

Date	May	Water Flow Week of:	Actual Usage		June	Water Flow Week of:	Actual Usage	
			Meter #1	Meter #2			Meter #1	Meter #2
5/4/2010	6.93	4/27/10-5/4/10	318556	1174406	7.91	5/25/10-6/1/10	331654	1224936
5/11/2010	6.45	5/3/10-5/11/10	321542	1187051	7.73	6/1/10-6/8/10	336398	1237595
5/18/2010	8.27	5/11/10-5/18/10	324307	1199768	8.26	6/8/10-6/15/10	341202	1250628
5/25/2010	8.64	5/18/10-5/25/10	327485	1212440	8.45	6/15/10-6/22/10	346141	1264633
					8.24	6/22/10-6/29/10	351039	1275250

BioMed Realty Trust
 145 King of Prussia Road
 Radnor, PA 19087

Date	July	Water Flow Week of:	Actual Usage Meter #1	Actual Usage Meter #2
7/6/2010	8.51	6/29/10-7/6/10	356400	1287750
7/13/2010	8.36	7/9/10-7/13/10	363178	1367776

BioMed Realty Trust, Inc
 145 King of Prussia Road
 Radnor, PA 19087

Actual Monthly Flow - 2010

Date Range	Meter #1	Meter #2	Total Flow
1/5/10-1/12/10	293,600	129,980	423,580
1/12/10-1/19/10	283,000	129,800	412,800
1/19/10-1/26/10	285,700	129,090	414,790
1/26/10-2/2/10	265,400	222,830	488,230
2/2/10-2/9/10	281,900	42,700	324,600
2/9/10-2/16/10	281,900	134,620	416,520
2/16/10-2/23/10	288,000	67,310	355,310
2/23/10-3/2/10	438,700	178,010	616,710
3/2/10-3/9/10	5,100	30,490	35,590
3/9/10-3/16/10	222,200	225,780	447,980
3/16/10-3/23/10	213,200	128,100	341,300
3/23/10-3/30/10	391,200	148,000	539,200
3/30/10-4/6/10	260,300	148,000	408,300
4/6/10-4/13/10	257,600	127,740	385,340
4/13/10-4/20/10	259,500	127,300	386,800
4/20/10-4/27/10	331,500	128,330	459,830
4/28/09-5/5/09	298,600	126,450	425,050
5/3/10-5/11/10	276,500	127,170	403,670
5/11/10-5/18/10	317,800	126,720	444,520
5/18/10-5/25/10	416,900	124,960	541,860
5/25/10-6/1/10	474,400	126,590	600,990
6/1/10-6/8/10	480,400	130,330	610,730
6/8/10-6/15/10	493,900	140,050	633,950
6/15/10-6/22/10	489,800	106,170	595,970
6/22/10-6/29/10	536,100	125,000	661,100
6/29/10-7/6/10	677,800	800,260	1,478,060



TINA GEANPULOS
 BIOMED REALTY TRUST, INC.
 1205 WESTLAKES DRIVE
 SUITE 240
 BERWYN, PA 19312

Regarding:

ERIN SHEA
 BMR
 145 KING OF PRUSSIA ROAD
 RADNOR, PA 19087

Account No: AC0171, BIOMED REALTY TRUST, INC.
 Project No: AC0171, BIOMED REALTY TRUST, INC.

P.O. No:
 PWSID No:

Inv. No: 1195113

Sample Number	Sample Description	Samp. Date/Time/Temp	Sampled by
L3286913-1	EFFLUENT 10 HR COMPOSITE 0700-1700 Received Temp: 36 F Iced (Y/N): Y	04/07/10 05:00pm NA F	Kenneth L. Tanner, QC Laborator

Parameter	Method	Result	RLs	Test Date, Time, Analyst
GENERAL CHEMISTRY				
BIOCHEMICAL OXYGEN DEMAND	SM 5210B	50.5 mg/l	33.8 mg/l	04/09/10 05:10PM LS
TOTAL SUSPENDED SOLIDS	SM 2540D	64.0 mg/l	2.00 mg/l	04/13/10 09:10AM GLE

Sample Number	Sample Description	Samp. Date/Time/Temp	Sampled by
L3286913-2	EFFLUENT GRAB Received Temp: 36 F Iced (Y/N): Y	04/07/10 07:00am NA F	Kenneth L. Tanner, QC Laborator

Parameter	Method	Result	RLs	Test Date, Time, Analyst
FIELD SERVICES				
FIELD TEMPERATURE CELSIUS	SM 2550B	23.0 Deg. C	0.5 Deg. C	04/07/10 07:00AM KLT
FLOW		0.0288 mgd		04/07/10 07:00AM KLT
PH FIELD	SM 4500H+B	7.13 units	units	04/07/10 07:00AM KLT

- A result of "ND" indicates the concentration of the analyte tested was either not detected or below the RLs.
- Definitions: ND=not detected; NEG=negative; POS=positive; COL=colonies; RLs=laboratory reporting limits; L/A=laboratory accident; TNTC=too numerous to count
- A result marked with "DRY" indicates that the result was calculated and reported on a dry weight basis.
- All analysis, except field tests are conducted in Southampton, PA unless otherwise identified.
- The test "pH lab" is analyzed upon receipt at the laboratory, the result will not be suitable for regulatory purposes.
- The reported results relate only to the samples.
- QC NELAP ID's: PA 09-00131, NJ PA166, FL E87954, NY 11223, CT PH-0768, DE PA-018, KY 90228, MD 206, EPA PA00018, Bioassay: PA 09-03574, NJ PA034, FL E87953, KS E10373, SC 89020001.
- QC STATE ID's: Wind Gap, NJ PA001, PA 48-01334; E RUTHERFORD NJ02015; Vineyard NJ06005; Reading PA 06-03543.
- All samples are collected as "grab" samples unless otherwise identified.
- MCL= is the EPA recommended "maximum contaminant level" for a parameter. PLs=customer specific permit limits.
- The test results meet all requirements of NELAC unless otherwise specified.
- The report shall not be reproduced except in full without the written consent of the laboratory.

Thomas J. Hines
 Thomas J. Hines, President

QC Laboratories

Analytical Report



Account No: AC0171, BIOMED REALTY TRUST, INC.
Project No: AC0171, BIOMED REALTY TRUST, INC.

P.O. No:
PWSID No:

Inv. No: 1195113

Regulatory authorities are assessing substantial fines for testing omissions. Please track your sample collections and results on a weekly, monthly, or quarterly basis to ensure compliance. QC's internet program 'LIVE ACCESS' will provide you with real-time access to collection dates and results. Please contact Customer Service for further information on acquiring LIVE ACCESS.

ERIN SHEA
 BMR
 145 KING OF PRUSSIA ROAD
 RADNOR, PA 19087
 (610)647-9590

PickSheet: P3286913
 Cust: AC0171
 Schd: 37686
 MUST SET UP COMPOSITE FROM 7AM TO 5PM PER PERMIT
 REQUIREMENTS

P.O. #: _____
 Project Name: BLOWED REALTY TRUST, INC.
 Start Date: 03/08/04 Stop Date: _____
 MONDAY 04/05/10 - 04/30/10

Printed on: 03/17/10

Temp	Site	Initials	Iced?
37°F	U	KA	(YES) NO
°F			YES NO

Route: 86 KEN TANNER LANDFILLS / DISCHARGES, ETC.

3286913-1 EFFLUENT 10 HR COMPOSITE 0700-1700
 BOD 5, CHAIN OF CUSTODY RET, ISCO SAMPLER, TSS

3286913-2 EFFLUENT GRAB
 CHAIN OF CUSTODY RET, FLD TEMP C, FLOW, PH FLD

X: -75.35579

Y: 40.0401

	BR	CL	PH

Dept.	Relinquished By	Time	Date

Dept.	Relinquished To	Time	Date

Hours of Operation:
 M: 07:00-18:00 T: 07:00-18:00 W: 07:00-18:00 Th: 07:00-18:00 F: 07:00-18:00 St: - - Sn:

Health Dept: # _____ Unpreserved # _____ HCL pH _____
 # _____ Ascorbic/HCL Vials # _____ HCL Vials
 # _____ Na2-S2-O3
 # _____ Na OH/Zn acetate pH
 # _____ HNO3 pH
 # _____ H2-SO4 pH
 # _____ NaOH pH

QC Laboratories
 1205 Industrial Blvd.
 Southampton, PA 18966-0514

Phone: 215-355-3900
 Fax: 215-355-7231

Client/Acct. No. Bmk
 Address _____
 City/State/Zip Radnor, PA
 Phone/Fax _____
 Client Contact Erin Shea
 P.O. No. _____
 QC Contact _____

CHAIN OF CUSTODY

Page _____ of _____
 Bill to/Report to: (if different)

Sampling Site Address: (if different)

Lab LIMS No: L 32 80913

LAB USE ONLY:
 # Ascorbic/HCl Vials # HCl Vials
 # Na₂S₂O₃
 # Na OH/Zn acetate pH
 # HNO₃ pH
 # H₂SO₄ pH
 # NaOH pH
 # Unpreserved plat
 # Hcl pH

Matrix Codes:
 DW: DRINKING WATER
 GW: GROUND WATER
 WW: WASTEWATER
 SO: SOIL
 SL: SLUDGE
 OIL: OIL
 SOL: NON SOIL SOLID
 MI: MISCELLANEOUS
 X: OTHER

370 Temp control # QC ID# 11-11-11-11
ANALYSIS REQUESTED
BOD5 TSS
Temp-23.0° Ph-7.13 Flow-0.0282 mgd

PROJECT	FIELD ID	Date	Military Time	Number of Containers																				
				G	C	M	A	C	H	H	M	Z	U	B										
	3286913-1	4-7-10	1700	1																				
	-2	4-7-10	0700	1																				

SAMPLED BY: (Name/Company) Kent
 Verbal/fax data due: _____
 Hardcopy due: _____
 Report Format: Standard QC NJ Reduced Disk Forms

Field Parameters Analyzed By: _____
 Date/Time: 4-8-10

RELINQUISHED BY	DATE	TIME	RECEIVED BY	DATE	TIME
<u>[Signature]</u>	4-8-10	1445	1 <u>COOK</u>	4-9-10	1445
<u>[Signature]</u>	4-8-10	1900	2 <u>JULIA BURSE</u>	4-8-10	1900
			3		
			4		
			5		

DELIVERY METHOD: UPS FEDEX OTHER
 CUSTODY SEAL NUMBER _____
 COMMENTS: 370 URS
 Hazardous: yes / no _____

For example to aid completion, see reverse side.

SAMPLING DOCUMENTATION FORM

Customer Number: BMR

QC Field Technician: KCT

Compositor ID: _____

Date/Time Installed: 4-7-10 0700

Custody Seal/Lock Installed: Yes No _____

Date/Time Extracted: 4-7-10 1700

Custody Seal/Lock Intact: Yes No _____

Sample Type:

Grab: Yes

Composite: 8HR _____ 12 HR _____ 24 HR _____

Shift

Program: Minutes/ML 15/100

Total Vol. Collected: ML 2 gal

Site Description	Location	Diagram
	<u>manhole top of Hill</u>	

Sampling Notes:

Grab Sample Iced: Yes _____ No

Composite Sample Iced: Yes No _____

Decon Performed: Yes No _____

Field Test Performed Onsite: Yes No _____

Customer Authorization: N/A

Date: 4.8.10



Vineland

Laboratories

1205 Industrial Highway, Southampton, PA 18966

Inter-Laboratory Transfer Form

Coolers for Transport to Southampton from Vineland

Cooler ID No.	QC Custodial Seal No.	QC Seal Date	QC Seal Time	QC Seal Initials	Southampton Custodial Seal No.	Southampton Seal Date	Southampton Seal Time	Southampton Seal Initials
204	04-08-0-1	04-08-10	1730	MJC	37			Y
01161	-2				38			Y
2412	-3				39			Y
665	-4				40			Y
1003	-5				41			Y
367	-6				42			Y
10	-7				43			Y
13A	-8				44			Y
92	-9				45			Y
3200	-10				46			X
3204	-11				47			X
506	-12				48			X
01609	-13				49			X

Please Note the Following:

Individual sample chains of custody must accompany this form.

Upon receipt and login at QC Laboratories, Southampton, PA., attach a copy of this form to each sample chain of custody.

Once a cooler is sealed, custody seals may not be broken until samples are received at the Southampton laboratory.

If a temperature blank is not received with a cooler, enter "X" in the Temp. column corresponding to that cooler.

An "X" in the "Iced" column indicates cooler was not received by Sample Custody and may have gone directly to Water Micro, Food, or Dairy labs.

Southampton Laboratory Receipt

Custody seals intact upon receipt? O/N Initials: CMJ

List ID of any seal found broken upon receipt below:

All legal evidence is required. Record all times in Military Time (24-Hr Clock) 4:00 P.M. = 1600

Relinquished by:	Date:	Time:	Received by:	Date:	Time:
<i>[Signature]</i>	4-8-10	1900	<i>[Signature]</i>	1900	1900
Relinquished by:	Date:	Time:	Received by:	Date:	Time:
Relinquished by:	Date:	Time:	Received by:	Date:	Time:



TINA GEANOPULOS
 BIOMED REALTY TRUST, INC.
 1205 WESTLAKES DRIVE
 SUITE 240
 BERWYN, PA 19312

Regarding:
 ERIN SHEA
 BMR
 145 KING OF PRUSSIA ROAD
 RADNOR, PA 19087

Account No: AC0171, BIOMED REALTY TRUST, INC.
 Project No: AC0171, BIOMED REALTY TRUST, INC.

P.O. No: Inv. No: 1202687
 PWSID No:

Sample Number: L3317183-1 Sample Description: EFFLUENT 10 HR COMPOSITE 0700-1700
 Received Temp: 37 F Iced (Y/N): Y Samp. Date/Time/Temp: 05/06/10 05:00pm NA F Sampled by: Kenneth L. Tanner, QC Laboratories

Parameter	Method	Result	RLs	Test Date, Time, Analyst
GENERAL CHEMISTRY				
BIOCHEMICAL OXYGEN DEMAND	SM 5210B	64.5 mg/l	13.6 mg/l	05/07/10 09:30PM GAP
TOTAL SUSPENDED SOLIDS	SM 2540D	136 mg/l	2.00 mg/l	05/11/10 09:30AM GLE

Sample Number: L3317183-2 Sample Description: EFFLUENT GRAB
 Received Temp: 37 F Iced (Y/N): Y Samp. Date/Time/Temp: 05/07/10 09:30am NA F Sampled by: Kenneth L. Tanner, QC Laboratories

Parameter	Method	Result	RLs	Test Date, Time, Analyst
FIELD SERVICES				
FIELD TEMPERATURE CELSIUS	SM 2550B	24.2 Deg. C	0.5 Deg. C	05/07/10 09:30AM KLT
FLOW		0.0288 mgd		05/07/10 09:30AM KLT
PH FIELD	SM 4500H+B	8.79 units	units	05/07/10 09:30AM KLT

- A result of "ND" indicates the concentration of the analyte tested was either not detected or below the RLs.
- Definitions: ND=not detected; NEG=negative; POS=positive; COL=colonies; RLs=laboratory reporting limits; L/A=laboratory accident; TNTC=too numerous to count
- A result marked with "DRY" indicates that the result was calculated and reported on a dry weight basis.
- All analysis, except field tests are conducted in Southampton, PA unless otherwise identified.
- The test "pH lab" is analyzed upon receipt at the laboratory, the result will not be suitable for regulatory purposes.
- The reported results relate only to the samples.
- QC NELAP ID's: PA 09-00131, NJ PA166, FL E87954, NY 11223, CT PH-0768, DE PA-018, KY 90228, MD 206, EPA PA00018, Bioassay: PA 09-03574, NJ PA034, FL E87953, KS E10373, SC 89020001.
- QC STATE ID's: Wind Gap, NJ PA001, PA 48-01334; E RUTHERFORD NJ02015; Vineland NJ06005; Reading PA 06-03543.
- All samples are collected as "grab" samples unless otherwise identified.
- MCL= is the EPA recommended "maximum contaminant level" for a parameter. PLS=customer specific permit limits.
- The test results meet all requirements of NELAC unless otherwise specified.
- The report shall not be reproduced except in full without the written consent of the laboratory.

Thomas J. Hines
 Thomas J. Hines, President

QC Laboratories

Analytical Report



Account No: AC0171, BIOMED REALTY TRUST, INC.
Project No: AC0171, BIOMED REALTY TRUST, INC.

P.O. No:
PWSID No:

Inv. No: 1202687

Regulatory authorities are assessing substantial fines for testing omissions. Please track your sample collections and results on a weekly, monthly, or quarterly basis to ensure compliance. QC's internet program 'LIVE ACCESS' will provide you with real-time access to collection dates and results. Please contact Customer Service for further information on acquiring LIVE ACCESS.

A handwritten signature in cursive script that reads "Thomas J. Hines".
Thomas J. Hines, President

ERIN SHEA
BMR
145 KING OF PRUSSIA ROAD
RADNOR, PA 19087
(610)647-9590

PickSheet: P3317183
Cust: AC0171
Sched: 37686

P.O. #: _____
Project Name: BIONED REALTY TRUST, INC.
Start Date: 03/08/04 Stop Date: _____
MONDAY 05/03/10 - 05/31/10
MUST SET UP COMPOSITE FROM 7AM TO 5PM PER PERMIT
REQUIREMENTS

Printed on: 04/14/10
Sample 5.7.10
Date 5.7.10
Time _____
By _____
Temp. _____ °F

Collected _____
Received _____
Tested _____
Complete _____

Temp	Site	Initials	Iced?
37°F	QL	KA	YES NO
°F			YES NO

Route: 86 KEN TANNER LANDFILLS / DISCHARGES, ETC.

X: -75.35579 Y: 40.0401

BR CL PH

ID	Description	Temp	Flow	PH	BR	CL	PH
3317183-1	EFFLUENT 10 HR COMPOSITE 0700-1700 BOD 5, CHAIN OF CUSTODY RET, ISCO SAMPLER, TSS						
3317183-2	EFFLUENT GRAB CHAIN OF CUSTODY RET, FLD TEMP C, FLOW, PH FLD						

Dept.	Relinquished By	Time	Date

Dept.	Relinquished To	Time	Date

#	Ascorbic/HCl Vials	#	HCl Vials
#	Na2-S2-O3		
#	Na OH/Zn acetate pH		
#	HNO3 pH		
#	H2-SO4 pH		
#	NaOH pH		
#	Unpreserved	#	HCl pH

Hours of Operation:

M: 07:00-18:00 T: 07:00-18:00 W: 07:00-18:00 Th: 07:00-18:00 F: 07:00-18:00 St: - Sn: -

Health Dept: _____



1205 Industrial Blvd. Phone: 215-355-3900
 Southampton, PA 18966-0514 Fax: 215-355-7231

Client/Acct. No. BMR

Address _____

City/State/Zip Radnor, PA

Phone/Fax _____

Client Contact Erin Shea

P.O. No. _____

QC Contact _____

CHAIN OF CUSTODY

Page _____ of _____

Bill to/Report to: (if different) _____

Sampling Site Address: (if different) _____

Number of Containers

G C Matrix Code

R R A M P

H C I G

N O U H

Z A P F

B V B F

Total

1 0

Collection

Date

Military Time

56-10 1700

57-10 0930

W U

W U

SAMPLED BY: (Name/Company) Kentare

Verbal/fax data due: _____

Hardcopy due: _____

Please call for pricing and availability on rush (<14-21 day) turnaround and on all but standard format.

Report Format: Standard Forms

Standard + OC NJ Reduced Disk

Field Parameters Analyzed By: _____

Sig: _____

Date/Time: 5.1.10

Lab LIMS No: _____

LAB USE ONLY:

Ascorbic/HCl Vials # HCl Vials

Na₂S₂O₃

Na OH/Zn acetate pH

HNO₃ pH

H₂SO₄ pH

NaOH pH

Unpreserved gl

Hcl pH

Temp control M ID# _____

ANALYSIS REQUESTED

BOD5, TSS

Temp-24.2° Pn-8.79 Pw . 02882

MATRIX CODES

DW: DRINKING WATER

GW: GROUND WATER

WW: WASTEWATER

SO: SOIL

SL: SLUDGE

OIL: OIL

SOL: NON SOIL SOLID

MI: MISCELLANEOUS

X: OTHER

Field pH, Temp (C or F),
DO, Cl₂, S. Cond. etc.

SAMPLE CUSTODY EXCHANGES MUST BE DOCUMENTED BELOW. USE FULL LEGAL SIGNATURE, DATE AND MILITARY TIME (24 HOUR CLOCK. I.E. 8AM IS 0800. 4 PM IS 1600)

RELINQUISHED BY	DATE	TIME	RECEIVED BY	DATE	TIME	DELIVERY METHOD:	QC COURIER	CLIENT
<u>[Signature]</u>	<u>5-7-10</u>	<u>1430</u>	<u>[Signature]</u>	<u>5/7/10</u>	<u>1430</u>	<input type="checkbox"/> UPS	<input type="checkbox"/> FEDEX	<input type="checkbox"/> OTHER
RELINQUISHED BY	DATE	TIME	RECEIVED BY	DATE	TIME	COMMENTS:		
RELINQUISHED BY	DATE	TIME	RECEIVED BY	DATE	TIME	Hazardous: yes / no		
RELINQUISHED BY	DATE	TIME	RECEIVED BY	DATE	TIME			
RELINQUISHED BY	DATE	TIME	RECEIVED BY	DATE	TIME			
RELINQUISHED BY	DATE	TIME	RECEIVED BY	DATE	TIME			

For example to aid completion, see reverse side.

SAMPLING DOCUMENTATION FORM

Customer Number: AC0171

QC Field Technician: KJ

Compositor ID: S-6-10 0700

Date/Time Installed: S-6-10 1700

Custody Seal/Lock Installed: Yes No

Date/Time Extracted: _____

Custody Seal/Lock Intact: Yes No

Sample Type:

Grab: Yes

Composite: 8HR _____ 12 HR _____ 24 HR _____

Shift 10hr

Program: Minutes/ML 15/100

Total Vol. Collected: ML 1gal

Site Description	Location	Diagram
	<u>manhole top of Hill</u>	

Sampling Notes:

Grab Sample Iced: Yes _____ No

Composite Sample Iced: Yes No _____

Decon Performed: Yes No _____

Field Test Performed Onsite: Yes No _____

Customer Authorization NA

Date S-6-10



TINA GEANOPULOS
 BIOMED REALTY TRUST, INC.
 1205 WESTLAKES DRIVE
 SUITE 240
 BERWYN, PA 19312

Regarding:

ERIN SHEA
 BMR
 145 KING OF PRUSSIA ROAD
 RADNOR, PA 19087

Account No: ACO171, BIOMED REALTY TRUST, INC.
 Project No: ACO171, BIOMED REALTY TRUST, INC.

P.O. No:
 PWSID No:

Inv. No: 1214380

Sample Number L3355809-1	Sample Description EFFLUENT 10 HR COMPOSITE 0700-1700 Received Temp: 37 F Iced (Y/N): Y	Samp. Date/Time/Temp 06/15/10 05:00pm NA F	Sampled by Kenneth L. Tanner, QC Laboratories
-----------------------------	---	---	--

Parameter	Method	Result	RLs	Test Date, Time, Analyst
GENERAL CHEMISTRY				
BIOCHEMICAL OXYGEN DEMAND	SM 5210B	107 mg/l	30.0 mg/l	06/16/10 11:09PM GAP
TOTAL SUSPENDED SOLIDS	SM 2540D	92.0 mg/l	2.00 mg/l	06/18/10 07:10AM DJP

Sample Number L3355809-2	Sample Description EFFLUENT GRAB Received Temp: 37 F Iced (Y/N): Y	Samp. Date/Time/Temp 06/15/10 07:05am NA F	Sampled by Kenneth L. Tanner, QC Laboratories
-----------------------------	--	---	--

Parameter	Method	Result	RLs	Test Date, Time, Analyst
FIELD SERVICES				
FIELD TEMPERATURE CELSIUS	SM 2550B	31.7 Deg. C	0.5 Deg. C	06/15/10 07:05AM KLT
FLOW		0.0296 mgd		06/15/10 07:05AM KLT
PH FIELD	SM 4500H+B	7.40 units	units	06/15/10 07:05AM KLT

- A result of "ND" indicates the concentration of the analyte tested was either not detected or below the RLs.
- Definitions: ND=not detected; NEG=negative; POS=positive; COL=colonies; RLs=laboratory reporting limits; L/A=laboratory accident; TNTC=too numerous to count
- A result marked with "DRY" indicates that the result was calculated and reported on a dry weight basis.
- All analysis, except field tests are conducted in Southampton, PA unless otherwise identified.
- The test "pH lab" is analyzed upon receipt at the laboratory, the result will not be suitable for regulatory purposes.
- The reported results relate only to the samples.
- QC NELAP ID's: PA 09-00131, NJ PA166, FL E87954, NY 11223, CT PH-0768, DE PA-018, KY 90228, MD 206, EPA PA00018, Bioassay: PA 09-03574, NJ PA034, FL E87953, KS E10373, SC 89020001.
- QC STATE ID's: Wind Gap, NJ PA001, PA 48-01334; E RUTHERFORD NJ02015; Vineland NJ06005; Reading PA 06-03543.
- All samples are collected as "grab" samples unless otherwise identified.
- MCL= is the EPA recommended "maximum contaminant level" for a parameter. PLs=customer specific permit limits.
- The test results meet all requirements of NELAC unless otherwise specified.
- The report shall not be reproduced except in full without the written consent of the laboratory.

Thomas J. Hines
 Thomas J. Hines, President

QC Laboratories

Analytical Report



Account No: AC0171, BIOMED REALTY TRUST, INC.
Project No: AC0171, BIOMED REALTY TRUST, INC.

P.O. No:
PWSID No:

Inv. No: 1214380

Regulatory authorities are assessing substantial fines for testing omissions. Please track your sample collections and results on a weekly, monthly, or quarterly basis to ensure compliance. QC's internet program 'LIVE ACCESS' will provide you with real-time access to collection dates and results. Please contact Customer Service for further information on acquiring LIVE ACCESS.

QC Laboratories
 1205 Industrial Blvd.
 Southampton, PA 18966-0514
 Phone: 215-355-3900
 Fax: 215-355-7231

Client/Acct. No. BMC
 Address _____
 City/State/Zip Radnor, PA.
 Phone/Fax _____
 Client Contact Erin Sheg
 P.O. No. _____
 QC Contact _____

CHAIN OF CUSTODY

Page _____ of _____
 Bill to/Report to: (if different) _____
 Sampling Site Address: (if different) _____
 PROJECT _____

LAB USE ONLY	FIELD ID	Date	Military Time	Collection	G R A M P	C M P	Matrix Code	Total	Number of Containers												
									H	C	I	S	O	H	A	C	E	S	A	C	E
	3355809-1 Eff. 10 hrs ap 1700	6/5/10	1700				W	1													
	-2 Eff. grab	6/5/10	0705				W	0													

LAB USE ONLY
 ANALYSIS REQUESTED
BOD 5, TSS
Temp - 31.7°C Pw = 7.40
Flow = 0.2955 mg/d

Verbal/fax date due: _____
 Hardcopy due: _____
 Please call for pricing and availability on rush (<14-21 day) turnaround and on all but standard format.

SAMPLED BY: (Name/Company) Kentaro
 Date/Time: _____
 Field Parameters Analyzed By: _____
 Date/Time: 6-15-10

Report Format: Standard Forms
 Standard + OC NJ Reduced Disk

DELIVERY METHOD: OC COURIER CLIENT
 UPS FEDEX OTHER

RECEIVED BY

DATE	TIME	DATE	TIME
6-16-10	1340	6/16/10	1340
DATE	TIME	DATE	TIME
DATE	TIME	DATE	TIME
DATE	TIME	DATE	TIME
DATE	TIME	DATE	TIME

COMMENTS: _____

Hazardous: yes / no _____

Lab LIMS No: _____
 MATRIX CODES
 DW: DRINKING WATER
 GW: GROUND WATER
 WW: WASTEWATER
 SO: SOIL
 SL: SLUDGE
 OIL: OIL
 SOL: NON SOIL SOLID
 MI: MISCELLANEOUS
 X: OTHER
 Field pH, Temp (C or F), DO, Cl₂, S. Cond. etc.

SAMPLING DOCUMENTATION FORM

Customer Number: AC0171

QC Field Technician: KLT

Compositor ID: _____

Date/Time Installed: 6-15-10 0700
Custody Seal/Lock Installed: Yes No

Date/Time Extracted: 6-15-10 1700
Custody Seal/Lock Intact: Yes No

Sample Type:

Grab: Yes

Composite: 8HR _____ 12 HR _____ 24 HR _____

Shift 10 hr

Program: Minutes/ML _____

Total Vol. Collected: ML 1.6 gal

Site Description	Location	Diagram
	<u>manhole top of Hill</u>	


Sampling Notes:

Grab Sample Iced: Yes _____ No
Composite Sample Iced: Yes No _____
Decon Performed: Yes No _____
Field Test Performed Onsite: Yes No _____

Customer Authorization NA
Date 6-15-10

ATTACHMENT 3

2010 SECOND QUARTER RADIOISOTOPE USAGE



1720 Walton Road, Blue Bell, PA 19422 610-828-3078 Fax 610-828-7842

January 24, 2014

DRAFT
CERTIFIED MAIL; RETURN RECEIPT REQUESTED

Certified No.

Mr. Joseph Cerrone
Philadelphia Water Department
9001 State Road
Chester, Pennsylvania 19136

Subject: December 2013 Report
BioMed Realty Trust, Inc.
145 King Of Prussia Road
Industrial Discharge Permit No. 2DC-09-01
IES Project No. ON130687.01

Dear Mr. Cerrone:

On behalf of BioMed Realty Trust, Inc. (BMR), IES Engineers is pleased to submit the December 2013 Report from BMR's 145 King of Prussia Road facility. This report is now being submitted on a monthly basis in accordance with Industrial Discharge Permit No. 2DC-09-01, issued on October 1, 2010.

The December 2013 Report includes:

- Analytical Laboratory Results from QC Laboratories
- Analytical Laboratory Chain-of-Custody Sheets
- Individual data including flow and pH levels taken on an individual day

If you have any questions or need any additional information, please feel free to contact me or Ms. Maureen Delaney of BMR at (610) 647-9590.

Very truly yours,

Jennifer Yaroeh
Project Scientist III

Attachment(s)

cc: M. Delaney, BMR
M. Deluga, BMR
K. Turner, Janssen R&D
R. Schlosser, IES

ATTACHMENT 1
CERTIFICATION STATEMENT

Certification Statement, December 2013 Wastewater Report:

“I certify under penalty of law that this document and all attachments were prepared under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gather and evaluate the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information, the information submitted is, to best of my knowledge and belief, true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility fines and imprisonment for knowing violations.”

Russell Garland – Regional Director, East Coast Operations
Name/Title

Signature

Date



ATTACHMENT 2
December 2013 Report

BioMed Realty Trust
145 King of Prussia Road
Radnor, PA 19087

Monthly pH Level - 2013

<u>Date</u>	<u>Jan</u>	<u>Water Flow</u> <u>Week of:</u>	<u>Actual</u> <u>Usage</u> <u>Meter #1</u>	<u>Actual</u> <u>Usage</u> <u>Meter #2</u>
1/1/2013	7.28	12/25/12-1/1/13	785621	2922220
1/8/2013	7.15	1/1/13-1/8/13	787614	2934105
1/15/2013	7.35	1/8/13-1/15/13	789696	2946453
1/22/2013	6.34	1/15/13-1/22-13	792234	2962792
1/29/2013	6.65	1/22/13-1/29/12	793354	2971123

<u>Date</u>	<u>Feb</u>	<u>Water Flow</u> <u>Week of:</u>	<u>Actual</u> <u>Usage</u> <u>Meter #1</u>	<u>Actual</u> <u>Usage</u> <u>Meter #2</u>
2/5/2013	6.69	1/29/13-2/5/13	795232	2983255
2/12/2013	6.83	2/5/13-2/12/13	796864	2995355
2/19/2013	6.78	2/12/13-2/19/13	799800	3011431
2/26/2013	6.95	2/19/13-2/26/13	801066	3020228

<u>Date</u>	<u>March</u>	<u>Water Flow</u> <u>Week of:</u>	<u>Actual</u> <u>Usage</u> <u>Meter #1</u>	<u>Actual</u> <u>Usage</u> <u>Meter #2</u>
3/5/2013	7.20	2/26/13-3/5/13	803048	3032611
3/12/2013	6.85	3/5/13-3/12/13	805016	3044900
3/19/2013	6.91	3/12/13-3/19/13	807039	3058906
3/26/2013	7.45	3/19/13-3/26/13	808830	3071282

<u>Date</u>	<u>April</u>	<u>Water Flow</u> <u>Week of:</u>	<u>Actual</u> <u>Usage</u> <u>Meter #1</u>	<u>Actual</u> <u>Usage</u> <u>Meter #2</u>
4/2/2013	7.25	3/26/13-4/2/13	810810	3082111
4/9/2013	6.67	4/2/13-4/9/13	813323	3094608
4/16/2013	6.84	4/9/13-4/16/13	815668	3107107
4/23/2013	6.76	4/16/13-4/23/13	818700	3119477
4/30/2013	7.34	4/23/13-4/30/13	820692	3131620

<u>Date</u>	<u>May</u>	<u>Water Flow</u> <u>Week of:</u>	<u>Actual</u> <u>Usage</u> <u>Meter #1</u>	<u>Actual</u> <u>Usage</u> <u>Meter #2</u>
5/7/2013	7.25	4/30/13-5/7/13	823114	3144305
5/14/2013	7.10	5/7/13-5/14/13	825297	3156721
5/21/2013	7.28	5/14/13-5/21/13	828035	3169080
5/28/2013	7.16	5/21/13-5/28/13	831060	3181438

<u>Date</u>	<u>June</u>	<u>Water Flow</u> <u>Week of:</u>	<u>Actual</u> <u>Usage</u> <u>Meter #1</u>	<u>Actual</u> <u>Usage</u> <u>Meter #2</u>
6/4/2013	6.74	5/28/13-6/4/13	835634	3194470
6/11/2013	6.80	6/4/13-6/11/13	838690	3207080
6/18/2013	7.24	6/11/13-6/18/13	841925	3219711
6/25/2013	7.32	6/18/13-6/25/13	845232	3232610

BioMed Realty Trust
145 King of Prussia Road
Radnor, PA 19087

<u>Date</u>	<u>July</u>	<u>Water Flow</u> <u>Week of:</u>	<u>Actual</u> <u>Usage</u> <u>Meter #1</u>	<u>Actual</u> <u>Usage</u> <u>Meter #2</u>	<u>Date</u>	<u>Aug</u>	<u>Water Flow</u> <u>Week of:</u>	<u>Actual</u> <u>Usage</u> <u>Meter #1</u>	<u>Actual</u> <u>Usage</u> <u>Meter #2</u>
7/2/2013	7.43	6/25/13-7/2/13	848370	3244766	8/6/2013	7.25	7/30/13-8/6/13	892413	3304558
7/9/2013	7.33	7/2/13-7/9/13	852105	3259578	8/13/2013	7.43	8/6/13-8/13/13	895332	3318743
7/16/2013	7.30	7/11/13-7/16/13	867525	3268736	8/20/2013	7.26	8/13/13-8/20/13	897185	3329570
7/23/2013	7.67	7/16/13-7/23/13	887090	3279966	8/27/2013	6.85	8/20/13-8/27/13	899963	3341971
7/30/2013	6.85	7/23/13-7/30/13	890989	3292219					

<u>Date</u>	<u>Sept</u>	<u>Water Flow</u> <u>Week of:</u>	<u>Actual</u> <u>Usage</u> <u>Meter #1</u>	<u>Actual</u> <u>Usage</u> <u>Meter #2</u>	<u>Date</u>	<u>Oct</u>	<u>Water Flow</u> <u>Week of:</u>	<u>Actual</u> <u>Usage</u> <u>Meter #1</u>	<u>Actual</u> <u>Usage</u> <u>Meter #2</u>
9/3/2013	6.72	8/27/13-9/3/13	902572	3354484	10/1/2013	6.73	9/24/13-10/1/13	911054	3403802
9/10/2013	6.53	9/3/13-9/10/13	904985	3366880	10/8/2013	6.63	10/1/13-10/8/13	913809	3416404
9/17/2013	6.72	9/10/13-9/17/13	907455	3379270	10/15/2013	6.53	10/8/13-10/15/13	915645	3428796
9/24/2013	6.56	9/17/13-9/24/13	909215	3391371	10/22/2013	6.85	10/15/13-10/22/13	917328	3441170
					10/30/2013	6.79	10/22/13-10/30/13	919277	3455717

<u>Date</u>	<u>Nov</u>	<u>Water Flow</u> <u>Week of:</u>	<u>Actual</u> <u>Usage</u> <u>Meter #1</u>	<u>Actual</u> <u>Usage</u> <u>Meter #2</u>	<u>Date</u>	<u>Dec</u>	<u>Water Flow</u> <u>Week of:</u>	<u>Actual</u> <u>Usage</u> <u>Meter #1</u>	<u>Actual</u> <u>Usage</u> <u>Meter #2</u>
11/5/2013	6.54	10/30/13-11/5/13	921486	3469552	12/3/2013	6.75	11/26/13-12/3/13	927833	3515723
11/12/2013	6.73	11/5/13-11/12/13	922783	3478578	12/10/2013	7.85	12/3/13-12/10/13	929340	3528036
11/19/2013	6.75	11/12/13-11/19/13	924508	3491006	12/17/2013	7.55	12/10/13-12/17/13	930777	3540415
11/26/2013	6.79	11/19/13-11/26/13	926442	3503445	12/24/2013	7.75	12/17/13-12/24/13	932477	3553143
					12/31/2013	7.85	12/24/13-12/31/13	934087	3566785

BioMed Realty Trust, Inc
145 King of Prussia Road
Radnor, PA 19087

Actual Monthly Flow - 2013

Date Range	Meter #1	Meter #2	Total Flow	
12/25/12-1/1/13	199,300	118,850	318,150	gallons
1/1/13-1/8/13	208,200	123,480	331,680	gallons
1/8/13-1/15/13	253,800	163,390	417,190	gallons
1/15/13-1/22-13	112,000	83,310	195,310	gallons
1/22/13-1/29/12	187,800	121,320	309,120	gallons
1/29/13-2/5/13	163,200	121,000	284,200	gallons
2/5/13-2/12/13	293,600	160,760	454,360	gallons
2/12/13-2/19/13	126,600	87,970	214,570	gallons
2/19/13-2/26/13	198,200	123,830	322,030	gallons
2/26/13-3/5/13	196,800	122,890	319,690	gallons
3/5/13-3/12/13	202,300	140,060	342,360	gallons
3/12/13-3/19/13	179,100	123,760	302,860	gallons
3/19/13-3/26/13	198,000	108,290	306,290	gallons
3/26/13-4/2/13	251,300	124,970	376,270	gallons
4/2/13-4/9/13	234,500	124,990	359,490	gallons
4/9/13-4/16/13	303,200	123,700	426,900	gallons
4/16/13-4/23/13	199,200	121,430	320,630	gallons
4/23/13-4/30/13	242,200	126,850	369,050	gallons
4/30/13-5/7/13	218,300	124,160	342,460	gallons
5/7/13-5/14/13	273,800	123,590	397,390	gallons
5/14/13-5/21/13	302,500	123,580	426,080	gallons
5/21/13-5/28/13	457,400	130,320	587,720	gallons
5/28/13-6/4/13	305,600	126,100	431,700	gallons
6/4/13-6/11/13	323,500	126,310	449,810	gallons
6/11/13-6/18/13	330,700	128,990	459,690	gallons
6/18/13-6/25/13	313,800	121,560	435,360	gallons
6/25/13-7/2/13	373,500	148,120	521,620	gallons
7/2/13-7/9/13	1,542,000	91,580	1,633,580	gallons
7/11/13-7/16/13	1,956,500	112,300	2,068,800	gallons
7/16/13-7/23/13	389,900	122,530	512,430	gallons
7/23/13-7/30/13	142,400	123,390	265,790	gallons
7/30/13-8/6/13	291,900	141,850	433,750	gallons
8/6/13-8/13/13	185,300	108,270	293,570	gallons
8/13/13-8/20/13	277,800	124,010	401,810	gallons
8/20/13-8/27/13	260,900	125,130	386,030	gallons
8/27/13-9/3/13	241,300	123,960	365,260	gallons
9/3/13-9/10/13	247,000	123,900	370,900	gallons
9/10/13-9/17/13	176,000	121,010	297,010	gallons
9/17/13-9/24/13	183,900	124,310	308,210	gallons
9/24/13-10/1/13	275,500	126,020	401,520	gallons
10/1/13-10/8/13	183,600	123,920	307,520	gallons
10/8/13-10/15/13	168,300	123,740	292,040	gallons
10/15/13-10/22/13	194,900	145,470	340,370	gallons
10/22/13-10/30/13	220,900	138,350	359,250	gallons
10/30/13-11/5/13	129,700	90,260	219,960	gallons
11/5/13-11/12/13	172,500	124,280	296,780	gallons
11/12/13-11/19/13	193,400	124,390	317,790	gallons
11/19/13-11/26/13	139,100	122,780	261,880	gallons
11/26/13-12/3/13	150,700	123,130	273,830	gallons



Analytical Report

Serialized: 12/12/2013 07:17pm

TINA GEANOPULOS
BIOMED REALTY TRUST, INC.
1205 WESTLAKES DRIVE
SUITE 240
BERWYN, PA 19312

Regarding:
ERIN SHEA
BMR
145 KING OF PRUSSIA ROAD
RADNOR, PA 19087

PROJECT ID:

AC0171

LABORATORY REPORT NUMBER:

L4830159



Authorized by: Oommen V. Kappil, QA Director

QCL Accreditations: Southampton Div: EPA ID PA00018; NELAP ID's: PA 09-00131, NJ PA166, NY 11223
State ID's: CT PH-0768, DE PA-018, MD 206, SC 89021001; FDA Reg. #: 2515238
Delaware Division: State ID's: DE 00011, MD 138
Vineland Division: State ID: NJ 06005; Reading Div: State ID: PA 06-03543
Wind Gap Division: State ID's: PA 48-01334, NJ PA001
E. Rutherford Division: State ID: NJ 02015



September 3, 2013

RE: Electronic Information Availability

Dear Valued Client,

QC Laboratories (QCL) has continually taken advantage of technological advancements to improve services to our clients. These improvements frequently focus on streamlining information delivery through electronic means that promote the reduction and elimination of paper, while accelerating client delivery. We are very pleased to offer several information delivery options which take us one step closer to that goal.

QCL will shortly convert to simultaneous electronic delivery of invoices and reports. Many of our clients have long been enjoying paperless report and invoices through our existing electronic delivery options (Live Access, email, etc.) These reports can be delivered directly to your account by e-mail or downloaded through QCL's Live Access on-line system.

Electronic reports and invoices will be available in parallel with paper reports through January 1, 2014. After that date, electronic reporting and invoicing will become QCL's preferred method of delivery. Paper reports and invoices will always be available for a nominal charge after January 1, 2014. However, if you are working under an existing contract, QCL will continue to honor the specified delivery method under the terms of your contract. If you would like to begin electronic delivery now, please register by contacting your QCL client services representative with a valid e-mail address to ensure correct delivery.

Regardless, we urge all clients to register for QC Laboratories' "Live Access" data portal now. This portal enables clients to instantly access data as soon as they are approved by the department managers and has been available for several years. It contains many data reporting options that simplify data usability and enables the download of routine data reports and customized data reports in user defined formats. This online feature is user-friendly, can be customized for various users within your account and best of all it is FREE of charge. All your account's analytical data, chains of custody, invoices and QA packages are available for viewing and printing in real-time through "Live Access", 24/7. Sign-up is easy and can be performed online through the QCL website (www.qclaboratories.com).

We are excited to offer these improvements to our clients and look forward to offering additional data delivery enhancements that improve the efficiency of all data user tasks. If you have any questions regarding these changes, please contact me at 215.355.3900 ex 3363.

Sincerely

A handwritten signature in black ink, appearing to read "Stephen Bobbs", written over a white background.

Stephen Bobbs
Manager, Client Services
QC Laboratories

ERIN SHEA
BMR
145 KING OF PRUSSIA ROAD
RADNOR, PA 19087

Regarding:
ERIN SHEA
BMR
145 KING OF PRUSSIA ROAD
RADNOR, PA 19087

Account No: AC0171, BIOMED REALTY TRUST, INC.
Project No: AC0171, BIOMED REALTY TRUST, INC.

P.O. No:

Inv. No: 1571952
PWSID No:

Sample ID	Sample Description	Samp. Date/Time/Temp	Sampled by
L4830159-1	EFFLUENT 10 HR COMPOSITE 0700-1700	12/05/13 05:00pm NA C	Kenneth L. Tanner, QC Laboratories
	Received Date/Time/Temp 12/06/13 08:40pm 1.0 C Iced (Y/N): Y		

Parameter	Result	RL	Units	Method	DF	Q	Test Date, Time, Analyst
-----------	--------	----	-------	--------	----	---	--------------------------

GENERAL CHEMISTRY

TOTAL SUSPENDED SOLIDS	58.0	2.00	mg/l	SM 2540D	1		12/10/13 09:07AM LMB
BIOCHEMICAL OXYGEN DEMAND	97.9	31.3	mg/l	SM 5210B	25		12/07/13 04:02AM LS

Sample ID	Sample Description	Samp. Date/Time/Temp	Sampled by
L4830159-2	EFFLUENT GRAB	12/06/13 08:15am NA C	Kenneth L. Tanner, QC Laboratories
	Received Date/Time/Temp 12/06/13 08:40pm 1.0 C Iced (Y/N): Y		

Parameter	Result	RL	Units	Method	DF	Q	Test Date, Time, Analyst
-----------	--------	----	-------	--------	----	---	--------------------------

FIELD SERVICES

FIELD TEMPERATURE CELSIUS	16.2	0.5	Deg. C	SM 2550B			12/06/13 08:15AM KLT
PH FIELD	7.49		units	SM 4500H+B	1		12/06/13 08:15AM KLT
FLOW	0.0274		mgd				12/06/13 08:15AM KLT

Account No: AC0171, BIOMED REALTY TRUST, INC.
Project No: AC0171, BIOMED REALTY TRUST, INC.

P.O. No:

Inv. No: 1571952
PWSID No:

General Notes:

Definitions: ND= The analyte tested was either not detected or the concentration was below the RL; Q=Qualifier
NEG=negative; POS=positive; COL=colonies; RL=laboratory reporting limit; L/A=laboratory accident; TNTC= Too numerous to count;
pres=presumptive; DF=Dilution Factor

A result marked with "DRY" Indicates that the result was calculated and reported on a dry weight basis.

Results for Tentatively Identified Compounds are estimated values only.

The test results meet all requirements of NELAC unless otherwise specified.

The report shall not be reproduced except in full without the written consent of the laboratory.

Unless otherwise specified, the Environmental testing except Field Parameters were performed by
QC Inc. located at 1205 Industrial Blvd., Southampton, PA 18966; Pharmaceutical, Dairy and Food Microbiological tests
were performed by QC Inc. located at 702 Electronic Dr., Horsham, PA 19044.

QCL Accreditations: Southampton Div: EPA ID PA00018; NELAP ID's: PA 09-00131, NJ PA166, NY 11223

State ID's: CT PH-0768, DE PA-018, MD 206, FDA Reg. # : 2515238

ACL Div: State ID's: DE 00011, MD 138; Wind Gap Div: State ID's: PA 48-01334, NJ PA001

E. Rutherford Div: State ID: NJ 02015; Vineland Div: State ID: NJ 06005; Reading Div: State ID: PA 06-03543

The reported results relate only to the samples.

All samples are collected as "grab" samples unless otherwise identified.

Regulatory authorities are assessing substantial fines for testing omissions. Please track your sample collections and results
on a weekly, monthly, or quarterly basis to ensure compliance. QC's internet program 'LIVE ACCESS' will provide you with
real-time access to collection dates and results. Please contact Customer Service for further information on acquiring LIVE ACCESS.





SAMPLING DOCUMENTATION FORM

Customer Acct Number: AC0171

QC Field Technician: KLT

Compositer ID: _____

Compositer Started: 12-5-13 0700
Date Time

Custody Seal / Lock Installed? Y or N

Compositer Stopped: 12-5-13 0700
Date Time

Sample Collected: 12-6-13 0815
Date Time

Custody Seal / Lock Intact? Y or N

Sample Type: Grab: —

Composite: 4 HR _____ 8 HR _____
10 hr 12 HR _____ 24 HR _____


Program: 15/100 minutes / mL

Total Volume Collected: 3 gal mL

Field Filtered Sample: Y or N

Volume and container type and preservation

Location and Site Description:

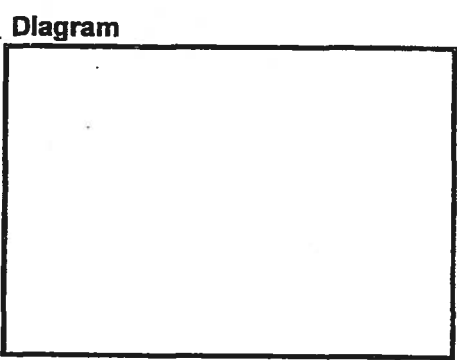

Sampling Notes:

Grab Sample Iced? Y or N
Composite Sample Iced? Y or N
Decon Performed? Y or N
Field Tests Performed Within 15 min. of Sample Collection? Y or N

Customer Authorization: MA Date: 12-6-13



Inter-Laboratory Transport Form: VIN20613

Coolers for Transport from VINELAND

To be completed by person sealing coolers

Cooler ID No.	Custody Seal No.	Date	Time	Initials	Complete Section Upon Delivery	
					Temp °C	iced Y/N
N18	60613-1	12/6/13	1:30	GM	1.1	Yes
12					0.4	Yes
28					1.0	Yes
38					1.7	Yes
42					0.1	Yes
9					8.6	Yes

Please Note the Following:

Individual sample chains of custody must accompany this form.
Once a cooler is sealed, custody seals may not be broken until samples are received at the designated OCL laboratory.

Laboratory use only

Custody Seals intact upon receipt? Y N

List ID of any seal found broken upon receipt below:

Initials: GM

A full legal signature is required. Record all times in military time (24-Hr Clock; 4:00 PM=1600)

Relinquished by: *[Signature]* Date: 12/6/13 Time: 2:00 PM Received by: *[Signature]* Date: 12/6/13 Time: 2:40

Relinquished by: *[Signature]* Date: Date: Time: Received by: Date: Time:

Relinquished by: Date: Time: Received by: Date: Time:

Relinquished by: Date: Time: Received by: Date: Time:



1720 Walton Road, Blue Bell, PA 19422 610-828-3078 Fax 610-828-7842

November 26, 2014

CERTIFIED MAIL; RETURN RECEIPT REQUESTED

Certified No. 7013 2250 0000 2603 0760

Ms. Irene Fitzgerald
Laboratory & Pretreatment Manager
Dclaware County Regional Water Quality Control Authority
100 E. Fifth Street
Chester, Pennsylvania 19016-0999

Subject: October 2014 Report
BioMed Realty Trust, Inc.
145 King Of Prussia Road
Industrial Discharge Permit No. 2DC-09-01
IES Project No. ON140687.01

Dear Ms. Fitzgerald:


On behalf of BioMed Realty Trust, Inc. (BMR), IES Engineers is pleased to submit the October 2014 Report from BMR's 145 King of Prussia Road facility. This report is submitted on a monthly basis in accordance with Industrial Discharge Permit No. 2DC-09-01, issued on October 1, 2010.

The October 2014 Report includes:

- Analytical Laboratory Results from QC Laboratories
- Analytical Laboratory Chain-of-Custody Sheets
- Individual data including flow and pH levels taken on an individual day


If you have any questions or need any additional information, please feel free to contact me or Ms. Maureen Delaney of BMR at (610) 647-9590.

Very truly yours,


Jennifer Yaroeh
Project Scientist III

Attachment(s)

cc: M. Delaney, BMR
M. Deluga, BMR
R. Schlosser, IES



ATTACHMENT 1
CERTIFICATION STATEMENT

Certification Statement, October 2014 Wastewater Report:

“I certify under penalty of law that this document and all attachments were prepared under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gather and evaluate the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information, the information submitted is, to best of my knowledge and belief, true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility fines and imprisonment for knowing violations.”

Russell Garland – Regional Director, East Coast Operations

Name/Title


Russell Garland
Mon Nov 24 2014 13:47



Signature

11/24/14

Date



ATTACHMENT 2
October 2014 Report

BioMed Realty Trust
 145 King of Prussia Road
 Radnor, PA 19087

Monthly pH Level - 2014

Date	Jan	Water Flow Week of:	Actual Usage Meter #1	Actual Usage Meter #2	Date	Feb	Water Flow Week of:	Actual Usage Meter #1	Actual Usage Meter #2
1/7/2014	7.84	12/31/13-01/07/14	935150	3579891	2/4/2014	7.24	01/28/14-02/04/14	947086	3628561
1/14/2014	7.24	01/07/14-01/14/14	937470	3590027	2/11/2014	6.74	02/4/14-02/11/14	949627	3641309
1/21/2014	8.43	01/14/14-01/21/14	939650	3602843	2/18/2014	6.54	02/11/14-02/18/14	951580	3654032
1/28/2014	8.15	01/21/14-01/28/14	942601	3615776	2/25/2014	6.15	2/18/14-2/25/14	953545	3666788

Date	March	Water Flow Week of:	Actual Usage Meter #1	Actual Usage Meter #2	Date	April	Water Flow Week of:	Actual Usage Meter #1	Actual Usage Meter #2
3/4/2014	6.38	2/25/14-3/4/14	955365	3679193	4/1/2014	6.87	3/25/14-4/1/14	962988	3729606
3/11/2014	6.81	3/4/14-3/11/14	957272	3691797	4/8/2014	6.93	4/1/14-4/8/14	964774	3742106
3/18/2014	6.95	3/11/14-3/18/14	959330	3704284	4/15/2014	6.96	4/8/14-4/15/14	966451	3754429
3/25/2014	6.77	3/18/14-3/25/14	961345	3717273	4/22/2014	6.73	4/15/14-4/22/14	968128	3766811
					4/29/2014	6.92	4/22/14-4/29/14	969369	3778544

Date	May	Water Flow Week of:	Actual Usage Meter #1	Actual Usage Meter #2	Date	June	Water Flow Week of:	Actual Usage Meter #1	Actual Usage Meter #2
5/6/2014	6.73	4/29/14-5/6/14	970267	3789960	6/3/2014	8.60	5/27/14-6/3/14	974298	3836143
5/13/2014	6.84	5/6/14-5/13/14	971210	3801427	6/10/2014	8.70	6/3/14-6/10/14	975632	3848047
5/20/2014	7.10	5/13/14-5/20/14	972342	3813205	6/17/2014	8.79	6/10/14-6/17/14	976750	3859864
5/27/2014	8.76	5/20/14-5/27/14	973505	3825583	6/23/2014	9.23	6/17/14-6/23/14	978286	3872021

BioMed Realty Trust
 145 King of Prussia Road
 Radnor, PA 19087

Date	July	Water Flow Week of:	Actual Usage Meter #1	Actual Usage Meter #2	Date	Aug	Water Flow Week of:	Actual Usage Meter #1	Actual Usage Meter #2
7/1/2014	8.96	6/23/14-7/1/14	979776	3884058	8/5/2014	8.24	7/29/14-8/5/14	988428	3944798
7/8/2014	8.83	7/1/14-7/8/14	982355	3896748	8/12/2014	8.65	8/5/14-8/12/14	989804	3956994
7/15/2014	8.62	7/8/14-7/15/14	983840	3908632	8/19/2014	9.13	8/12/14-8/19/14	993656	3969610
7/22/2014	9.46	7/15/14-7/22/14	985611	3921000	8/26/2014	8.75	8/19/14-8/26/14	997605	3982177
7/29/2014	8.01	7/22/14-7/29/14	987058	3932926					

Date	Sept	Water Flow Week of:	Actual Usage Meter #1	Actual Usage Meter #2	Date	Oct	Water Flow Week of:	Actual Usage Meter #1	Actual Usage Meter #2
9/2/2014	8.66	8/26/14-9/2/14	1001640	3994646	10/7/2014	7.37	9/30/14-10/7/14	1006378	4050526
9/9/2014	9.24	9/2/14-9/9/14	1003131	3995924	10/14/2014	7.25	10/7/14-10/14/14	1007333	4062537
9/16/2014	8.57	9/9/14-9/16/14	1004078	4017232	10/21/2014	7.65	10/14/14-10/21/14	1007733	4069250
9/23/2014	8.62	9/16/14-9/23/14	1004897	4028497	10/28/2014	7.86	10/21/14-10/28/14	1007752	4072883
9/30/2014	7.14	9/23/14-9/30/14	1005612	4039455					

Date	Nov	Water Flow Week of:	Actual Usage Meter #1	Actual Usage Meter #2
11/4/2014	7.83	10/28/14-11/4/14	1007770	4076518
11/11/2014	8.10	11/4/14-11/11/14	1007770	4076847

BioMed Realty Trust, Inc
 145 King of Prussia Road
 Radnor, PA 19087

Actual Monthly Flow - 2014

Date Range	Meter #1	Meter #2	Total Flow	
12/31/13-01/07/14	232,000	101,360	333,360	gallons
01/07/14-01/14/14	218,000	128,160	346,160	gallons
01/14/14-01/21/14	295,100	129,330	424,430	gallons
01/21/14-01/28/14	448,500	127,850	576,350	gallons
01/28/14-02/04/14	254,100	127,480	381,580	gallons
02/4/14-02/11/14	195,300	127,230	322,530	gallons
02/11/14-02/18/14	196,500	127,560	324,060	gallons
2/18/14-2/25/14	182,000	124,050	306,050	gallons
2/25/14-3/4/14	190,700	126,040	316,740	gallons
3/4/14-3/11/14	205,800	124,870	330,670	gallons
3/11/14-3/18/14	201,500	129,890	331,390	gallons
3/18/14-3/25/14	164,300	123,330	287,630	gallons
3/25/14-4/1/14	178,600	125,000	303,600	gallons
4/1/14-4/8/14	167,700	123,230	290,930	gallons
4/8/14-4/15/14	167,700	123,820	291,520	gallons
4/15/14-4/22/14	124,100	117,330	241,430	gallons
4/22/14-4/29/14	89,800	114,160	203,960	gallons
4/29/14-5/6/14	94,300	114,670	208,970	gallons
5/6/14-5/13/14	113,200	117,780	230,980	gallons
5/13/14-5/20/14	116,300	123,780	240,080	gallons
5/20/14-5/27/14	79,300	105,600	184,900	gallons
5/27/14-6/3/14	133,400	119,040	252,440	gallons
6/3/14-6/10/14	111,800	118,170	229,970	gallons
6/10/14-6/17/14	153,600	121,570	275,170	gallons
6/17/14-6/23/14	149,000	120,370	269,370	gallons
6/23/14-7/1/14	257,900	126,900	384,800	gallons
7/1/14-7/8/14	148,500	118,840	267,340	gallons
7/8/14-7/15/14	177,100	123,680	300,780	gallons
7/15/14-7/22/14	144,700	119,260	263,960	gallons
7/22/14-7/29/14	137,000	118,720	255,720	gallons
7/29/14-8/5/14	137,600	121,960	259,560	gallons
8/5/14-8/12/14	385,200	126,160	511,360	gallons
8/12/14-8/19/14	394,900	125,670	520,570	gallons
8/19/14-8/26/14	403,500	124,690	528,190	gallons
8/26/14-9/2/14	149,100	12,780	161,880	gallons
9/2/14-9/9/14	94,700	213,080	307,780	gallons
9/9/14-9/16/14	81,900	112,650	194,550	gallons
9/16/14-9/23/14	71,500	109,580	181,080	gallons
9/23/14-9/30/14	76,600	110,710	187,310	gallons
9/30/14-10/7/14	95,500	120,110	215,610	gallons
10/7/14-10/14/14	40,000	67,130	107,130	gallons
10/14/14-10/21/14	1,900	36,330	38,230	gallons
10/21/14-10/28/14	1,800	36,350	38,150	gallons
10/28/14-11/4/14	0	3,290	3,290	gallons



Analytical Report

Serialized: 10/08/2014 03:01pm QC36

TINA GEANOPULOS
BIOMED REALTY TRUST, INC.
1205 WESTLAKES DRIVE
SUITE 240
BERWYN, PA 19312

Regarding:
ERIN SHEA
BMR
145 KING OF PRUSSIA ROAD
RADNOR, PA 19087

PROJECT ID:

AC0171

LABORATORY REPORT NUMBER:

L5249684



Authorized by: Gommen V. Kappil, QA Director

QCL Accreditations: Southampton Div: EPA ID PA00018; NELAP ID's: PA 09-00131, NJ PA166, NY 11223
State ID's: CT PH-0768, DE PA-018, MD 206, SC 89021001; FDA Reg. # - 2515238
Delaware Division: State ID's: DE 00011, MD 138
Vineland Division: State ID: NJ 06005; Reading Div: State ID: PA 06-03543
Wind Gap Division: State ID's: PA 48-01334, NJ PA001
E. Rutherford Division: State ID: NJ 02015

QC Laboratories

Analytical Report

Printed 10/08/14 15:01 QC36

ERIN SHEA
BMR
145 KING OF PRUSSIA ROAD
RADNOR, PA 19087

Regarding:
ERIN SHEA
BMR
145 KING OF PRUSSIA ROAD
RADNOR, PA 19087

Account No: AC0171, BIOMED REALTY TRUST, INC.
Project No: AC0171, BIOMED REALTY TRUST, INC.

P.O. No:

Inv. No: 1650324
PWSID No:

Sample ID L5249684-1 Sample Description EFFLUENT 10 HR COMPOSITE 0700-1700
Received Date/Time/Temp 10/02/14 07:25pm 0.4 C Iced (Y/N): Y
Samp. Date/Time/Temp 10/01/14 05:00pm NA C Sampled by Kenneth L. Tanner, QC Laboratories

Parameter	Result	RL	Units	Method	DF	Qual	Test Date, Time, Analyst
-----------	--------	----	-------	--------	----	------	--------------------------

GENERAL CHEMISTRY

Total Suspended Solids	2.00	2.00	mg/l	SM 2540D	1		10/07/14 09:08AM LMB
Biochemical Oxygen Demand, 5 Day	ND	2.80	mg/l	SM 5210B	2		10/02/14 11:06PM LS

Sample ID L5249684-2 Sample Description EFFLUENT GRAB
Received Date/Time/Temp 10/02/14 07:25pm 0.4 C Iced (Y/N): Y
Samp. Date/Time/Temp 10/02/14 10:50am NA C Sampled by Kenneth L. Tanner, QC Laboratories

Parameter	Result	RL	Units	Method	DF	Qual	Test Date, Time, Analyst
-----------	--------	----	-------	--------	----	------	--------------------------

FIELD SERVICES

Field Temperature Celsius	23.6	0.5	Deg. C	SM 2550B			10/02/14 10:50AM KLT
pH, field	7.50	0.010	units	SM 4500H+B	1		10/02/14 10:50AM KLT
Flow	0.0277		mgd				10/02/14 10:50AM KLT



PIN: 94214

Serial Number: 4103266

DEFINITIONS

The following terms or abbreviations are used in this report:

MPN	Most probable number	PL	Customer-specific limit
CFU	Colony forming unit	DF	Dilution Factor
POS	Positive	QUAL	Qualifier
NEG	Negative	NTU	Nephelometric turbidity units
PRES	Presumptive	RL	Laboratory reporting limit or Limit of Quantitation (LOQ)
MF	Membrane Filtration	MCL	EPA recommended "Maximum Contaminant Level"
TNTC	Too numerous to count	MDL	Method Detection Limit

ND	The analyte was not detected at a concentration above the RL / MDL.
J	Estimated value \geq MDL but $<$ RL. Applies to organics and general chemistry results (see below for metals)
Q	Indicates this analyte did not meet quality control requirements.
DRY	Indicates the result was calculated and reported on a dry weight basis.
TIC	Tentatively Identified Compounds (Library Search Compounds); concentrations are estimated values only.
ppm (mg/l)	Parts per million: equivalent to 1 milligram per kilogram (mg/Kg) for solids or one milligram per liter (mg/L) for aqueous samples.
ppb (ug/L)	Parts per billion: equivalent to 1 microgram per kilogram (ug/Kg) for solids or one microgram per liter (ug/L) for aqueous samples.
<	Less than: In conjunction with a numerical value, indicates a concentration less than RL / MDL.
>	Greater than: In conjunction with a numerical value, indicates a concentration greater than RL / MDL.

Data Qualifiers (EPA CLP Convention)

<u>Organics</u>		<u>Metals</u>	
B	Analyte was detected in the method blank	B	Value is \geq MDL and $<$ RL
E	Concentration exceeds calibration range	E	Estimated value due to presence of interference
U	Compound not detected above MDL/RL	M	Duplicate precision for an element outside control limit
N	Presumptive evidence of compound in library search	N	Spike recovery for an element outside control limits
P1	Column precision criteria not met, report lower value	U	Element not detected above MDL/RL
P2	Column precision criteria not met, report higher value	Other	Defined in case narrative or data package
Other	Defined in case narrative or data package		

Warranties, Terms, and Conditions

- Unless otherwise specified in the Parameter field, analyses (excluding "Field Parameters") were performed at the QCL Southampton Division (1205 Industrial Boulevard, Southampton, PA 18966). Food, pharmaceutical, and dairy testing were performed the QCL facility in Horsham (702 Electronic Drive, Horsham, PA 19044).
- The test results meet all TNI or other applicable regulatory agency requirements, including holding times and preservation, unless otherwise indicated.
- The report shall not be reproduced, except in full, without the written consent of the laboratory.
- All samples are collected as "grab" samples unless otherwise identified.
- The reported results relate only to the sample as tested. QCL is not responsible for sample integrity unless sampling has been performed by a member of our staff.
- QCL is not responsible for sampling and/or testing omissions. Note that regulatory authorities may assess substantial fines for testing omissions. Please track your sample collection schedules and results on a regular basis (e.g. weekly, monthly, or quarterly) to ensure compliance. QCL's internet program "LIVE ACCESS" will provide you with real-time access to collection dates and testing results. Please contact Customer Service for further information.
- The following personnel or their deputies have approved the results of the tests performed by QCL: Nicki Smith (Environmental Chemistry), Amanda Lukaszewski (Pharmaceutical), Ryan Baker (Dairy), Karen Battista (Food Micro), Jonathan Decenzi (Food Chemistry), Sue Abbott (QCL Delaware).

QCL Accreditations

Southampton Division	EPA ID:	PA00018		
	NELAP IDs:	PA 09-00131; NJ PA166; NY 11223		
	State IDs:	CT PH-0768; DE PA-018; MD 206		
	FDA Reg #:	2515238		
Delaware Division	State IDs:	DE 00011; MD 138	Reading Division	State ID: PA 06-03543
Wind Gap Division	State IDs:	PA 48-01334; NJ PA001	Vineland Division	State ID: NJ 06005
East Rutherford Division	State ID:	NJ 02015		

CHAIN OF CUSTODY		Lab LIMS No: _____		MATRIX CODES	
Page _____ of _____		LAB USE ONLY:		DW: DRINKING WATER GW: GROUND WATER WW: WASTEWATER SO: SOIL SL: SLUDGE OL: OIL SOL: NON SOIL SOLID MI: MISCELLANEOUS X: OTHER	
Bill to/report to: (if different)		# Ascorbic/HCl Vials # HCl Vials			
Sampling Site Address: (if different)		# Na ₂ S ₂ O ₃			
P.D. No.		# Na OH/Zn acetate pH			
QC Contact		# HNO ₃ pH			
Collection		# H ₂ SO ₄ pH			
Date		# NaOH pH			
Military Time		# Unpreserved		10 of 2	
Matrix Code		# HCl pH		# P.Y Temp control ID# <i>Lab 200</i>	
Total		ANALYSIS REQUESTED			
LAB		BOS-TSS			
USE		Top 236° Ph-7.50 Flow #02774 mg/L			
ONLY					
SAMPLED BY: (Name/Company)		Report Format: <input type="checkbox"/> Standard <input type="checkbox"/> Forms		Field Parameters Analyzed By:	
<i>K. V. Tr</i>		<input type="checkbox"/> Standard + OC <input type="checkbox"/> NJ Reduced <input type="checkbox"/> Disk		Date/Time: 10.2.14	
Verbal/fax data due:		Please call for pricing and availability on rush (<14-21 day) turnaround and on all but standard format.			
Hardcopy due:					
SAMPLE CUSTODY EXCHANGES MUST BE DOCUMENTED BELOW. USE FULL LEGAL SIGNATURE, DATE AND MILITARY TIME (24 HOUR CLOCK, I.E. 8AM IS 0800, 4 PM IS 1600)		DELIVERY METHOD: <input type="checkbox"/> OC COURIER <input type="checkbox"/> CLIENT		Custody Seal Number	
RELINQUISHED BY SAMPLER	DATE	TIME	RECEIVED BY	DATE	TIME
<i>[Signature]</i>	10-2-14	1155	1 coollev	10-2-14	1155
RELINQUISHED BY	DATE	TIME	RECEIVED BY	DATE	TIME
<i>[Signature]</i>	10-2-14	1925	<i>[Signature]</i>	10-2-14	1925
RELINQUISHED BY	DATE	TIME	RECEIVED BY	DATE	TIME
RELINQUISHED BY	DATE	TIME	RECEIVED BY	DATE	TIME
RELINQUISHED BY	DATE	TIME	RECEIVED BY	DATE	TIME
RELINQUISHED BY	DATE	TIME	RECEIVED BY	DATE	TIME

COMMENTS:

3% V K₂Cr₂O₇
 Hazardous: yes / no

For example to aid completion, see reverse side. Page 5 of 7



SAMPLING DOCUMENTATION FORM

Customer Acct Number: A 0171 Sample Log In Number: _____

Compositer ID: _____ Decon Performed prior to setup? or N Compositer base fully iced? or N

Compositer Started: 10-1-14 0700 QC Field Tech: KT Custody Seal / Lock Installed? or N
Date Time

Compositer Stopped: 10-1-14 1700 QC Field Tech: KT Custody Seal / Lock Installed? or N
Date Time

Composite: 1 HR 8 HR _____ 12 HR _____ 24 HR _____

Program: Collection Frequency: 15 minutes Volume: 100 mL

Total Volume Collected: 2.961 mL

Grab Collected Y/N 10-2-14 1050 Volume: _____ mL
Date Time

Field Filtered Sample: Y or N _____
Volume and container type and preservation

Location and Site Description:

Diagram

Diagram area (empty box)

Sampling Notes:

Grab Sample iced for transport? Y or N
Composite Sample iced for transport? or N
Field Tests Performed Within 15 min. of Sample Collection? or N

Customer Authorization: MA Date: 10-2-14
(when possible)

QC Laboratories


1205 Industrial Highway, Southampton, PA 18966

VINELAND-SOUTHAMPTON



Inter-Laboratory Transport Form: VS100214

Coolers for Transport

To be completed by person sealing coolers					Complete Section Upon Delivery	
Cooler ID No.	Custody Seal No.	Date	Time	Initials	Temp °C	Iced Y/N
0710	VS100214-1	10-2-14	1455	KCT	0.4	Y
A227	VS100214-2	10/2/14	1510	JIM	0.2	Y
25	VS100214-3	10/2/14	1510	JIM	0.3	Y
9	VS100214-4	10-2-14	1515	MJO	0.3	Y
24	VS00214-5	10-2-14	1580	DEM	0.3	Y
34	VS100214-6	10-2-14	1525	GLM		
12	VS100214-7	10-2-14	1525	GLM		
66	VS100214-6	10/2/14	1949	JTS	1.3	Y
917	VS100214-7	10-2-14	1553	JST	2.4	Y
Box 1	VS100214-8	10-2-14	1605	JLS	17.8	N
43	VS100214-9	10-2-14	1630	MJO	0.1	Y
Laboratory use only						
Custody Seals intact upon receipt? <input checked="" type="checkbox"/> Y <input type="checkbox"/> N					Initials: MJS	
List ID of any seal found broken upon receipt below:						
Received by:  Date: 10/2/14 Time: 1925 Received by: _____ Date: _____ Time: _____ Received by: _____ Date: _____ Time: _____ Received by: _____ Date: _____ Time: _____						

A full legal signature is required. Record all times in military time (24-HR Clock: 4:00 PM=1600)

Pennoni Associates Inc.

Consulting Engineers

JOB NO.: **UPHS1504**

SHEET: 1 of 1

DATE:

3/28/2016

PROJECT: **Penn Medicine - Radnor**

BY: CRP

SUBJECT: **Water Data Summary**

CHK'D

Radnor - Meter #09056585

Bill Date	Billing Period		Billing Days	Average Daily Usage	Usage
11/12/2015	10/9/2015	11/10/2015	32	10,103	323,300
10/13/2015	9/10/2015	10/9/2015	29	13,134	380,800
9/14/2015	8/22/2015	9/10/2015	19	14,542	276,300
8/13/2015	7/13/2015	8/11/2015	29	15,103	438,000
7/15/2015	6/11/2015	7/13/2015	32	14,362	459,600
6/15/2015	5/12/2015	6/11/2015	30	12,833	385,000
5/14/2015	4/13/2015	5/12/2015	29	10,989	318,700
4/15/2015	3/11/2015	4/13/2015	33	8,524	281,300
3/17/2015	2/10/2015	3/11/2015	29	8,855	256,800
2/12/2015	1/12/2015	2/10/2015	29	8,796	255,100
1/15/2015	12/11/2015	1/12/2015	32	7,640	244,500
12/15/2014	11/12/2015	12/11/2014	29	8,555	248,100
11/14/2014	10/10/2014	11/12/2014	33	9,524	314,300

Total Building Data (Office Area + Medical Office Area)

Average Daily Usage (gpd)	10,997
Gross Building Square Footage	165,088
Average Daily Usage/SF (gpd/sf)	0.0666

Office Data

Office Area (sf)	46,788
Number of Employees	150
DEP Flow per Employee	10.00
Office Flow (gpd)	1,500
Average Area per Employee	312

Medical Office Data

Medical Office Area (sf)	118,300
Medical Office Flow (gpd)	9,497
Medical Office Flow per building area (gpd/sf)	0.0803



Service To:
TRUSTEES OF U OF PA
0250 KING OF PRUSSIA RD
RADNOR, PA 19087-5220

Account Number
000349512 0349512
 MAIN DIVISION
 1101010 PWSID # PA1460073

Aqua Pennsylvania, Inc.
 762 W. Lancaster Avenue
 Bryn Mawr, PA 19010-3489

Toll Free: **877.987.2782**
 Fax: **866.780.8292**
www.aquaamerica.com

Questions about your water service?... Contact us before the due date.
 Bill Date **November 12, 2015** Total Amount Due **\$ 2,675.21** Current Charges Due Date **December 04, 2015**

Meter Data	Meter	Size	Billing Period	Days	Read Type / Meter Readings		Usage	Units
	09056585	3"	11/10/15	32	A 8270000	A 7561600	323,300	Gallons
			10/09/15		A 8157000	A 7351300		
Average Daily Usage = 10,103 Gallons			Total Days:	32	* A = Actual E = Estimated		Total Usage:	323,300 Gallons

Billing Detail

Amount Owed from Last Bill.....	\$ 3,065.49
Total Payments Received.....	3,065.49
Remaining Balance	0.00
Customer Charge.....	257.00
10,000 gallons @ \$0.01 per gallon.....	100.00
Next 23,300 gallons @ \$0.008785 per gallon.....	204.69
Next 290,000 gallons @ \$0.007288 per gallon.....	2,113.52
Total Water Charges	2,675.21
Amount Due.....	\$ 2,675.21

Message Center (see reverse side for other information)

- Would you like to quickly and easily learn important information about your water? Please let us know how you want to be contacted via our new automated notification system by clicking on the Aqua Notify button at www.aquaamerica.com.
- The due date refers to current charges and any deferred payment amount only. If you do not pay your bill on time, your service could be subject to interruption. To ensure proper credit, please remember to provide your full 16-digit account number when paying your bill.

Keep top portion for your records.
 Return this portion with your payment.

AQUA Water Bill

Aqua Pennsylvania, Inc.
 762 W. Lancaster Avenue • Bryn Mawr, PA 19010-3489

Service To:
TRUSTEES OF U OF PA
0250 KING OF PRUSSIA RD
RADNOR, PA 19087-5220

PLEASE DO NOT REMIT PAYMENT TO THE ABOVE ADDRESS

Cyc=10W8 1up=1646345 HIG

Seq=13997

TRUSTEES OF U OF PA
 NEAL ALI
 0250 KING OF PRUSSIA RD
 RADNOR PA 19087-5235

Account Number - Please print on your check

000349512 0349512

Amount Due **\$ 2,675.21** Current Charges Due Date **December 04, 2015**

Amount Enclosed

\$

Please make check payable to
Aqua PA

MAIL TO ADDRESS ON BACK OF THIS STUB

00034951203495120000002675211



Service To:
TRUSTEES OF U OF PA
0250 KING OF PRUSSIA RD
RADNOR, PA 19087-5220

Account Number
000349512 0349512
 MAIN DIVISION
 1101010 PWSID # PA1460073

Aqua Pennsylvania, Inc.
 762 W. Lancaster Avenue
 Bryn Mawr, PA 19010-3489

Toll Free: **877.987.2782**
 Fax: **866.780.8292**
www.aquaamerica.com

Questions about your water service?... Contact us before the due date.
 Bill Date **October 13, 2015** Total Amount Due **\$ 3,065.49** Current Charges Due Date **November 04, 2015**

Meter Data		Meter	Size	Billing Period	Days	Read Type / Meter Readings		Usage	Units
		09056585	3"	10/09/15	29	A 8157000	A 7351300	380,900	Gallons
				09/10/15		A 8018000	A 7109400		
Average Daily Usage = 13,134 Gallons				Total Days:	29	* A = Actual E = Estimated		Total Usage:	380,900 Gallons

Billing Detail

Amount Owed from Last Bill	\$ 4,724.02
Total Payments Received	4,724.02
Remaining Balance	0.00
Customer Charge.....	257.00
10,000 gallons @ \$0.01 per gallon	100.00
Next 23,300 gallons @ \$0.008785 per gallon.....	204.69
Next 300,000 gallons @ \$0.007288 per gallon.....	2,186.40
Next 47,600 gallons @ \$0.006668 per gallon.....	317.40
Total Water Charges	3,065.49
Amount Due.....	\$ 3,065.49

Message Center (see reverse side for other information)

- Would you like to quickly and easily learn important information about your water? Please let us know how you want to be contacted via our new automated notification system by clicking on the Aqua Notify button at www.aquaamerica.com.
- The due date refers to current charges and any deferred payment amount only. If you do not pay your bill on time, your service could be subject to interruption. To ensure proper credit, please remember to provide your full 16-digit account number when paying your bill.

Keep top portion for your records.
 Return this portion with your payment.

AQUA Water Bill

Aqua Pennsylvania, Inc.
 762 W. Lancaster Avenue • Bryn Mawr, PA 19010-3489

Service To:
TRUSTEES OF U OF PA
0250 KING OF PRUSSIA RD
RADNOR, PA 19087-5220

PLEASE DO NOT REMIT PAYMENT TO THE ABOVE ADDRESS

Cyc=10W8 1up=1636257

Seq=14286

TRUSTEES OF U OF PA
 NEAL ALI
 0250 KING OF PRUSSIA RD
 RADNOR PA 19087-5235

Account Number - Please print on your check

000349512 0349512

Amount Due **\$ 3,065.49** Current Charges Due Date **November 04, 2015**

Amount Enclosed

\$,

Please make check payable to
Aqua PA
 MAIL TO ADDRESS ON BACK OF THIS STUB

00034951203495120000003065495



Service To:
TRUSTEES OF U OF PA
0250 KING OF PRUSSIA RD
RADNOR, PA 19087-5220

Account Number
000349512 0349512
 MAIN DIVISION
 1101010 PWSID # PA1460073

Aqua Pennsylvania, Inc.
 762 W. Lancaster Avenue
 Bryn Mawr, PA 19010-3489

Toll Free: **877.987.2782**
 Fax: **866.780.8292**
 www.aquaamerica.com

Questions about your water service?... Contact us before the due date.
 Bill Date **September 14, 2015** Total Amount Due **\$ 4,724.02**
 Current Charges Due Date **October 06, 2015**

Meter Data

Meter	Size	Billing Period	Days	Read Type / Meter Readings		Usage	Units
09056585	3"	09/10/15	19	A 8018000	A 7109400	276,300	Gallons
		08/22/15		A 7937000	A 6914100		
Average Daily Usage = 14,542 Gallons		Total Days:	19	* A = Actual E = Estimated		Total Usage:	276,300 Gallons

Billing Detail

Amount Owed from Last Bill	\$ 5,994.97
Total Payments Received	3,446.23
Remaining Balance	2,548.74 <i>-pd</i>
Customer Charge	162.77
6,333 gallons @ \$0.01 per gallon	63.33
Next 14,757 gallons @ \$0.008785 per gallon	129.64
Next 190,000 gallons @ \$0.007288 per gallon	1,384.72
Next 65,210 gallons @ \$0.006668 per gallon	434.82
Total Water Charges	2,175.28 ✓
Amount Due	\$ 4,724.02

Message Center (see reverse side for other information)

- Would you like to quickly and easily learn important information about your water? Please let us know how you want to be contacted via our new automated notification system by clicking on the Aqua Notify button at www.aquaamerica.com.
- The due date refers to current charges and any deferred payment amount only. If you do not pay your bill on time, your service could be subject to interruption. To ensure proper credit, please remember to provide your full 16-digit account number when paying your bill.

Keep top portion for your records.
 Return this portion with your payment.

AQUA Water Bill

Aqua Pennsylvania, Inc.
 762 W. Lancaster Avenue • Bryn Mawr, PA 19010-3489

Service To:
TRUSTEES OF U OF PA
0250 KING OF PRUSSIA RD
RADNOR, PA 19087-5220

PLEASE DO NOT REMIT PAYMENT TO THE ABOVE ADDRESS

Cyc=10W8 Tup=1626188

Seq=14147

TRUSTEES OF U OF PA
 NEAL ALI
 0250 KING OF PRUSSIA RD
 RADNOR PA 19087-5235

Account Number - Please print on your check

000349512 0349512

Amount Due Current Charges Due Date

\$ 4,724.02 October 06, 2015

Amount Enclosed

\$

Please make check payable to

Aqua PA

MAIL TO ADDRESS ON BACK OF THIS STUB

00034951203495120000004724021



Service To:
 TRUSTEES OF U OF PA
 0250 KING OF PRUSSIA RD
 RADNOR, PA 19087-5220

Account Number
000349512 0349512
 MAIN DIVISION
 1101010 PWSID # PA1460673

Aqua Pennsylvania, Inc.
 762 W. Lancaster Avenue
 Bryn Mawr, PA 19010-3489

Toll Free: **877.987.2782**
 Fax: **866.780.8292**
 www.aquaamerica.com

Questions about your water service?... Contact us before the due date.

Bill Date: **August 25, 2015** Total Amount Due: **\$ 5,994.97** Current Charges Due Date: **September 16, 2015**

Meter Data

Meter	Size	Billing Period	Days	Read Type / Meter Readings		Usage	Units
09056585	3"	08/22/15	102	A 7937000	A 6914100	1,633,300	Gallons
		05/12/15		A 7389000	A 5828800		
Average Daily Usage = 16,012 Gallons		Total Days: 102		* A = Actual E = Estimated		Total Usage: 1,633,300	Gallons

Billing Detail

Amount Owed from Last Bill \$ 3,446.23
 Total Payments Received 0.00
 Remaining Balance 3,446.23 - Pd
 Adjustments 10,129.32 Credit
 Customer Charge 873.80
 34,000 gallons @ \$0.01 per gallon 340.00
 Next 79,220 gallons @ \$0.008785 per gallon 695.95
 Next 1,020,000 gallons @ \$0.007288 per gallon... 7,433.76
 Next 500,080 gallons @ \$0.006668 per gallon 3,334.55
 Total Water Charges 12,678.06
 Amount Due \$ 5,994.97 # 2548.74

Message Center (see reverse side for other information)

- Would you like to quickly and easily learn important information about your water? Please let us know how you want to be contacted via our new automated notification system by clicking on the Aqua Notify button at www.aquaamerica.com.
- The due date refers to current charges and any deferred payment amount only. If you do not pay your bill on time, your service could be subject to interruption. To ensure proper credit, please remember to provide your full 16-digit account number when paying your bill.

Keep top portion for your records.
 Return this portion with your payment.

AQUA Water Bill

Aqua Pennsylvania, Inc.
 762 W. Lancaster Avenue • Bryn Mawr, PA 19010-3489

Service To:
 TRUSTEES OF U OF PA
 0250 KING OF PRUSSIA RD
 RADNOR, PA 19087-5220

PLEASE DO NOT REMIT PAYMENT TO THE ABOVE ADDRESS

Cyc= Top=1620065

Seq=40288

Account Number - Please print on your check

000349512 0349512

Amount Due: **\$ 5,994.97** Current Charges Due Date: **September 16, 2015**

Amount Enclosed

\$

Please make check payable to
Aqua PA

MAIL TO ADDRESS ON BACK OF THIS STUB

TRUSTEES OF U OF PA
 NEAL ALI
 0250 KING OF PRUSSIA RD
 RADNOR PA 19087-5235

0003495120349512000000599497



Service To:
TRUSTEES OF U OF PA
0250 KING OF PRUSSIA RD
RADNOR, PA 19087-5220

Account Number
000349512 0349512
 MAIN DIVISION
 1101070 PWSID # PA1460073

Aqua Pennsylvania, Inc.
 762 W. Lancaster Avenue
 Bryn Mawr, PA 19010-3489

Toll Free: **877.987.2782**
 Fax: **866.780.8292**
 www.aquaamerica.com

Questions about your water service?... Contact us before the due date.
 Bill Date **August 13, 2015** Total Amount Due **\$ 3,446.23** Current Charges Due Date **September 04, 2015**

Meter Data

Meter	Size	Billing Period	Days	Read Type / Meter Readings	Usage	Units
09056585	3"	08/11/15	29	E 7712000 A 6788400	438,000	Gallons
		07/13/15		7609000 A 6453400		
Average Daily Usage = 15,103 Gallons		Total Days:	29	* A = Actual E = Estimated	Total Usage:	438,000 Gallons

Billing Detail

Amount Owed from Last Bill	\$ 3,590.26
Total Payments Received	3,590.26
Remaining Balance	0.00
Customer Charge	257.00
10,000 gallons @ \$0.01 per gallon	100.00
Next 23,300 gallons @ \$0.008785 per gallon.....	204.69
Next 300,000 gallons @ \$0.007288 per gallon.....	2,186.40
Next 104,700 gallons @ \$0.006668 per gallon.....	698.14
Total Water Charges	3,446.23
Amount Due.....	\$ 3,446.23

Message Center (see reverse side for other information)

- This bill is based on an estimated reading. Your actual usage could be higher. Please refer to the back for estimated billing procedure.
- Would you like to quickly and easily learn important information about your water? Please let us know how you want to be contacted via our new automated notification system by clicking on the Aqua Notify button at www.aquaamerica.com.
- The due date refers to current charges and any deferred payment amount only. If you do not pay your bill on time, your service could be subject to interruption. To ensure proper credit, please remember to provide your full 16-digit account number when paying your bill.

Keep top portion for your records.
 Return this portion with your payment.

AQUA Water Bill

Aqua Pennsylvania, Inc.
 762 W. Lancaster Avenue • Bryn Mawr, PA 19010-3489

Service To:
TRUSTEES OF U OF PA
0250 KING OF PRUSSIA RD
RADNOR, PA 19087-5220

PLEASE DO NOT REMIT PAYMENT TO THE ABOVE ADDRESS

Cyc=10W8 1up=1516255

Seq=15495

TRUSTEES OF U OF PA
 NEAL ALI
 0250 KING OF PRUSSIA RD
 RADNOR PA 19087-5235

Account Number - Please print on your check
000349512 0349512
 Amount Due **\$ 3,446.23** Current Charges Due Date **September 04, 2015**

Amount Enclosed

\$

Please make check payable to
Aqua PA
 MAIL TO ADDRESS ON BACK OF THIS STUB

00034951203495120000003446235



Service To:
TRUSTEES OF U OF PA
 0250 KING OF PRUSSIA RD
 RADNOR, PA 19087-5220

Account Number
000349512 0349512
 MAIN DIVISION
 1101010 PWSID # PA1460073

Aqua Pennsylvania, Inc.
 762 W. Lancaster Avenue
 Bryn Mawr, PA 19010-3489

Toll Free: **877.987.2782**
 Fax: **866.780.8292**
 www.aquaamerica.com

Questions about your water service?... Contact us before the due date.
 Bill Date **July 15, 2015** Total Amount Due **\$ 3,590.26** Current Charges Due Date **August 06, 2015**

Meter Data

Meter	Size	Billing Period	Days	Read Type / Meter Readings	Usage	Units
09056585	3"	07/13/15	32	E 7609000 A 6453400	459,600	Gallons
		06/11/15		7496000 A 6106800		
Average Daily Usage = 14,362 Gallons		Total Days: 32		* A = Actual E = Estimated	Total Usage:	459,600 Gallons

Billing Detail

Amount Owed from Last Bill..... \$ 3,092.83
 Total Payments Received..... 3,092.83
Remaining Balance..... 0.00
 Customer Charge..... 257.00
 10,000 gallons @ \$0.01 per gallon..... 100.00
 Next 23,300 gallons @ \$0.008785 per gallon..... 204.69
 Next 300,000 gallons @ \$0.007288 per gallon..... 2,186.40
 Next 126,300 gallons @ \$0.006668 per gallon..... 842.17
 Total Water Charges..... 3,590.26
Amount Due..... \$ 3,590.26 ✓

Message Center (see reverse side for other information)

- This bill is based on an estimated reading. Your actual usage could be higher. Please refer to the back for estimated billing procedure.
- Would you like to quickly and easily learn important information about your water? Please let us know how you want to be contacted via our new automated notification system by clicking on the Aqua Notify button at www.aquaamerica.com.
- The due date refers to current charges and any deferred payment amount only. If you do not pay your bill on time, your service could be subject to interruption. To ensure proper credit, please remember to provide your full 16-digit account number when paying your bill.

Keep top portion for your records.
 Return this portion with your payment.

AQUA Water Bill

Aqua Pennsylvania, Inc.
 762 W. Lancaster Avenue • Bryn Mawr, PA 19010-3489

Service To:
TRUSTEES OF U OF PA
 0250 KING OF PRUSSIA RD
 RADNOR, PA 19087-5220

PLEASE DO NOT REMIT PAYMENT TO THE ABOVE ADDRESS

Cyc=10WB 1up=1806775 10065 1 AV 0.391 Seq=10065

AUT0SCH 5-DIGIT 19087 C 23 P 25
 TRUSTEES OF U OF PA
 NEAL ALI
 0250 KING OF PRUSSIA RD
 RADNOR PA 19087-5235



Account Number - Please print on your check
000349512 0349512
 Amount Due **\$ 3,590.26** Current Charges Due Date **August 06, 2015**

Amount Enclosed
 \$

Please make check payable to
Aqua PA
 MAIL TO ADDRESS ON BACK OF THIS STUB

00034951203495120000003590266





Service To:
TRUSTEES OF U OF PA
0250 KING OF PRUSSIA RD
RADNOR, PA 19087-5220

Account Number
000349512 0349512
 MAIN DIVISION
 1101010 PWSID # PA1460073

Aqua Pennsylvania, Inc.
 762 W. Lancaster Avenue
 Bryn Mawr, PA 19010-3489

Toll Free: **877.987.2782**
 Fax: **866.780.8292**
www.aquaamerica.com

Questions about your water service?... Contact us before the due date.
 Bill Date **June 15, 2015** Total Amount Due **\$ 3,092.83** Current Charges Due Date **July 07, 2015**

Meter Data

Meter	Size	Billing Period	Days	Read Type / Meter Readings	Usage	Units
09056585	3"	06/11/15 05/12/15	30	E 7496000 A 6106800 A 7389000 A 5828800	385,000	Gallons
Average Daily Usage = 12,833 Gallons		Total Days: 30		* A = Actual E = Estimated	Total Usage:	385,000 Gallons

Billing Detail

Amount Owed from Last Bill	\$ 2,641.69
Total Payments Received	2,641.69
Remaining Balance	0.00
Customer Charge	257.00
10,000 gallons @ \$0.01 per gallon	100.00
Next 23,300 gallons @ \$0.008785 per gallon	204.69
Next 300,000 gallons @ \$0.007288 per gallon	2,186.40
Next 51,700 gallons @ \$0.006668 per gallon	344.74
Total Water Charges	3,092.83
Amount Due	\$ 3,092.83

Message Center (see reverse side for other information)

- * This bill is based on an estimated reading. Your actual usage could be higher. Please refer to the back for estimated billing procedure.
- Would you like to quickly and easily learn important information about your water? Please let us know how you want to be contacted via our new automated notification system by clicking on the Aqua Notify button at www.aquaamerica.com.
- The due date refers to current charges and any deferred payment amount only. If you do not pay your bill on time, your service could be subject to interruption. To ensure proper credit, please remember to provide your full 16-digit account number when paying your bill.

Keep top portion for your records.
 Return this portion with your payment.

AQUA Water Bill

Aqua Pennsylvania, Inc.
 762 W. Lancaster Avenue • Bryn Mawr, PA 19010-3489

Service To:
TRUSTEES OF U OF PA
0250 KING OF PRUSSIA RD
RADNOR, PA 19087-5220

Account Number - Please print on your check

000349512 0349512

Amount Due **\$ 3,092.83** Current Charges Due Date **July 07, 2015**

Amount Enclosed

\$,

Please make check payable to
Aqua PA

MAIL TO ADDRESS ON BACK OF THIS STUB

PLEASE DO NOT REMIT PAYMENT TO THE ABOVE ADDRESS

Cyc=10W8 sup=1597235

14665 1 AV 0,391
 Seq=14665

AUTOSCH 5-DIGIT 19087 C 33 P 33
 TRUSTEES OF U OF PA
 NEAL ALI
 0250 KING OF PRUSSIA RD
 RADNOR PA 19087-5235



00034951203495120000003092839





Service To:
TRUSTEES OF U OF PA
0250 KING OF PRUSSIA RD
RADNOR, PA 19087-5220

Account Number
000349512 0349512
 MAIN DIVISION
 1101010 PWSID # PA1460073

Aqua Pennsylvania, Inc.
 762 W. Lancaster Avenue
 Bryn Mawr, PA 19010-3489

Toll Free: **877.987.2782**
 Fax: **866.780.8292**
www.aquaamerica.com

Questions about your water service?... Contact us before the due date.
 Bill Date **May 14, 2015** Total Amount Due **\$ 2,641.69** Current Charges Due Date **June 05, 2015**

Meter Data

Meter	Size	Billing Period	Days	Read Type / Meter Readings		Usage	Units
09056585	3"	05/12/15	29	A 7389000	A 5828800	318,700	Gallons
		04/13/15		A 7283000	A 5616100		
Average Daily Usage = 10,989 Gallons		Total-Days:	29	* A = Actual E = Estimated		Total Usage:	318,700 Gallons

Billing Detail

Amount Owed from Last Bill \$ 2,369.11
 Total Payments Received..... 2,369.11
Remaining Balance **0.00**
 Customer Charge..... 257.00
 10,000 gallons @ \$0.01 per gallon 100.00
 Next 23,300 gallons @ \$0.008785 per gallon..... 204.69
 Next 285,400 gallons @ \$0.007288 per gallon..... 2,080.00
 Total Water Charges 2,641.69
Amount Due..... **\$ 2,641.69**

Message Center (see reverse side for other information)

- Would you like to quickly and easily learn important information about your water? Please let us know how you want to be contacted via our new automated notification system by clicking on the Aqua Notify button at www.aquaamerica.com.
- The due date refers to current charges and any deferred payment amount only. If you do not pay your bill on time, your service could be subject to interruption. To ensure proper credit, please remember to provide your full 16-digit account number when paying your bill.

PAP-516-E-0

Keep top portion for your records.
 Return this portion with your payment.

AQUA Water Bill

Aqua Pennsylvania, Inc.
 762 W. Lancaster Avenue • Bryn Mawr, PA 19010-3489

Service To:
TRUSTEES OF U OF PA
0250 KING OF PRUSSIA RD
RADNOR, PA 19087-5220

Account Number - Please print on your check
000349512 0349512

Amount Due **\$ 2,641.69** Current Charges Due Date **June 05, 2015**

Amount Enclosed
 \$,

Please make check payable to
Aqua PA
MAIL TO ADDRESS ON BACK OF THIS STUB

PLEASE DO NOT REMIT PAYMENT TO THE ABOVE ADDRESS

Cyc=10W8 1up=1587765 16127 1 AV 0.381 Seq=16127

AUTOSCH 5-DIGIT 19087 C 53 P 55
 TRUSTEES OF U OF PA
 NEAL ALI
 250 KING OF PRUSSIA RD
 RADNOR PA 19087-5235



00034951203495120000002641695





Service To:
TRUSTEES OF U OF PA
0250 KING OF PRUSSIA RD
RADNOR, PA 19087-S220

Account Number
000349512 0349512
 MAIN DIVISION
 1101010 PWSID # PA1460073

Aqua Pennsylvania, Inc.
 762 W. Lancaster Avenue
 Bryn Mawr, PA 19010-3489

Toll Free: **877.987.2782**
 Fax: **866.780.8292**
www.aquaamerica.com

Questions about your water service?... Contact us before the due date.
 Bill Date **April 15, 2015** Total Amount Due **\$ 2,369.11** Current Charges Due Date **May 07, 2015**

Meter Data

Meter	Size	Billing Period	Days	Read Type / Meter Readings		Usage	Units
09056585	3"	04/13/15	33	A 7283000	A 5616100	281,300	Gallons
		03/11/15		A 7203000	A 5414800		
Average Daily Usage = 8,524 Gallons		Total Days: 33		* A = Actual E = Estimated		Total Usage: 281,300	Gallons

Billing Detail

Amount Owed from Last Bill \$ 2,190.56
 Total Payments Received 2,190.56
Remaining Balance..... 0.00
 Customer Charge..... 257.00
 10,000 gallons @ \$0.01 per gallon 100.00
 Next 23,300 gallons @ \$0.008785 per gallon..... 204.69
 Next 248,000 gallons @ \$0.007288 per gallon..... 1,807.42
 Total Water Charges 2,369.11
Amount Due..... \$ 2,369.11

Message Center (see reverse side for other information)

- Would you like to quickly and easily learn important information about your water? Please let us know how you want to be contacted via our new automated notification system by clicking on the Aqua Notify button at www.aquaamerica.com.
- The due date refers to current charges and any deferred payment amount only. If you do not pay your bill on time, your service could be subject to interruption. To ensure proper credit, please remember to provide your full 16-digit account number when paying your bill.

PAF-910-B-0

Keep top portion for your records.
 Return this portion with your payment.

AQUA Water Bill

Aqua Pennsylvania, Inc.
 762 W. Lancaster Avenue • Bryn Mawr, PA 19010-3489

Service To:
TRUSTEES OF U OF PA
0250 KING OF PRUSSIA RD
RADNOR, PA 19087-S220

Account Number - Please print on your check
000349512 0349512

Amount Due **\$ 2,369.11** Current Charges Due Date **May 07, 2015**

Amount Enclosed
 \$,

Please make check payable to
Aqua PA
 MAIL TO ADDRESS ON BACK OF THIS STUB

PLEASE DO NOT REMIT PAYMENT TO THE ABOVE ADDRESS

Cyc=10WB 1up=1578068 82141 AV 0.381 Seq=8214

****AUTO**SCH 5-DIGIT 19087 C 19 P 21**
TRUSTEES OF U OF PA
NEAL ALI
250 KING OF PRUSSIA RD
RADNOR PA 19087-5235



00034951203495120000002369114

1 of 1

008214



Service To:
TRUSTEES OF U OF PA
0250 KING OF PRUSSIA RD
RADNOR, PA 19087-5220

Account Number
000349512 0349512
 MAIN DIVISION
 1101010 PWSID # PA1460073

Aqua Pennsylvania, Inc.
 762 W. Lancaster Avenue
 Bryn Mawr, PA 19010-3489

Toll Free: **877.987.2782**
 Fax: **866.780.8292**
 www.aquaamerica.com

Questions about your water service?... Contact us before the due date.
 Bill Date **March 17, 2015** Total Amount Due **\$ 2,190.56** Current Charges Due Date **April 08, 2015**

Meter Data

Meter	Size	Billing Period	Days	Read Type / Meter Readings	Usage	Units
09056585	3"	03/11/15 02/10/15	29	A 7203000 A 5414800 A 7132000 A 5229000	256,800	Gallons
Average Daily Usage = 8,855 Gallons		Total Days:	29	* A = Actual E = Estimated	Total Usage:	256,800 Gallons

Billing Detail

Amount Owed from Last Bill \$ 2,178.17
 Total Payments Received..... 2,178.17
Remaining Balance 0.00
 Customer Charge..... 257.00
 10,000 gallons @ \$0.01 per gallon 100.00
 Next 23,300 gallons @ \$0.008785 per gallon..... 204.69
 Next 223,500 gallons @ \$0.007288 per gallon..... 1,628.87
 Total Water Charges 2,190.56
Amount Due..... \$ 2,190.56

Message Center (see reverse side for other information)

- Would you like to quickly and easily learn important information about your water? Please let us know how you want to be contacted via our new automated notification system by clicking on the Aqua Notify button at www.aquaamerica.com.
- The due date refers to current charges and any deferred payment amount only. If you do not pay your bill on time, your service could be subject to interruption. To ensure proper credit, please remember to provide your full 16-digit account number when paying your bill.

PAP-515-B-0

Keep top portion for your records.
 Return this portion with your payment.

AQUA Water Bill

Aqua Pennsylvania, Inc.
 762 W. Lancaster Avenue • Bryn Mawr, PA 19010-3489

Service To:
TRUSTEES OF U OF PA
0250 KING OF PRUSSIA RD
RADNOR, PA 19087-5220

Account Number - Please print on your check

000349512 0349512

Amount Due Current Charges Due Date

\$ 2,190.56 April 08, 2015

Amount Enclosed

\$

Please make check payable to
Aqua PA

MAIL TO ADDRESS ON BACK OF THIS STUB

PLEASE DO NOT REMIT PAYMENT TO THE ABOVE ADDRESS

Cyc=10W8 1up=1568397 10991 1 AV 0.361 Seq=10961

AUTOSCH 5-DIGIT 19087 C 34 P 40
 TRUSTEES OF U OF PA
 NEAL ALI
 250 KING OF PRUSSIA RD
 RADNOR PA 19087-5235



00034951203495120000002190565



1 of 1

16010



Service To:
TRUSTEES OF U OF PA
0250 KING OF PRUSSIA RD
RADNOR, PA 19087-5220

Account Number
000349512 0349512
 MAIN DIVISION
 1101010 PWSID # PA1460073

Aqua Pennsylvania, Inc.
 762 W. Lancaster Avenue
 Bryn Mawr, PA 19010-3489

Toll Free: **877.987.2782**
 Fax: **866.780.8292**
www.aquaamerica.com

Questions about your water service?... Contact us before the due date.
 Bill Date: **February 12, 2015** Total Amount Due: **\$ 2,178.17** Current Charges Due Date: **March 06, 2015**

Meter Data

Meter	Size	Billing Period	Days	Read Type / Meter Readings		Usage	Units
09056585	3"	02/10/15	29	A 7132000	A 5229000	255,100	Gallons
		01/12/15		A 7055000	A 5050900		
Average Daily Usage = 8,796 Gallons		Total Days:	29	* A = Actual E = Estimated		Total Usage:	255,100 Gallons

Billing Detail

Amount Owed from Last Bill..... \$ 2,100.92
 Total Payments Received..... 2,100.92
 Remaining Balance..... **0.00**
 Customer Charge..... 257.00
 10,000 gallons @ \$0.01 per gallon..... 100.00
 Next 23,300 gallons @ \$0.008785 per gallon..... 204.69
 Next 221,800 gallons @ \$0.007288 per gallon..... 1,616.48
 Total Water Charges..... 2,178.17
 Amount Due..... **\$ 2,178.17**

Message Center (see reverse side for other information)

- Would you like to quickly and easily learn important information about your water? Please let us know how you want to be contacted via our new automated notification system by clicking on the Aqua Notify button at www.aquaamerica.com.
- The due date refers to current charges and any deferred payment amount only. If you do not pay your bill on time, your service could be subject to interruption. To ensure proper credit, please remember to provide your full 16-digit account number when paying your bill.

Keep top portion for your records.
 Return this portion with your payment.

PAP-S15-A-D

AQUA Water Bill

Aqua Pennsylvania, Inc.
 762 W. Lancaster Avenue • Bryn Mawr, PA 19010-3489

Service To:
TRUSTEES OF U OF PA
0250 KING OF PRUSSIA RD
RADNOR, PA 19087-5220

PLEASE DO NOT REMIT PAYMENT TO THE ABOVE ADDRESS

Cyc=10W8 1up=1557329

9105 1 AV 0.381
 Seq=9105

0349512

AUTOSCH 5-DIGIT 19087 C 21 P 24
 TRUSTEES OF U OF PA
 NEAL ALI
 250 KING OF PRUSSIA RD
 RADNOR PA 19087-5235



Account Number - Please print on your check

000349512 0349512

Amount Due Current Charges Due Date

\$ 2,178.17 March 06, 2015

Amount Enclosed

\$, .

Please make check payable to

Aqua PA

MAIL TO ADDRESS ON BACK OF THIS STUB

00034951203495120000002178179





Service To:
TRUSTEES OF U OF PA
0250 KING OF PRUSSIA RD
RADNOR, PA 19087-5220

Account Number
000349512 0349512
 MAIN DIVISION
 1101010 PWSID # PA1460073

Aqua Pennsylvania, Inc.
 762 W. Lancaster Avenue
 Bryn Mawr, PA 19010-3489

Toll Free: **877.987.2782**
 Fax: **866.780.8292**
www.aquaamerica.com

Questions about your water service? ... Contact us before the due date.

Bill Date: **January 15, 2015** Total Amount Due: **\$ 2,100.92** Current Charges Due Date: **February 06, 2015**

Meter Data

Meter	Size	Billing Period	Days	Read Type / Meter Readings		Usage	Units
09056585	3"	01/12/15	32	A 7055000	A 5050900	244,500	Gallons
		12/11/14		A 6989000	A 4872400		
Average Daily Usage = 7,640 Gallons		Total Days: 32		* A = Actual E = Estimated		Total Usage:	244,500 Gallons

Billing Detail

Amount Owed from Last Bill.....	\$ 2,147.15
Total Payments Received.....	2,147.15
Remaining Balance.....	0.00
Customer Charge.....	257.00
10,000 gallons @ \$0.01 per gallon.....	100.00
Next 23,300 gallons @ \$0.008785 per gallon.....	204.69
Next 211,200 gallons @ \$0.007288 per gallon.....	1,539.23
Total Water Charges.....	2,100.92
Amount Due.....	\$ 2,100.92

Message Center (see reverse side for other information)

- Would you like to quickly and easily learn important information about your water? Please let us know how you want to be contacted via our new automated notification system by clicking on the Aqua Notify button at www.aquaamerica.com.
- The due date refers to current charges and any deferred payment amount only. If you do not pay your bill on time, your service could be subject to interruption. To ensure proper credit, please remember to provide your full 16-digit account number when paying your bill.

PAP-515-A-0

Keep top portion for your records.
 Return this portion with your payment.

AQUA Water Bill

Aqua Pennsylvania, Inc.
 762 W. Lancaster Avenue • Bryn Mawr, PA 19010-3489

Service To:
TRUSTEES OF U OF PA
0250 KING OF PRUSSIA RD
RADNOR, PA 19087-5220

Account Number - Please print on your check

000349512 0349512

Amount Due: **\$ 2,100.92** Current Charges Due Date: **February 06, 2015**

Amount Enclosed

\$,

Please make check payable to
Aqua PA

MAIL TO ADDRESS ON BACK OF THIS STUB

PLEASE DO NOT REMIT PAYMENT TO THE ABOVE ADDRESS

Cyc=10W8 1up=1547598

13329 1 AV 0.381
 Seq=13329

0349512

AUTOSCH 5-DIGIT 19087 C 39 P 44
 TRUSTEES OF U OF PA
 NEAL ALI
 250 KING OF PRUSSIA RD
 RADNOR PA 19087-5235



00034951203495120000002100920





Service To:
TRUSTEES OF U OF PA
0250 KING OF PRUSSIA RD
RADNOR, PA 19087-5220

Account Number:
000349512 0349512
 MAIN DIVISION
 1101010 PWSID # PA1460073

Aqua Pennsylvania, Inc.
 762 W. Lancaster Avenue
 Bryn Mawr, PA 19010-3489

Toll Free: **877.987.2782**
 Fax: **866.780.8292**
 www.aquaamerica.com

Questions about your water service? ... Contact us before the due date.
 Bill Date: **December 15, 2014** Total Amount Due: **\$ 2,147.15** Current Charges Due Date: **January 06, 2015**

Meter Data

Meter	Size	Billing Period	Days	Read Type / Meter Readings		Usage	Units
09056585	3"	12/11/14	29	A 6989000	A 4872400	248,100	Gallons
		11/12/14		A 6912000	A 4701300		
Average Daily Usage = 8,555 Gallons		Total Days:	29	* A = Actual E = Estimated		Total Usage:	248,100 Gallons

Billing Detail

Amount Owed from Last Bill \$ 2,609.62
 Total Payments Received..... 2,609.62
Remaining Balance..... 0.00
 Customer Charge..... 257.00
 10,000 gallons @ \$0.01 per gallon 100.00
 Next 23,300 gallons @ \$0.008785 per gallon..... 204.69
 Next 214,800 gallons @ \$0.007288 per gallon..... 1,565.46
 Total Water Charges 2,127.15
 Annual Backflow Admin Fee \$5 Per Device 20.00
Amount Due..... \$ 2,147.15

Message Center (see reverse side for other information)

- Would you like to quickly and easily learn important information about your water? Please let us know how you want to be contacted via our new automated notification system by clicking on the Aqua Notify button at www.aquaamerica.com.
- The due date refers to current charges and any deferred payment amount only. If you do not pay your bill on time, your service could be subject to interruption. To ensure proper credit, please remember to provide your full 16-digit account number when paying your bill.

Keep top portion for your records.
 Return this portion with your payment.

PAP-515-A-0

AQUA Water Bill

Aqua Pennsylvania, Inc.
 762 W. Lancaster Avenue • Bryn Mawr, PA 19010-3489

Service To:
TRUSTEES OF U OF PA
0250 KING OF PRUSSIA RD
RADNOR, PA 19087-5220

PLEASE DO NOT REMIT PAYMENT TO THE ABOVE ADDRESS

Cyc=10W8 1up=1536227

1526 1 AV 0.381

Seq=1526

0349512

AUTOSCH 5-DIGIT 19087 C 5 P 5
 TRUSTEES OF U OF PA
 NEAL ALI
 250 KING OF PRUSSIA RD
 RADNOR PA 19087-5235



Account Number - Please print on your check

000349512 0349512

Amount Due **\$ 2,147.15** Current Charges Due Date **January 06, 2015**

Amount Enclosed

\$,

Please make check payable to
Aqua PA

MAIL TO ADDRESS ON BACK OF THIS STUB

00034951203495120000002147159





Service To:
TRUSTEES OF U OF PA
0250 KING OF PRUSSIA RD
RADNOR, PA 19087-5220

Account Number
000349512 0349512
 MAIN DIVISION
 1101010 PWSID # PA1450075



Aqua Pennsylvania, Inc.
 762 W. Lancaster Avenue
 Bryn Mawr, PA 19010-3489

Toll Free: **877.987.2782**
 Fax: **866.780.8292**
www.aquaamerica.com

Questions about your water service?... Contact us before the due date.

Bill Date: **November 14, 2014** Total Amount Due: **\$ 2,609.62** Current Charges Due Date: **December 08, 2014**

Meter Data

Meter	Size	Billing Period	Days	Read Type / Meter Readings	Usage	Units
09056585	3"	11/12/14	33	A 6912000 A 4701300	314,300	Gallons
		10/10/14		A 6801000 A 4498000		
Average Daily Usage = 9,524 Gallons		Total Days:	33	* A = Actual E = Estimated	Total Usage:	314,300 Gallons

Billing Detail

Amount Owed from Last Bill \$ 3,034.81
 Total Payments Received 3,034.81
Remaining Balance 0.00
 Customer Charge 257.00
 10,000 gallons @ \$0.01 per gallon 100.00
 Next 23,300 gallons @ \$0.008785 per gallon 204.69
 Next 281,000 gallons @ \$0.007288 per gallon 2,047.93
 Total Water Charges 2,609.62
Amount Due \$ 2,609.62

Message Center (see reverse side for other information)

- Would you like to quickly and easily learn important information about your water? Please let us know how you want to be contacted via our new automated notification system by clicking on the Aqua Notify button at www.aquaamerica.com.
- The due date refers to current charges and any deferred payment amount only. If you do not pay your bill on time, your service could be subject to interruption. To ensure proper credit, please remember to provide your full 16-digit account number when paying your bill.

Keep top portion for your records.
 Return this portion with your payment.

AQUA Water Bill

Aqua Pennsylvania, Inc.
 762 W. Lancaster Avenue • Bryn Mawr, PA 19010-3489

Service To:
TRUSTEES OF U OF PA
0250 KING OF PRUSSIA RD
RADNOR, PA 19087-5220

Account Number - Please print on your check

000349512 0349512

Amount Due: **\$ 2,609.62** Current Charges Due Date: **December 08, 2014**

Amount Enclosed

\$,

Please make check payable to
Aqua PA

MAIL TO ADDRESS ON BACK OF THIS SLIP

PLEASE DO NOT REMIT PAYMENT TO THE ABOVE ADDRESS

Cyc=10W9 1up=1525989A PC=H

Seq=84

0349512

*****SINGLE-PIECE C 1 P 2
 TRUSTEES OF U OF PA
 NEAL ALI
 250 KING OF PRUSSIA RD
 RADNOR PA 19087-5235



00034951203495120000002609622



Pennoni Associates Inc.

Consulting Engineers

JOB NO.: **UPHS1504**

SHEET: 1 of 1

DATE:

1/23/2017

PROJECT: **Penn Medicine - Radnor**

BY: CRP

SUBJECT: **Hotel Water Data Summary**

CHK'D

BILLING DATE	BILLING DATE	TOTAL GALLONS USED DURING BILLING CYCLE	NUMBER OF DAYS IN BILLING CYCLE	TOTAL GALLONS USED PER DAY (GPD)	No. of Rooms Occupied	GPD/Room
12/11/2015	3/2/2016	677,000.00	82	8,256.10	76	108.63
3/2/2016	6/6/2016	825,000.00	96	8,593.75	76	113.08
6/6/2016	9/6/2016	872,000.00	92	9,478.26	76	124.71
9/6/2016	12/7/2016	750,000.00	92	8,152.17	76	107.27
	TOTALS	3,124,000.00	362.00	34,480.28		453.69
	AVERAGE	781,000.00		8,620.07		113.42

ASSUME 80% OCCUPANCY FOR 96 ROOM HOTEL
 96 SUITE HOTEL FULLY OCCUPIED
 AVERAGE FLOW PER ROOM


76.00 ROOMS OCCUPIED
 10,889 gpd
 113.00 gpd/room

WARRINGTON TOWNSHIP WATER & SEWER DEPARTMENT

852 Easton Rd, Warrington, PA 18976 Phone: 215-343-1800

Account Number: **420024-420024**
Name: HOMEWOOD SUITES
Service Location: 2650 KELLY RD

Invoice Date: 12/16/2016
Invoice Number: 702060
Payment Due Date: 01/17/2016

SERVICE	CURRENT DATE	CURRENT READING	PREVIOUS DATE	PREVIOUS READING	USE		
Water	12/7/2016	12,417	9/6/2016	11,667	750		
						Current Charges	
						Balance	970.37
						Sewer	4,857.65
						Water	3,494.28
						PAY BY DUE DATE \$9,322.30	
828 Please keep this portion for your records						DUE DATE: January 17, 2016	
						PAY AFTER DUE DATE \$10,157.49	

A ten percent (10%) penalty will be added to any balance not paid by the due date.

NOTES AND OTHER IMPORTANT INFORMATION ABOUT YOUR ACCOUNT

- To pay your bill online**
- 1) Go to www.warringtontownship.org, then Departments
 - 2) Click on Water and Sewer, then Online payments.
 - 3) In the SEARCH field (on the LEFT side of the screen) enter your entire account number with the dash.
 - 4) Enter JUST your LAST name. Click on the blue "ubpayment", then checkout.

Checks should be made payable to WTWSD


The Warrington Township 2014 Water Quality report is available
<http://www.warringtontownship.org/waterandsewer.cfm>

WARRINGTON TOWNSHIP WATER & SEWER DEPARTMENT

852 Easton Rd, Warrington, PA 18976 Phone: 215-343-1800

Account Number: **420024-420024**
Name: **HOMWOOD SUITES**
Service Location: **2650 KELLY RD**

Invoice Date: **09/16/2016**
Invoice Number: **679177**
Payment Due Date: **10/17/2016**

SERVICE	CURRENT DATE	CURRENT READING	PREVIOUS DATE	PREVIOUS READING	USE	
Water	9/6/2016	11,667	6/6/2016	10,795	872	
						Current Charges
						Balance 0.00
						Sewer 5,646.99
						Water 4,056.70
						
821 Please keep this portion for your records						PAY BY DUE DATE \$9,703.69
						DUE DATE: October 17, 2016
						PAY AFTER DUE DATE \$10,674.06

A ten percent (10%) penalty will be added to any balance not paid by the due date.

NOTES AND OTHER IMPORTANT INFORMATION ABOUT YOUR ACCOUNT

**Please note our rates have increased for 2016 usage.
Please be mindful of your water usage, visit
www.warringtontownship.org for more tips and to view
the 2015 Water Quality Report.**

TO PAY ONLINE


- 1) Go to www.warringtontownship.org, then Departments
- 2) Click on Water and Sewer, then Online payments.
- 3) In the SEARCH field (on the LEFT side of the screen) enter your entire account number with the dash.
- 4) Enter JUST your LAST name. Click on the blue "ubpayment," then checkout.

WARRINGTON TOWNSHIP WATER & SEWER DEPARTMENT

852 Easton Rd, Warrington, PA 18976 Phone: 215-343-1800

Account Number: **420024-420024**
Name: **HOMEWOOD SUITES**
Service Location: **2650 KELLY RD**

Invoice Date: 06/16/2016
Invoice Number: 646570
Payment Due Date: 07/15/2016

SERVICE	CURRENT		PREVIOUS		USE		
	DATE	READING	DATE	READING			
Water	6/6/2016	10,795	3/2/2016	9,970	825	Current Charges	
						Balance	0.00
						Sewer	5,342.90
						Water	3,840.03
						PAY BY DUE DATE \$9,182.93	
821 Please keep this portion for your records						DUE DATE: July 15, 2016	
						PAY AFTER DUE DATE \$10,101.22	

A ten percent (10%) penalty will be added to any balance not paid by the due date.

NOTES AND OTHER IMPORTANT INFORMATION ABOUT YOUR ACCOUNT

**Please note our rates have increased for 2016 usage.
Although, Warrington has sufficient water supply,
please be mindful of your water usage.
Visit www.warringtontownship.org for more tips.**

TO PAY ONLINE


- 1) Go to www.warringtontownship.org, then Departments
- 2) Click on Water and Sewer, then Online payments.
- 3) In the SEARCH field (on the LEFT side of the screen) enter your entire account number with the dash.
- 4) Enter JUST your LAST name. Click on the blue "ubpayment," then checkout.

WARRINGTON TOWNSHIP WATER & SEWER DEPARTMENT

852 Easton Rd, Warrington, PA 18976 Phone: 215-343-1800

Account Number: **420024-420024**
Name: **HOMWOOD SUITES**
Service Location: **2650 KELLY RD**

Invoice Date: 03/09/2016
Invoice Number: 617383
Payment Due Date: 04/09/2016

SERVICE	CURRENT DATE	CURRENT READING	PREVIOUS DATE	PREVIOUS READING	USE		
Water	3/2/2016	9,970	12/11/2015	9,293	677	Current Charges	
						Balance	0.00
						Sewer	4,256.56
						Water	3,069.76
						PAY BY DUE DATE \$7,326.32	
821 Please keep this portion for your records						DUE DATE: April 9, 2016	
						PAY AFTER DUE DATE \$8,058.95	

A ten percent (10%) penalty will be added to any balance not paid by the due date.

NOTES AND OTHER IMPORTANT INFORMATION ABOUT YOUR ACCOUNT

- To pay your bill online**
- 1) Go to www.warringtontownship.org, then Departments
 - 2) Click on Water and Sewer, then Online payments.
 - 3) In the SEARCH field (on the LEFT side of the screen) enter your entire account number with the dash.
 - 4) Enter JUST your LAST name. Click on the blue "ubpayment", then checkout.

Checks should be made payable to WTWSD


The Warrington Township 2014 Water Quality report is available
<http://www.warringtontownship.org/waterandsewer.cfm>

Traffic

TRAFFIC IMPACT STUDY

MIXED MEDICAL FACILITY

145 King of Prussia Road
Radnor Township
Delaware County, Pennsylvania



James P. Markham, PE

Pennsylvania Professional Engineer License No. PE061283

Prepared For:

University of Pennsylvania Health System
3400 Civic Center Boulevard
Philadelphia, PA 19104

September 2017
Revised January 2018
UPHS 1507



PARTNERS FOR WHAT'S POSSIBLE

pennoni.com

TRAFFIC IMPACT STUDY
TABLE OF CONTENTS

EXECUTIVE SUMMARY i

INTRODUCTION 1

EXISTING CONDITIONS 3

2020 AND 2025 NO-BUILD TRAFFIC CONDITIONS 9

DEVELOPMENT TRAFFIC 19

2020 and 2025 BUILD TRAFFIC CONDITIONS WITHOUT IMPROVEMENTS 23

2020 and 2025 BUILD TRAFFIC CONDITIONS WITH IMPROVEMENTS 38

CONCLUSIONS AND RECOMMENDATIONS 49

LIST OF TABLES

TABLE 1: 2016 EXISTING CONDITIONS SUMMARY TABLE 7

TABLE 2: EXISTING SITE TRIP GENERATION 9

TABLE 3: 2020 NO-BUILD CONDITIONS SUMMARY TABLE 13

TABLE 4: 2025 NO-BUILD CONDITION SUMMARY TABLE 17

TABLE 5: TRIP GENERATION RATES 20

TABLE 6: PROPOSED SITE TRIP GENERATION 21

TABLE 7: NET TRIP COMPARISON 21

TABLE 8: 2020 BUILD CONDITION SUMMARY TABLE 26

TABLE 9: 2025 BUILD CONDITION SUMMARY TABLE 32

TABLE 10: CAPACITY VS ANTICIPATED TRAFFIC VOLUME 36

TABLE 11: 2020 BUILD CONDITIONS WITH IMPROVEMENTS SUMMARY TABLE 41

TABLE 12: 2025 BUILD CONDITIONS WITH IMPROVEMENTS SUMMARY TABLE 45

LIST OF FIGURES

- FIGURE 1: PROJECT LOCATION
- FIGURE 2: SITE PLAN
- FIGURE 3: EXISTING 2016 WEEKDAY PEAK HOUR TRAFFIC VOLUMES
- FIGURE 4: EXISTING SITE TRIP DISTRIBUTION
- FIGURE 5: EXISTING SITE TRIPS (CALCULATED)
- FIGURE 6: 2020 NO-BUILD WEEKDAY PEAK HOUR TRAFFIC VOLUMES
- FIGURE 7: 2025 NO-BUILD WEEKDAY PEAK HOUR TRAFFIC VOLUMES
- FIGURE 8: PROPOSED SITE TRIP DISTRIBUTION
- FIGURE 9: PROPOSED SITE TRIPS
- FIGURE 10: 2020 BUILD WEEKDAY PEAK HOUR TRAFFIC VOLUMES
- FIGURE 11: 2025 BUILD WEEKDAY PEAK HOUR TRAFFIC VOLUMES

LIST OF APPENDICES

- APPENDIX A: LEVEL OF SERVICE CRITERIA
- APPENDIX B: EXISTING SIGNAL PERMIT PLANS / TIMING DIRECTIVES
- APPENDIX C: TRAFFIC COUNT AND GAP DATA
- APPENDIX D: EXISTING CONDITION CAPACITY ANALYSIS WORKSHEETS
- APPENDIX E: VOLUME DEVELOPMENT WORKSHEETS
- APPENDIX F: 2020 and 2025 NO-BUILD CONDITION CAPACITY ANALYSIS WORKSHEETS
- APPENDIX G: TRIP GENERATION
- APPENDIX H: TURN LANE EVALUATION
- APPENDIX I: 2020 AND 2025 BUILD CONDITION WITHOUT IMPROVEMENTS QUEUE AND CAPACITY ANALYSIS WORKSHEETS
- APPENDIX J: SIGNAL WARRANT EVALUATION
- APPENDIX K: LEFT TURN PHASE EVALUATION
- APPENDIX L: PEDESTRIAN AND VEHICLE CLEARANCE CALCULATIONS
- APPENDIX M: 2020 AND 2025 BUILD CONDITION WITH IMPROVEMENTS QUEUE AND CAPACITY ANALYSIS WORKSHEETS

Traffic Impact Study

145 King of Prussia Road

EXECUTIVE SUMMARY

This document summarizes the results of an evaluation of traffic impacts associated with the proposed University of Pennsylvania Health Systems site located at 145 King of Prussia Road in Radnor Township, Delaware County, Pennsylvania.

The site currently is vacated and located on the east side of King of Prussia Road between the existing Southern driveway and existing Septa/Northern driveway. The proposed site will be comprised of a 250,000 square foot mixed medical use building, a 150,000 square foot general office building, and a 75,000 square foot, 120 room hotel. The proposed development is anticipated to be constructed and occupied by 2020.

Turning movement counts, including heavy vehicles and pedestrian counts, were conducted between the hours of 7:00 – 9:00A.M. and 4:00 – 6:00 P.M. at the following intersections:

1. King of Prussia Road & Matsonford Road (SR 1038) – November 18, 2015
2. King of Prussia Road & Radnor Chester Road (SR 1021) – April 27, 2016
3. King of Prussia Road & SEPTA Station Driveway – September 15, 2016
4. King of Prussia Road & Existing Northern Site Driveway – April 27, 2016
5. King of Prussia Road & Existing Raider Road/Site Driveway – November 18, 2015
6. King of Prussia Road & Existing Southern Site Driveway – April 27, 2016
7. Lancaster Avenue (SR 0030) & King of Prussia Road/I-476 NB Off Ramp – November 18, 2015
8. Lancaster Avenue (SR 0030) & I-476 SB On/Off Ramps – September 15, 2016
9. Lancaster Avenue (SR 0030) & I-476 NB On Ramp Hillside Circle – November 18, 2015
10. Lancaster Avenue (SR 0030) & Radnor Chester Road (SR 1021) – April 27, 2016

The performance of the study intersections were evaluated under existing, no-build, and build conditions through a qualitative measure of operating conditions called Levels of Service. Levels of Service (LOS) are determined through analysis procedures outlined in the 2010 Highway Capacity Manual (Transportation Research Board, Washington, D.C.). The Levels of Service were obtained using *Synchro 9* and the 2016 existing, 2020 no-build, and 2020 build conditions and were evaluated to identify impacts to the study area. The need for additional mitigations is based on the LOS requirements identified in the PennDOT's *Policies and Procedures for Traffic Impact Studies*.

As the existing space was previously approved and could be occupied by a tenant without additional approvals, trips for the existing site were calculated and applied to the existing traffic to develop the future “no build” conditions. The traffic volumes for the existing site were estimated based on information contained in the Institute of Transportation Engineers (ITE) publication *Trip Generation* (9th Edition, 2012). The existing site trips are based upon the ITE Land Use Codes 710 “General Office” utilizing the square footage of the building as the independent variable. The trip calculations result in a total of **611 (538 entering and 73 exiting)** and **557 (95 entering and 462 exiting)** new trips generated by the site during the morning and afternoon peak hours, respectively.

The proposed mixed use site will be located at 145 King of Prussia Road between the existing Southern Driveway and the shared SEPTA/Site Driveway. The proposed site will have three driveways along King of Prussia Drive at the location of the of the existing entry driveways. The existing driveway across from Raider Road will become a full access driveway. The southern driveway will primarily be for accessing the loading area.

The traffic volumes for the hotel and general office components of the proposed site were estimated based on information contained in the Institute of Transportation Engineers (ITE) publication *Trip Generation* (9th Edition, 2012). The *ITE Trip Generation Manual* defines a trip as a “single or one-direction vehicle movement with either the origin or the destination (exiting or entering) inside a study site.”

Traffic Impact Study

145 King of Prussia Road

The proposed Penn Medicine mixed medical use portion of the development will have a gross floor area of 250,000 SF, more than triple the size of 90% of the facilities used by ITE to derive trip generation data. Also, unlike private physician practices used to generate the ITE rates, the proposed Penn Medicine mixed medical use facility will include a number of treatment facilities that are uncommon in a typical medical office and that occupy a larger portion of the gross square floor area of the building, while not accommodating a larger number of patients. These facilities include ambulatory operating rooms, endoscopy rooms, chemotherapy treatment areas, radiological imaging rooms and radiation oncology treatment areas. Therefore, the proposed facility is very different from those used to derive ITE trip generation data. It is for these reasons that the ITE trip generation is not appropriate to use for the proposed Penn Medicine building and a trip generation rate was developed based on an evaluation of three existing mixed medical use facilities for the peak hour of the adjacent street which, based on traffic counts, is 7:15-8:15 AM and 5:00–6:00 PM.

The following existing mixed medical use facilities were evaluated to develop trip generation rates:

- 171,000 square foot facility at 250 King of Prussia Rd in Radnor PA
- 83,000 square foot facility at 1001 Chesterbrook Blvd. in Berwyn PA
- 154,826 square foot facility at 915 Old Fern Hill Road in West Chester, PA

Based on driveway counts and data regarding the number of patient positions at each facility, average weekday, AM and PM trip generation rates and entry/exit distributions were developed and presented to Radnor Township for review and approval.

The trip calculations result in a total of **731** (**577** entering and **154** exiting) and **583** (**158** entering and **425** exiting) new trips generated to the site during the morning and afternoon peak hours, respectively. The proposed site will generate approximately 90% more net trips over the course of a whole day than the existing land use “general office building” but only generates approximately 20% more net trips in the AM peak period and approximately 5% more net trips during the PM peak period.

An analysis was conducted to determine whether left turn lanes or a right turn lane into the site from are warranted. Based on the standard worksheets in the Chapter 11 Appendix of PennDOT Publication 46, the warrants for left turn lanes on King of Prussia Road and a northbound right turn lane into the site at the intersection of King of Prussia Road and Raider Road/Site Driveway are met, along with a southbound left turn lane from King of Prussia Road into the Septa Station Driveway.

Traffic Signal warrant requirements were evaluated at the unsignalized intersections of King of Prussia Road & Raider Road/Site Driveway and King of Prussia Road & Septa Station Driveway using the manual counts and generated site trips. From the signal warrant analysis, it was determined that the 4-Hour and Peak Hour signal warrants were satisfied at the intersection of King of Prussia Road & Raider Road/Site Driveway. Evaluation of the left turn signalization warrants for the northbound and southbound left turn lanes on King of Prussia Road at Raider Road and the proposed site driveway indicate that the left turn movements from King of Prussia Road should be controlled with permitted phases.

Vehicular and pedestrian clearances were calculated for the proposed signal at King of Prussia Road and Raider Road/site driveway based on PennDOT policies.

Operations of the study intersections during the AM and PM peak hours were evaluated for the build configuration of the proposed development in the proposed build year of 2020 and the horizon year of 2025 with the optimized timings from the no-build condition.

Under the 2020 and 2025 no-build configuration, all the study intersections operate at an acceptable LOS D or better except for the following locations:

King of Prussia Road & Radnor-Chester Road (SR 1021)

- In 2020 the overall intersection operates at a LOS F (218.9 seconds of delay) during the AM peak hour and LOS F (85.7 seconds of delay) during the PM peak hour.
- In 2025 the overall intersection operates at a LOS F (227.1 seconds of delay) during the AM peak hour and LOS F

Traffic Impact Study

145 King of Prussia Road

(88.4 seconds of delay) during the PM peak hour.

King of Prussia Road & South Site Driveway

- In 2020 the overall intersection operates at a LOS F (83.9 seconds of delay) during the PM peak hour.
- In 2025 the overall intersection operates at a LOS F (87.3 seconds of delay) during the PM peak hour.

Lancaster Avenue (SR 0030) & I-476 NB Off Ramps/King of Prussia Road

- In 2020 the overall intersection operates at a LOS E (66.2 seconds of delay) during the AM peak hour and LOS E (55.6 seconds of delay) during the PM peak hour.
- In 2025 the overall intersection operates at a LOS E (69.4 seconds of delay) during the AM peak hour and LOS E (60.5 seconds of delay) during the PM peak hour.

Lancaster Avenue (SR 0030) & Radnor Chester Road

- Overall Intersection operates at a LOS E (57.2 seconds of delay) during the PM peak hour in 2020.
- Overall Intersection operates at a LOS E (62.1 seconds of delay) during the PM peak hour in 2025.

Based on the anticipated Level of Service for the exiting movements from the site via the SEPTA Driveway and south site driveway to King of Prussia Road a gap study was performed at both locations. The gap study was conducted from 7:00-9:00 AM and 4:00-6:00 PM on April 27, 2016. Based on the peak hour gap analysis, it is anticipated that sufficient gaps are available to accommodate the anticipated traffic from the site at the two locations.

As required by 255-20.B(5)(d)(6)(a) of the Radnor Township Subdivision and Land Development Ordinance, additional off-site improvements would be necessary to achieve LOS C at all of the off-site intersections. Based on Synchro analysis, Lancaster Avenue would require significant intersection upgrades including widening to provide additional through lanes and providing additional dedicated turn lanes on most approaches. The King of Prussia Road intersections at Radnor-Chester Road and Matsonford Road would require two through lanes in each direction on King of Prussia Road and dual turn lanes on the minor approaches. Due to physical constraints at most of the project intersections, including the SEPTA Rail Bridge on King of Prussia Road and the I-476 Bridges on Lancaster Avenue, the necessary improvements are not feasible and are not proposed by the applicant.

The Intersection LOS and delay under no-build conditions was compared to the 2020 and 2025 build conditions. The comparison indicated that there are no changes in overall intersection LOS at existing signalized intersections between the no-build and build conditions as a result of the trips generated by the proposed site. In conjunction with the proposed development the following roadway improvements are recommended:

- At King of Prussia Road and Matsonford Road/Park Driveway:
 - Modify AM signal timings to shift 3 seconds from the SB King of Prussia Road lead phase to the NB/SB King of Prussia phase (1 second) and the EB/WB Matsonford Road/Park Driveway Phase (2 seconds).
- At King of Prussia Road and Radnor-Chester Road:
 - Modify PM signal timings to shift 6 seconds from the EB/WB King of Prussia Road phase to the NB/SB Radnor Chester Road phase.
- At King of Prussia Road and Septa Station Driveway:
 - Restripe southbound King of Prussia Road to provide a dedicated left turn lane.
- At King of Prussia Road and Raider Road/Site Driveway :
 - Provide left turn lanes on both approaches of King of Prussia Road
 - Widen the east side of King of Prussia Road to provide two continuous northbound lanes from Lancaster Avenue to the signalized intersection at the Main Site Driveway/ Raider Road.
 - Install 2 phase semi-actuated traffic signal.
- At King of Prussia Road and South Site Driveway :

Traffic Impact Study

145 King of Prussia Road

- Restripe northbound King of Prussia Road to provide shared through/right turn lane.
- Widen the east side of King of Prussia Road to provide two continuous northbound lanes from the south driveway to the Main Site Driveway/ Raider Road, with a transition into a dedicated right turn lane.
- At Lancaster Avenue and NB Off Ramps/King of Prussia Road:
 - Restripe northbound I-76 off-ramp at Lancaster Avenue to provide shared through/right turn lane
- At Lancaster Avenue and I-476 SB Off Ramp:
 - Modify PM signal timings to shift 1 second from the EB/WB Lancaster Avenue phase to the WB Lancaster Avenue lead phase.
- At Lancaster Avenue and I-476 NB On Ramp/Hillside Circuit:
 - Modify PM signal timings to shift 7 second from the EB/WB Lancaster Avenue phase to the EB Lancaster Avenue lead phase.
- At Lancaster Avenue and Radnor-Chester Road:
 - Modify AM signal timings to shift 12 seconds from the southbound Radnor-Chester Road lead phase and 1 second from the Lancaster Avenue Phase lead left phase to the EB/WB Lancaster Avenue EB/WB Phase.

The additional improvements result in the overall intersection LOS at Lancaster Avenue and I-476 NB Off Ramp/King of Prussia Road improving from LOS E to LOS D during the AM peak hour in both 2020 and 2025. Striping the additional NB thru lane improves the approach from LOS E to LOS D and the through movement from LOS F to LOS E during the AM peak hour in 2020 and 2025.

Under the build Conditions with the identified improvements implemented, all of the study intersections maintain existing levels of service between the no-build and build conditions and operate at overall LOS D or better with the exception of those that operate at LOS E or F under no-build conditions.

Based on the comparison of the Intersection LOS and delay under no-build conditions and build conditions with the identified mitigation measures, the intersections meet the LOS requirements identified in the PennDOT's *Policies and Procedures for Traffic Impact Studies* at all of the study intersections. The Levels of Service exhibited are not a result of, nor is the need for additional mitigation measures triggered as a result of the trips generated by the proposed site.

In addition to the improvements identified within the is TIS, a bus shelter is to be constructed on King of Prussia Road southeast of the SEPTA Driveway to the extent that it is approved by SEPTA and the University of Pennsylvania Health System will partner with the Township to install a Traffic Adaptive Signal Coordination at the following intersections, subject to PennDOT review:

- Route 30 & I-476 Northbound Ramps
- Route 30 & I-476/King of Prussia Road
- Route 30 & I-476 Southbound Ramps.
- Route 30 & Radnor-Chester Road.
- Route 30 & Radnor Financial Center Eastern Driveway
- Route 30 & Radnor Financial Center Western Driveway
- King of Prussia Road & Radnor-Chester Road.
- King of Prussia Road & Matsonford Road.
- Matsonford Road & South Centennial Drive.
- Matsonford Road & North Centennial Drive
- King of Prussia Road & Raider Road.

Traffic Impact Study
145 King of Prussia Road

- Radnor Chester and Raider Road
- Radnor Chester and Radnor Financial Center

Traffic Impact Study

145 King of Prussia Road

INTRODUCTION

This document summarizes the results of an evaluation of traffic impacts associated with the proposed University of Pennsylvania Health Systems site located at 145 King of Prussia Road in Radnor Township, Delaware County, Pennsylvania.

The site currently is vacated and located on the east side of King of Prussia Road between the existing Southern driveway and existing Northern driveway. The proposed site will be comprised of a 250,000 square foot mixed medical use building with 130,000 square foot of clinical space and 120,000 square feet of ambulatory care space, a 150,000 square foot general office building, and a 75,000 square foot, 120 room hotel. The proposed development is anticipated to be constructed and occupied in 2020. The overall project area is shown in **Figure 1**. A site plan of the proposed development is illustrated in **Figure 2**.

Study Area (Traffic Impact Area)

The peak traffic periods evaluated on the adjacent roadway network are: morning (7:00 am to 9:00 am) and late afternoon (4:00 pm to 6:00 pm) periods on a typical weekday when school is in session.

The following intersections were selected for study:

1. King of Prussia Road & Matsonford Road (SR 1038)
2. King of Prussia Road & Radnor Chester Road (SR 1021)
3. King of Prussia Road & SEPTA Station Driveway
4. King of Prussia Road & Existing Northern Site Driveway
5. King of Prussia Road & Existing Raider Road/Site Driveway
6. King of Prussia Road & Existing Southern Site Driveway
7. Lancaster Avenue (SR 0030) & King of Prussia Road/I-476 NB Off Ramp
8. Lancaster Avenue (SR 0030) & I-476 SB On/Off Ramps
9. Lancaster Avenue (SR 0030) & I-476 NB On Ramp/Hillside Circle
10. Lancaster Avenue (SR 0030) & Radnor Chester Road (SR 1021)

Study Contents

Specific elements included in this assessment are:

- An inventory of the roadway facilities in the vicinity of this project, including the existing physical and traffic operating characteristics.
- Manual turning movement counts performed at the study intersections during weekday morning and afternoon peak traffic hours.
- Calculation of vehicular trip generation for the proposed development within the study area based on trip generation rates contained in the Institute of Transportation Engineers (ITE) manual entitled *Trip Generation*, An ITE Information Report (9th Edition, 2012).
- Gap study of the existing site driveways
- Distribution of development-generated traffic onto the study area roadways in accordance with current travel patterns.
- Assessment of Existing (2016), Opening Year (2020), and Horizon Year (2025) traffic conditions based on



FIGURE 1
PROJECT LOCATION

SOUTHEASTERN PENNSYLVANIA
TRANSPORTATION AUTHORITY

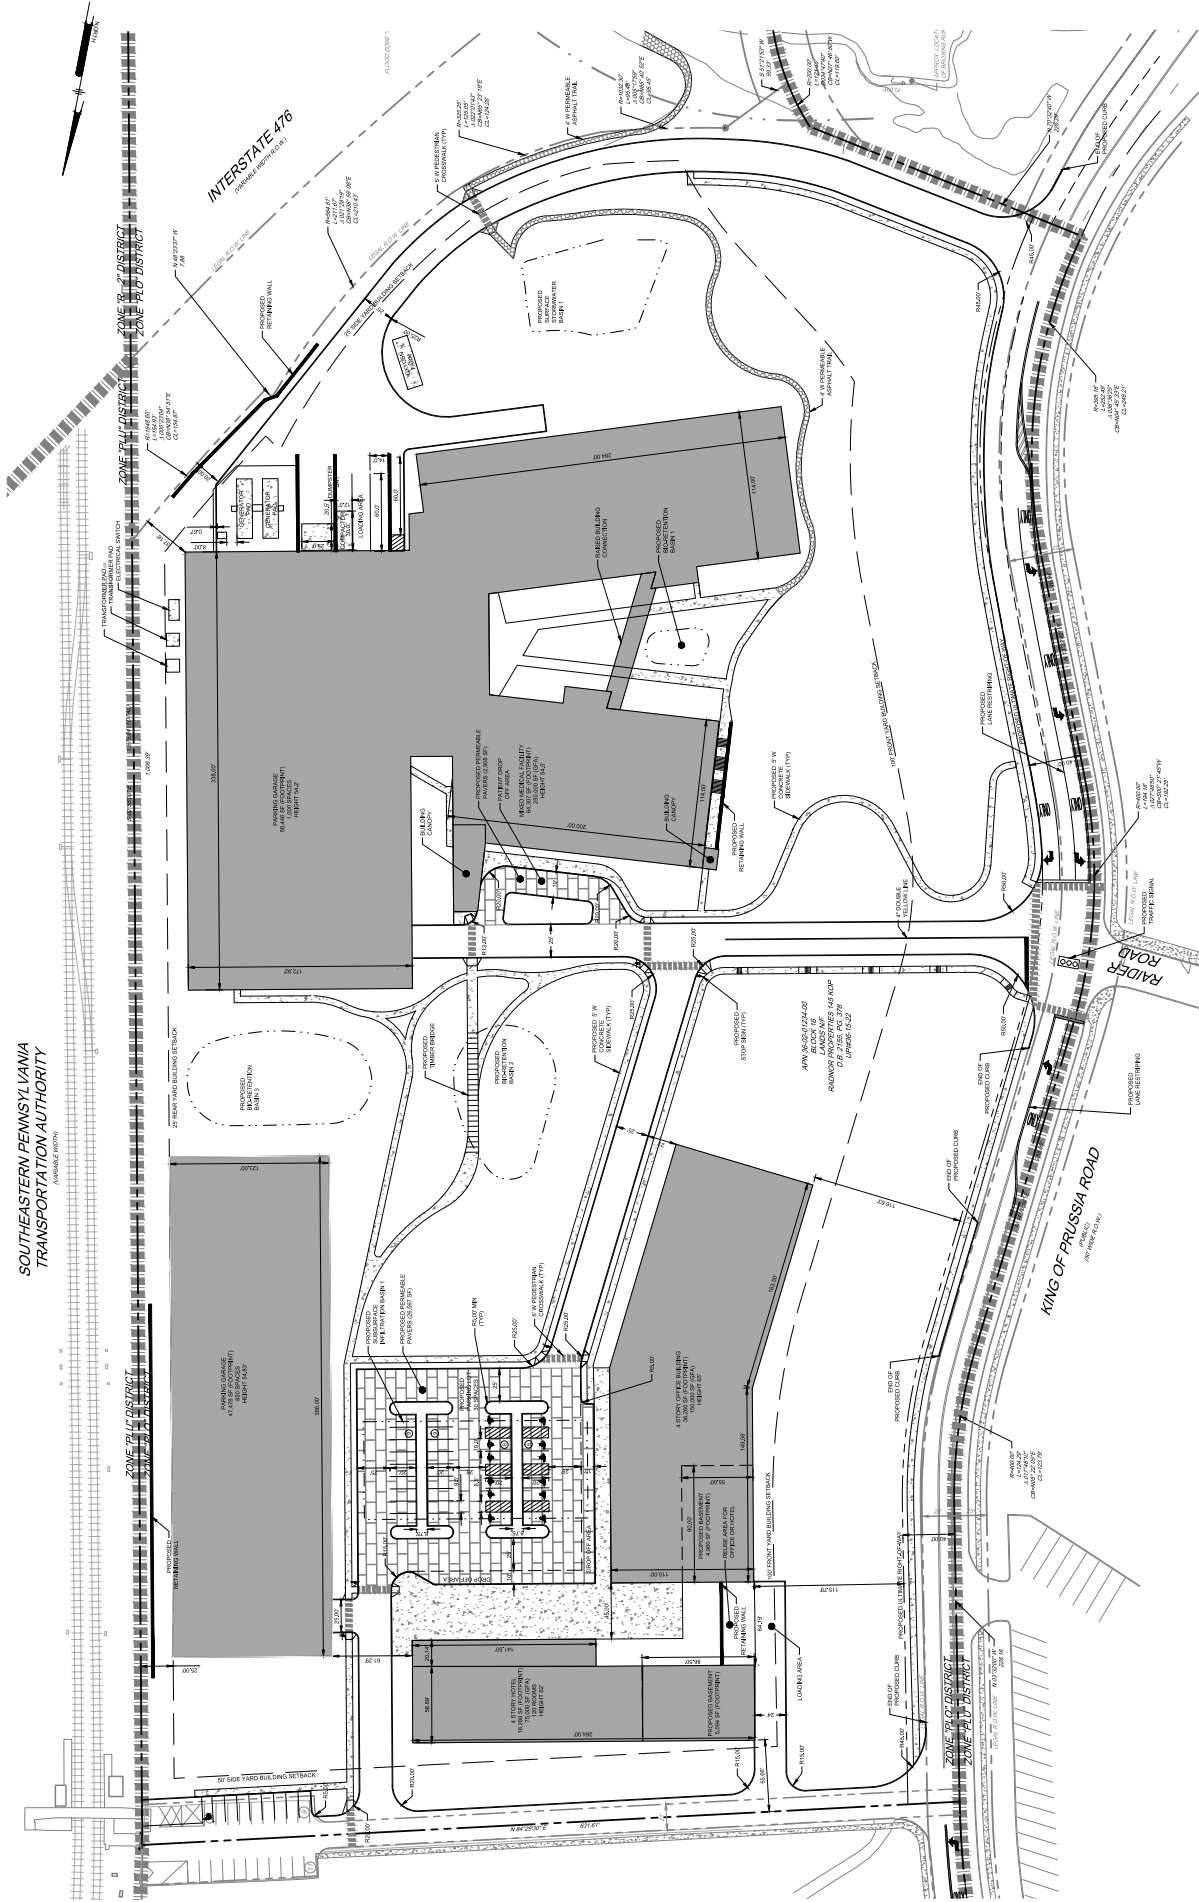


FIGURE 2
SITE PLAN



Traffic Impact Study 145 King of Prussia Road

capacity and level of service analyses performed at the study intersections.

Study Methodology

The analysis was conducted in accordance with guidelines presented in Pennsylvania Department of Transportation (PennDOT) Policies and Procedures for Transportation Impact Studies, dated January 28, 2009. As required, three analysis years are considered: existing baseline traffic conditions, opening year analysis and design horizon year analysis (5 years after the opening year). The opening year and horizon year analyses include an assessment of the operational conditions of the study intersections under “no-build” and “build” scenarios. Mitigation is assessed for intersections that experience an overall level of service drop and delay increase of more than ten (10) seconds from the “no-build” to “build” conditions.

The performance of the study intersections for each analysis scenario was evaluated through a qualitative measure of operating conditions called Levels of Service (LOS). Six levels of Service (LOS) are defined with letter designations from ‘A’ to ‘F’, with Level of Service ‘A’ representing delays up to ten seconds and Level of Service ‘F’ indicating delays exceeding eighty seconds. Level of Service ‘C’ or better is considered acceptable, with a threshold of Level of Service ‘D’ in urban areas. Levels of Service are determined through analysis procedures outlined in the 2010 Highway Capacity Manual (Transportation Research Board, Washington, D.C.).

Levels of Service for signalized intersections are based on average delay experienced by motorists passing the intersection. The delay is based on the results of the capacity analysis (rate of demand flow to capacity) and other important variables such as quality of progression, cycle length, and ratio of green time.

Levels of Service for unsignalized intersections are defined in terms of delay to vehicles entering from the side road and turning left from a major road. Delay is a function of the capacity of the approach and degree of saturation. The capacity is based on the distribution of gaps in the major street traffic stream, driver judgment in selecting a gap through which to execute the desired maneuver, and follow-up time required by each driver in a queue. The Level of Service Criteria for signalized and unsignalized intersections is provided in **APPENDIX A**.

The operational analyses of the study intersections under all conditions were performed using the Synchro 9 software. Chapter 10 of PennDOT Publication 46 provides Pennsylvania default values to be utilized in the HCM 2010 Level of Service analysis. The following default values were used for signalized intersections: base saturation flow rate of 1800 passenger cars per hour per lane (suburban); an extension of effective green time of 3.5 seconds, and a start-up lost time of 2.5 seconds.

Traffic Impact Study

145 King of Prussia Road

EXISTING CONDITIONS

Existing Roadway Facilities

The following roadways within the immediate vicinity of the project site were evaluated as part of this study:

- **Lancaster Avenue (SR 0030)** is an east-west oriented Principal Arterial Highway. Within the study area, Lancaster Avenue is 90' wide and designated two-way. There are two travel lanes in each direction with separate eastbound and westbound left turn lanes at the two study intersections. The posted speed limit on Lancaster Avenue is 35 mph.
- **King of Prussia Road** is a north-south oriented local roadway with sidewalk on the western side of the roadway. Within the study area, King of Prussia Road is 40' wide with one lane of travel in each direction. The posted speed limit on King of Prussia Road is 35 mph.
- **Matsonford Road (SR 1038)** is an east-west oriented minor arterial roadway. Within the study area, Matsonford Road is 50' wide with one lane of traffic in each direction and a westbound left turn lane. The posted speed limit on Matsonford Road is 40 mph.
- **Radnor Chester Road (SR 1021)** is a north-south oriented minor arterial roadway. Within the study area, Radnor Chester Road is 25' wide with one lane of traffic in each direction. The posted speed limit on Radnor Chester Road is 35 mph.
- **Raider Road** is an east-west oriented local roadway. Within the study area, Raider Road is 30' wide with one lane of traffic in each direction with sidewalk on the southern side. The speed limit on Raider Road is not posted but is assumed to be 25 mph.

Existing Intersections

The following existing intersections were analyzed for existing and future capacity restraints as part of this study:

- **King of Prussia Road & Matsonford Road (SR 1038)/Driveway.** The intersection of King of Prussia Road and Matsonford Road is a four-legged signalized intersection operating on a three-phase traffic signal with a southbound lead. Matsonford Road has a left turn lane and a through/right lane in each direction. Northbound King of Prussia Road has one left turn lane, one through lane, and one yield controlled right turn lane. The southbound approach of King of Prussia Road has a left turn lane and a southbound through/right turn lane.
- **King of Prussia Road & Radnor-Chester Road (SR 1021).** The intersection of King of Prussia Road and Radnor-Chester Road is a four-legged signalized intersection operating on a two-phase timing with a 90 second cycle length. Radnor-Chester Road provides one eastbound through/left turn lane and one eastbound right turn lane along with one westbound lane. Radnor-Chester Road contains one northbound left turn lane and one northbound through/right turn lane along with one southbound left turn lane, one southbound through lane and one southbound right turn lane.
- **King of Prussia Road & SEPTA Station Driveway.** The intersection of King of Prussia Road and the SEPTA Station Driveway is a three-legged stop-controlled intersection with stop control on the SEPTA Station Driveway. Northbound King of Prussia Road has one lane. Southbound King of Prussia Road has one through lane and one left turn lane. The driveway has one lane in each direction.

Traffic Impact Study

145 King of Prussia Road

- **King of Prussia Road & Northern Site Exit Driveway** The intersection of Lancaster Avenue and the site's northern driveway is a three-legged stop-controlled intersection with stop control on the driveway. King of Prussia Road contains one lane in each direction with a center two-way left turn lane. Raider Road has one lane in each direction. The site driveway is a one lane exit driveway.
- **King of Prussia Road & Raider Road/ Entry Driveway.** The intersection of King of Prussia Road and Raider Road is a three-legged unsignalized intersection with stop-control on Raider Road. King of Prussia Road contains one lane in each direction with a center two-way left turn lane. Raider Road has one lane in each direction. The site driveway is a one lane entry driveway.
- **King of Prussia Road & Southern Site Driveway.** The intersection of King of Prussia Road and the sites southern driveway is a three-legged stop-controlled intersection with stop control on the driveway. Northbound King of Prussia Road has one lane. Southbound King of Prussia Road has one through lane and one left turn lane. The driveway has one lane in each direction.
- **Lancaster Avenue (SR 0030) & King of Prussia Road /I-476 NB Off Ramp.** The intersection of Lancaster Avenue and I-476 NB off-ramps/King of Prussia Road is a four-legged signalized intersection. Lancaster Avenue has two eastbound left turn lanes and two eastbound through lanes. Westbound Lancaster Avenue has two through lanes and one channelized right turn lane. The I-476 NB off-ramp contains two left turn lanes, one through lane, and one right turn lane. Southbound King of Prussia Road has two left turn lanes and one right turn lane.
- **Lancaster Avenue (SR 0030) & I-476 SB on/off-ramps.** The intersection of Lancaster Avenue and I-476 on/off-ramps is a three-legged intersection with a three-phase traffic signal. Westbound Lancaster Avenue has two through lanes and two left turn lanes. Eastbound Lancaster Avenue has two through lanes and one eastbound channelized right turn lane. The I-476 SB off-ramp has two northbound left turn lanes and one channelized right turn lane.
- **Lancaster Avenue (SR 0030) & I-476 NB On Ramps/Hillside Circle.** The intersection of Lancaster Avenue and I-476 off-ramps is a four-legged signalized intersection. Westbound Lancaster Avenue has one left turn lane, two through lanes, and one right turn lane. Eastbound Lancaster Avenue has two left turn lanes, one through lane, and one through/right turn lane. Hillside Circle has one northbound through/left turn lane and one northbound right turn lane.
- **Lancaster Avenue (SR 0030) & Radnor-Chester Road (SR 1021).** The intersection of Lancaster Avenue and Radnor-Chester Road four-legged signalized intersection. Eastbound Lancaster Avenue has one left turn lane, two through lanes, and one right turn lane. Westbound Lancaster Avenue has one left turn lane, one through lane, and one through/right turn lane. Northbound Radnor-Chester Road has one left turn lane, one through lane, and one through/right turn lane. Southbound Radnor-Chester Road has one left/through lane, one through/right lane.

Signal plans and timings Signal for the study area intersections were obtained PennDOT and are provided in **APPENDIX B**.

Pedestrian Access

King of Prussia Road has sidewalk on both sides of the roadway from the Matsonford Road to the SEPTA station driveway. Sidewalk is provided on the west side of King of Prussia Road from the SEPTA station driveway to Lancaster Avenue. Crosswalks with ADA compliant crosswalks are provided at each of the signalized intersections on King of Prussia Road. There is an unsignalized midblock crosswalk approximately 400' south of Matsonford Road.

Sidewalk is provided on the north side of Lancaster Avenue east of King of Prussia Road. There is no sidewalk provided on Lancaster Avenue west of King of Prussia Road.

Transit Facilities

Transit facilities are present within the study area including, Septa Regional Rail and Septa Bus Routes. The site is located

Traffic Impact Study

145 King of Prussia Road

adjacent to the Radnor Train Station which is serviced by Norristown High Speed Line and the Paoli-Thorndale Regional Rail Line. Several bus routes run adjacent to the site including the 105 and 106 lines on King of Prussia Road.

Data Collection

Turning movement counts, including heavy vehicles and pedestrian counts, were conducted between the hours of 7:00 – 9:00 A.M. and 4:00 – 6:00 P.M. at the following intersections:

1. King of Prussia Road & Matsonford Road (SR 1038) – November 18, 2015
2. King of Prussia Road & Radnor Chester Road (SR 1021) – April 27, 2016
3. King of Prussia Road & Existing Northern Site Driveway – April 27, 2016
4. King of Prussia Road & Existing Raider Road/Site Driveway – November 18, 2015
5. King of Prussia Road & Existing Southern Site Driveway – April 27, 2016
6. Lancaster Avenue (SR 0030) & King of Prussia Road / I-476 NB Off Ramp– November 18, 2015
7. Lancaster Avenue (SR 0030) & I-476 SB On/Off Ramps – September 15, 2016
8. Lancaster Avenue (SR 0030) & I-476 NB On Ramp Hillside Circle – November 18, 2015
9. Lancaster Avenue (SR 0030) & Radnor Chester Road (SR 1021) – April 27, 2016

A gap study was also performed for the existing site driveways on April 27, 2016 between the hours of 7:00 – 9:00 A.M. and 4:00 – 6:00 P.M.

The existing traffic volumes are shown on **FIGURE 3**.

The count and gap study data is provided in **APPENDIX C**.

Existing Levels of Service/Queue Analysis

The operational analyses of the study intersections under all conditions were performed using the *Synchro/Simtraffic* Version 9.0 software. Chapter 10 of *PennDOT Publication 46* provides Pennsylvania default values to be utilized in the HCM 2010 Level of Service analysis.

Under the existing conditions, all of the study intersections operate at an overall Level of Service D or better, with all movements operating at Level of Service D or better during the AM and PM peak hours besides the following locations:

- King of Prussia Road & Radnor Chester Road
 - Northbound approach operates at a LOS F during the AM and PM peak hours with 613.9 and 249.3 seconds of delay, respectively.
 - Northbound left/through movement operates at a LOS F during the AM and PM peak hours with 666.0 and 328.0 seconds of delay, respectively.
 - The overall intersection operates at a LOS F during the AM peak hour (228.6 seconds of delay) and at a LOS F during the PM peak hour (93.3 seconds of delay).
- King of Prussia Road & Raider Road
 - Eastbound movement operates at a LOS F (53.4 seconds of delay) during the AM peak hour.
- Lancaster Avenue (SR 0030) & I-476 NB Off Ramps/King of Prussia Road
 - Eastbound approach operates at a LOS E (57.4 seconds of delay) during the AM peak hour.
 - Eastbound through operates at a LOS E (58.1 seconds of delay) during the AM peak hour.
 - Northbound through movement operates at LOS F (81.1 seconds of delay) during the AM peak hour.
 - Northbound right movement operates at LOS E (78.0 seconds of delay) during the PM peak hour.

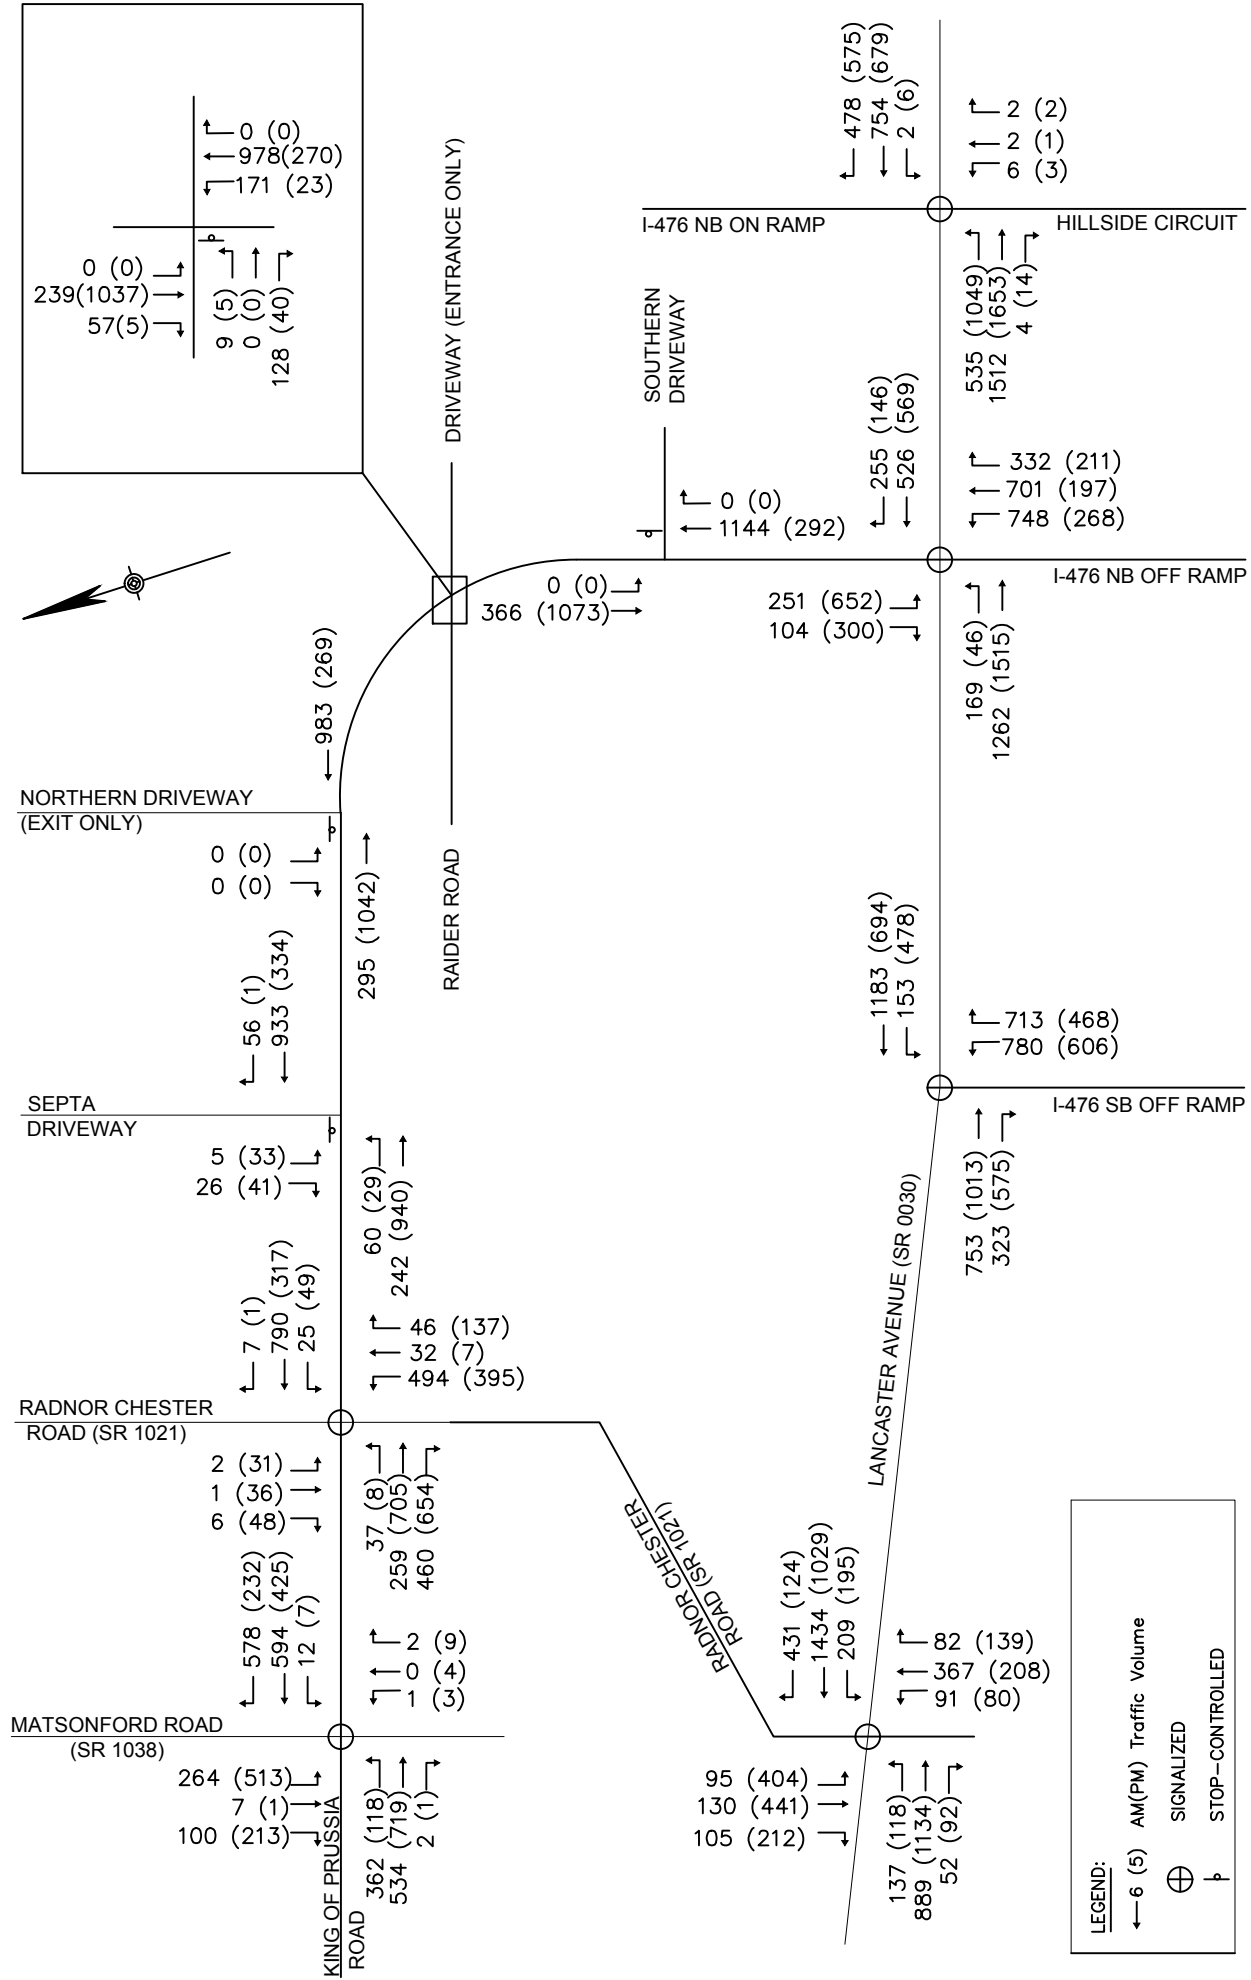


FIGURE 3
EXISTING 2016 WEEKDAY
PEAK HOUR TRAFFIC VOLUMES



Traffic Impact Study

145 King of Prussia Road

- Southbound approach movement operates at a LOS E (57.1 seconds of delay) during the AM peak hour.
- Lancaster Avenue (SR 0030) & I-476 NB On Ramp/Hillside Circuit
 - Eastbound left movement operates at a LOS E (57.4 seconds of delay) during the PM peak hour.
 - Westbound left movement operates at a LOS E during the AM and PM peak hours with 56.5 and 59.3 seconds of delay, respectively.
 - Northbound approach operates at a LOS E during the AM and PM peak hours with 58.1 and 56.7 seconds of delay, respectively.
 - Northbound through/left movement operates at a LOS E during the AM and PM peak hours with 58.8 and 56.9 seconds of delay, respectively.
 - Northbound right movement operates at a LOS E during the AM and PM peak hours with 55.1 and 56.2 seconds of delay, respectively.
- Lancaster Avenue (SR 0030) & Radnor Chester Road
 - Westbound left operates at LOS E (62.2 seconds of delay) during the PM peak hour.
 - Westbound thru operates at LOS E (63.7 seconds of delay) during the AM peak hour.
 - Southbound approach operates at a LOS F (81.9 seconds of delay) during the PM peak hour.
 - Southbound left movement operates at a LOS F (174.7 seconds of delay) during the PM peak hour.

In the existing conditions, the estimated 95th percentile queues at the study intersections are within the available storage lengths and do not extend into adjacent intersections with the following exceptions:

- The reported 95th percentile queue for southbound left turns at the intersection of King of Prussia Road & Matsonford Road (SR 1038) exceeds the available storage length of 100' by 345' during the AM peak period.
- The reported 95th percentile queue for westbound left turns at the intersection of King of Prussia Road & Matsonford Road (SR 1038) exceeds the available storage length of 550' by 60' during the PM peak period.
- The reported 95th percentile queues for northbound left/thru lane at the intersection of King of Prussia Road & Radnor Chester Road exceeds the available storage length of 1200 by 925' and 40' during the AM and PM peak periods, respectively.
- The reported 95th percentile queue for southbound left/thru/right turns at the intersection of King of Prussia Road & Radnor Chester Road exceeds the available storage length of 100' by 40' during the PM peak period.
- The reported 95th percentile queue for the eastbound through movements at the intersection of Lancaster Avenue (SR 0030) & I-476 NB Off Ramps/King of Prussia Road exceeds the available storage length of 800' by 128' during the PM peak period.
- The reported 95th percentile queue for eastbound left turns at the intersection of Lancaster Avenue (SR 0030) & I-476 NB On Ramp/Hillside Drive exceeds the available storage length of 400' by 505' during the PM peak period.
- The reported 95th percentile queue for westbound right turns at the intersection of Lancaster Avenue (SR 0030) & Radnor Chester Road exceeds the available storage length of 300' by 143' during the AM peak period.
- The reported 95th percentile queues for northbound thru/right turn at the intersection of Lancaster Avenue (SR 0030) & Radnor Chester Road exceeds the available storage length of 100' by 232' and 138' during the AM and PM peak periods respectively.
- The reported 95th percentile queues for southbound left turns at the intersection of Lancaster Avenue (SR 0030) & Radnor Chester Road exceeds the available storage length of 160' by 658' during the PM peak period.

A summary of the Delays, LOS, and 95th Percentile Queues for the existing conditions analysis are summarized in **TABLE 1**. Detailed outputs of the 2016 existing conditions analysis are provided in **APPENDIX D**.

Table 1 – 2016 Existing Conditions Summary Table

		Available Storage Length	AM Peak Hour			PM Peak Hour		
			Delay (Secs)	LOS	95th % Queue	Delay (Secs)	LOS	95th % Queue
King of Prussia Road (N/S) & Matsonford Road (E/W)	EB Approach		27.9	C	-	19.3	B	-
	(EB Left)	50'	30.8	C	0	24.5	C	3
	(EB Thru/Right)	50'	26.5	C	3	18.2	B	10
	WB Approach	-	36.7	D	-	43.1	D	-
	(WB Left)	550'	39.7	D	310	52.1	D	610
	(WB Thru/Right)	950'	29.3	C	113	21.6	C	195
	SB Approach	-	23.9	C	-	23.3	C	-
	(SB Left)	100'	45.5	D	445	15.9	B	80
	(SB Thru/Right)	1000'+	9.3	A	313	24.5	C	618
	NB Approach	-	40.8	D	-	27.5	C	-
	(NB Left)	130'	17.7	B	10	30.6	C	8
(NB Thru)	1150'	41.3	D	543	27.4	C	382	
Overall	-	31.9	C	-	31.3	C	-	
King of Prussia Road (E/W) & Radnor Chester Road (N/S) (SR 1021)	EB Approach	-	18.1	B	-	21.0	C	-
	(EB Left)	75'	46.3	D	50	16.6	B	5
	(EB Thru)	1200'	14.1	B	178	21.1	C	470
	WB Approach	-	38.1	D	-	18.0	B	-
	(WB Left)	160'	16.6	B	20	38.2	D	60
	(WB Thru/Right)	1100'	38.8	D	800	14.8	B	225
	NB Approach	-	613.9	F	-	249.3	F	-
	(NB Left/Thru)	1200'	666.0	F	2125	328.0	F	1240
	(NB Right)	280'	18.1	B	35	19.5	B	110
SB Approach	100'	21.8	C	8	50.8	D	140	
Overall	-	228.6	F	-	93.3	F	-	
King of Prussia Road (N/S) & Septa Driveway (W)	WB Approach	450'	26.2	D	73	19.1	C	25
	NB Approach	380'	0.0	A	0	0.0	A	0
	SB Approach	1200'	2.5	A	90	0.3	A	3
	Overall	-	1.2	A	-	1.2	A	-
King of Prussia Road (N/S) & Northern Driveway (W)	WB Approach	400'	0.0	A	0	0.0	A	0
	NB Approach	280'	0.0	A	0	0.0	A	0
	SB Approach	380'	0.0	A	0	0.0	A	0
	Overall	-	0.0	A	-	0.0	A	-
King of Prussia Road (N/S) & Raider Road/Driveway (E)	EB Approach	500'	53.4	F	128	24.1	C	18
	NB Approach	550'	1.3	A	18	0.9	A	3
	SB Approach	280'	0.0	A	0	0.0	A	0
	Overall	-	5.6	A	-	1.0	A	-
King of Prussia Road (N/S) & Southern Driveway (W)	WB Approach	600'	0.0	A	0	0.0	A	0
	NB Approach	500'	0.0	A	0	0.0	A	0
	SB Approach	550'	0.0	A	0	0.0	A	0
	(SB Left)	75'	0.0	A	-	0.0	A	-
	Overall	-	0.0	A	-	0.0	A	-

Table 1 – 2016 Existing Conditions Summary Table (Cont.)

		Available Storage Length	AM Peak Hour			PM Peak Hour		
			Delay (Secs)	LOS	95th % Queue	Delay (Secs)	LOS	95th % Queue
Lancaster Avenue (SR 0030) & I-476 NB Off Ramps/King of Prussia Road	EB Approach	-	57.4	E	-	56.6	E	-
	(EB Left)	800'	52.1	D	120	54.0	D	35
	(EB Thru)	800'	58.1	E	765	56.7	E	928
	WB Approach	600'	23.8	C	240	8.3	A	128
	NB Approach	-	44.5	D	-	47.4	D	-
	(NB Left)	500'	17.6	B	300	19.8	B	123
	(NB Thru)	1900'	81.1	F	1350	52.0	D	275
	(NB Right)	500'	27.9	C	330	78.0	E	345
	SB Approach	500'	57.1	E	32	47.5	D	407
Overall	-	47.2	D	-	45.1	D	-	
Lancaster Avenue (SR 0030) & I-476 SB Off Ramps	EB Approach	1800'	16.9	B	208	21.6	C	298
	WB Approach	-	33.7	C	-	33.9	C	-
	(WB Left)	600'	53.4	D	108	52.6	D	295
	(WB Thru)	800'	31.1	C	556	20.9	C	340
	NB Approach	1000'+	40.1	D	435	46.5	D	365
Overall	-	31.0	C	-	32.1	C	-	
Lancaster Avenue (SR 0030) & I-476 NB On Ramp/Hillside Circuit	EB Approach	-	8.9	A	-	22.4	C	-
	(EB Left)	400'	32.9	C	250	57.4	E	905
	(EB Thru/Right)	600'	0.4	A	8	0.3	A	5
	WB Approach	-	9.5	A	-	15.6	B	-
	(WB Left)	100'	56.5	E	3	59.3	E	10
	(WB Thru/Right)	750'	9.4	A	238	15.3	B	263
	NB Approach	-	58.1	E	-	56.7	E	-
	(NB Left/Thru)	750'	58.8	E	13	56.9	E	8
(NB Right)	50'	55.1	E	3	56.2	E	3	
Overall	-	9.2	A	-	21.1	C	-	
Lancaster Avenue (E/W) (SR 0030) & Radnor Chester Road (N/S)	EB Approach	-	31.2	C	-	51.0	D	-
	(EB Left)	260'	42.6	D	143	22.2	C	93
	(EB Thru)	750'	29.6	C	473	53.7	D	730
	WB Approach	-	53.5	D	-	35.7	D	-
	(WB Left)	340'	30.2	C	155	62.2	E	240
	(WB Thru)	1800'	63.7	E	1280	32.4	C	503
	(WB Right)	300'	30.9	C	443	21.0	C	113
	NB Approach	-	45.7	D	-	34.8	C	-
	(NB Left/Thru)	1000'+	44.6	D	340	34.9	C	235
	(NB Thru/Right)	100	46.9	D	332	34.8	C	238
	SB Approach	-	26.3	C	-	81.9	F	-
	(SB Left)	160'	29.4	C	98	174.7	F	818
(SB Thru)	350'	25.1	C	118	24.7	C	300	
Overall	-	44.3	D	-	52.2	D	-	

Traffic Impact Study

145 King of Prussia Road

2020 and 2025 “NO-BUILD” TRAFFIC CONDITIONS

Operations of the study intersections during the AM and PM peak hours were evaluated for the no-build configuration without the proposed development in the proposed build year 2020 and the horizon year 2025.

No-Build Traffic Volumes

In order to account for general traffic growth in the area, an annual background growth rate is applied to existing traffic volumes on the study area roadways. An annual background growth rate of 0.38% per year has been previously established by PennDOT’s *Bureau of Planning and Research* for urban, non-interstate roadways in the study area.

The existing 427,109 SF office/research and development space is currently vacant with access provided via four driveways along King of Prussia Road. As the existing space was previously approved and could be occupied by a tenant without additional approvals, trips for the existing site were calculated and applied to the existing traffic to develop the future “no-build” conditions.

The traffic volumes for the existing site were estimated based on information contained in the Institute of Transportation Engineers (ITE) publication *Trip Generation* (9th Edition, 2012). The existing site trips are based upon the ITE Land Use Codes 710 “General Office” utilizing the square footage of the building as the independent variable. The trip calculations result in a total of **611** (**538** entering and **73** exiting) and **557** (**95** entering and **462** exiting) new trips generated to the site during the morning and afternoon peak hours, respectively. **TABLE 2** summarizes the trip calculation for the existing site during the weekday morning and weekday afternoon peak hours.

Table 2 – Existing Site Trip Generation

Land Use Code	Size	Unit of Measure	Weekday Trips			AM Trips			PM Trips		
			In	Out	Total	In	Out	Total	In	Out	Total
General Office Building (ITE Land Use 710)	427,110 SF	1,000 SF GFA	1,979	1,978	3,957	538	73	611	95	462	557
Total			1,979	1,978	3,957	538	73	611	95	462	557

The trip distribution of the existing site based on the proposed location along King of Prussia Road and the existing traffic patterns on the surrounding roadway network. The estimated distribution of the site traffic is:

- To/From King of Prussia Road northbound - 25%
- To/From King of Prussia Road southbound - 75%

The trip distribution and volumes generated at the proposed site are provided in **FIGURES 4 and 5**. The 2020 and 2025 no-build Traffic volumes are illustrated in **FIGURES 6 and 7**. Traffic volumes development tables are provided in **APPENDIX E**.

Signal timing adjustments were made for future no-build conditions to optimize the intersection performance minimizing the overall intersection delay where possible. The following timing adjustments were made:

- At King of Prussia Road and Matsonford Road/Park Driveway:
 - Modify AM signal timings to shift 3 seconds from the SB King of Prussia Road lead phase to the NB/SB King of Prussia phase (1 second) and the EB/WB Matsonford Road/Park Driveway Phase (2 seconds).
- At King of Prussia Road and Radnor-Chester Road:

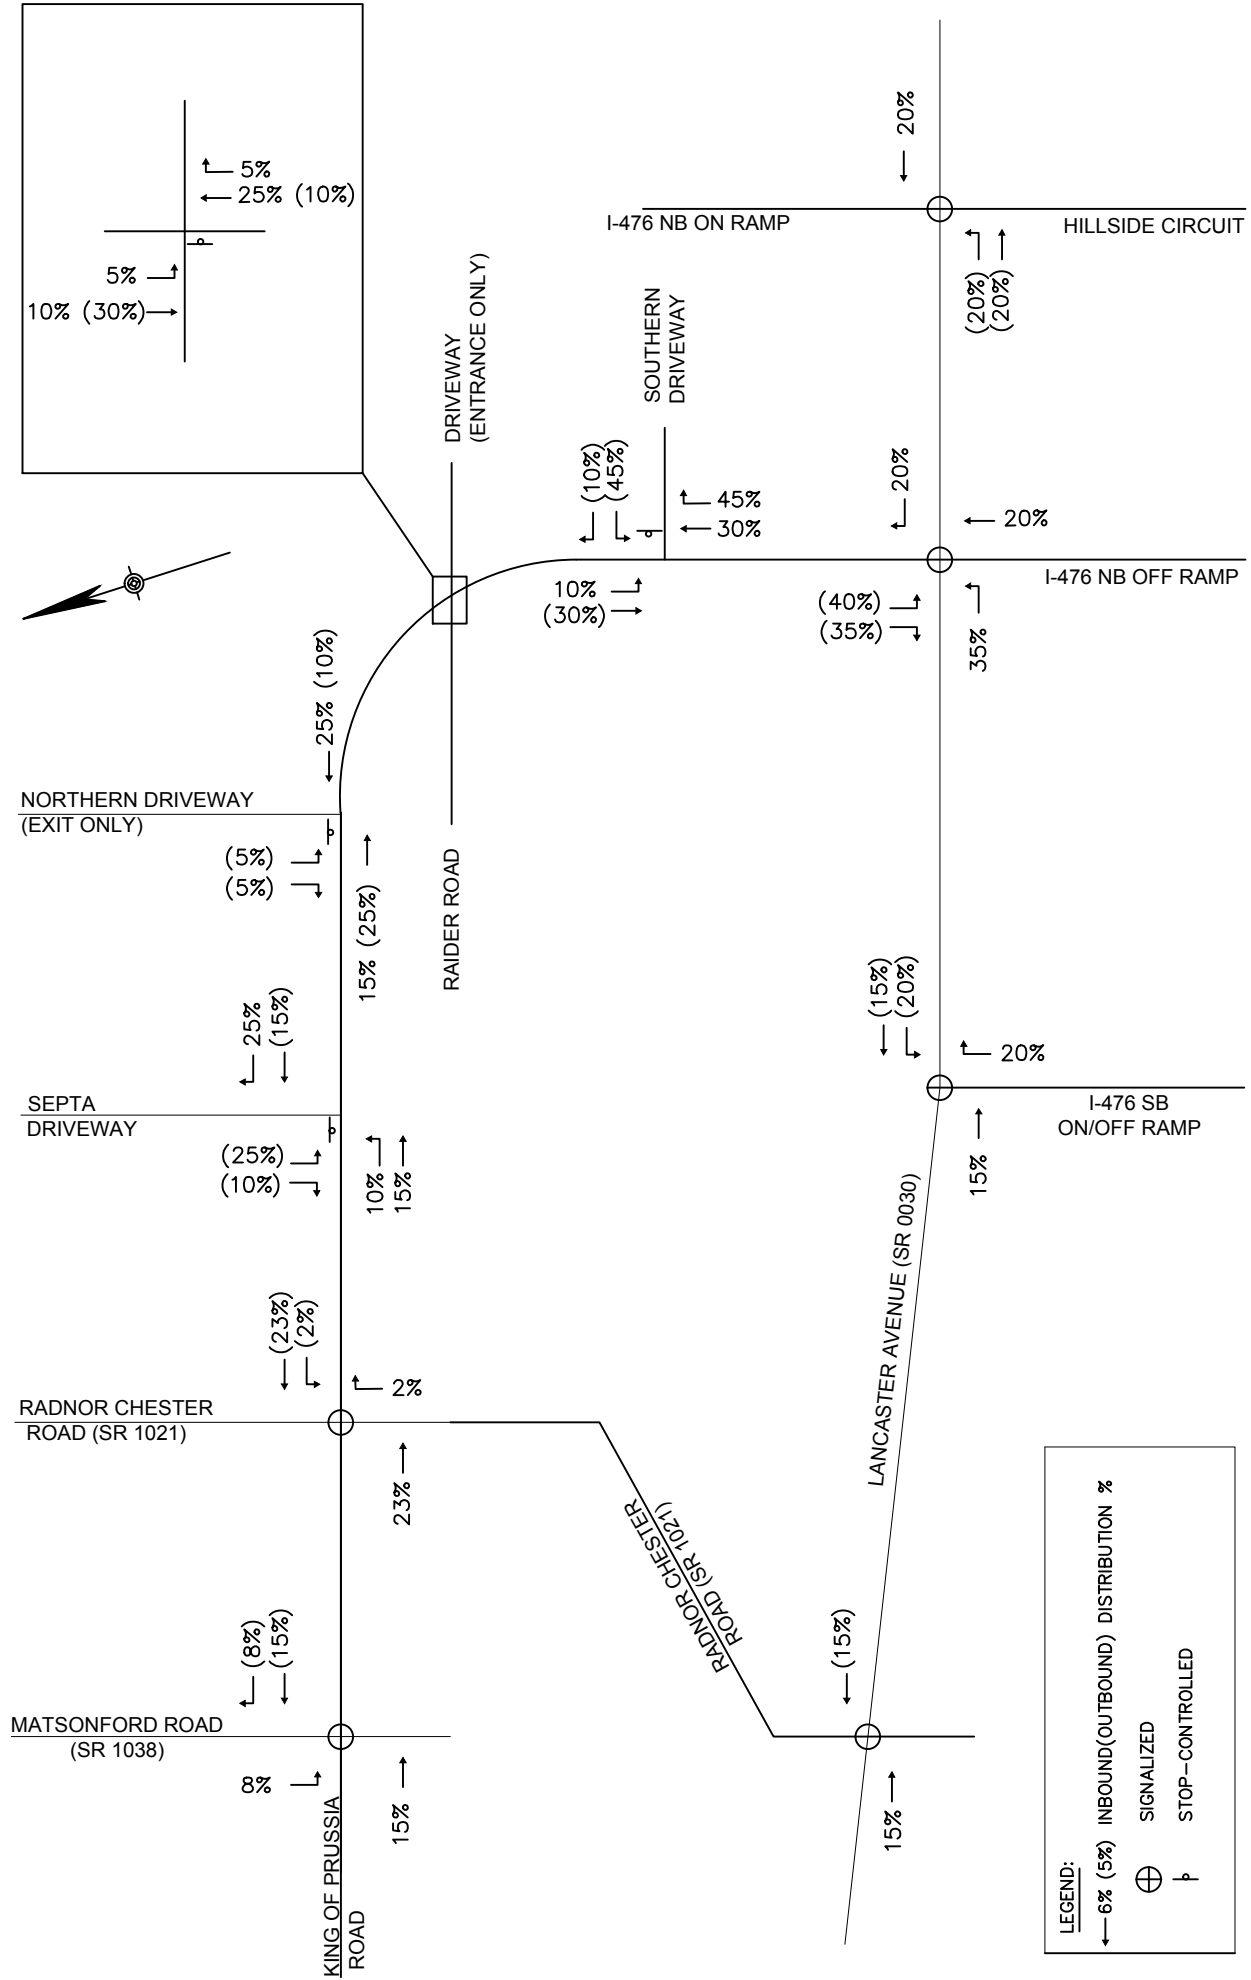


FIGURE 4
EXISTING SITE TRIP DISTRIBUTION




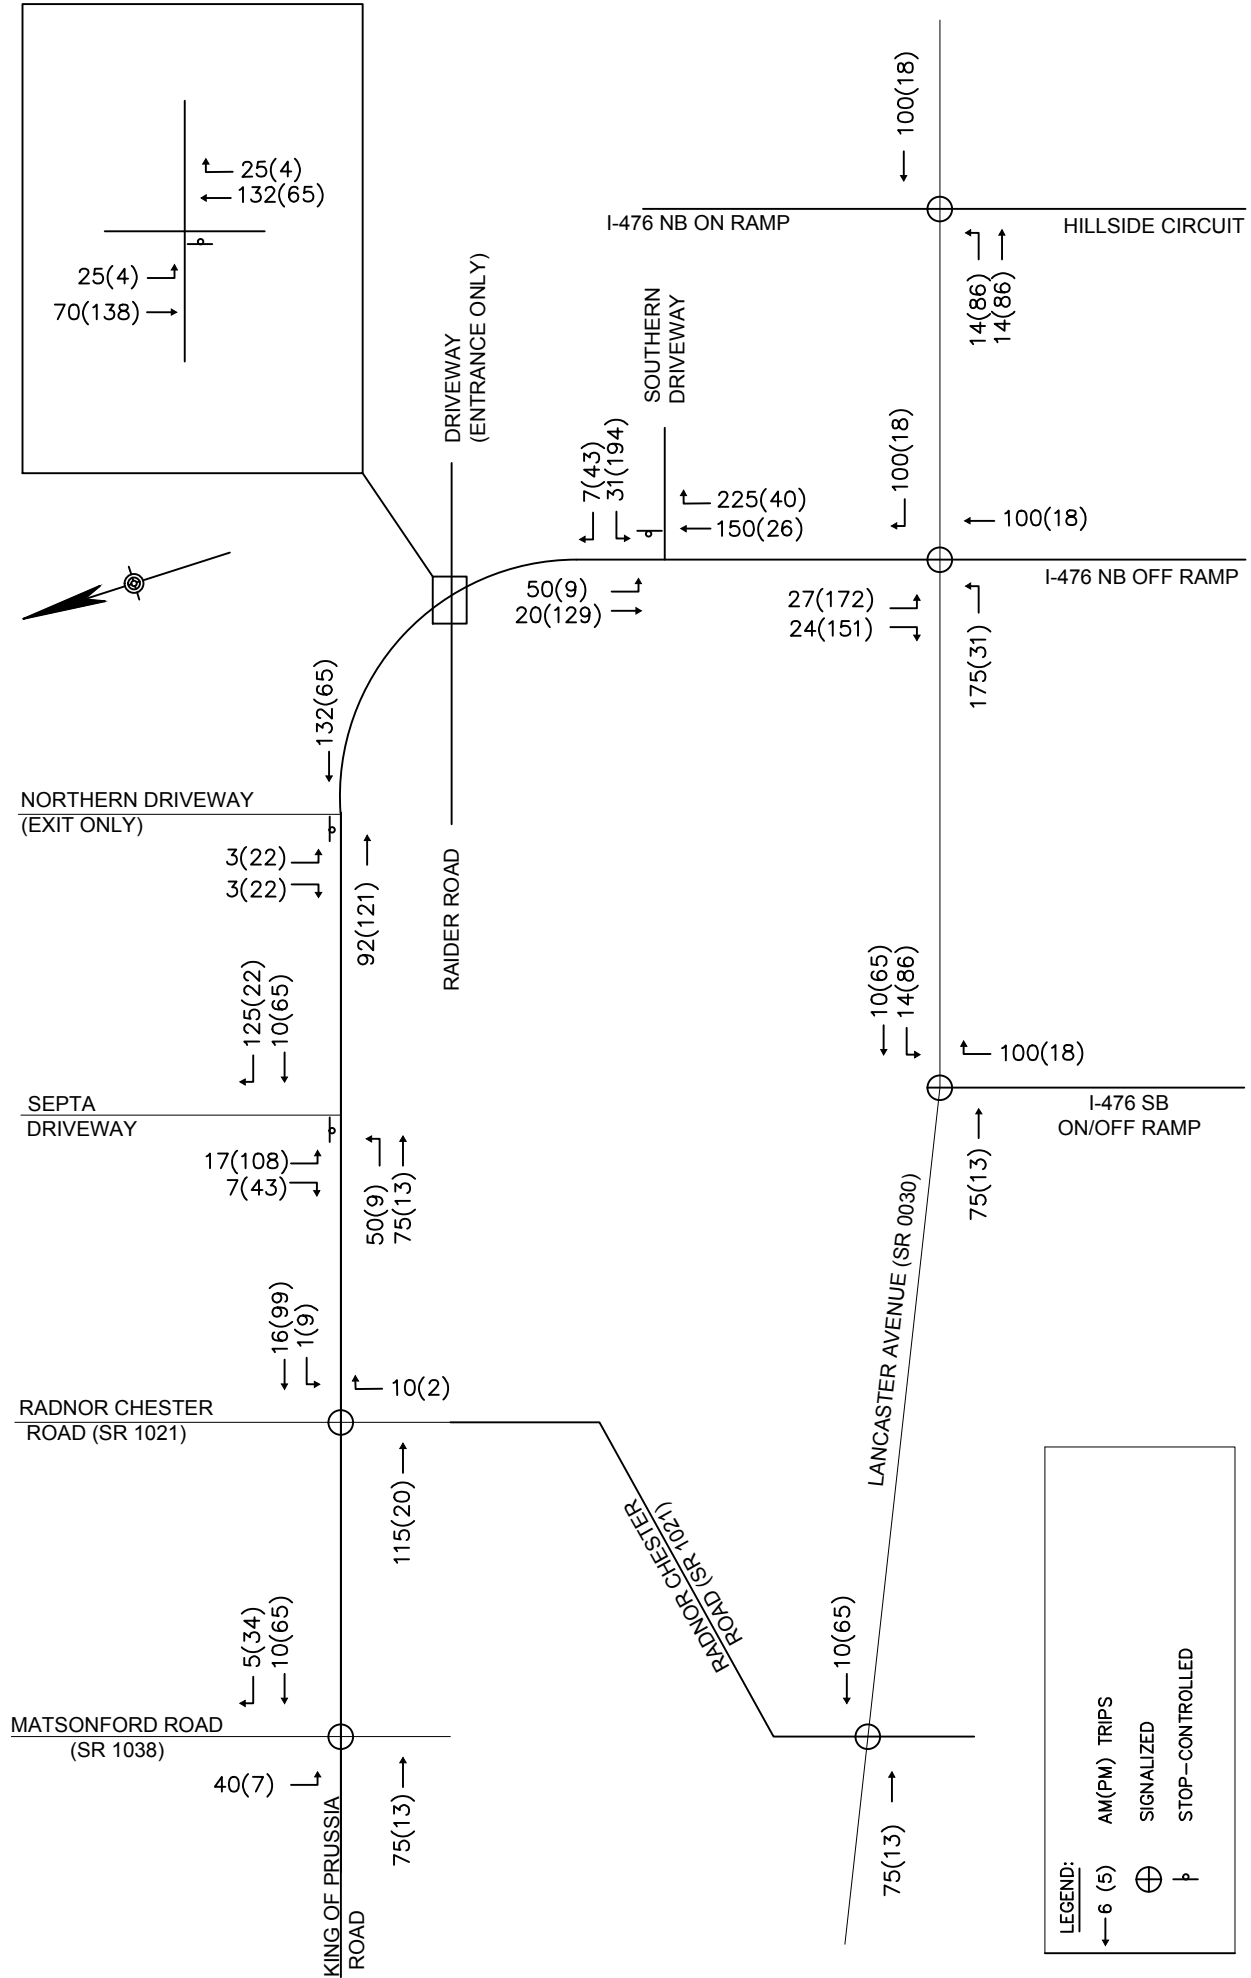


FIGURE 5
EXISTING SITE TRIPS
(CALCULATED)



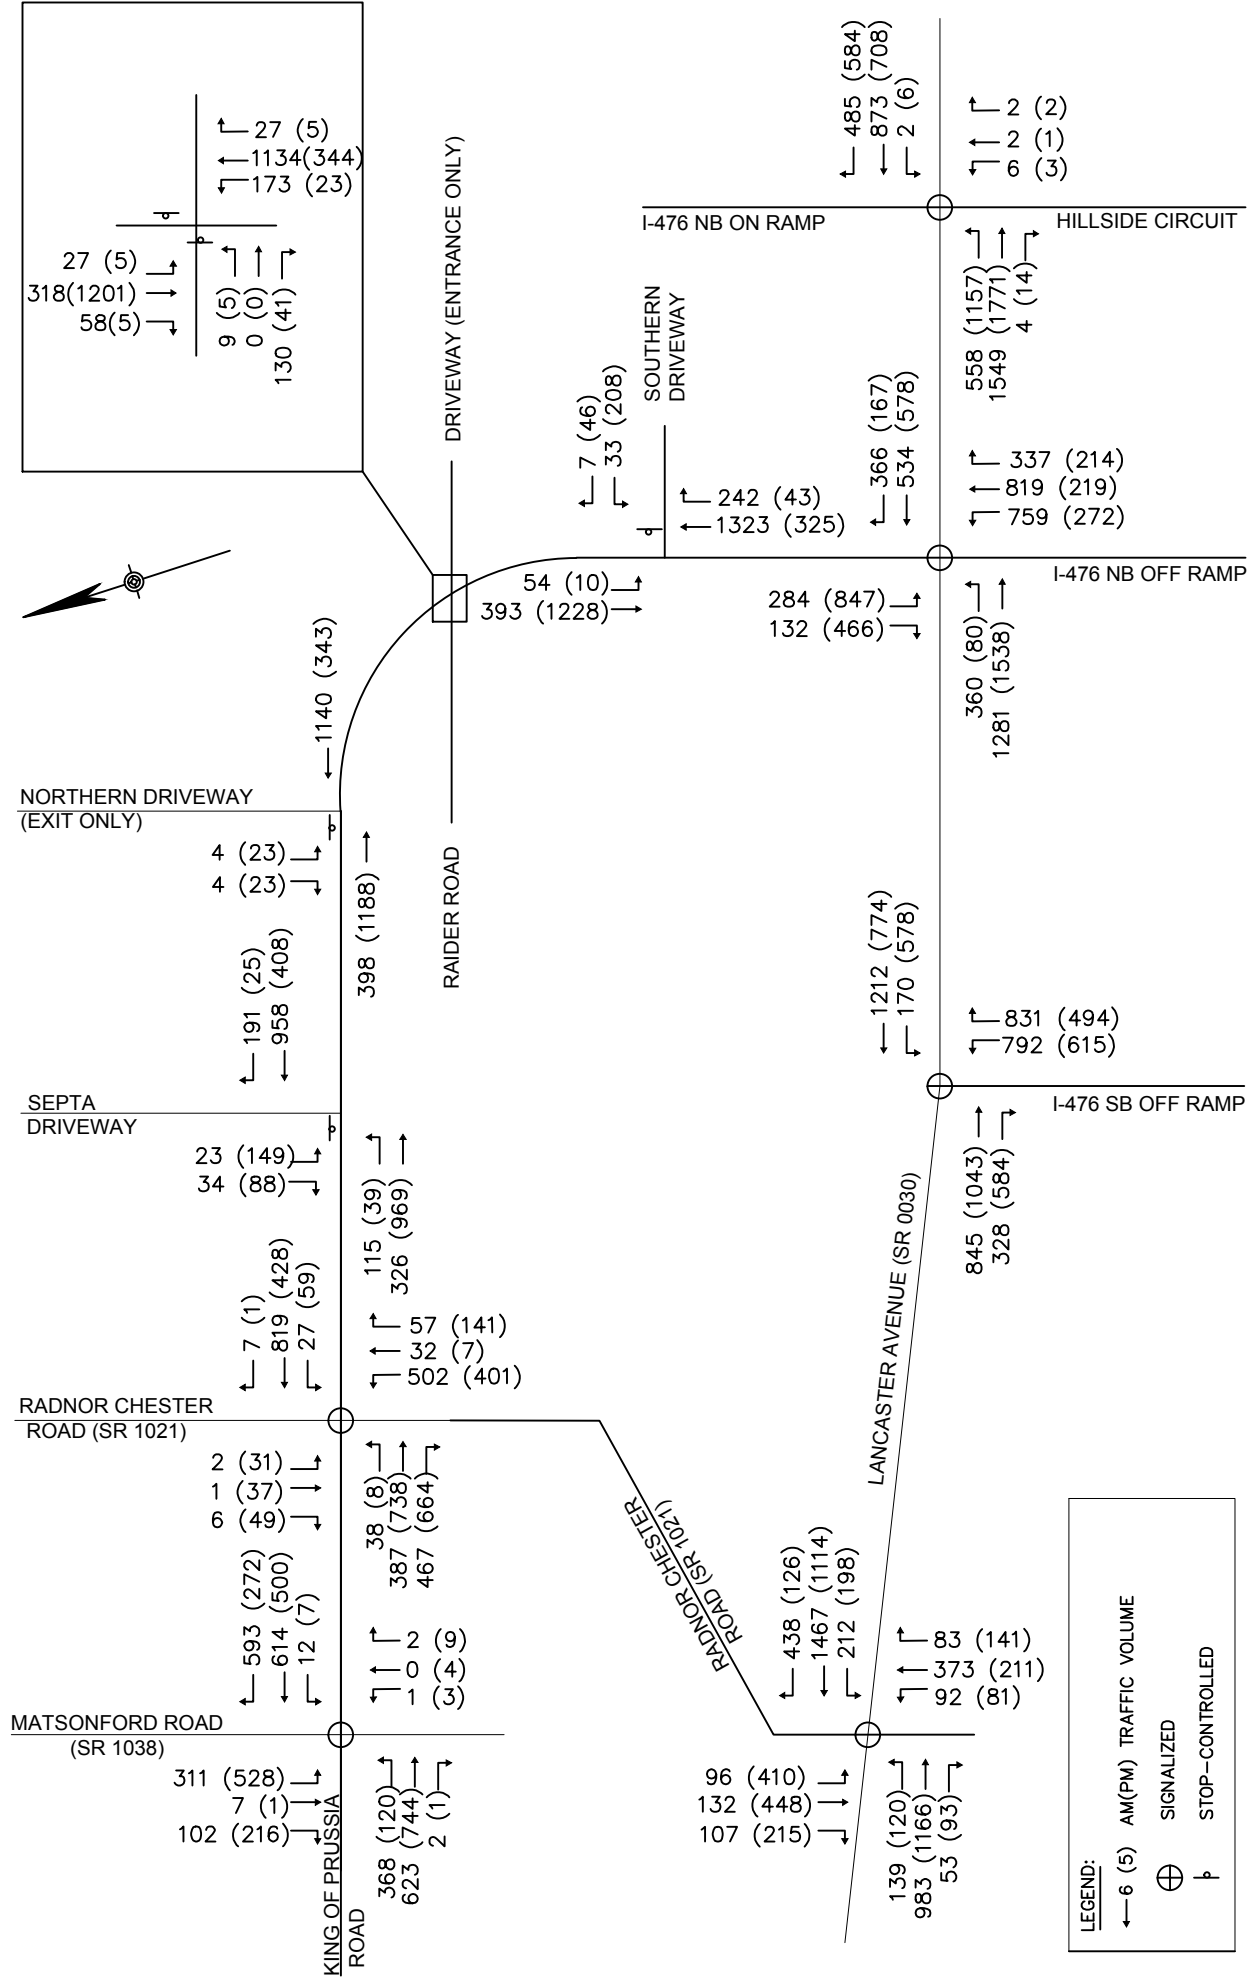


LEGEND:

- ← 6 (5) AM(PM) TRAFFIC VOLUME
- ⊕ SIGNALIZED
- ⊥ STOP-CONTROLLED

FIGURE 6
2020 NO-BUILD WEEKDAY
PEAK HOUR TRAFFIC VOLUMES



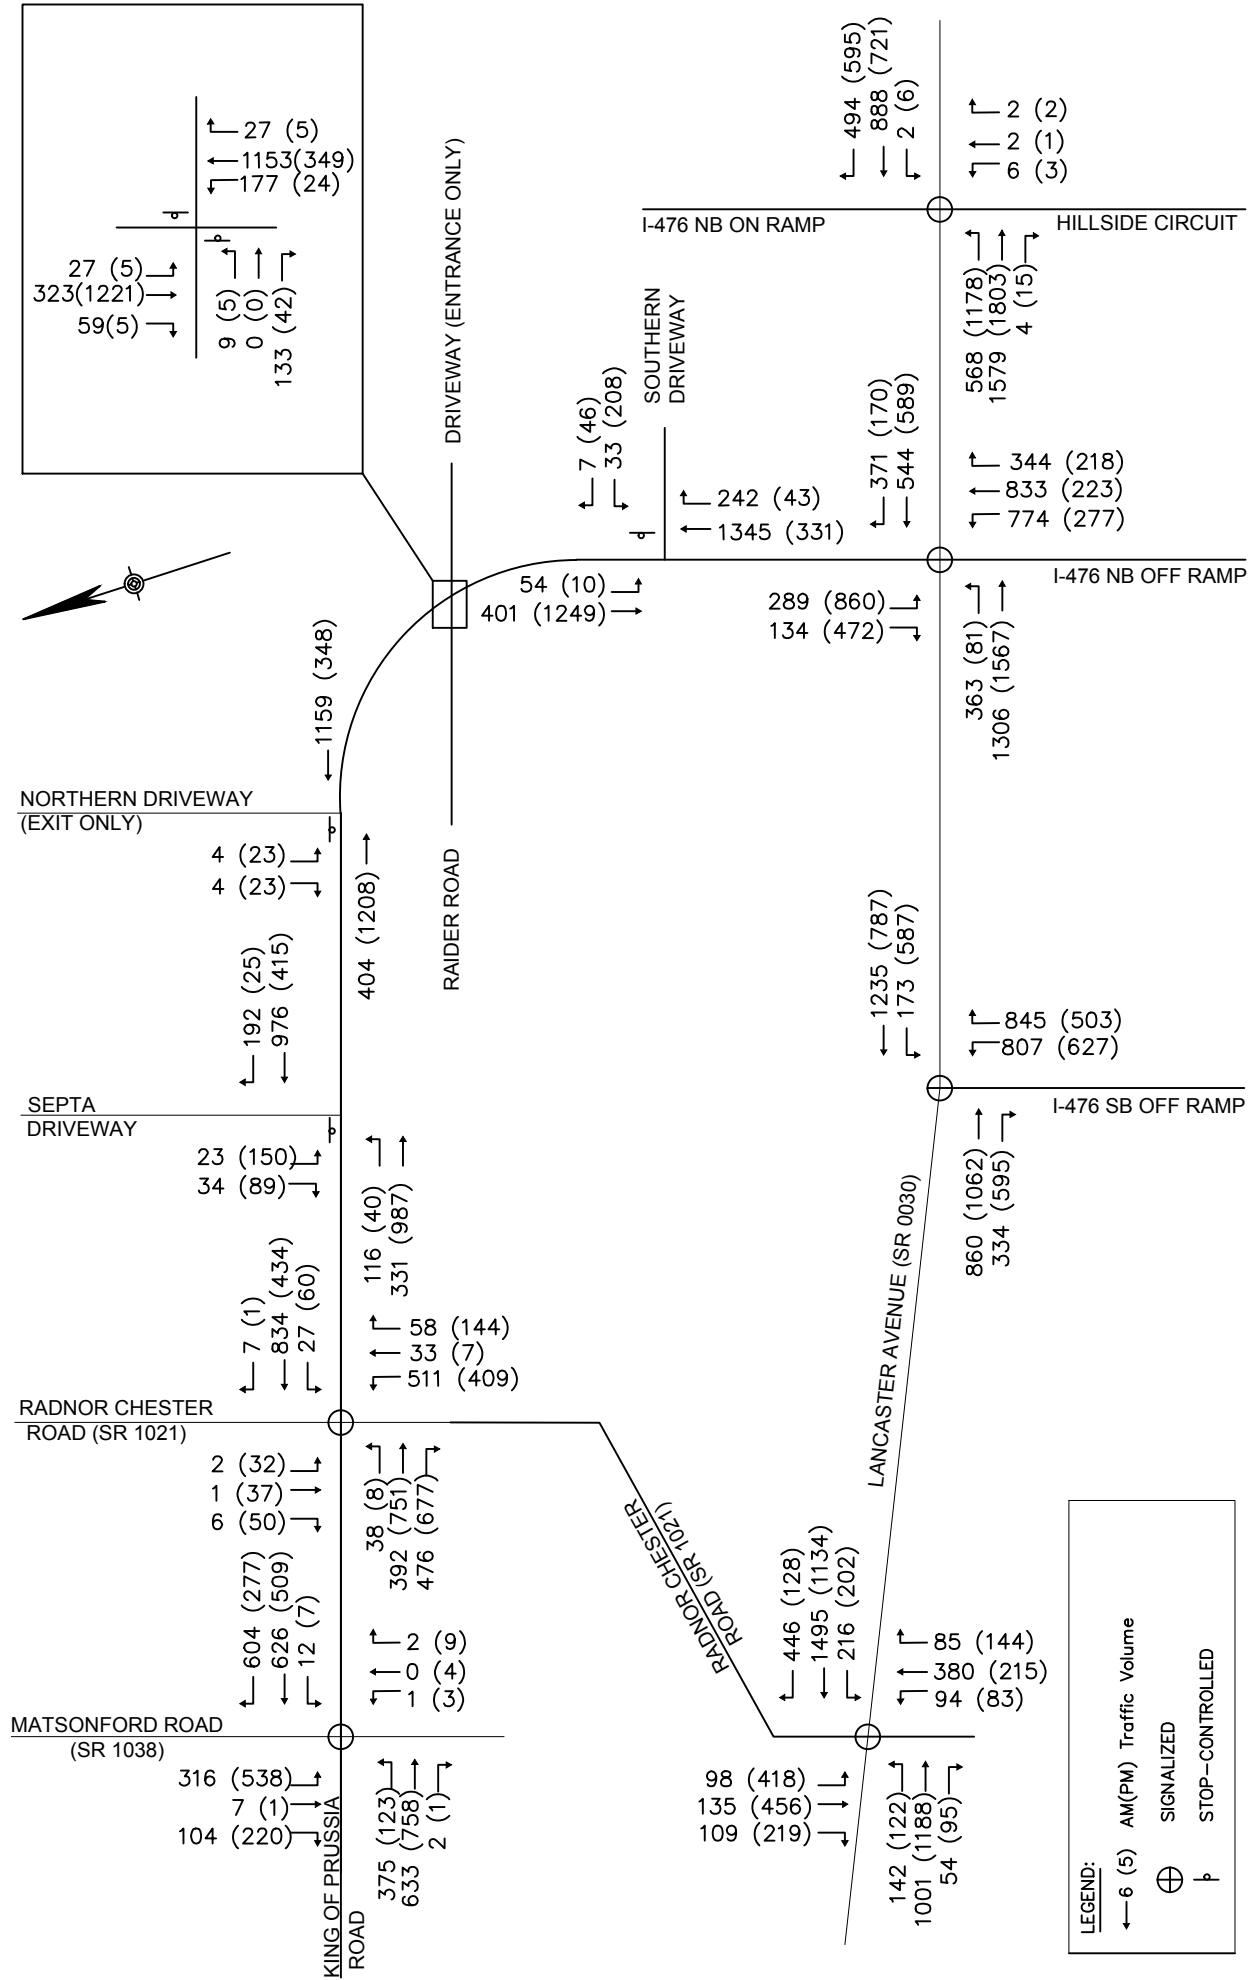

LEGEND:

- ← 6 (5) AM(PM) Traffic Volume
- ⊕ SIGNALIZED
- ⊔ STOP-CONTROLLED

FIGURE 7
2025 NO-BUILD WEEKDAY
PEAK HOUR TRAFFIC VOLUMES



Traffic Impact Study

145 King of Prussia Road

- Modify PM signal timings to shift 4 seconds from the EB/WB King of Prussia Road phase to the NB/SB Radnor Chester Road phase.
- At Lancaster Avenue and I-476 SB Off Ramp:
 - Modify PM signal timings to shift 1 second from the EB/WB Lancaster Avenue phase to the WB Lancaster Avenue lead phase.
- At Lancaster Avenue and I-476 NB On Ramp/Hillside Circuit:
 - Modify PM signal timings to shift 6 seconds from the EB/WB Lancaster Avenue phase to the EB Lancaster Avenue lead phase.
- At Lancaster Avenue and Radnor-Chester Road:
 - Modify AM signal timings to shift 12 seconds from the southbound Radnor-Chester Road lead phase to the EB/WB Lancaster Avenue Phase.

2020 No-Build Levels of Service Analysis

Operations of the study intersections during the AM and PM peak hours were evaluated for the no-build configuration of the proposed development in the proposed build year of 2020. The signal timing adjustments were made for future no-build conditions to minimizing the overall intersection delay where possible. Under the 2020 no-build Conditions, all the study intersections and movements operate at an acceptable LOS D or better besides the following locations:

- King of Prussia Road & Matsonford Road
 - Westbound left movement operates at a LOS E (55.8 seconds of delay) during the PM peak hour.
 - Southbound left movement operates at a LOS F (84.9 seconds of delay) during the AM peak hour.
 - Northbound approach movement operates at LOS E (60.9 seconds of delay) during the AM peak hour.
 - Northbound thru movement operates at LOS E (61.7 seconds of delay) during the AM peak hour.
- King of Prussia Road & Radnor Chester Road
 - Overall intersection LOS of F (218.9 seconds of delay) during the AM peak hour and LOS F (85.7 seconds of delay) during the PM peak hour.
 - Westbound left movement operates at a LOS E (62.4 seconds of delay) during the PM peak hour.
 - Northbound approach movement operates at a LOS F (617.3 seconds of delay) during the AM peak hour and at a LOS F (225.5 seconds of delay) during the PM peak hour.
 - Northbound through/left movement operates at a LOS F (681.6 seconds of delay) during the AM peak hour and a LOS E (297.7 seconds of delay) during the PM peak hour.
- King of Prussia and SEPTA Driveway
 - Westbound approach movement operates at a LOS E (38.6 seconds of delay) during the AM peak hour and at LOS F (120.0 seconds of delay) during the PM peak hour.
- King of Prussia and Southern Driveway
 - Overall intersection LOS of F (83.9 seconds of delay) during the PM peak hour.
 - Westbound approach movement operates at a LOS F (265.0 seconds of delay) during the AM peak hour and at a LOS F (613.8 seconds of delay) during the PM peak hour.
- Lancaster Avenue (SR 0030) & I-476 NB Off Ramps/King of Prussia Road
 - Overall intersection LOS of E (66.2 seconds of delay) during the AM peak hour and LOS E (55.6 seconds of delay) during the PM peak hour.
 - Eastbound approach movement operates at a LOS E (60.5 seconds of delay) during the AM peak hour and at a LOS E (58.5 seconds of delay) during the PM peak hour.
 - Eastbound left movement operates at a LOS E (59.1 seconds of delay) during the AM peak hour.
 - Eastbound through movement operates at a LOS E (60.9 seconds of delay) during the AM peak hour and at a LOS E (58.8 seconds of delay) during the PM peak hour.
 - Northbound approach movement operates at a LOS E (74.8 seconds of delay) during the AM peak hour.

Traffic Impact Study

145 King of Prussia Road

- Northbound through movement operates at a LOS F (146.9 seconds of delay) during the AM peak hour and a LOS E (57.8 seconds of delay) during the PM peak hour.
- Northbound right movement operates at a LOS E (79.3 seconds of delay) during the PM peak hour.
- Southbound approach movement operates at a LOS E (63.9 seconds of delay) during the AM peak hour and at a LOS F (85.8 seconds of delay) during the PM peak hour.
- Lancaster Avenue (SR 0030) & I-476 NB On Ramp/Hillside Circuit
 - Westbound left movement operates at a LOS E (56.5 seconds of delay) during the AM peak hour and at a LOS E (59.3 seconds of delay) during the PM peak hour.
 - Northbound approach movement operates at a LOS E (58.1 seconds of delay) during the AM peak hour and at a LOS E (56.7 seconds of delay) during the PM peak hour.
 - Northbound through/left movement operates at a LOS E (58.8 seconds of delay) during the AM peak hour and at a LOS E (56.9 seconds of delay) during the PM peak hour
 - Northbound right movement operates at a LOS E (55.1 seconds of delay) during the AM peak hour and at a LOS E (56.2 seconds of delay) during the PM peak hour.
- Lancaster Avenue (SR 0030) & Radnor Chester Road
 - Overall intersection operates at a LOS E (57.2 seconds of delay) during the PM peak hour.
 - Eastbound approach movement operates at a LOS E (59.1 seconds of delay) during the PM peak hour.
 - Eastbound through movement operates at a LOS E (62.5 seconds of delay) during the PM peak hour.
 - Westbound left movement operates at a LOS E (79.4 seconds of delay) during the PM peak hour.
 - Westbound thru movement operates at a LOS E (58.0 seconds of delay) during the AM peak hour.
 - Southbound approach movement operates at a LOS F (83.9 seconds of delay) during the PM peak hour.
 - Southbound left movement operates at a LOS F (180.3 seconds of delay) during the PM peak hour.

In the 2020 no-build conditions, the estimated 95th percentile queues at the study intersections are within the available storage lengths and do not extend into adjacent intersections with the following exceptions:

- The reported 95th percentile queue for southbound left turns at the intersection of King of Prussia Road & Matsonford Road (SR 1038) exceeds the available storage length of 100' by 618' during the AM peak period.
- The reported 95th percentile queue for westbound left turns at the intersection of King of Prussia Road & Matsonford Road (SR 1038) exceeds the available storage length of 550' by 90' during the PM peak period.
- The reported 95th percentile queues for northbound left/thru lane at the intersection of King of Prussia Road & Radnor Chester Road exceeds the available storage length of 1200' by 970' and 15' during the AM and PM peak periods, respectively.
- The reported 95th percentile queue for southbound left/thru/right turns at the intersection of King of Prussia Road & Radnor Chester Road exceeds the available storage length of 100' by 38' during the PM peak period.
- The reported 95th percentile queue for the eastbound through movements at the intersection of Lancaster Avenue (SR 0030) & I-476 NB Off Ramps/King of Prussia Road exceeds the available storage length of 800' by 535' during the PM peak period.
- The reported 95th percentile queue for the northbound through movements at the intersection of Lancaster Avenue (SR 0030) & I-476 NB Off Ramps/King of Prussia Road exceeds the available storage length of 1900' by 17' during the AM peak period.
- The reported 95th percentile queue for eastbound left turns at the intersection of Lancaster Avenue (SR 0030) & I-476 NB On Ramp/Hillside Drive exceeds the available storage length of 400' by 442' during the PM peak period.
- The reported 95th percentile queue for the eastbound through lane at the intersection of Lancaster Avenue (SR 0030) & Radnor Chester Road exceeds the available storage length of 750' by 45' during the PM peak period.
- The reported 95th percentile queue for westbound left turns at the intersection of Lancaster Avenue (SR 0030) & Radnor Chester Road exceeds the available storage length of 340' by 2' during the PM peak period.

Traffic Impact Study

145 King of Prussia Road

- The reported 95th percentile queue for westbound right turns at the intersection of Lancaster Avenue (SR 0030) & Radnor Chester Road exceeds the available storage length of 300' by 135' during the AM peak period.
- The reported 95th percentile queues for northbound thru/right turn at the intersection of Lancaster Avenue (SR 0030) & Radnor Chester Road exceeds the available storage length of 100' by 240' and 142' during the AM and PM peak periods respectively.
- The reported 95th percentile queues for southbound left turns at the intersection of Lancaster Avenue (SR 0030) & Radnor Chester Road exceeds the available storage length of 160' by 688' during the PM peak period.

A summary of the Delays, LOS, and 95th Percentile Queues for the no-build conditions analysis are summarized in **TABLE 3**. Detailed outputs of the 2020 no-build conditions analysis are provided in **APPENDIX F**.

Table 3 – 2020 No-Build Conditions Summary Table

		Available Storage Length	AM Peak Hour			PM Peak Hour		
			Delay (Secs)	LOS	95th % Queue	Delay (Secs)	LOS	95th % Queue
King of Prussia Road (N/S) & Matsonford Road (E/W)	EB Approach		26.4	C	-	19.3	B	-
	(EB Left)	50'	29.1	C	0	24.5	C	3
	(EB Thru/Right)	50'	25.0	C	3	18.2	B	10
	WB Approach	-	38.8	D	-	45.9	D	-
	(WB Left)	550'	42.8	D	368	55.8	E	640
	(WB Thru/Right)	950'	27.6	C	110	21.6	C	195
	SB Approach	-	39.0	D	-	25.9	C	-
	(SB Left)	100'	84.9	F	718	18.0	B	83
	(SB Thru/Right)	1000'+	12.0	B	403	27.1	C	660
	NB Approach	-	60.9	E	-	33.5	C	-
	(NB Left)	130'	17.3	B	10	33.1	C	8
	(NB Thru)	1150'	61.7	E	785	33.5	C	492
Overall	-	45.7	D	-	34.6	C	-	
King of Prussia Road (E/W) & Radnor Chester Road (N/S) (SR 1021)	EB Approach	-	19.0	B	-	28.1	C	-
	(EB Left)	75'	50.4	D	53	23.2	C	8
	(EB Thru)	1200'	16.0	B	255	28.1	C	548
	WB Approach	-	44.2	D	-	25.2	C	-
	(WB Left)	160'	20.5	C	25	62.4	E	93
	(WB Thru/Right)	1100'	45.0	D	883	20.1	C	333
	NB Approach	-	617.3	F	-	225.5	F	-
	(NB Left/Thru)	1200'	681.6	F	2170	297.7	F	1215
	(NB Right)	280'	18.2	B	45	16.8	B	105
	SB Approach	100'	21.8	C	8	49.3	D	138
Overall	-	218.9	F	-	85.7	F	-	
King of Prussia Road (N/S) & Septa Driveway (W)	WB Approach	450'	38.6	E	43	120.0	F	288
	NB Approach	380'	0.0	A	0	0.0	A	0
	SB Approach	1200'	4.2	A	30	0.3	A	3
	Overall	-	2.5	A	-	17.1	C	-
King of Prussia Road (N/S) & Northern Driveway (W)	WB Approach	400'	21.8	C	3	18.2	C	13
	NB Approach	280'	0.0	A	0	0.0	A	0
	SB Approach	380'	0.0	A	0	0.0	A	0
	Overall	-	0.1	A	-	0.5	A	-
King of Prussia Road (N/S) & Raider Road/Driveway (W)	EB Approach	500'	13.3	B	30	32.1	D	25
	NB Approach	550'	1.2	A	20	0.7	A	3
	SB Approach	280'	0.9	A	5	0.0	A	0
	Overall	-	2.0	A	-	1.1	A	-
King of Prussia Road (N/S) & Southern Driveway (W)	WB Approach	600'	265.0	F	108	613.8	F	567
	NB Approach	500'	0.0	A	0	0.0	A	0
	SB Approach	550'	1.8	A	-	0.1	A	-
	(SB Left)	75'	15.2	C	13	8.0	A	0
	Overall	-	5.6	A	-	83.9	F	-

Table 3 – 2020 No-Build Conditions Summary Table (Cont.)

		Available Storage Length	AM Peak Hour			PM Peak Hour		
			Delay (Secs)	LOS	95th % Queue	Delay (Secs)	LOS	95th % Queue
Lancaster Avenue (SR 0030) & I-476 NB Off Ramps/King of Prussia Road	EB Approach	-	60.5	E	-	58.5	E	-
	(EB Left)	800'	59.1	E	252	52.5	D	58
	(EB Thru)	800'	60.9	E	787	58.8	E	1335
	WB Approach	600'	53.9	D	338	10.3	B	163
	NB Approach	-	74.8	E	-	49.7	D	-
	(NB Left)	500'	17.6	B	305	19.8	B	123
	(NB Thru)	1900'	146.9	F	1917	57.8	E	313
	(NB Right)	500'	28.1	C	335	79.3	E	353
	SB Approach	500'	63.9	E	78	85.8	F	328
	Overall	-	66.2	E	-	55.6	E	-
Lancaster Avenue (SR 0030) & I-476 SB Off Ramps	EB Approach	1800'	18.0	B	235	24.6	C	323
	WB Approach	-	34.5	C	-	35.3	D	-
	(WB Left)	600'	53.8	D	120	53.1	D	342
	(WB Thru)	800'	31.8	C	568	22.0	C	370
	NB Approach	1000'+	40.0	D	443	46.6	D	370
	Overall	-	31.3	C	-	33.9	C	-
Lancaster Avenue (SR 0030) & I-476 NB On Ramp/Hillside Circuit	EB Approach	-	8.6	A	-	9.7	A	-
	(EB Left)	400'	31.8	C	248	24.4	C	842
	(EB Thru/Right)	600'	0.3	A	5	0.2	A	5
	WB Approach	-	10.4	B	-	19.8	B	-
	(WB Left)	100'	56.5	E	3	59.3	E	10
	(WB Thru/Right)	750'	10.3	B	280	19.4	B	303
	NB Approach	-	58.1	E	-	56.7	E	-
	(NB Left/Thru)	750'	58.8	E	13	56.9	E	8
	(NB Right)	50'	55.1	E	3	56.2	E	3
Overall	-	9.3	A	-	11.8	B	-	
Lancaster Avenue (E/W) (SR 0030) & Radnor Chester Road (N/S)	EB Approach	-	31.5	C	-	59.1	E	-
	(EB Left)	260'	43.8	D	145	24.3	C	95'
	(EB Thru)	750'	30.0	C	520	62.5	E	795
	WB Approach	-	49.7	D	-	42.2	D	-
	(WB Left)	340'	35.0	C	185	79.4	E	342
	(WB Thru)	1800'	58.0	E	1285	37.9	D	575
	(WB Right)	300'	29.0	C	435	21.5	C	115
	NB Approach	-	45.9	D	-	34.6	C	-
	(NB Left/Thru)	1000'+	44.7	D	345	34.8	C	238
	(NB Thru/Right)	100	47.1	D	340	34.4	C	242
	SB Approach	-	27.8	C	-	83.9	F	-
	(SB Left)	160'	31.3	C	103	180.3	F	848
	(SB Thru)	350'	26.5	C	125	24.4	C	300
Overall	-	42.3	D	-	57.2	E	-	

2025 No-Build Levels of Service Analysis

Operations of the study intersections during the AM and PM peak hours were evaluated for the no-build configuration of the proposed development in the proposed build year of 2020. The signal timing adjustments were made for future no-build conditions to minimizing the overall intersection delay where possible. Under the 2025 no-build Conditions, all the study intersections and movements operate at an acceptable LOS D or better besides the following locations:

- King of Prussia Road & Matsonford Road
 - Northbound approach movement operates at a LOS E (64.6 seconds of delay) during the AM peak hour.
 - Southbound left movement operates at a LOS F (93.0 seconds of delay) during the AM peak hour.
 - Northbound thru movement operates at a LOS E (65.5 seconds of delay) during the AM peak hour.
- King of Prussia Road & Radnor Chester Road
 - Overall intersection LOS of F (227.1 seconds of delay) during the AM peak hour and LOS F (88.4 seconds of delay) during the PM peak hour.
 - Westbound left movement operates at a LOS F (96.4 seconds of delay) during the PM peak hour.
 - Northbound approach movement operates at a LOS F (636.0 seconds of delay) during the AM peak hour and at a LOS F (212.9 seconds of delay) during the PM peak hour.
 - Northbound through/left movement operates at a LOS F (702.2 seconds of delay) during the AM peak hour and a LOS E (281.3 seconds of delay) during the PM peak hour.
- King of Prussia and SEPTA Driveway
 - Westbound approach movement operates at a LOS E (39.8 seconds of delay) during the AM peak hour and at a LOS F (132.3 seconds of delay) during the PM peak hour.
- King of Prussia and Southern Driveway
 - Overall intersection LOS of F (87.3 seconds of delay) during the PM peak hour.
 - Westbound approach movement operates at a LOS F (298.0 seconds of delay) during the AM peak hour and at a LOS F (647.9 seconds of delay) during the PM peak hour.
- Lancaster Avenue (SR 0030) & I-476 NB Off Ramps/King of Prussia Road
 - Overall intersection LOS of E (69.4 seconds of delay) during the AM peak hour and at a LOS E (60.5 seconds of delay) during the PM peak hour.
 - Eastbound approach movement operates at a LOS E (64.2 seconds of delay) during the AM peak hour and at a LOS E (64.6 seconds of delay) during the PM peak hour.
 - Eastbound left movement operates at a LOS E (59.6 seconds of delay) during the AM peak hour.
 - Eastbound through movement operates at a LOS E (65.4 seconds of delay) during the AM peak hour and at a LOS E (65.2 seconds of delay) during the PM peak hour.
 - Northbound approach movement operates at a LOS E (78.6 seconds of delay) during the AM peak hour.
 - Northbound through movement operates at a LOS F (155.9 seconds of delay) during the AM peak hour and a LOS E (60.3 seconds of delay) during the PM peak hour.
 - Northbound right movement operates at a LOS E (85.4 seconds of delay) during the PM peak hour.
 - Southbound approach movement operates at a LOS E (65.3 seconds of delay) during the AM peak hour and at a LOS F (94.1 seconds of delay) during the PM peak hour.
- Lancaster Avenue (SR 0030) & I-476 NB On Ramp/Hillside Circuit
 - Westbound left movement operates at a LOS E (56.5 seconds of delay) during the AM peak hour and at a LOS E (59.3 seconds of delay) during the PM peak hour.
 - Northbound approach movement operates at a LOS E (58.1 seconds of delay) during the AM peak hour and at a LOS E (56.7 seconds of delay) during the PM peak hour.
 - Northbound through/left movement operates at a LOS E (58.8 seconds of delay) during the AM peak hour and at a LOS E (56.9 seconds of delay) during the PM peak hour
 - Northbound right movement operates at a LOS E (55.1 seconds of delay) during the AM peak hour and at a LOS E (56.2 seconds of delay) during the PM peak hour.

Traffic Impact Study

145 King of Prussia Road

- Lancaster Avenue (SR 0030) & Radnor Chester Road
 - Overall intersection LOS of E (62.1 seconds of delay) during the PM peak hour.
 - Eastbound approach movement operates at a LOS E (67.7 seconds of delay) during the PM peak hour.
 - Eastbound left movement operates at a LOS E (63.1 seconds of delay) during the AM peak hour.
 - Eastbound through movement operates at a LOS E (71.9 seconds of delay) during the PM peak hour.
 - Westbound left movement operates at a LOS F (92.1 seconds of delay) during the PM peak hour.
 - Westbound through movement operates at a LOS E (57.1 seconds of delay) during the AM peak hour.
 - Southbound approach movement operates at a LOS F (86.4 seconds of delay) during the PM peak hour.
 - Southbound left movement operates at a LOS F (187.1 seconds of delay) during the PM peak hour.

In the 2025 no-build conditions, the estimated 95th percentile queues at the study intersections are within the available storage lengths and do not extend into adjacent intersections with the following exceptions:

In the 2020 no-build conditions, the estimated 95th percentile queues at the study intersections are within the available storage lengths and do not extend into adjacent intersections with the following exceptions:

- The reported 95th percentile queue for southbound left turns at the intersection of King of Prussia Road & Matsonford Road (SR 1038) exceeds the available storage length of 100' by 653' during the AM peak period.
- The reported 95th percentile queue for westbound left turns at the intersection of King of Prussia Road & Matsonford Road (SR 1038) exceeds the available storage length of 550' by 70' during the PM peak period.
- The reported 95th percentile queue for westbound left turns at the intersection of King of Prussia Road & Radnor Chester Road exceeds the available storage length of 100' by 20' during the PM peak period.
- The reported 95th percentile queues for northbound left/thru lane at the intersection of King of Prussia Road & Radnor Chester Road exceeds the available storage length of 1200 by 1030' and 10' during the AM and PM peak periods, respectively.
- The reported 95th percentile queue for southbound left/thru/right turns at the intersection of King of Prussia Road & Radnor Chester Road exceeds the available storage length of 100' by 43' during the PM peak period.
- The reported 95th percentile queue for the eastbound through movements at the intersection of Lancaster Avenue (SR 0030) & I-476 NB Off Ramps/King of Prussia Road exceeds the available storage length of 800' by 323' and 593' during the AM and PM peak periods, respectively.
- The reported 95th percentile queue for the northbound through movements at the intersection of Lancaster Avenue (SR 0030) & I-476 NB Off Ramps/King of Prussia Road exceeds the available storage length of 1900' by 95' during the AM peak period.
- The reported 95th percentile queue for eastbound left turns at the intersection of Lancaster Avenue (SR 0030) & I-476 NB On Ramp/Hillside Drive exceeds the available storage length of 400' by 130' during the PM peak period.
- The reported 95th percentile queue for the eastbound through lane at the intersection of Lancaster Avenue (SR 0030) & Radnor Chester Road exceeds the available storage length of 750' by 398' during the PM peak period.
- The reported 95th percentile queue for westbound left turns at the intersection of Lancaster Avenue (SR 0030) & Radnor Chester Road exceeds the available storage length of 340' by 85' during the PM peak period.
- The reported 95th percentile queue for westbound right turns at the intersection of Lancaster Avenue (SR 0030) & Radnor Chester Road exceeds the available storage length of 300' by 413' during the AM peak period.
- The reported 95th percentile queues for northbound thru/right turn at the intersection of Lancaster Avenue (SR 0030) & Radnor Chester Road exceeds the available storage length of 100' by 250' and 145' during the AM and PM peak periods respectively.
- The reported 95th percentile queues for southbound left turns at the intersection of Lancaster Avenue (SR 0030) & Radnor Chester Road exceeds the available storage length of 160' by 725' during the PM peak period.

Traffic Impact Study

145 King of Prussia Road

A summary of the Delays, LOS, and 95th Percentile Queues for the no-build conditions analysis are summarized in **TABLE 4**. Detailed outputs of the 2025 no-build conditions analysis are provided in **APPENDIX F**.

Table 4 – 2025 No-Build Conditions Summary Table

		Available Storage Length	AM Peak Hour			PM Peak Hour		
			Delay (Secs)	LOS	95th % Queue	Delay (Secs)	LOS	95th % Queue
King of Prussia Road (N/S) & Matsonford Road (E/W)	EB Approach		26.4	C	-	18.0	B	-
	(EB Left)	50'	29.3	C	0	22.9	C	3
	(EB Thru/Right)	50'	25.0	C	3	17.0	B	10
	WB Approach	-	39.6	D	-	39.8	D	-
	(WB Left)	550'	43.8	D	378	47.9	D	620
	(WB Thru/Right)	950'	27.7	C	115	20.1	C	193
	SB Approach	-	42.3	D	-	31.6	C	-
	(SB Left)	100'	93.0	F	753	20.2	C	90
	(SB Thru/Right)	1000'+	12.2	B	415	33.4	C	733
	NB Approach	-	64.6	E	-	41.0	D	-
	(NB Left)	130'	17.3	B	10	37.5	D	10
(NB Thru)	1150'	65.5	F	1090	41.0	D	542	
Overall	-	48.5	D	-	36.6	D	-	
King of Prussia Road (E/W) & Radnor Chester Road (N/S) (SR 1021)	EB Approach	-	19.2	B	-	39.5	D	-
	(EB Left)	75'	53.0	D	63	25.3	C	8
	(EB Thru)	1200'	16.0	B	260	39.7	D	992
	WB Approach	-	48.0	D	-	31.1	C	-
	(WB Left)	160'	20.6	C	25	96.4	F	120
	(WB Thru/Right)	1100'	48.9	D	928	22.1	C	350
	NB Approach	-	636.0	F	-	212.9	F	-
	(NB Left/Thru)	1200'	702.2	F	2230	281.3	F	1210
	(NB Right)	280'	18.2	B	45	15.6	B	105
SB Approach	100'	21.8	C	8	53.0	D	143	
Overall	-	227.1	F	-	88.4	F	-	
King of Prussia Road (N/S) & Septa Driveway (W)	WB Approach	450'	39.8	E	43	132.3	F	305
	NB Approach	380'	0.0	A	0	0.0	A	0
	SB Approach	1200'	4.3	A	33	0.3	A	5
	Overall	-	2.5	A	-	18.7	C	-
King of Prussia Road (N/S) & Northern Driveway (W)	WB Approach	400'	22.3	C	3	18.4	C	13
	NB Approach	280'	0.0	A	0	0.0	A	0
	SB Approach	380	0.0	A	0	0.0	A	0
	Overall	-	0.1	A	-	0.5	A	-
King of Prussia Road (N/S) & Raider Road/Driveway (W)	EB Approach	500'	13.5	B	33	33.4	D	28
	NB Approach	550'	1.2	A	20	0.8	A	3
	SB Approach	280	0.9	A	8	0.0	A	0
	Overall	-	2.1	A	-	1.1	A	-
King of Prussia Road (N/S) & Southern Driveway (W)	WB Approach	600'	298.0	F	113	647.9	F	580
	NB Approach	500'	0.0	A	0	0.0	A	0
	SB Approach	550'	1.8	A	-	0.1	A	-
	(SB Left)	75'	15.5	C	15	8.0	A	0
	Overall	-	6.1	A	-	87.3	F	-

Table 5 – 2025 No-Build Conditions Summary Table (Cont.)

		Available Storage Length	AM Peak Hour			PM Peak Hour		
			Delay (Secs)	LOS	95th % Queue	Delay (Secs)	LOS	95th % Queue
Lancaster Avenue (SR 0030) & I-476 NB Off Ramps/King of Prussia Road	EB Approach	-	64.2	E	-	64.6	E	-
	(EB Left)	800'	59.6	E	253	53.1	D	60
	(EB Thru)	800'	65.4	E	1123	65.2	F	1393
	WB Approach	600'	54.4	D	345	10.0	A	165
	NB Approach	-	78.6	E	-	52.3	D	-
	(NB Left)	500'	17.8	B	313	19.9	B	128
	(NB Thru)	1900'	155.9	F	1995	60.3	E	323
	(NB Right)	500'	28.5	C	345	85.4	F	370
	SB Approach	500'	65.3	E	83	94.1	F	368
Overall	-	69.4	E	-	60.5	E	-	
Lancaster Avenue (SR 0030) & I-476 SB Off Ramps	EB Approach	1800'	18.5	B	240	25.3	C	330
	WB Approach	-	35.0	C	-	35.5	D	-
	(WB Left)	600'	53.9	D	123	53.2	D	345
	(WB Thru)	800'	32.4	C	578	22.3	C	372
	NB Approach	1000'+	39.9	D	450	46.7	D	375
	Overall	-	31.7	C	-	34.3	C	-
Lancaster Avenue (SR 0030) & I-476 NB On Ramp/Hillside Circuit	EB Approach	-	8.4	A	-	8.7	A	-
	(EB Left)	400'	31.3	C	245	21.6	C	530
	(EB Thru/Right)	600'	0.2	A	5	0.2	A	5
	WB Approach	-	10.7	B	-	20.6	C	-
	(WB Left)	100'	56.5	E	3	59.3	E	10
	(WB Thru/Right)	750'	10.6	B	288	20.3	C	310
	NB Approach	-	58.1	E	-	56.7	E	-
	(NB Left/Thru)	750'	58.8	E	13	56.9	E	8
	(NB Right)	50'	55.1	E	3	56.2	E	3
Overall	-	9.2	A	-	11.1	B	-	
Lancaster Avenue (E/W) (SR 0030) & Radnor Chester Road (N/S)	EB Approach	-	33.3	C	-	67.7	E	-
	(EB Left)	260'	63.1	E	258	25.3	C	98
	(EB Thru)	750'	29.4	C	528	71.9	E	1148
	WB Approach	-	50.1	D	-	47.0	D	-
	(WB Left)	340'	46.6	D	228	92.1	F	425
	(WB Thru)	1800'	57.1	E	1313	41.7	D	605
	(WB Right)	300'	28.5	C	713	22.1	C	118
	NB Approach	-	47.0	D	-	34.3	C	-
	(NB Left/Thru)	1000'+	45.7	D	357	34.6	C	240
	(NB Thru/Right)	100	48.3	D	350	34.1	C	245
	SB Approach	-	28.0	C	-	86.4	F	-
	(SB Left)	160'	31.7	C	115	187.1	F	885
	(SB Thru)	350'	26.6	C	128	24.1	C	305
Overall	-	43.2	D	-	62.1	E	-	

Traffic Impact Study

145 King of Prussia Road

DEVELOPMENT TRAFFIC

Project Description

The proposed mixed use site will be located at 145 King of Prussia Road between the existing Southern Driveway and the shared SEPTA/Site Driveway. The proposed site will have three full access driveways along King of Prussia Drive at the location of the of the existing entry driveways. The existing driveway across from Raider Road will become a 2-lane full access driveway. The southern driveway will primarily be for accessing the loading area. The proposed facility is anticipated to be constructed and occupied in 2020.

The following assumptions regarding the square footage and other parameters about the site were provided by the University of Pennsylvania Health Systems:

- 250,000 square foot mixed medical use building with 271 patient positions
- 150,000 square foot general office building
- 120 room hotel

Figure 2 is a Site Plan of the proposed development.

Site Access

Access to the site will be provided through 3 full access driveways. The primary site driveway will be a full access driveway located on King of Prussia Drive across from Raider Road. A second driveway will be located on the north side of the site and accessed via the existing SEPTA driveway on King of Prussia Drive. The third site driveway provides access to loading areas and is located at the southern corner of the site on King of Prussia Road approximately 500' north of Lancaster Avenue (SR 0030). The site driveways are shown on the Site Plan illustrated in **Figure 2**.

Public Transit

University of Pennsylvania Health Systems (UPHS) promotes public transportation and tax incentive programs for commuting costs at all of its City and suburban locations and encourages the use of public transportation options by staff and patients. UPHS educates its employees on programs like Transportation Reimbursement Incentive Program (TRIP) that allow commuting costs to be paid with pre-tax dollars and offers discounts on SEPTA travel and new employees to Penn Medicine Radnor receive are public transportation options around the campus during a new employee orientation. UPHS also uses its website to inform patients of opportunities to use public transportation to and from their facilities.

Trip Generation

The traffic volumes for the hotel and general office components of the proposed site were estimated based on information contained in the Institute of Transportation Engineers (ITE) publication *Trip Generation* (9th Edition, 2012). The *ITE Trip Generation Manual* defines a trip as a "single or one-direction vehicle movement with either the origin or the destination (exiting or entering) inside a study site."

The traffic volumes for the hotel and office portions of the site proposed site were estimated based on information contained in the Institute of Transportation Engineers (ITE) publication *Trip Generation* (9th Edition, 2012). The expected trip generation for the site is based upon the following ITE Land Use Codes utilizing the square footage of the building as the independent variable:

- 310 "Hotel"

Traffic Impact Study 145 King of Prussia Road

- 710 “General Office”

The Institute of Transportation Engineers’ Trip Generation Manual, 9th Edition states: “A medical-dental office building is a facility that provides diagnoses and outpatient care on a routine basis but is unable to provide prolonged in-house medical and surgical care. One or more private physicians or dentists generally operate this type of facility.” The AM and PM ITE Trip Generation Rate for a medical-dental office are derived based on 64 studies, of which 63 had buildings with a gross floor area of less than 70,000 SF.

The proposed Penn Medicine mixed medical use portion of the development will have a gross floor area of 250,000 SF, more than triple the size of 90% of the facilities used by ITE to derive trip generation data. Also, unlike private physician practices used to generate the ITE rates, the proposed Penn Medicine mixed medical use facility will include a number of treatment facilities that are uncommon in a typical medical office and that occupy a larger portion of the gross square floor area of the building, while not accommodating a larger number of patients. These facilities include ambulatory operating rooms, endoscopy rooms, chemotherapy treatment areas, radiological imaging rooms and radiation oncology treatment areas. Therefore, the proposed facility is very different from those used to derive ITE trip generation data.

It is for these reasons that the ITE trip generation is not appropriate to use for the proposed Penn Medicine building and a trip generation rate was developed based on an evaluation of three existing mixed medical use facilities for the peak hour of the adjacent street which, based on traffic counts, is 7:15-8:15 AM and 5:00–6:00 PM.

The following existing mixed medical use facilities were evaluated to develop trip generation rates:

- 171,000 square foot facility at 250 King of Prussia Rd in Radnor PA
- 83,000 square foot facility at 1001 Chesterbrook Blvd. in Berwyn PA
- 154,826 square foot facility at 915 Old Fern Hill Road in West Chester, PA

Based on driveway counts and data regarding the number of patient positions at each facility average weekday, AM and PM trip generation rates and entry/exit distributions were developed and approved by Radnor Township. The following are the developed trip generation rates for a mixed medical use facility and the rates used for the general office and hotel land uses:

Table 5 –Trip Generation Rates

Land Use Code	Unit of Measure	Weekday Trips			AM Trips			PM Trips		
		Rate	% In	% Out	Rate	% In	% Out	Rate	% In	% Out
Medical Mixed Use*	Patient Positions	18.02	50%	50%	1.60	77%	23%	1.06	29%	71%

* Trip generation calculated using calculated trip rates for Medical Mixed Use based on observations of similar facilities

Land Use Code	Unit of Measure	Weekday Trips			AM Trips			PM Trips		
		Rate	% In	% Out	Rate	% In	% Out	Rate	% In	% Out
General Office	KSF	11.03	50%	50%	1.56	88%	12%	1.49	17%	83%

Land Use Code	Unit of Measure	Weekday Trips			AM Trips			PM Trips		
		Rate	% In	% Out	Rate	% In	% Out	Rate	% In	% Out
Hotel	Rooms	8.17	50%	50%	0.53	59%	41%	0.60	51%	49%

Traffic Impact Study 145 King of Prussia Road

The proposed development is a mixed use site and internal trips were calculated using the methodology outlined in the [ITE Trip Generation Handbook](#).

The trip calculations result in a total of **731** (577 entering and 154 exiting) and **583** (158 entering and 425 exiting) new trips generated to the site during the morning and afternoon peak hours, respectively. **TABLE 6** summarizes the calculated peak hour trips to/from the proposed development during the weekday morning and weekday afternoon peak hours.

Table 6 –Proposed Site Trip Generation

Land Use Code	Size	Unit of Measure	Weekday Trips			AM Trips			PM Trips		
			In	Out	Total	In	Out	Total	In	Out	Total
Medical Mixed Use*	250,000 SF (271 PP)	Patient Positions	2,442	2,442	4,883	334	100	434	83	204	287
General Office Building (ITE Land Use 710)	150,000 SF	1,000 SF GFA	827	827	1,655	206	28	234	38	186	224
Hotel (ITE Land Use 310)	75,000 SF (120 rooms)	Rooms	490	490	980	38	26	64	37	35	72
Total			3,759	3,759	7,518	577	154	731	158	425	583

The trip generation calculations and the Letter to Radnor Township outlining the development of the trip generation rates for the mixed medical use facility are provided in **APPENDIX G**.

The proposed site will generate approximately 90% more net trips over the course of a whole day than the existing land use “general office building” but only generates approximately 20% more net trips in the AM peak period and approximately 5% more net trips during the PM peak period. The comparison of the net trips generated by the existing land use versus the proposed is illustrated in **TABLE 7**.

Table 7 –Net Trip Comparison

Land Use	Size	Net Trips		
		Weekday	AM Peak Hour	PM Peak Hour
Existing General Office Building	427,110 SF	3,957	611	557
Proposed Mixed Use (Mixed Medical/ Hotel/General Office)	475,000 SF	7,518	731	583
Difference	Volume	3,561	120	26
	% Difference	90.0%	19.6%	4.7%

Trip Distribution and Assignment

The trip distribution of the University of Pennsylvania Health Systems medical-dental office, general office building, and hotel were based on the proposed location along King of Prussia Road and the existing traffic patterns on the surrounding roadway network. The proposed site will have 3 driveways along King of Prussia Road with the primary driveway located across from Raider Road. The estimated distribution of the site traffic is:

To/From the north on King of Prussia Road northbound 25%
To/From south on King of Prussia Road southbound 75%

The trip distribution and volumes generated at the proposed site are provided in **Figures 8 and 9**.

Build Traffic Volumes

The traffic volumes generated by the proposed development were added to the 2020 and 2025 base traffic volumes to provide the 2020 and 2025 build traffic volumes. The peak hour traffic volumes are illustrated in **Figures 10 and 11** and traffic volumes development tables are provided in **APPENDIX E**.

Turn Lane Warrant Assessment

An analysis was conducted at the proposed site driveways using the 2025 build volumes to determine whether left turn lanes or a right turn lane into the site from are warranted. Based on the standard worksheets in the Chapter 11 Appendix of PennDOT Publication 46, the following turn lanes at site driveways are warranted during both the AM and PM peak periods:

King of Prussia Road & Septa Driveway

- Left turn lane from SB King of Prussia Road into the Septa Driveway.

King of Prussia Road & Raider Road

- Left turn lane from SB King of Prussia Road into the Site Driveway.
- Left turn lane from NB King of Prussia Road into Raider Road.
- Right turn lane from NB King of Prussia Road into the Site Driveway.

The turn lanes warranted in both the AM and PM Peak periods are being recommended as mitigation measures to the proposed development.

Although the southbound left turn lane from King of Prussia Drive to the Southern Driveway is only warranted in the AM peak period, it is an existing condition. Therefore, the dedicated left lane on southbound King of Prussia Road is proposed to remain. The dedicated left turn lane is formed from an area that would otherwise be a median gore and provides storage for left turning delivery trucks into the site, thus providing a clear lane for through traffic on King of Prussia Road.

A northbound right turn lane from King of Prussia Drive to the Septa is only warranted during the AM peak period and is not being recommended as a mitigation measure.

The detailed turn lane warrant analysis for the driveway entries is provided in **APPENDIX H**.


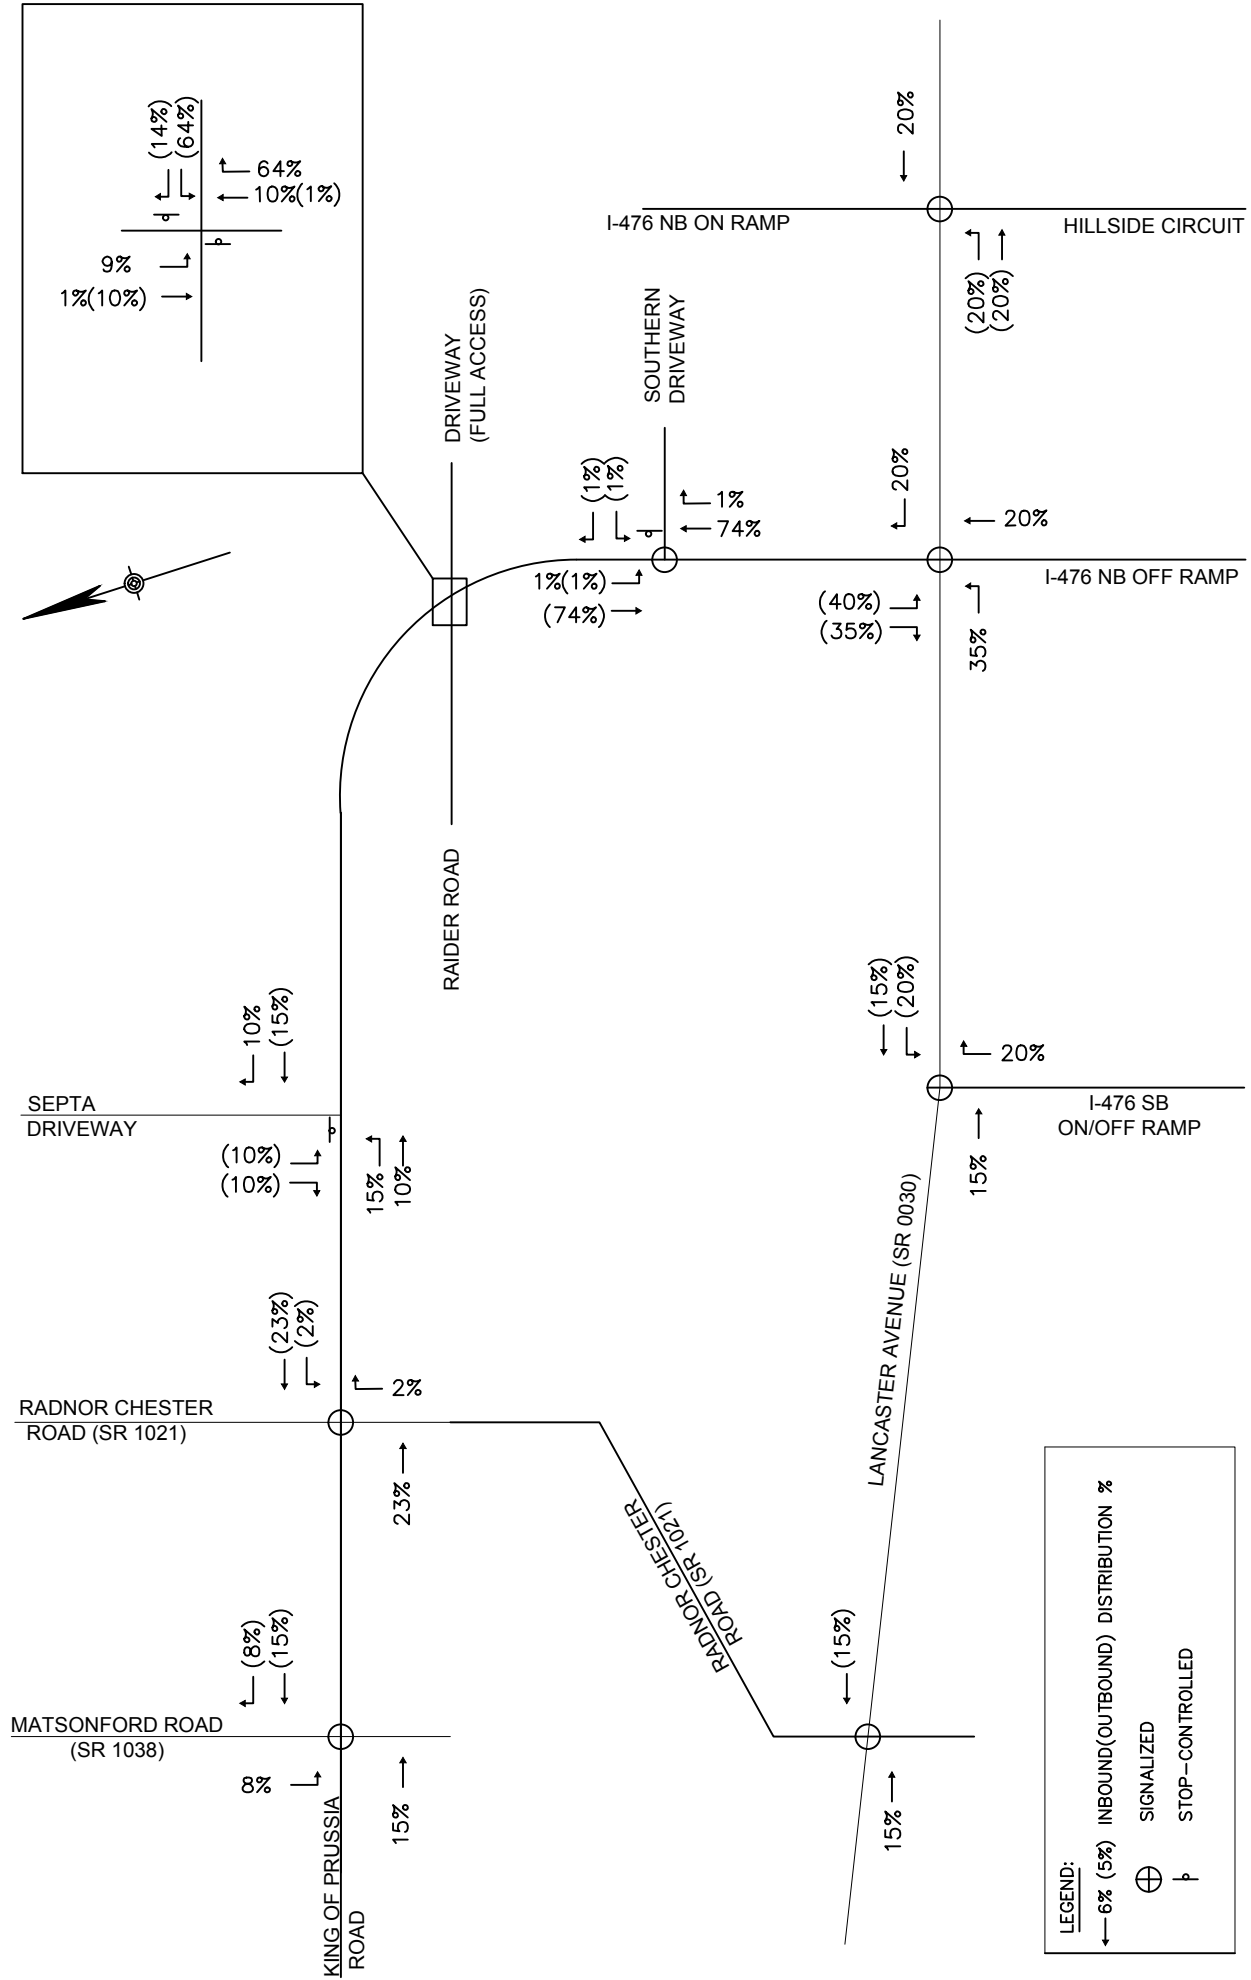


FIGURE 8 PROPOSED SITE TRIP DISTRIBUTION



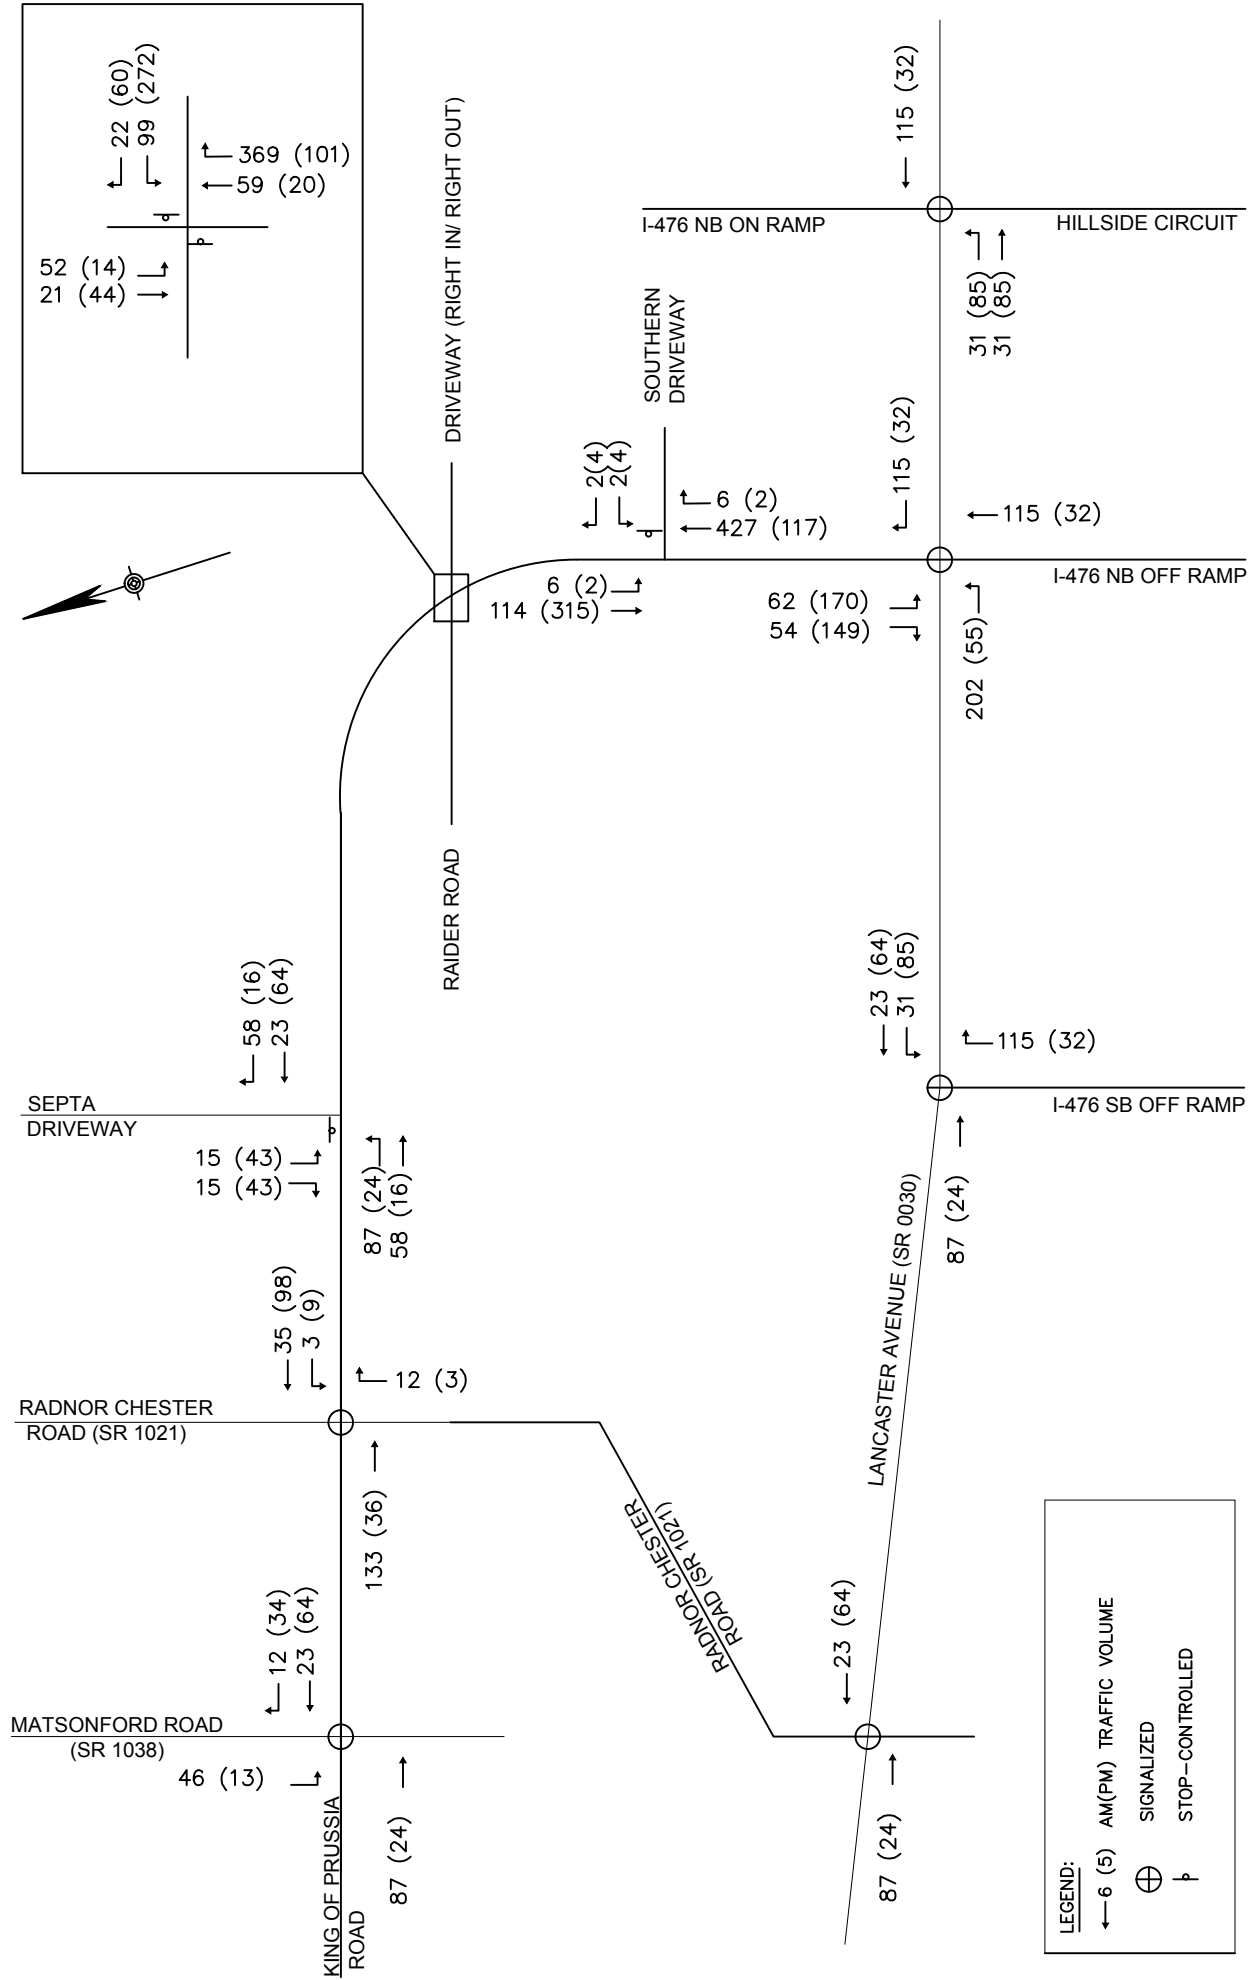

LEGEND:

- ←-6 (5) AM(PM) TRAFFIC VOLUME
- ⊕ SIGNALIZED
- T STOP-CONTROLLED

**FIGURE 9
PROPOSED SITE TRIPS**




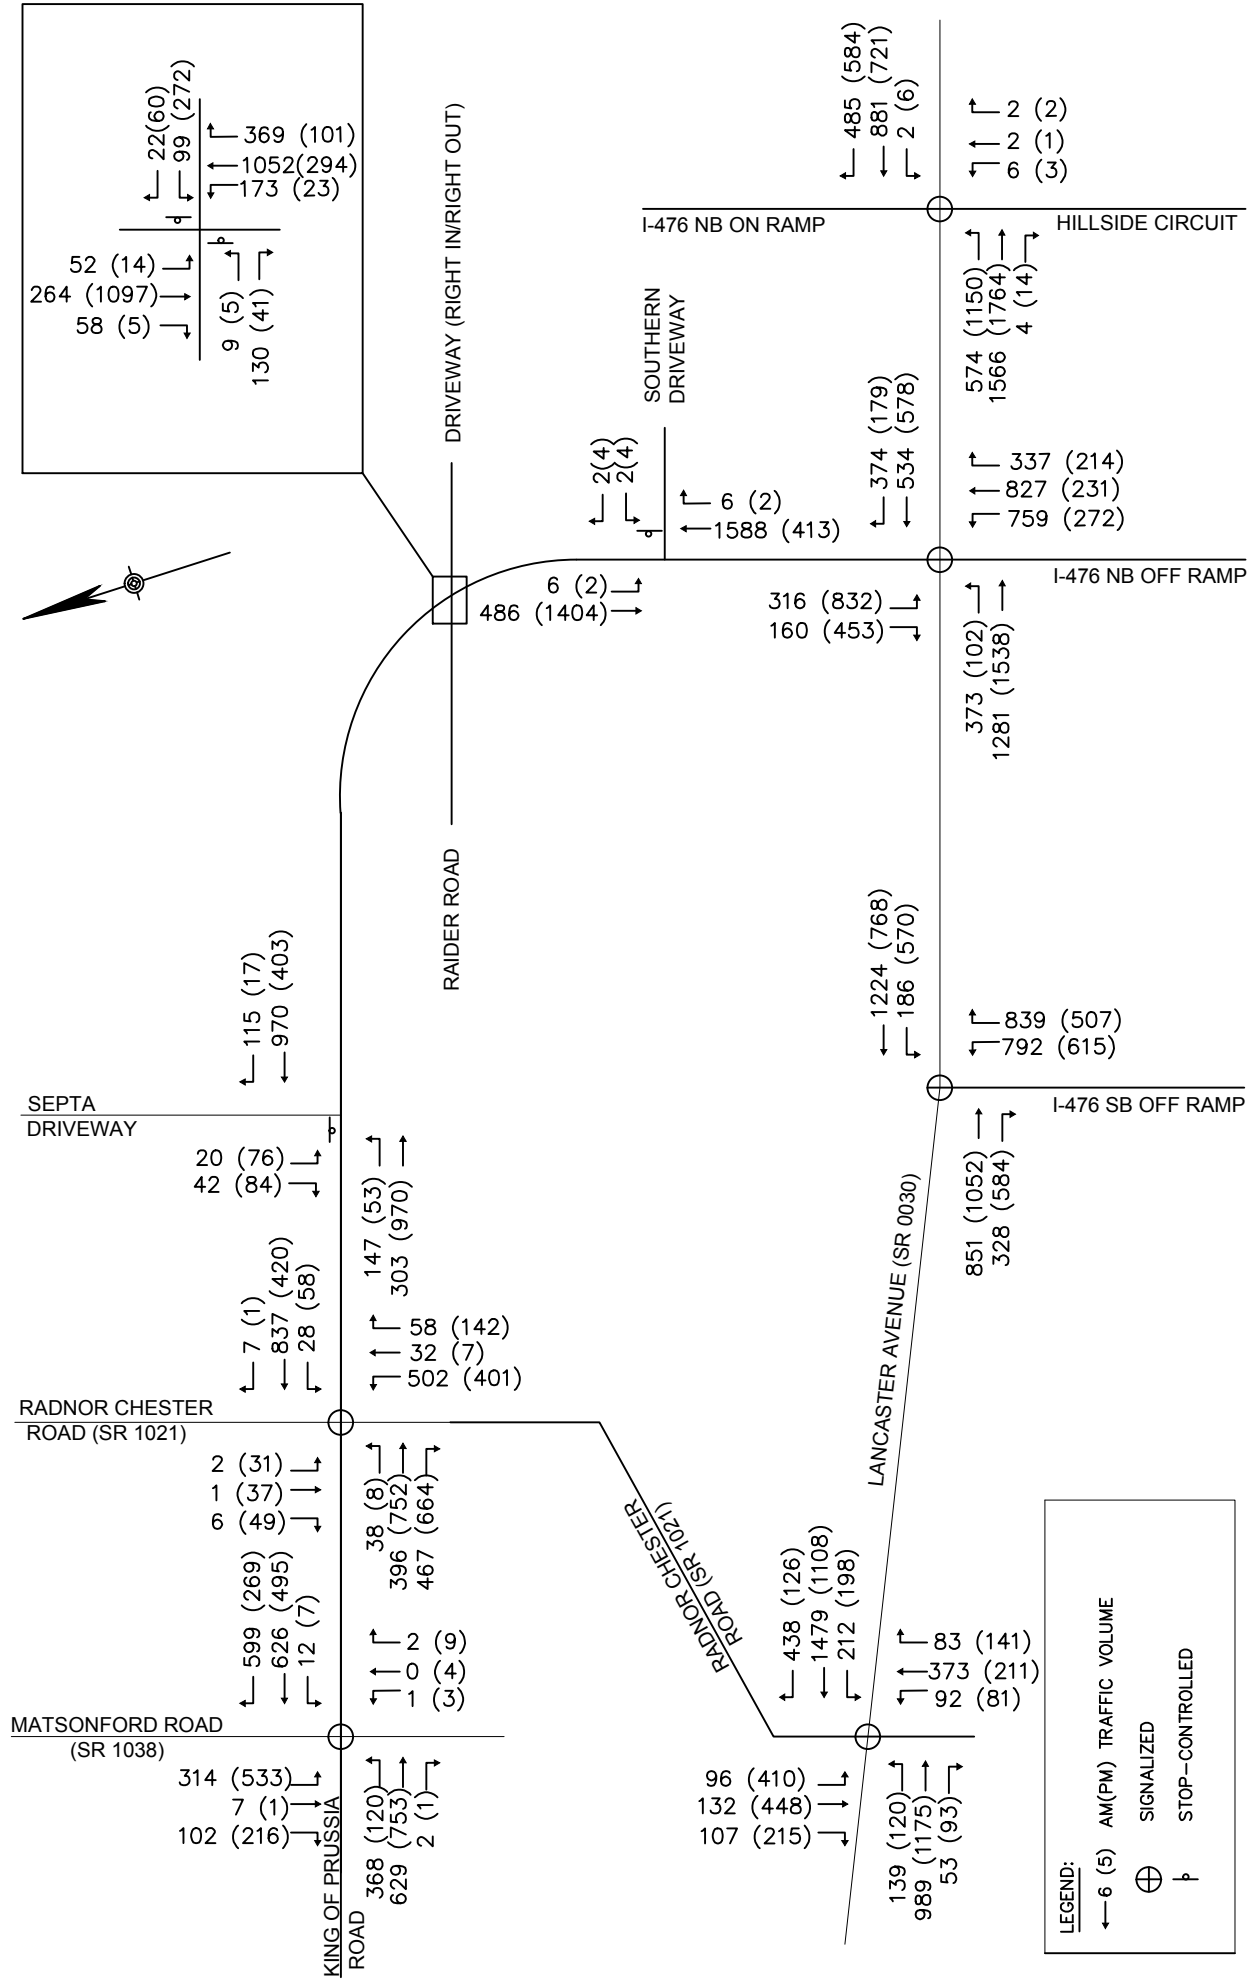


FIGURE 10
2020 BUILD WEEKDAY
PEAK HOUR TRAFFIC VOLUMES

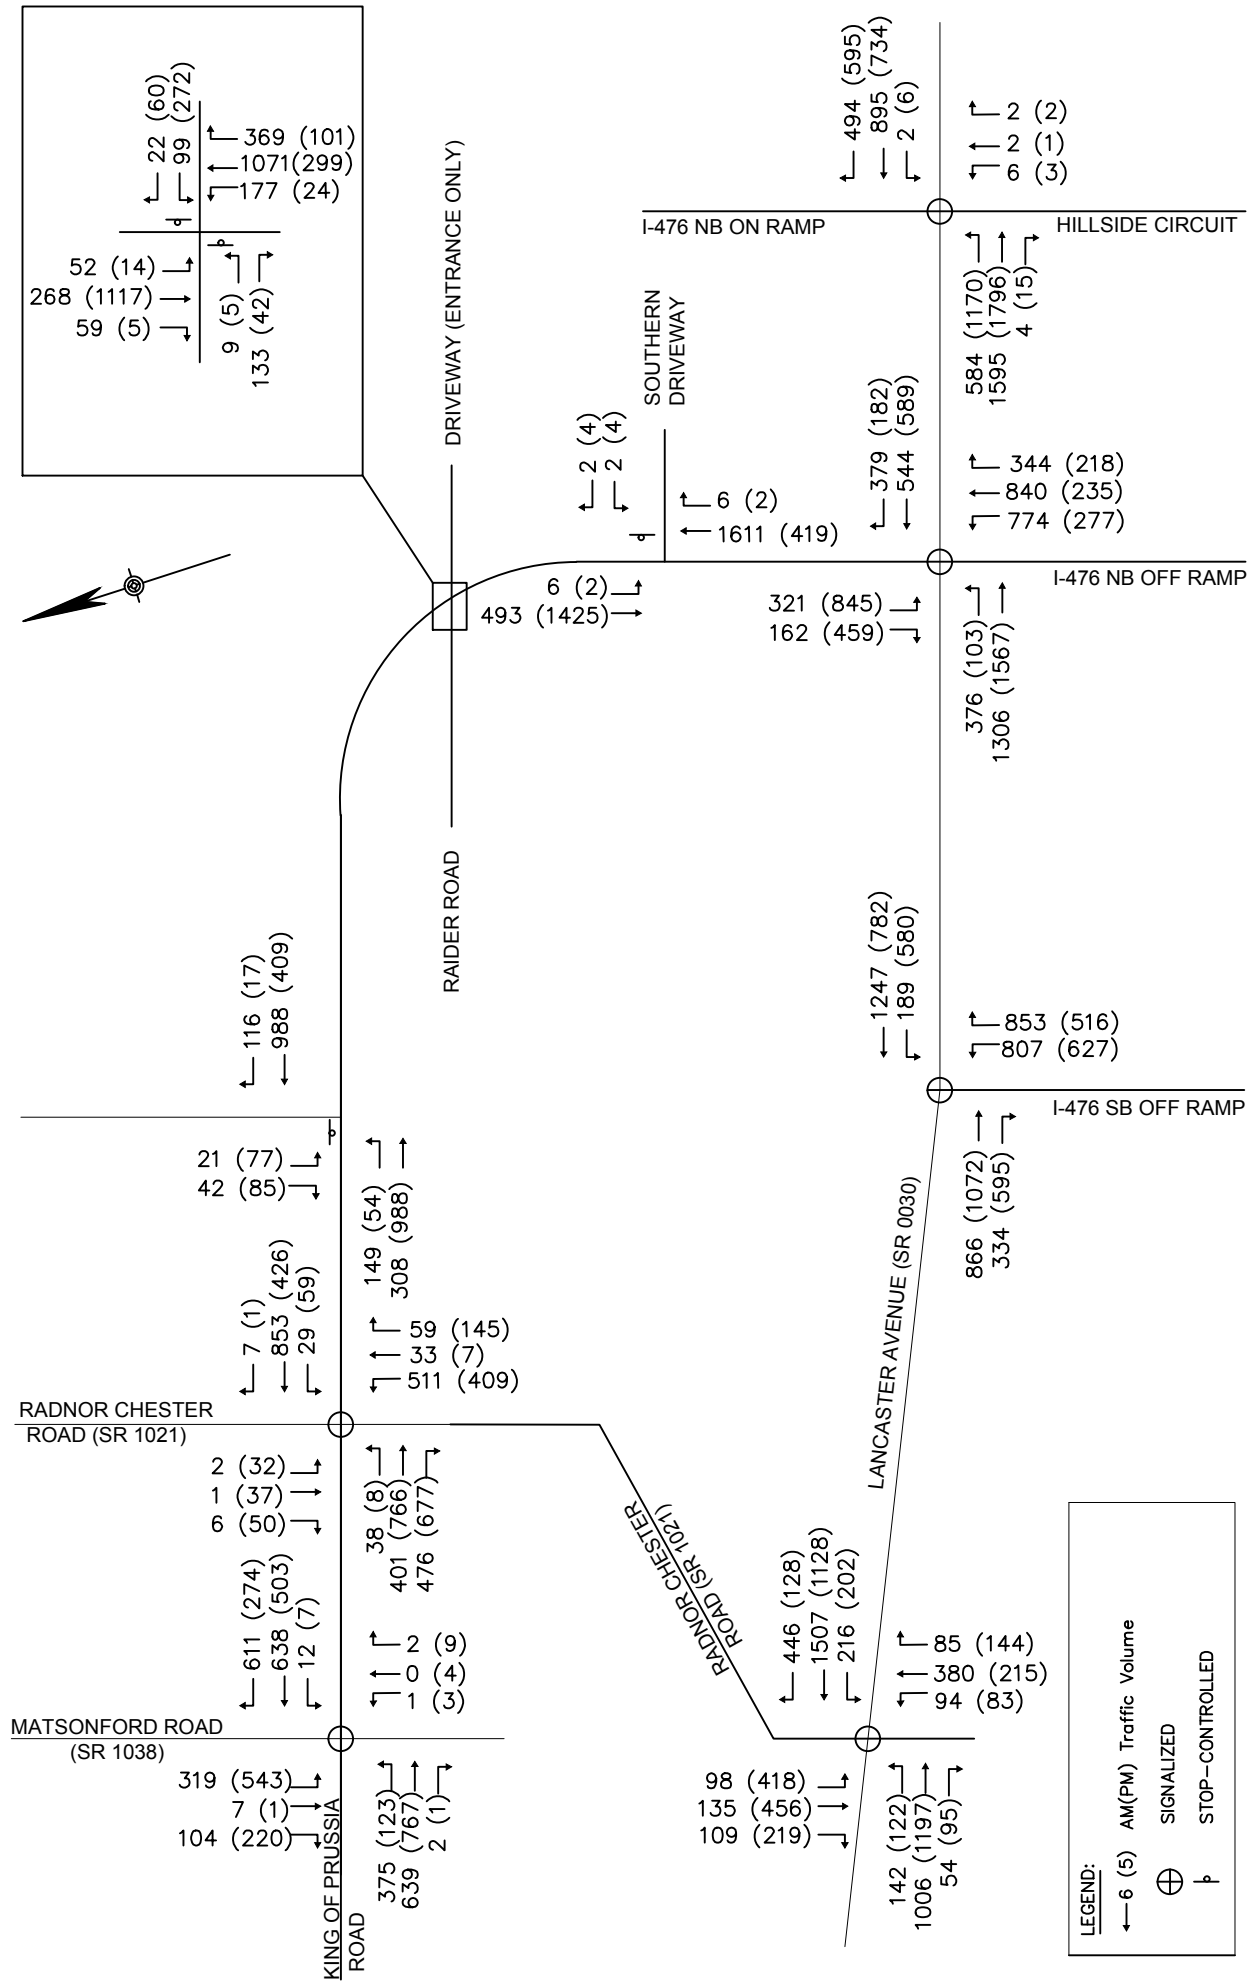

LEGEND:

- ←-6 (5) AM(PM) Traffic Volume
- ⊕ SIGNALIZED
- ⊔ STOP-CONTROLLED

FIGURE 11
2025 BUILD WEEKDAY
PEAK HOUR TRAFFIC VOLUMES



2020 and 2025 “BUILD” TRAFFIC CONDITIONS WITHOUT MITIGATION

Operations of the study intersections during the AM and PM peak hours were evaluated for the build configuration of the proposed development in the proposed build year of 2020 and the horizon year of 2025 with the optimized timings from the no-build condition.

2020 Build Levels of Service

Under the 2020 build configuration without any improvements, all the study intersections and movements operate at an acceptable LOS D or better except for the following locations:

King of Prussia Road & Matsonford Road (SR 1038)

- Southbound left movement operates at a LOS F (86.7 seconds of delay) during the AM peak hour.
- Westbound left movement operates at a LOS E (57.7 seconds of delay) during the PM peak hour.
- Northbound approach movement operates at LOS E (64.6 seconds of delay) during the AM peak hour.
- Northbound thru movement operates at LOS E (65.5 seconds of delay) during the AM peak hour.

King of Prussia Road & Radnor-Chester Road (SR 1021)

- Overall intersection operates at a LOS F (218.4 seconds of delay) during the AM peak hour and LOS F (86.0 seconds of delay) during the PM peak hour.
- Eastbound left movement operates at a LOS E (55.1 seconds of delay) during the AM peak hour.
- Westbound left movement operates at a LOS E (67.9 seconds of delay) during the PM peak hour.
- Northbound approach movement operates at a LOS F (616.3 seconds of delay) during the AM peak hour and at a LOS F (225.1 seconds of delay) during the PM peak hour.
- Northbound through/left movement operates at a LOS F (681.6 seconds of delay) during the AM peak hour and a LOS F (297.7 seconds of delay) during the PM peak hour.

King of Prussia Road & Septa Driveway

- Westbound approach movement operates at a LOS E (39.3 seconds of delay) during the AM peak hour and LOS E (38.6 seconds of delay) during the PM peak hour.

King of Prussia Road & Raider Road

- The intersection operates at a LOS F (282.8 seconds of delay) during the AM peak hour and at a LOS F (260.3 seconds of delay) during the PM peak hour.
- Eastbound approach movement operates at a LOS F (240.2 seconds of delay) during the AM peak hour.
- Westbound left movement operates at a LOS F (5992.0 seconds of delay) during the AM peak hour and at LOS F (1820.4 seconds of delay) during the PM peak hour.
- Westbound thru/right movement operates at a LOS E (39.5 seconds of delay) during the AM peak hour.

King of Prussia Road & Southern Driveway

- Westbound approach movement operates at LOS F (92.2 seconds of delay) during the AM peak hour.

Lancaster Avenue (SR 0030) & I-476 NB Off Ramps/King of Prussia Road

- Overall intersection operates at a LOS E (68.4 seconds of delay) during the AM peak hour and at a LOS E (56.0 seconds of delay) during the PM peak hour.
- Eastbound approach movement operates at a LOS E (61.1 seconds of delay) during the AM peak hour and at LOS E (59.6 seconds of delay) during the PM peak hour.
- Eastbound left movement operates at a LOS E (62.0 seconds of delay) during the AM peak hour.
- Eastbound through movement operates at a LOS E (60.9 seconds of delay) during the AM peak hour and at LOS E (60.0 seconds of delay) during the PM peak hour.
- Northbound approach movement operates at a LOS E (77.4 seconds of delay) during the AM peak hour.
- Northbound through movement operates at a LOS F (152.3 seconds of delay) during the AM peak hour and at a LOS E (64.3 seconds of delay) during the PM peak hour.

Traffic Impact Study

145 King of Prussia Road

- Northbound right operates at a LOS F (81.6 seconds of delay) during the PM peak hour.
- Southbound approach movement operates at a LOS E (75.9 seconds of delay) during the AM peak hour and at a LOS F (83.2 seconds of delay) during the PM peak hour.

Lancaster Avenue (SR 0030) & I-476 NB On Ramp/Hillside Circuit

- Westbound left movement operates at a LOS E (56.5 seconds of delay) during the AM peak hour and a LOS E (59.3 seconds of delay) during the PM peak hour.
- Northbound approach movement operates at a LOS E (58.1 seconds of delay) during the AM peak hour and a LOS E (56.7 seconds of delay) during the PM peak hour.
- Northbound left/through movement operates at a LOS E (58.8 seconds of delay) during the AM peak hour and a LOS E (56.9 seconds of delay) during the PM peak hour.
- Northbound right movement operates at a LOS E (55.1 seconds of delay) during the AM peak hour and at LOS E (56.2 seconds of delay) during the PM peak hour.

Lancaster Avenue (SR 0030) & Radnor Chester Road

- Overall Intersection operates at a LOS E (57.7 seconds of delay) during the PM peak hour.
- Eastbound approach movement operates at a LOS E (60.6 seconds of delay) during the PM peak hour.
- Eastbound thru movement operates at a LOS E (63.9 seconds of delay) during the PM peak hour.
- Westbound approach movement operates at LOS E (64.5 seconds of delay) during the AM peak hour.
- Westbound left movement operates at a LOS F (82.5 seconds of delay) during the PM peak hour.
- Westbound through movement operates at a LOS E (77.1 seconds of delay) during the AM peak hour
- Southbound approach movement operates at a LOS F (83.9 seconds of delay) during the PM peak hour.
- Southbound left movement operates at a LOS F (180.3 seconds of delay) during the PM peak hour.

In the 2020 build conditions, the estimated 95th percentile queues at the study intersections are within the available storage lengths and do not extend into adjacent intersections with the following exceptions:

- The reported 95th percentile queue for southbound left turns at the intersection of King of Prussia Road & Matsonford Road (SR 1038) exceeds the available storage length of 100' by 622' during the AM peak period.
- The reported 95th percentile queue for westbound left turns at the intersection of King of Prussia Road & Matsonford Road (SR 1038) exceeds the available storage length of 550' by 103' during the PM peak period.
- The reported 95th percentile queues for northbound left/thru lane at the intersection of King of Prussia Road & Radnor Chester Road exceeds the available storage length of 1200 by 970' and 15' during the AM and PM peak periods, respectively.
- The reported 95th percentile queue for southbound left/thru/right turns at the intersection of King of Prussia Road & Radnor Chester Road exceeds the available storage length of 100' by 38' during the PM peak period.
- The reported 95th percentile queue for westbound lefts at the intersection of King of Prussia Road & Raider Road exceeds the available storage length of 500' by 298' during the PM peak period.
- The reported 95th percentile queue for the eastbound through movements at the intersection of Lancaster Avenue (SR 0030) & I-476 NB Off Ramps/King of Prussia Road exceeds the available storage length of 800' by 540' during the PM peak period.
- The reported 95th percentile queue for the northbound through movements at the intersection of Lancaster Avenue (SR 0030) & I-476 NB Off Ramps/King of Prussia Road exceeds the available storage length of 1900' by 62' during the AM peak period.
- The reported 95th percentile queue for eastbound left turns at the intersection of Lancaster Avenue (SR 0030) & I-476 NB On Ramp/Hillside Drive exceeds the available storage length of 400' by 433' during the PM peak period.
- The reported 95th percentile queue for the eastbound through lane at the intersection of Lancaster Avenue (SR 0030) & Radnor Chester Road exceeds the available storage length of 750' by 63' during the PM peak period.

Traffic Impact Study

145 King of Prussia Road

- The reported 95th percentile queue for westbound left turns at the intersection of Lancaster Avenue (SR 0030) & Radnor Chester Road exceeds the available storage length of 340' by 5' during the PM peak period.
- The reported 95th percentile queue for westbound right turns at the intersection of Lancaster Avenue (SR 0030) & Radnor Chester Road exceeds the available storage length of 300' by 153' during the AM peak period.
- The reported 95th percentile queues for northbound thru/right turn at the intersection of Lancaster Avenue (SR 0030) & Radnor Chester Road exceeds the available storage length of 100' by 240' and 143' during the AM and PM peak periods respectively.
- The reported 95th percentile queues for southbound left turns at the intersection of Lancaster Avenue (SR 0030) & Radnor Chester Road exceeds the available storage length of 160' by 728' during the PM peak period.

A summary of the Delays, LOS, and 95th Percentile Queues for the build conditions analysis are summarized in **TABLE 8**. Detailed outputs of the 2020 build conditions analysis are provided in **APPENDIX I**.

Table 8 – 2020 Build Conditions Summary Table

		Available Storage Length	2020 No Build - AM Peak Hour			2020 Build No Mit - AM Peak Hour		
			Delay (Secs)	LOS	95th % Queue	Delay (Secs)	LOS	95th % Queue
King of Prussia Road (N/S) & Matsonford Road (E/W)	EB Approach		26.4	C	-	26.4	C	-
	(EB Left)	50'	29.1	C	0	29.1	C	0
	(EB Thru/Right)	50'	25.0	C	3	25.0	C	3
	WB Approach	-	39.3	D	-	39.3	D	-
	(WB Left)	550'	43.4	D	375	43.4	D	375
	(WB Thru/Right)	950'	27.6	C	110	27.6	C	110
	SB Approach	-	39.6	D	-	49.5	D	-
	(SB Left)	100'	86.7	F	722	86.7	F	722
	(SB Thru/Right)	1000'+	12.2	B	198	8.3	A	408
	NB Approach	-	64.6	E	-	64.6	E	-
	(NB Left)	130'	17.1	B	10	17.1	B	10
(NB Thru)	1150'	65.5	E	1090	65.5	E	1090	
Overall	-	47.3	D	-	52.5	D	-	
King of Prussia Road (E/W) & Radnor Chester Road (N/S) (SR 1021)	EB Approach	-	19.0	B	-	19.6	B	-
	(EB Left)	75'	50.4	D	53	55.1	E	55
	(EB Thru)	1200'	16.0	B	255	16.3	B	270
	WB Approach	-	44.2	D	-	48.7	D	-
	(WB Left)	160'	20.5	C	25	20.8	C	25
	(WB Thru/Right)	1100'	45.0	D	883	49.7	D	940
	NB Approach	-	617.3	F	-	616.3	F	-
	(NB Left/Thru)	1200'	681.6	F	2170	681.6	F	2170
	(NB Right)	280'	18.2	B	45	18.2	B	45
	SB Approach	100'	21.8	C	8	21.8	C	8
Overall	-	218.9	F	-	218.4	F	-	
King of Prussia Road (N/S) & Septa Driveway (W)	WB Approach	450'	38.6	E	43	39.3	E	45
	NB Approach	380'	0.0	A	0	0.0	A	0
	SB Approach	1200'	4.2	A	30	5.4	A	40
	Overall	-	2.5	A	-	3.0	A	-
King of Prussia Road (N/S) & Northern Driveway (W)	WB Approach	400'	21.8	C	3	-	-	-
	NB Approach	280'	0.0	A	0	-	-	-
	SB Approach	380'	0.0	A	0	-	-	-
	Overall	-	0.1	A	-	-	-	-
King of Prussia Road (N/S) & Raider Road/Driveway (W)	EB Approach	500'	13.3	B	30	240.2	F	278
	WB Approach	500'	-	-	-	4909.7	F	-
	(WB Left)	500'	-	-	-	5992.0	F	435
	(WB Thru/Right)	500'	-	-	-	39.5	E	20
	NB Approach	550'	1.2	A	20	1.0	A	0
	SB Approach	660'	0.9	A	5	2.5	A	18
Overall	-	2.0	A	-	282.8	F	-	
King of Prussia Road (N/S) & Southern Driveway (W)	WB Approach	600'	265.0	F	108	92.2	F	8
	NB Approach	500'	0.0	A	0	0.0	A	0
	SB Approach	550'	1.8	A	-	0.2	A	-
	(SB Left)	75'	15.2	C	13	16.7	C	3
	Overall	-	5.6	A	-	0.2	A	-

Table 8 – 2020 Build Conditions Summary Table (Cont.)

		Available Storage Length	2020 No Build - AM Peak Hour			2020 Build No Mit - AM Peak Hour		
			Delay (Secs)	LOS	95th % Queue	Delay (Secs)	LOS	95th % Queue
Lancaster Avenue (SR 0030) & I-476 NB Off Ramps/King of Prussia Road	EB Approach	-	60.5	E	-	61.1	E	-
	(EB Left)	800'	59.1	E	252	62.0	E	263
	(EB Thru)	800'	60.9	E	787	60.9	E	785
	WB Approach	600'	53.9	D	338	53.9	D	338
	NB Approach	-	74.8	E	-	77.4	E	-
	(NB Left)	500'	17.6	B	305	17.6	B	305
	(NB Thru)	1900'	146.9	F	1917	152.3	F	1962
	(NB Right)	500'	28.1	C	335	28.1	C	333
	SB Approach	500'+	63.9	E	78	75.9	E	125
Overall	-	66.2	E	-	68.4	E	-	
Lancaster Avenue (SR 0030) & I-476 SB Off Ramps	EB Approach	1800'	18.0	B	235	18.4	B	238
	WB Approach	-	34.5	C	-	34.9	C	-
	(WB Left)	600'	53.8	D	120	54.4	D	130
	(WB Thru)	800'	31.8	C	568	31.9	C	573
	NB Approach	1000'+	40.0	D	443	40.0	D	443
	Overall	-	31.3	C	-	31.6	C	-
Lancaster Avenue (SR 0030) & I-476 NB On Ramp/Hillside Circuit	EB Approach	-	8.6	A	-	8.4	A	-
	(EB Left)	400'	31.8	C	248	30.9	C	240
	(EB Thru/Right)	600'	0.3	A	5	0.2	A	3
	WB Approach	-	10.4	B	-	10.8	B	-
	(WB Left)	100'	56.5	E	3	56.5	E	3
	(WB Thru/Right)	750'	10.3	B	280	10.7	B	285
	NB Approach	-	58.1	E	-	58.1	E	-
	(NB Left/Thru)	750'	58.8	E	13	58.8	E	13
	(NB Right)	50'	55.1	E	3	55.1	E	3
Overall	-	9.3	A	-	9.2	A	-	
Lancaster Avenue (E/W) (SR 0030) & Radnor Chester Road (N/S)	EB Approach	-	31.5	C	-	34.3	C	-
	(EB Left)	260'	43.8	D	145	43.9	D	150
	(EB Thru)	750'	30.0	C	520	33.1	C	545
	WB Approach	-	49.7	D	-	64.5	E	-
	(WB Left)	340'	35.0	C	185	43.5	D	200
	(WB Thru)	1800'	58.0	E	1285	77.1	E	1390
	(WB Right)	300'	29.0	C	435	31.8	C	453
	NB Approach	-	45.9	D	-	45.9	D	-
	(NB Left/Thru)	1000'+	44.7	D	345	44.7	D	345
	(NB Thru/Right)	100	47.1	D	340	47.1	D	340
	SB Approach	-	27.8	C	-	26.1	C	-
	(SB Left)	160'	31.3	C	103	29.3	C	100
	(SB Thru)	350'	26.5	C	125	24.9	C	120
Overall	-	42.3	D	-	50.5	D	-	

Table 8 – 2020 Build Conditions Summary Table (Cont.)

		Available Storage Length	2020 No Build - PM Peak Hour			2020 Build No Mit - PM Peak Hour		
			Delay (Secs)	LOS	95th % Queue	Delay (Secs)	LOS	95th % Queue
King of Prussia Road (N/S) & Matsonford Road (E/W)	EB Approach		19.3	B	-	19.3	B	-
	(EB Left)	50'	24.5	C	3	24.5	C	3
	(EB Thru/Right)	50'	18.2	B	10	18.2	B	10
	WB Approach	-	45.9	D	-	47.3	D	-
	(WB Left)	550'	55.8	E	640	57.7	E	653
	(WB Thru/Right)	950'	21.6	C	195	21.6	C	195
	SB Approach	-	25.9	C	-	26.5	C	-
	(SB Left)	100'	18.0	B	83	17.8	B	83
	(SB Thru/Right)	1000'+	27.1	C	660	27.8	C	678
	NB Approach	-	33.5	C	-	31.6	C	-
(NB Left)	130'	33.1	C	8	33.6	C	8	
(NB Thru)	1150'	33.5	C	492	31.6	C	460	
Overall	-	34.6	C	-	34.9	C	-	
King of Prussia Road (E/W) & Radnor Chester Road (N/S) (SR 1021)	EB Approach	-	28.1	C	-	29.0	C	-
	(EB Left)	75'	23.2	C	8	22.9	C	8
	(EB Thru)	1200'	28.1	C	548	29.1	C	560
	WB Approach	-	25.2	C	-	25.7	C	-
	(WB Left)	160'	62.4	E	93	67.9	E	95
	(WB Thru/Right)	1100'	20.1	C	333	19.9	B	328
	NB Approach	-	225.5	F	-	225.1	F	-
	(NB Left/Thru)	1200'	297.7	F	1215	297.7	F	1215
	(NB Right)	280'	16.8	B	105	16.8	B	108
SB Approach	100'	49.3	D	138	49.3	D	138	
Overall	-	85.7	F	-	86.0	F	-	
King of Prussia Road (N/S) & Septa Driveway (W)	WB Approach	450'	120.0	F	288	38.6	E	108
	NB Approach	380'	0.0	A	0	0.0	A	0
	SB Approach	1200'	0.3	A	3	0.5	A	5
	Overall	-	17.1	C	-	4.2	A	-
King of Prussia Road (N/S) & Northern Driveway (W)	WB Approach	400'	18.2	C	3	-	-	13
	NB Approach	280'	0.0	A	0	-	-	0
	SB Approach	380'	0.0	A	0	-	-	0
	Overall	-	0.5	A	-	-	-	-
King of Prussia Road (N/S) & Raider Road/Driveway (W)	EB Approach	500'	32.1	D	25	31.1	D	25
	WB Approach	500'	-	-	-	1493.4	F	-
	(WB Left)	500'	-	-	-	1820.4	F	798
	(WB Thru/Right)	500'	-	-	-	10.9	B	8
	NB Approach	550'	0.7	A	3	0.6	A	3
	SB Approach	660'	0.0	A	0	0.1	A	0
Overall	-	1.1	A	-	260.3	F	-	
King of Prussia Road (N/S) & Southern Driveway (W)	WB Approach	600'	613.8	F	567	34.4	D	5
	NB Approach	500'	0.0	A	0	0.0	A	0
	SB Approach	550'	0.1	A	-	0.0	A	-
	(SB Left)	75'	8.0	A	0	8.2	A	0
	Overall	-	83.9	F	-	0.2	A	-

Table 8 – 2020 Build Conditions Summary Table (Cont.)

		Available Storage Length	2020 No Build - PM Peak Hour			2020 Build No Mit - PM Peak Hour		
			Delay (Secs)	LOS	95th % Queue	Delay (Secs)	LOS	95th % Queue
Lancaster Avenue (SR 0030) & I-476 NB Off Ramps/King of Prussia Road	EB Approach	-	58.5	E	-	59.6	E	-
	(EB Left)	800'	52.5	D	58	52.5	D	75
	(EB Thru)	800'	58.8	E	1335	60.0	E	1340
	WB Approach	600'	10.3	B	163	11.1	B	170
	NB Approach	-	49.7	D	-	52.6	D	-
	(NB Left)	500'	19.8	B	123	19.9	B	125
	(NB Thru)	1900'	57.8	E	313	64.3	E	343
	(NB Right)	500'	79.3	E	353	81.6	F	360
	SB Approach	500'+	85.8	F	328	83.2	F	310
Overall	-	55.6	E	-	56.0	E	-	
Lancaster Avenue (SR 0030) & I-476 SB Off Ramps	EB Approach	1800'	24.6	C	323	24.5	C	323
	WB Approach	-	35.3	D	-	35.2	D	-
	(WB Left)	600'	53.1	D	342	53.1	D	338
	(WB Thru)	800'	22.0	C	370	21.9	C	368
	NB Approach	1000'+	46.6	D	370	46.6	D	370
	Overall	-	33.9	C	-	33.8	C	-
Lancaster Avenue (SR 0030) & I-476 NB On Ramp/Hillside Circuit	EB Approach	-	9.7	A	-	9.1	A	-
	(EB Left)	400'	24.4	C	842	22.9	C	833
	(EB Thru/Right)	600'	0.2	A	5	0.2	A	5
	WB Approach	-	19.8	B	-	19.9	B	-
	(WB Left)	100'	59.3	E	10	59.3	E	10
	(WB Thru/Right)	750'	19.4	B	303	19.6	B	308
	NB Approach	-	56.7	E	-	56.7	E	-
	(NB Left/Thru)	750'	56.9	E	8	56.9	E	8
	(NB Right)	50'	56.2	E	3	56.2	E	3
Overall	-	11.8	B	-	11.3	B	-	
Lancaster Avenue (E/W) (SR 0030) & Radnor Chester Road (N/S)	EB Approach	-	59.1	E	-	60.6	E	-
	(EB Left)	260'	24.3	C	95	24.2	C	95
	(EB Thru)	750'	62.5	E	795	63.9	E	813
	WB Approach	-	42.2	D	-	42.3	D	-
	(WB Left)	340'	79.4	E	342	82.5	F	345
	(WB Thru)	1800'	37.9	D	575	37.5	D	570
	(WB Right)	300'	21.5	C	115	21.5	C	115
	NB Approach	-	34.6	C	-	34.6	C	-
	(NB Left/Thru)	1000'+	34.8	C	238	34.8	C	238
	(NB Thru/Right)	100	34.4	C	242	34.4	C	243
	SB Approach	-	83.9	F	-	83.9	F	-
	(SB Left)	160'	180.3	F	848	180.3	F	848
	(SB Thru)	350'	24.4	C	300	24.4	C	300
Overall	-	57.2	E	-	57.7	E	-	

Traffic Impact Study

145 King of Prussia Road

2025 Build Levels of Service

Under the 2025 build configuration with identified improvements, all the study intersections and movements operate at an acceptable LOS D or better except for the following locations:

King of Prussia Road & Matsonford Road (SR 1038)

- Southbound left movement operates at a LOS F (93.0 seconds of delay) during the AM peak hour.
- Northbound approach movement operates at a LOS E (69.8 seconds of delay) during the AM peak hour.
- Northbound thru movement operates at a LOS E (70.7 seconds of delay) during the AM peak hour.

King of Prussia Road & Radnor-Chester Road (SR 1021)

- Overall intersection operates at a LOS F (226.5 seconds of delay) during the AM peak hour and LOS F (90.4 seconds of delay) during the PM peak hour.
- Eastbound left movement operates at a LOS E (55.6 seconds of delay) during the AM peak hour.
- Eastbound thru movement operates at a LOS F (45.4 seconds of delay) during the PM peak hour.
- Westbound left movement operates at a LOS F (94.4 seconds of delay) during the PM peak hour.
- Westbound thru/right movement operates at a LOS F (54.4 seconds of delay) during the AM peak hour.
- Northbound approach movement operates at a LOS F (635.1 seconds of delay) during the AM peak hour and at a LOS F (212.6 seconds of delay) during the PM peak hour.
- Northbound through/left movement operates at a LOS F (702.2 seconds of delay) during the AM peak hour and a LOS F (281.3 seconds of delay) during the PM peak hour.

King of Prussia Road & Septa Driveway

- Westbound approach movement operates at a LOS E (41.4 seconds of delay) during the AM peak hour and at a LOS E (41.4 seconds of delay) during the PM peak hour.

King of Prussia Road & Raider Road

- The intersection operates at a LOS F (313.4 seconds of delay) during the AM peak hour and at LOS F (278.8 seconds of delay) during the PM peak hour.
- The eastbound approach operates at a LOS F (287.6 seconds of delay) during the AM peak hour.
- The westbound approach operates at a LOS F (5492.6 seconds of delay) during the AM peak hour and at LOS F (1622.6 seconds of delay) during the PM peak hour.
- Westbound left movement operates at a LOS F (6704.1 seconds of delay) during the AM peak hour and at LOS F (1978.1 seconds of delay) during the PM peak hour.
- Westbound thru/right movement operates at a LOS E (40.9 seconds of delay) during the AM peak hour.

King of Prussia Road & Southern Driveway

- Westbound approach movement operates at LOS F (99.0 seconds of delay) during the AM peak hour.

Lancaster Avenue (SR 0030) & I-476 NB Off Ramps/King of Prussia Road

- Overall intersection operates at a LOS E (71.4 seconds of delay) during the AM peak hour and a LOS E (59.5 seconds of delay) during the PM peak hour.
- Eastbound approach movement operates at a LOS E (64.8 seconds of delay) during the AM peak hour and at a LOS E (64.4 seconds of delay) during the PM peak hour.
- Eastbound left movement operates at a LOS E (62.6 seconds of delay) during the AM peak hour.
- Eastbound through movement operates at a LOS E (65.4 seconds of delay) during the AM peak hour and at a LOS E (65.2 seconds of delay) during the PM peak hour.
- Northbound approach movement operates at a LOS F (80.7 seconds of delay) during the AM peak hour.
- Northbound thru movement operates at a LOS F (160.2 seconds of delay) during the AM peak hour and at a LOS E (66.3 seconds of delay) during the PM peak hour.
- Northbound right operates at a LOS F (85.4 seconds of delay) during the PM peak hour.
- Southbound approach movement operates at a LOS E (78.5 seconds of delay) during the AM peak hour and at a LOS F (88.1 seconds of delay) during the PM peak hour.

Traffic Impact Study

145 King of Prussia Road

Lancaster Avenue (SR 0030) & I-476 NB On Ramp/Hillside Circuit

- Westbound left movement operates at a LOS E (56.5 seconds of delay) during the AM peak hour and a LOS E (59.3 seconds of delay) during the PM peak hour.
- Northbound approach movement operates at a LOS E (58.0 seconds of delay) during the AM peak hour and a LOS E (56.7 seconds of delay) during the PM peak hour.
- Northbound left/through movement operates at a LOS E (58.8 seconds of delay) during the AM peak hour and a LOS E (56.9 seconds of delay) during the PM peak hour.
- Northbound right movement operates at a LOS E (56.2 seconds of delay) during the PM peak hour.

Lancaster Avenue (SR 0030) & Radnor Chester Road

- Overall Intersection operates at a LOS E (62.5 seconds of delay) during the PM peak hour.
- Eastbound approach movement operates at a LOS E (69.4 seconds of delay) during the PM peak hour.
- Eastbound left movement operates at a LOS E (60.6 seconds of delay) during the AM peak hour.
- Eastbound through movement operates at a LOS E (73.8 seconds of delay) during the PM peak hour.
- Westbound left movement operates at a LOS F (92.1 seconds of delay) during the PM peak hour.
- Westbound through movement operates at a LOS E (61.9 seconds of delay) during the AM peak hour.
- Southbound approach movement operates at a LOS F (86.4 seconds of delay) during the PM peak hour.
- Southbound left movement operates at a LOS F (187.1 seconds of delay) during the PM peak hour.

In the 2025 build conditions, the estimated 95th percentile queues at the study intersections are within the available storage lengths and do not extend into adjacent intersections with the following exceptions:

- The reported 95th percentile queue for southbound left turns at the intersection of King of Prussia Road & Matsonford Road (SR 1038) exceeds the available storage length of 100' by 652' during the AM peak period.
- The reported 95th percentile queue for westbound left turns at the intersection of King of Prussia Road & Matsonford Road (SR 1038) exceeds the available storage length of 550' by 80' during the PM peak period.
- The reported 95th percentile queues for westbound thru/right lane at the intersection of King of Prussia Road & Radnor Chester Road exceeds the available storage length of 1100 by 270' during the AM peak period.
- The reported 95th percentile queues for northbound left/thru lane at the intersection of King of Prussia Road & Radnor Chester Road exceeds the available storage length of 1200 by 1030' and 10' during the AM and PM peak periods, respectively.
- The reported 95th percentile queue for southbound left/thru/right turns at the intersection of King of Prussia Road & Radnor Chester Road exceeds the available storage length of 100' by 43' during the PM peak period.
- The reported 95th percentile queue for westbound lefts at the intersection of King of Prussia Road & Raider Road exceeds the available storage length of 500' by 310' during the PM peak period.
- The reported 95th percentile queue for the eastbound through movements at the intersection of Lancaster Avenue (SR 0030) & I-476 NB Off Ramps/King of Prussia Road exceeds the available storage length of 800' by 325' and 593' during the AM and PM peak periods, respectively.
- The reported 95th percentile queue for the northbound through movements at the intersection of Lancaster Avenue (SR 0030) & I-476 NB Off Ramps/King of Prussia Road exceeds the available storage length of 1900' by 132' during the AM peak period.
- The reported 95th percentile queue for eastbound left turns at the intersection of Lancaster Avenue (SR 0030) & I-476 NB On Ramp/Hillside Drive exceeds the available storage length of 400' by 110' during the PM peak period.
- The reported 95th percentile queue for the eastbound through lane at the intersection of Lancaster Avenue (SR 0030) & Radnor Chester Road exceeds the available storage length of 750' by 413' during the PM peak period.
- The reported 95th percentile queue for westbound left turns at the intersection of Lancaster Avenue (SR 0030) & Radnor Chester Road exceeds the available storage length of 340' by 85' during the PM peak period.

Traffic Impact Study

145 King of Prussia Road

- The reported 95th percentile queue for westbound right turns at the intersection of Lancaster Avenue (SR 0030) & Radnor Chester Road exceeds the available storage length of 300' by 145' during the AM peak period.
- The reported 95th percentile queues for northbound thru/right turn at the intersection of Lancaster Avenue (SR 0030) & Radnor Chester Road exceeds the available storage length of 100' by 248' and 145' during the AM and PM peak periods respectively.
- The reported 95th percentile queues for southbound left turns at the intersection of Lancaster Avenue (SR 0030) & Radnor Chester Road exceeds the available storage length of 160' by 725' during the PM peak period.

A summary of the Delays, LOS, and 95th Percentile Queues for the build conditions analysis are summarized in **TABLE 9**. Detailed outputs of the 2025 build conditions analysis are provided in **APPENDIX I**.

Table 9 – 2025 Build Conditions Summary Table

		Available Storage Length	2025 No Build - AM Peak Hour			2025 Build No Mit - AM Peak Hour		
			Delay (Secs)	LOS	95th % Queue	Delay (Secs)	LOS	95th % Queue
King of Prussia Road (N/S) & Matsonford Road (E/W)	EB Approach		26.4	C	-	26.4	C	-
	(EB Left)	50'	29.3	C	0	29.3	C	0
	(EB Thru/Right)	50'	25.0	C	3	25.0	C	3
	WB Approach	-	39.6	D	-	40.1	D	-
	(WB Left)	550'	43.8	D	378	44.4	D	383
	(WB Thru/Right)	950'	27.7	C	115	27.7	C	115
	SB Approach	-	42.3	D	-	42.2	D	-
	(SB Left)	100'	93.0	F	753	93.0	F	752
	(SB Thru/Right)	1000'+	12.2	B	415	12.4	B	420
	NB Approach	-	64.6	E	-	69.8	E	-
	(NB Left)	130'	17.3	B	10	17.3	B	10
(NB Thru)	1150'	65.5	F	1090	70.7	F	1135	
Overall	-	48.5	D	-	50.3	D	-	
King of Prussia Road (E/W) & Radnor Chester Road (N/S) (SR 1021)	EB Approach	-	19.2	B	-	19.5	B	-
	(EB Left)	75'	53.0	D	63	55.6	E	55
	(EB Thru)	1200'	16.0	B	260	16.1	B	265
	WB Approach	-	48.0	D	-	53.3	D	-
	(WB Left)	160'	20.6	C	25	21.0	C	25
	(WB Thru/Right)	1100'	48.9	D	928	54.4	F	1370
	NB Approach	-	636.0	F	-	635.1	F	-
	(NB Left/Thru)	1200'	702.2	F	2230	702.2	F	2230
	(NB Right)	280'	18.2	B	45	18.3	B	48
SB Approach	100'	21.8	C	8	21.8	C	8	
Overall	-	227.1	F	-	226.5	F	-	
King of Prussia Road (N/S) & Septa Driveway (W)	WB Approach	450'	39.8	E	43	41.4	E	48
	NB Approach	380'	0.0	A	0	0.0	A	0
	SB Approach	1200'	4.3	A	33	5.5	A	40
	Overall	-	2.5	A	-	3.2	A	-
King of Prussia Road (N/S) & Northern Driveway (W)	WB Approach	400'	22.3	C	3	-	-	-
	NB Approach	280'	0.0	A	0	-	-	-
	SB Approach	380'	0.0	A	0	-	-	-
	Overall	-	0.1	A	-	-	-	-
King of Prussia Road (N/S) & Raider Road/Driveway (W)	EB Approach	500'	13.5	B	33	287.6	F	305
	WB Approach	500'	-	-	-	5492.6	F	-
	(WB Left)	500'	-	-	-	6704.1	F	438
	(WB Thru/Right)	500'	-	-	-	40.9	E	20
	NB Approach	550'	1.2	A	20	1.0	A	0
	SB Approach	660'	0.9	A	8	2.6	A	18
Overall	-	2.1	A	-	313.4	F	-	
King of Prussia Road (N/S) & Southern Driveway (W)	WB Approach	600'	298.0	F	113	99.0	F	10
	NB Approach	500'	0.0	A	0	0.0	A	0
	SB Approach	550'	1.8	A	-	0.2	A	-
	(SB Left)	75'	15.5	C	15	17.0	C	3
	Overall	-	6.1	A	-	0.2	A	-

Table 9 – 2025 Build Conditions Summary Table (Cont.)

		Available Storage Length	2025 No Build - AM Peak Hour			2025 Build No Mit - AM Peak Hour		
			Delay (Secs)	LOS	95th % Queue	Delay (Secs)	LOS	95th % Queue
Lancaster Avenue (SR 0030) & I-476 NB Off Ramps/King of Prussia Road	EB Approach	-	64.2	E	-	64.8	E	-
	(EB Left)	800'	59.6	E	253	62.6	E	265
	(EB Thru)	800'	65.4	E	1123	65.4	F	1125
	WB Approach	600'	54.4	D	345	54.3	D	343
	NB Approach	-	78.6	E	-	80.7	F	-
	(NB Left)	500'	17.8	B	313	17.8	B	313
	(NB Thru)	1900'	155.9	F	1995	160.2	F	2032
	(NB Right)	500'	28.5	C	345	28.5	C	345
	SB Approach	500'+	65.3	E	83	78.5	E	135
Overall	-	69.4	E	-	71.4	E	-	
Lancaster Avenue (SR 0030) & I-476 SB Off Ramps	EB Approach	1800'	18.5	B	240	18.9	B	245
	WB Approach	-	35.0	C	-	35.5	D	-
	(WB Left)	600'	53.9	D	123	54.4	D	133
	(WB Thru)	800'	32.4	C	578	32.6	C	583
	NB Approach	1000'+	39.9	D	450	39.9	D	450
	Overall	-	31.7	C	-	32.0	C	-
Lancaster Avenue (SR 0030) & I-476 NB On Ramp/Hillside Circuit	EB Approach	-	8.4	A	-	8.3	A	-
	(EB Left)	400'	31.3	C	245	30.7	C	243
	(EB Thru/Right)	600'	0.2	A	5	0.2	A	3
	WB Approach	-	10.7	B	-	11.0	B	-
	(WB Left)	100'	56.5	E	3	56.5	E	3
	(WB Thru/Right)	750'	10.6	B	288	10.9	B	293
	NB Approach	-	58.1	E	-	58.0	E	-
	(NB Left/Thru)	750'	58.8	E	13	58.8	E	13
	(NB Right)	50'	55.1	E	3	54.7	D	3
Overall	-	9.2	A	-	9.2	A	-	
Lancaster Avenue (E/W) (SR 0030) & Radnor Chester Road (N/S)	EB Approach	-	33.3	C	-	33.4	C	-
	(EB Left)	260'	63.1	E	258	60.6	E	252
	(EB Thru)	750'	29.4	C	528	29.8	C	532
	WB Approach	-	50.1	D	-	53.7	D	-
	(WB Left)	340'	46.6	D	228	48.0	D	228
	(WB Thru)	1800'	57.1	E	1313	61.9	E	1340
	(WB Right)	300'	28.5	C	713	28.8	C	445
	NB Approach	-	47.0	D	-	46.2	D	-
	(NB Left/Thru)	1000'+	45.7	D	357	45.0	D	353
	(NB Thru/Right)	100	48.3	D	350	47.6	D	348
	SB Approach	-	28.0	C	-	27.6	C	-
	(SB Left)	160'	31.7	C	115	31.2	C	105
	(SB Thru)	350'	26.6	C	128	26.3	C	128
Overall	-	43.2	D	-	44.9	D	-	

Table 9 – 2025 Build Conditions Summary Table (Cont.)

		Available Storage Length	2025 No Build - PM Peak Hour			2025 Build No Mit - PM Peak Hour		
			Delay (Secs)	LOS	95th % Queue	Delay (Secs)	LOS	95th % Queue
Lancaster Avenue (SR 0030) & I-476 NB Off Ramps/King of Prussia Road	EB Approach	-	64.6	E	-	64.4	E	-
	(EB Left)	800'	53.1	D	60	52.4	D	75
	(EB Thru)	800'	65.2	F	1393	65.2	F	1393
	WB Approach	600'	10.0	A	165	11.2	B	170
	NB Approach	-	52.3	D	-	54.4	D	-
	(NB Left)	500'	19.9	B	128	19.9	B	128
	(NB Thru)	1900'	60.3	E	323	66.3	E	353
	(NB Right)	500'	85.4	F	370	85.4	F	370
	SB Approach	500'+	94.1	F	368	88.1	F	235
Overall	-	60.5	E	-	59.5	E	-	
Lancaster Avenue (SR 0030) & I-476 SB Off Ramps	EB Approach	1800'	25.3	C	330	25.3	C	333
	WB Approach	-	35.5	D	-	35.4	D	-
	(WB Left)	600'	53.2	D	345	53.1	D	343
	(WB Thru)	800'	22.3	C	372	22.3	C	373
	NB Approach	1000'+	46.7	D	375	46.7	D	375
	Overall	-	34.3	C	-	34.2	C	-
Lancaster Avenue (SR 0030) & I-476 NB On Ramp/Hillside Circuit	EB Approach	-	8.7	A	-	8.0	A	-
	(EB Left)	400'	21.6	C	530	20.1	C	510
	(EB Thru/Right)	600'	0.2	A	5	0.2	A	5
	WB Approach	-	20.6	C	-	20.7	C	-
	(WB Left)	100'	59.3	E	10	59.3	E	10
	(WB Thru/Right)	750'	20.3	C	310	20.4	C	318
	NB Approach	-	56.7	E	-	56.7	E	-
	(NB Left/Thru)	750'	56.9	E	8	56.9	E	8
	(NB Right)	50'	56.2	E	3	56.2	E	3
Overall	-	11.1	B	-	10.6	B	-	
Lancaster Avenue (E/W) (SR 0030) & Radnor Chester Road (N/S)	EB Approach	-	67.7	E	-	69.4	E	-
	(EB Left)	260'	25.3	C	98	25.2	C	98
	(EB Thru)	750'	71.9	E	1148	73.8	E	1163
	WB Approach	-	47.0	D	-	46.6	D	-
	(WB Left)	340'	92.1	F	425	92.1	F	425
	(WB Thru)	1800'	41.7	D	605	41.2	D	603
	(WB Right)	300'	22.1	C	118	22.1	C	118
	NB Approach	-	34.3	C	-	34.3	C	-
	(NB Left/Thru)	1000'+	34.6	C	240	34.6	C	240
	(NB Thru/Right)	100	34.1	C	245	34.1	C	245
	SB Approach	-	86.4	F	-	86.4	F	-
	(SB Left)	160'	187.1	F	885	187.1	F	885
	(SB Thru)	350'	24.1	C	305	24.1	C	305
Overall	-	62.1	E	-	62.5	E	-	

Table 9 – 2025 Build Conditions Summary Table (Cont.)

		Available Storage Length	2025 No Build - PM Peak Hour			2025 Build No Mit - PM Peak Hour		
			Delay (Secs)	LOS	95th % Queue	Delay (Secs)	LOS	95th % Queue
Lancaster Avenue (SR 0030) & I-476 NB Off Ramps/King of Prussia Road	EB Approach	-	64.6	E	-	64.4	E	-
	(EB Left)	800'	53.1	D	60	52.4	D	75
	(EB Thru)	800'	65.2	F	1393	65.2	F	1393
	WB Approach	600'	10.0	A	165	11.2	B	170
	NB Approach	-	52.3	D	-	54.4	D	-
	(NB Left)	500'	19.9	B	128	19.9	B	128
	(NB Thru)	1900'	60.3	E	323	66.3	E	353
	(NB Right)	500'	85.4	F	370	85.4	F	370
	SB Approach	500'+	94.1	F	368	88.1	F	235
Overall	-	60.5	E	-	59.5	E	-	
Lancaster Avenue (SR 0030) & I-476 SB Off Ramps	EB Approach	1800'	25.3	C	330	25.3	C	333
	WB Approach	-	35.5	D	-	35.4	D	-
	(WB Left)	600'	53.2	D	345	53.1	D	343
	(WB Thru)	800'	22.3	C	372	22.3	C	373
	NB Approach	1000'+	46.7	D	375	46.7	D	375
Overall	-	34.3	C	-	34.2	C	-	
Lancaster Avenue (SR 0030) & I-476 NB On Ramp/Hillside Circuit	EB Approach	-	8.7	A	-	8.0	A	-
	(EB Left)	400'	21.6	C	530	20.1	C	510
	(EB Thru/Right)	600'	0.2	A	5	0.2	A	5
	WB Approach	-	20.6	C	-	20.7	C	-
	(WB Left)	100'	59.3	E	10	59.3	E	10
	(WB Thru/Right)	750'	20.3	C	310	20.4	C	318
	NB Approach	-	56.7	E	-	56.7	E	-
	(NB Left/Thru)	750'	56.9	E	8	56.9	E	8
(NB Right)	50'	56.2	E	3	56.2	E	3	
Overall	-	11.1	B	-	10.6	B	-	
Lancaster Avenue (E/W) (SR 0030) & Radnor Chester Road (N/S)	EB Approach	-	67.7	E	-	69.4	E	-
	(EB Left)	260'	25.3	C	98	25.2	C	98
	(EB Thru)	750'	71.9	E	1148	73.3	E	1163
	WB Approach	-	47.0	D	-	46.6	D	-
	(WB Left)	340'	92.1	F	425	92.1	F	425
	(WB Thru)	1800'	41.7	D	605	41.2	D	603
	(WB Right)	300'	22.1	C	118	22.1	C	118
	NB Approach	-	34.3	C	-	34.3	C	-
	(NB Left/Thru)	1000'+	34.6	C	240	34.6	C	240
	(NB Thru/Right)	100	34.1	C	245	34.1	C	245
	SB Approach	-	86.4	F	-	86.4	F	-
	(SB Left)	160'	187.1	F	885	187.1	F	885
(SB Thru)	350'	24.1	C	305	24.1	C	305	
Overall	-	62.1	E	-	62.5	E	-	

Traffic Impact Study

145 King of Prussia Road

Gap Analysis

Based on the anticipated Level of Service for the exiting movements from the site via the SEPTA Driveway and south site driveway to King of Prussia Road a gap study was performed at both locations. The gap study was conducted from 7:00-9:00 AM and 4:00-6:00 PM on April 27, 2016.

Based on the weekday AM and PM peak hour gap analysis, it is anticipated that sufficient gaps are available to accommodate the anticipated traffic from the site at the two locations. The summary of the available gaps compared to the anticipated exiting traffic is shown in **TABLE 10**. The gap data is provided in **APPENDIX C**.

Table 10 – Capacity vs Anticipated Traffic Volume

King of Prussia Road and SEPTA Driveway

Peak Hour	Existing Capacity per Field Data fo Left Turns ¹	Existing Capacity per Field Data for RightTurns ¹	2020 Anticipated Traffic Volume		2025 Anticipated Traffic Volume	
			Left	Right	Left	Right
Weekday AM	59	149	20	42	21	42
Weekday PM	104	733	76	84	77	85

King of Prussia Road and Southern Driveway

Peak Hour	Existing Capacity per Field Data fo Left Turns ¹	Existing Capacity per Field Data for RightTurns ¹	2020 Anticipated Traffic Volume		2025 Anticipated Traffic Volume	
			Left	Right	Left	Right
Weekday AM	33	75	2	2	2	2
Weekday PM	80	654	4	4	4	4

1. Gap Data provided in Appendix C

Comparison of No Build versus Build without mitigation

A comparison of the performance of the study intersections under no-build conditions and build conditions was evaluated to identify impacts to the study area and the need for additional mitigation area based on the LOS requirements identified in the PennDOT's *Policies and Procedures for Traffic Impact Studies* which are that overall intersection LOS should be no worse than no-build Year overall intersection LOS. If the overall intersection LOS drops, mitigation will be required if the overall intersection delay increases by more than 10 seconds.

King of Prussia Road & Matsonford Road (SR 1038)

Under the 2020 and 2025 build conditions, the overall intersection and approaches maintain the no-build condition LOS in both the AM and PM peak periods. The overall intersection delay increase between no-build and build condition is less than 7 seconds for both peak periods in 2020 and 2025.

King of Prussia Road & Radnor-Chester Road (SR 1021)

Under the 2020 and 2025 build conditions, the overall intersection and approaches maintain the no-build condition LOS in both the AM and PM peak periods. The overall intersection delay increase between no-build and Build condition is less than 2 seconds for both peak periods in 2020 and 2025.

King of Prussia Road & SEPTA Driveway

Under the 2020 and 2025 build conditions, the intersection does not experience a worsening of LOS under the build conditions in either the AM or PM peak periods.

Traffic Impact Study

145 King of Prussia Road

King of Prussia Road & Raider Road/Site Driveway

Under the 2020 and 2025 No-Build conditions the intersection is stop controlled with the north approach being an in only driveway. Under the 2020 and 2025 Build conditions without mitigation the intersection will remain stop-controlled with the north approach being a 2-lane full access site driveway. The unsignalized intersection operates with significant increase in delay and at an overall LOS F during the AM and PM peak periods in both the 2020 and 2025 Build conditions.

King of Prussia Road & Southern Driveway

Under the 2020 and 2025 Build conditions, the intersection operates at the same overall LOS as under the no-build conditions in the AM peak period. Under the 2020 and 2025 build PM peak period condition, the southern driveway experiences a significant reduction in traffic and thus improved LOS. . The reduced traffic is due to the fact that the southern driveway will primarily be used for deliveries.

Lancaster Avenue (SR 0030) & I-476 NB Off Ramps/King of Prussia Road

Under the 2020 and 2025 build conditions, the intersection operates at the same overall LOS as under the no-build conditions in both the AM and PM peak periods. The overall intersection delay increase between no-build and build condition is less than 3 seconds in both peak periods in 2020 and 2025.

Lancaster Avenue (SR 0030) & I-476 NB On Ramp/Hillside Circuit

Under the 2020 and 2025 build conditions, the intersection operates at the same overall LOS as under the no-build conditions in both the AM and PM peak periods. There is very little change in overall intersection delay between no-build and build conditions in either peak period in 2020 and 2025.

Lancaster Avenue (SR 0030) & I-476 SB Off Ramps

Under the 2020 and 2025 build conditions, the intersection operates at the same overall LOS as under the no-build conditions in both the AM and PM peak periods. There is less than 1 second change in overall intersection delay between no-build and build condition in either peak period in 2020 and 2025.

Lancaster Avenue (SR 0030) & Radnor Chester Road

Under the 2020 and 2025 build conditions, the intersection operates at the same overall LOS as under the no-build conditions in both the AM and PM peak periods. The overall intersection delay increase between no-build and build condition is less than 8 seconds in all both peak periods in 2020 and 2025.

Based on the comparison of the Intersection LOS and delay under no build conditions and build conditions and using the LOS requirements identified in the PennDOT's *Policies and Procedures for Traffic Impact Studies*, the need for additional mitigation measures at most of the study intersections is not triggered as a result of the trips generated by the proposed site. However, the unsignalized intersection of King of Prussia Road & Raider Road/Site Driveway exhibits a significant increase in overall intersection delay will be mitigated through the installation of a traffic signal.

2020 and 2025 “BUILD” TRAFFIC CONDITIONS WITH MITIGATION

Improvements to Achieve LOS C per SLDO Requirements and Mitigate Intersections

As required by 255-20.B(5)(d)(6)(a) of the Radnor Township Subdivision and Land Development Ordinance, additional off-site improvements would be necessary to achieve LOS C at all of the off-site intersections. Based on Synchro analysis, Lancaster Avenue would require significant intersection upgrades including widening to provide additional through lanes and providing additional dedicated turn lanes on most approaches. The King of Prussia Road intersections at Radnor-Chester Road and Matsonford Road would require two lanes in each direction on King of Prussia Road and dual turn lanes on the minor approaches. Due to physical constraints at most of the project intersections, including the SEPTA Rail Bridge on King of Prussia Road and the I-476 Bridges on Lancaster Avenue, the necessary improvements are not feasible and are not proposed by the applicant.

The intersection of King of Prussia Road & Raider Road/Site Driveway exhibits a significant increase in overall intersection delay as a result of proposed site traffic. In order to mitigate the intersection, it is proposed that the intersection be signalized and left turn lanes be added on both approaches of King of Prussia Road.

The following additional improvements are proposed:

- Restripe northbound I-476 off-ramp at Lancaster Avenue to provide a shared through/right turn lane
- Restripe northbound King of Prussia Road at the southern site driveway to provide a shared through/right turn lane
- Widen the east side of King of Prussia Road to provide two continuous northbound lanes from Lancaster Avenue to the signalized intersection at the Main Site Driveway/ Raider Road, with a transition into a dedicated right turn lane.
- Construct a southbound King of Prussia Road left turn lane into the Septa Driveway.

Signal Warrant Assessment

Signal warrant analyses were conducted for the intersections of King of Prussia Road and Raider Road/Site Driveway and King of Prussia Road and Septa Station Driveway using the warrants set forth in FHWA’s Manual on Uniform Traffic Control Devices (MUTCD), 2009 Edition. Based on the MUTCD requirements for intersections warranting a signal, MUTCD Warrants 2 and 3 are applicable to the intersections King of Prussia Road and Raider Road/Site Driveway and King of Prussia Road and Septa Station Driveway.

King of Prussia Road and Raider Road/Site Driveway

Warrant 2 – Four Hour Vehicular Volume is met if four plotted points representing vehicles per hour on the major and minor street approaches fall above the appropriate curve on Figure 4C-1 of the MUTCD. For the intersection of King of Prussia Road and Raider Road/Site Driveway, an Urban 2 or more major lanes and 1 minor lane curve is used for the Warrant 2 analysis. As illustrated on Table 4C-1 provided in **APPENDIX J**, four of the plotted points exceed the four hour warrant curve using the combination of manual count data and trip generation data. Therefore for the purposes of this analysis, **Warrant 2 is satisfied.**

Warrant 3 – Peak Hour Vehicular Volume is met if four plotted points representing vehicles per hour on the major and minor street approaches fall above the appropriate curve on Figure 4C-3 of the MUTCD. For the intersection of King of Prussia Road and Raider Road/Site Driveway, an Urban 2 major lanes and 1 minor lane curve is used for the Warrant 3 analysis. As illustrated on Table 4C-3 provided in **APPENDIX J**, four of the plotted points exceed the peak hour warrant curve using the combination of manual count data and trip generation data. Therefore for the purposes of this analysis, **Warrant 3 is satisfied.**

King of Prussia Road and Septa Station Driveway

Warrant 2 – Four Hour Vehicular Volume is met if four plotted points representing vehicles per hour on the major and minor

Traffic Impact Study

145 King of Prussia Road

street approaches fall above the appropriate curve on Figure 4C-1 of the MUTCD. For the intersection of King of Prussia Road and Septa Station Driveway, an Urban 2 major lanes and 1 minor lane curve is used for the Warrant 2 analysis. As illustrated on Table 4C-1 provided in **APPENDIX J**, only two of the plotted points exceed the four hour warrant curve using the combination of manual count data and trip generation data. Therefore for the purposes of this analysis, **Warrant 2 is not satisfied**.

Warrant 3 – Peak Hour Vehicular Volume is met if four plotted points representing vehicles per hour on the major and minor street approaches fall above the appropriate curve on Figure 4C-3 of the MUTCD. For the intersection of King of Prussia Road and Septa Station Driveway, an Urban 2 major lanes and 1 minor lane curve is used for the Warrant 3 analysis. As illustrated on Table 4C-3 provided in **APPENDIX J**, four of the plotted points exceed the peak hour warrant curve using the combination of manual count data and trip generation data. Therefore for the purposes of this analysis, **Warrant 3 is satisfied**.

As both Warrant 2 and Warrant 3 are satisfied at the intersection of King of Prussia Road and Raider Road/Site Driveway, a traffic signal is proposed at the intersection as a mitigation measure.

At the King of Prussia Road and Septa Station Driveway warrant 3 is satisfied during the PM peak period but Warrant 2 was not met. Typically, a traffic signal is not considered if Warrant 3 is the only warrant that can be met. Therefore, a traffic signal was not proposed as a mitigation measure at the intersection.

The warrant volume analysis worksheet and MUTCD Figures are provided in **APPENDIX J**.

Left Turn Signalization Warrant Assessment

Left turn signalization warrants were performed for the northbound and southbound left turns on King of Prussia Road at Raider Road and the proposed site driveway. The results indicate that the left turn movements from King of Prussia Road should be provided by permitted left turn phases. The warrant worksheet is provided in **APPENDIX K**.

Vehicular and Pedestrian Clearances

Estimated vehicular and pedestrian clearances were calculated for the proposed signal at King of Prussia Road and Raider Road/site driveway based on PennDOT policies. The yellow and all-red times determined from these calculations were used for the future build scenario traffic analyses. The policies and the results of the calculations are provided in **APPENDIX L**. It is anticipated that the pedestrian and vehicular clearances will be refined during the development of an approved traffic signal plan.

2020 and 2025 Build Levels of Service with Mitigation Improvements

Operations of the study intersections during the AM and PM peak hours were evaluated for the build configuration of the proposed development in the proposed build year of 2020 and the horizon year of 2025 with the with the implementation of the identified mitigations.

Under the build conditions with the identified improvements implemented the following changes occur to overall and approach LOS:

2020

- At King of Prussia Road and Raider Road/Site Driveway:
 - Overall PM intersection operation improves from an overall LOS F (282.8 seconds of delay) to LOS D (41.4 seconds of delay) during the AM peak hour and from overall LOS F (260.3 seconds of delay) to LOS C (31.1 seconds of delay) during the PM peak hour.
 - Westbound approach improves from LOS F (4909.7 seconds of delay) to LOS D (34.4 seconds of delay) during the AM peak hour and from LOS F (1493.4 seconds of delay) to LOS C (38.5 seconds of delay) during the PM peak hour.

Traffic Impact Study

145 King of Prussia Road

- Eastbound improves from LOS F (240.2 seconds of delay) to LOS C (33.7 seconds of delay) during the AM peak hour.
- At Lancaster Avenue and I-476 NB Off Ramp/King of Prussia Road:
 - Overall intersection operation improves from LOS E (68.4 seconds of delay) to LOS D (51.5 seconds of delay) during the AM peak hour.
 - Northbound approach improves from LOS E (74.8 seconds of delay) to LOS D (43.2 seconds of delay) during the AM peak hour.
 - NB Through movement improves from LOS F (152.3 seconds of delay) to LOS E (58.5 seconds of delay) during the AM peak hour

Under the 2020 build conditions with the identified improvements implemented the following changes will occur to the reported 95th percentile queues:

- The reported 95th percentile queue for northbound approach at the intersection of King of Prussia Road & Raider Road will increase to 1068' during the AM peak period. This will extend through the southern site driveway and approach the intersection of Lancaster Avenue.
- The reported 95th percentile queue for westbound left at the intersection of King of Prussia Road & Raider Road will be reduced from 795' to 308' during the PM peak period.
- The reported 95th percentile queue for the northbound through movements at the intersection of Lancaster Avenue (SR 0030) & I-476 NB Off Ramps/King of Prussia Road will be reduced from 1962' to 760' during the AM peak period.

2025

- At King of Prussia Road and Raider Road/Site Driveway:
 - Overall intersection operation improves from an overall LOS F (313.4 seconds of delay) to LOS D (45.7 seconds of delay) during the AM peak hour and from overall LOS F (278.8 seconds of delay) to LOS D (33.8 seconds of delay) during the PM peak hour.
 - Westbound approach improves from LOS F (5492.6 seconds of delay) to LOS D (34.4 seconds of delay) during the AM peak hour and from LOS F (1622.6 seconds of delay) to LOS C (38.5 seconds of delay) during the PM peak hour.
 - Eastbound improves from LOS F (287.6 seconds of delay) to LOS C (33.7 seconds of delay) during the AM peak hour.
- At Lancaster Avenue and I-476 NB Off Ramp/King of Prussia Road:
 - Overall intersection operation improves from LOS E (71.4 seconds of delay) to LOS D (53.8 seconds of delay) during the AM peak hour.
 - Northbound approach improves from LOS F (80.7 seconds of delay) to LOS D (45.4 seconds of delay) during the AM peak hour.
 - NB Through movement improves from LOS F (160.2 seconds of delay) to LOS E (62.0 seconds of delay) during the AM peak hour.

Under the 2025 build conditions with the identified improvements implemented the following changes will occur to the reported 95th percentile queues:

- The reported 95th percentile queue for northbound approach at the intersection of King of Prussia Road & Raider Road will increase to 1138'' during the AM peak period. This will extend through the southern site driveway to the intersection of Lancaster Avenue.
- The reported 95th percentile queue for westbound left at the intersection of King of Prussia Road & Raider Road will be reduced from 810' to 308' during the PM peak period.

Traffic Impact Study

145 King of Prussia Road

- The reported 95th percentile queue for the northbound through movements at the intersection of Lancaster Avenue (SR 0030) & I-476 NB Off Ramps/King of Prussia Road will be reduced from 2032' to 787' during the AM peak period.

A summary of the Delays, LOS, and 95th Percentile Queues for the build conditions analysis are summarized in **TABLE 11** and **TABLE 12**. Detailed outputs of the 2025 build conditions analysis are provided in **APPENDIX M**.

Table 11 – 2020 Build Conditions with Improvements Summary Table

		Available Storage Length	2020 No Build - AM Peak Hour			2020 Build Mit - AM Peak Hour		
			Delay (Secs)	LOS	95th % Queue	Delay (Secs)	LOS	95th % Queue
King of Prussia Road (N/S) & Matsonford Road (E/W)	EB Approach		26.4	C	-	26.4	C	-
	(EB Left)	50'	29.1	C	0	29.1	C	0
	(EB Thru/Right)	50'	25.0	C	3	25.0	C	3
	WB Approach	-	38.8	D	-	39.3	D	-
	(WB Left)	550'	42.8	D	368	43.4	D	375
	(WB Thru/Right)	950'	27.6	C	110	27.6	C	110
	SB Approach	-	39.0	D	-	39.6	D	-
	(SB Left)	100'	84.9	F	718	86.7	F	723
	(SB Thru/Right)	1000'+	12.0	B	403	12.2	B	158
	NB Approach	-	60.9	E	-	64.6	E	-
	(NB Left)	130'	17.3	B	10	17.3	B	10
(NB Thru)	1150'	61.7	E	785	65.5	E	1090	
Overall	-	45.7	D	-	47.3	D	-	
King of Prussia Road (E/W) & Radnor Chester Road (N/S) (SR 1021)	EB Approach	-	19.0	B	-	19.3	B	-
	(EB Left)	75'	50.4	D	53	53.7	D	55
	(EB Thru)	1200'	16.0	B	255	16.1	B	263
	WB Approach	-	44.2	D	-	48.7	D	-
	(WB Left)	160'	20.5	C	25	20.8	C	25
	(WB Thru/Right)	1100'	45.0	D	883	49.7	D	940
	NB Approach	-	617.3	F	-	616.3	F	-
	(NB Left/Thru)	1200'	681.6	F	2170	681.6	F	2170
	(NB Right)	280'	18.2	B	45	18.3	B	45
SB Approach	100'	21.8	C	8	21.8	C	8	
Overall	-	218.9	F	-	218.3	F	-	
King of Prussia Road (N/S) & Septa Driveway (W)	WB Approach	450'	38.6	E	43	39.3	E	45
	NB Approach	380'	0.0	A	0	0.0	A	0
	SB Approach	1200'	4.2	A	30	5.4	A	40
	Overall	-	2.5	A	-	3.0	A	-
King of Prussia Road (N/S) & Northern Driveway (W)	WB Approach	400'	21.8	C	3	-	-	-
	NB Approach	280'	0.0	A	0	-	-	-
	SB Approach	380	0.0	A	0	-	-	-
	Overall	-	0.1	A	-	-	-	-
King of Prussia Road (N/S) & Raider Road/Driveway (W)	EB Approach	500'	13.3	B	30	33.7	C	183
	WB Approach	500'	-	-	-	34.4	C	-
	(WB Left)	500'	-	-	-	35.5	D	135
	(WB Thru/Right)	500'	-	-	-	29.2	C	25
	NB Approach	550'	1.2	A	20	47.9	D	-
	(NB Left)	75'	-	-	-	10.1	B	133
	(NB Thru)	550'	-	-	-	68.4	F	1068
	(NB Right)	550'	-	-	-	7.0	A	35
	SB Approach	550'	0.9	A	5	18.8	B	-
	(SB Left)	75'	-	-	-	96.9	F	128
(SB Thru)	660'	-	-	-	6.2	A	188	
Overall	-	2.0	A	-	41.4	D	-	
King of Prussia Road (N/S) & Southern Driveway (W)	WB Approach	600'	265.0	F	108	90.2	F	8
	NB Approach	500'	0.0	A	0	0.0	A	0
	SB Approach	550'	1.8	A	-	0.2	A	-
	(SB Left)	75'	15.2	C	13	16.8	C	3
	Overall	-	5.6	A	-	0.2	A	-

Table 11 – 2020 Build Conditions with Improvements Summary Table (Cont.)

		Available Storage Length	2020 No Build - AM Peak Hour			2020 Build Mit - AM Peak Hour		
			Delay (Secs)	LOS	95th % Queue	Delay (Secs)	LOS	95th % Queue
Lancaster Avenue (SR 0030) & I-476 NB Off Ramps/King of Prussia Road	EB Approach	-	60.5	E	-	55.8	E	-
	(EB Left)	800'	59.1	E	252	56.3	E	253
	(EB Thru)	800'	60.9	E	787	55.6	E	758
	WB Approach	600'	53.9	D	338	53.9	D	338
	NB Approach	-	74.8	E	-	43.2	D	-
	(NB Left)	500'	17.6	B	305	18.3	B	313
	(NB Thru)	1900'	146.9	F	1917	58.5	E	760
	(NB Right)	500'	28.1	C	335	60.5	E	740
	SB Approach	500'+	63.9	E	78	75.9	E	125
Overall	-	66.2	E	-	51.5	D	-	
Lancaster Avenue (SR 0030) & I-476 SB Off Ramps	EB Approach	1800'	18.0	B	235	18.4	B	238
	WB Approach	-	34.5	C	-	34.9	C	-
	(WB Left)	600'	53.8	D	120	54.4	D	130
	(WB Thru)	800'	31.8	C	568	31.9	C	575
	NB Approach	1000'+	40.0	D	443	40.0	D	443
	Overall	-	31.3	C	-	31.6	C	-
Lancaster Avenue (SR 0030) & I-476 NB On Ramp/Hillside Circuit	EB Approach	-	8.6	A	-	8.4	A	-
	(EB Left)	400'	31.8	C	248	30.9	C	240
	(EB Thru/Right)	600'	0.3	A	5	0.2	A	5
	WB Approach	-	10.4	B	-	10.8	B	-
	(WB Left)	100'	56.5	E	3	56.5	E	3
	(WB Thru/Right)	750'	10.3	B	280	10.7	B	285
	NB Approach	-	58.1	E	-	58.1	E	-
	(NB Left/Thru)	750'	58.8	E	13	58.8	E	13
	(NB Right)	50'	55.1	E	3	55.0	D	3
Overall	-	9.3	A	-	9.2	A	-	
Lancaster Avenue (E/W) (SR 0030) & Radnor Chester Road (N/S)	EB Approach	-	31.5	C	-	34.3	C	-
	(EB Left)	260'	43.8	D	145	43.9	D	150
	(EB Thru)	750'	30.0	C	520	33.1	C	545
	WB Approach	-	49.7	D	-	64.5	E	-
	(WB Left)	340'	35.0	C	185	43.5	D	200
	(WB Thru)	1800'	58.0	E	1285	77.1	E	1390
	(WB Right)	300'	29.0	C	435	31.8	C	453
	NB Approach	-	45.9	D	-	45.9	D	-
	(NB Left/Thru)	1000'+	44.7	D	345	44.7	D	345
	(NB Thru/Right)	100	47.1	D	340	47.1	D	340
	SB Approach	-	27.8	C	-	26.1	C	-
	(SB Left)	160'	31.3	C	103	29.3	C	100
(SB Thru)	350'	26.5	C	125	24.9	C	120	
Overall	-	42.3	D	-	50.5	D	-	

Table 11 – 2020 Build Conditions with Improvements Summary Table (Cont.)

		Available Storage Length	2020 No Build - PM Peak Hour			2020 Build Mit - PM Peak Hour		
			Delay (Secs)	LOS	95th % Queue	Delay (Secs)	LOS	95th % Queue
King of Prussia Road (N/S) & Matsonford Road (E/W)	EB Approach		19.3	B	-	19.3	B	-
	(EB Left)	50'	24.5	C	3	24.5	C	3
	(EB Thru/Right)	50'	18.2	B	10	18.2	B	10
	WB Approach	-	45.9	D	-	47.3	D	-
	(WB Left)	550'	55.8	E	640	57.7	E	653
	(WB Thru/Right)	950'	21.6	C	195	21.6	C	195
	SB Approach	-	25.9	C	-	26.5	C	-
	(SB Left)	100'	18.0	B	83	17.8	B	83
	(SB Thru/Right)	1000'+	27.1	C	660	27.8	C	678
	NB Approach	-	33.5	C	-	31.6	C	-
	(NB Left)	130'	33.1	C	8	33.6	C	8
(NB Thru)	1150'	33.5	C	492	31.6	C	460	
Overall	-	34.6	C	-	34.9	C	-	
King of Prussia Road (E/W) & Radnor Chester Road (N/S) (SR 1021)	EB Approach	-	28.1	C	-	29.0	C	-
	(EB Left)	75'	23.2	C	8	22.9	C	8
	(EB Thru)	1200'	28.1	C	548	29.1	C	560
	WB Approach	-	25.2	C	-	25.7	C	-
	(WB Left)	160'	62.4	E	93	67.9	E	95
	(WB Thru/Right)	1100'	20.1	C	333	19.9	B	328
	NB Approach	-	225.5	F	-	225.1	F	-
	(NB Left/Thru)	1200'	297.7	F	1215	297.7	F	1215
	(NB Right)	280'	16.8	B	105	16.8	B	108
SB Approach	100'	49.3	D	138	49.3	D	138	
Overall	-	85.7	F	-	86.0	F	-	
King of Prussia Road (N/S) & Septa Driveway (W)	WB Approach	450'	120.0	F	288	38.6	E	108
	NB Approach	380'	0.0	A	0	0.0	A	0
	SB Approach	1200'	0.3	A	3	0.5	A	5
	Overall	-	17.1	C	-	4.2	A	-
King of Prussia Road (N/S) & Northern Driveway (W)	WB Approach	400'	18.2	C	13	-	-	-
	NB Approach	280'	0.0	A	0	-	-	-
	SB Approach	380'	0.0	A	0	-	-	-
	Overall	-	0.5	A	-	-	-	-
King of Prussia Road (N/S) & Raider Road/Driveway (W)	EB Approach	500'	32.1	D	25	28.2	C	45
	WB Approach	500'	-	-	-	38.5	D	-
	(WB Left)	500'	-	-	-	40.7	D	308
	(WB Thru/Right)	500'	-	-	-	28.7	C	60
	NB Approach	550'	0.7	A	3	8.7	A	-
	(NB Left)	75'	-	-	-	50.5	D	35
	(NB Thru)	550'	-	-	-	6.6	A	150
	(NB Right)	550'	-	-	-	5.6	A	45
	SB Approach	550'	0.0	A	0	37.5	D	-
	(SB Left)	75'	-	-	-	7.5	A	8
(SB Thru)	660'	-	-	-	37.8	D	1128	
Overall	-	1.1	A	-	31.1	C	-	
King of Prussia Road (N/S) & Southern Driveway (W)	WB Approach	600'	613.8	F	567	37.3	E	8
	NB Approach	500'	0.0	A	0	0.0	A	0
	SB Approach	550'	0.1	A	-	0.0	A	-
	(SB Left)	75'	8.0	A	0	8.2	A	0
	Overall	-	83.9	F	-	0.2	A	-

Table 11 – 2020 Build Conditions with Improvements Summary Table (Cont.)

		Available Storage Length	2020 No Build - PM Peak Hour			2020 Build Mit - PM Peak Hour		
			Delay (Secs)	LOS	95th % Queue	Delay (Secs)	LOS	95th % Queue
Lancaster Avenue (SR 0030) & I-476 NB Off Ramps/King of Prussia Road	EB Approach	-	58.5	E	-	59.6	E	-
	(EB Left)	800'	52.5	D	58	52.5	D	75
	(EB Thru)	800'	58.8	E	1335	60.0	E	1340
	WB Approach	600'	10.3	B	163	11.1	B	170
	NB Approach	-	49.7	D	-	55.3	E	-
	(NB Left)	500'	19.8	B	123	19.9	B	125
	(NB Thru)	1900'	57.8	E	313	72.1	E	360
	(NB Right)	500'	79.3	E	353	82.1	F	360
	SB Approach	500'+	85.8	F	328	83.2	E	310
Overall	-	55.6	E	-	56.5	E	-	
Lancaster Avenue (SR 0030) & I-476 SB Off Ramps	EB Approach	1800'	24.6	C	323	24.5	C	323
	WB Approach	-	35.3	D	-	35.2	D	-
	(WB Left)	600'	53.1	D	342	53.1	D	338
	(WB Thru)	800'	22.0	C	370	21.9	C	368
	NB Approach	1000'+	46.6	D	370	46.6	D	370
	Overall	-	33.9	C	-	33.8	C	-
Lancaster Avenue (SR 0030) & I-476 NB On Ramp/Hillside Circuit	EB Approach	-	9.7	A	-	9.1	A	-
	(EB Left)	400'	24.4	C	842	22.9	C	833
	(EB Thru/Right)	600'	0.2	A	5	0.2	A	5
	WB Approach	-	19.8	B	-	19.9	B	-
	(WB Left)	100'	59.3	E	10	59.3	E	10
	(WB Thru/Right)	750'	19.4	B	303	19.6	B	308
	NB Approach	-	56.7	E	-	56.7	E	-
	(NB Left/Thru)	750'	56.9	E	8	56.9	E	8
	(NB Right)	50'	56.2	E	3	56.2	E	3
Overall	-	11.8	B	-	11.3	B	-	
Lancaster Avenue (E/W) (SR 0030) & Radnor Chester Road (N/S)	EB Approach	-	59.1	E	-	49.4	D	-
	(EB Left)	260'	24.3	C	95	25.9	C	98
	(EB Thru)	750'	62.5	E	795	51.6	D	740
	WB Approach	-	42.2	D	-	44.4	D	-
	(WB Left)	340'	79.4	E	342	118.0	F	323
	(WB Thru)	1800'	37.9	D	575	33.9	C	550
	(WB Right)	300'	21.5	C	115	20.4	C	113
	NB Approach	-	34.6	C	-	34.6	C	-
	(NB Left/Thru)	1000'+	34.8	C	238	34.8	C	238
	(NB Thru/Right)	100	34.4	C	242	34.4	C	243
	SB Approach	-	83.9	F	-	83.9	F	-
	(SB Left)	160'	180.3	F	848	180.3	F	848
(SB Thru)	350'	24.4	C	300	24.4	C	300	
Overall	-	57.2	E	-	54.8	D	-	

Table 12 – 2025 Build Conditions with Improvements Summary Table

		Available Storage Length	2025 No Build - AM Peak Hour			2025 Build Mit - AM Peak Hour		
			Delay (Secs)	LOS	95th % Queue	Delay (Secs)	LOS	95th % Queue
King of Prussia Road (N/S) & Matsonford Road (E/W)	EB Approach		26.4	C	-	26.4	C	-
	(EB Left)	50'	29.3	C	0	29.3	C	0
	(EB Thru/Right)	50'	25.0	C	3	25.0	C	3
	WB Approach	-	39.6	D	-	39.9	D	-
	(WB Left)	550'	43.8	D	378	44.2	D	380
	(WB Thru/Right)	950'	27.7	C	115	27.7	C	115
	SB Approach	-	42.3	D	-	42.2	D	-
	(SB Left)	100'	93.0	F	753	93.0	F	753
	(SB Thru/Right)	1000'+	12.2	B	415	12.4	B	420
	NB Approach	-	64.6	E	-	69.8	E	-
	(NB Left)	130'	17.3	B	10	17.3	B	10
(NB Thru)	1150'	65.5	F	1090	70.7	E	1135	
Overall	-	48.5	D	-	50.2	D	-	
King of Prussia Road (E/W) & Radnor Chester Road (N/S) (SR 1021)	EB Approach	-	19.2	B	-	19.5	B	-
	(EB Left)	75'	53.0	D	63	55.7	E	55
	(EB Thru)	1200'	16.0	B	260	16.1	B	265
	WB Approach	-	48.0	D	-	53.3	D	-
	(WB Left)	160'	20.6	C	25	21.0	C	25
	(WB Thru/Right)	1100'	48.9	D	928	54.4	F	1370
	NB Approach	-	636.0	F	-	635.1	F	-
	(NB Left/Thru)	1200'	702.2	F	2230	702.2	F	2230
	(NB Right)	280'	18.2	B	45	18.3	B	48
SB Approach	100'	21.8	C	8	21.8	C	8	
Overall	-	227.1	F	-	226.5	F	-	
King of Prussia Road (N/S) & Septa Driveway (W)	WB Approach	450'	39.8	E	43	41.4	E	48
	NB Approach	380'	0.0	A	0	0.0	A	0
	SB Approach	1200'	4.3	A	33	5.5	A	40
	Overall	-	2.5	A	-	3.2	A	-
King of Prussia Road (N/S) & Northern Driveway (W)	WB Approach	400'	22.3	C	3	-	-	-
	NB Approach	280'	0.0	A	0	-	-	-
	SB Approach	380'	0.0	A	0	-	-	-
	Overall	-	0.1	A	-	-	-	-
King of Prussia Road (N/S) & Raider Road/Driveway (W)	EB Approach	500'	13.5	B	33	33.7	C	187
	WB Approach	500'	-	-	-	34.4	C	-
	(WB Left)	500'	-	-	-	35.6	D	135
	(WB Thru/Right)	500'	-	-	-	29.1	C	25
	NB Approach	550'	1.2	A	20	54.0	D	-
	(NB Left)	75'	-	-	-	10.9	B	140
	(NB Thru)	550'	-	-	-	77.2	F	1138
	(NB Right)	550'	-	-	-	7.1	A	225
	SB Approach	550'	0.9	A	8	18.8	B	-
	(SB Left)	75'	-	-	-	97.2	F	120
(SB Thru)	660'	-	-	-	6.3	A	195	
Overall	-	2.1	A	-	45.7	D	-	
King of Prussia Road (N/S) & Southern Driveway (W)	WB Approach	600'	298.0	F	113	92.2	F	8
	NB Approach	500'	0.0	A	0	0.0	A	0
	SB Approach	550'	1.8	A	-	0.2	A	-
	(SB Left)	75'	15.5	C	15	17.1	C	3
	Overall	-	6.1	A	-	0.2	A	-

Table 12 – 2025 Build Conditions with Improvements Summary Table (Cont.)

		Available Storage Length	2025 No Build - AM Peak Hour			2025 Build Mit - AM Peak Hour		
			Delay (Secs)	LOS	95th % Queue	Delay (Secs)	LOS	95th % Queue
Lancaster Avenue (SR 0030) & I-476 NB Off Ramps/King of Prussia Road	EB Approach	-	64.2	E	-	58.7	E	-
	(EB Left)	800'	59.6	E	253	56.7	E	255
	(EB Thru)	800'	65.4	E	1123	59.3	E	790
	WB Approach	600'	54.4	D	345	54.4	D	343
	NB Approach	-	78.6	E	-	45.4	D	-
	(NB Left)	500'	17.8	B	313	18.4	B	318
	(NB Thru)	1900'	155.9	F	1995	62.0	E	787
	(NB Right)	500'	28.5	C	345	64.3	E	770
	SB Approach	500'+	65.3	E	83	78.5	E	135
Overall	-	69.4	E	-	53.8	D	-	
Lancaster Avenue (SR 0030) & I-476 SB Off Ramps	EB Approach	1800'	18.5	B	240	18.9	B	245
	WB Approach	-	35.0	C	-	35.5	D	-
	(WB Left)	600'	53.9	D	123	54.4	D	133
	(WB Thru)	800'	32.4	C	578	32.6	C	585
	NB Approach	1000'+	39.9	D	450	39.9	D	450
Overall	-	31.7	C	-	32.0	C	-	
Lancaster Avenue (SR 0030) & I-476 NB On Ramp/Hillside Circuit	EB Approach	-	8.4	A	-	8.3	A	-
	(EB Left)	400'	31.3	C	245	30.6	C	245
	(EB Thru/Right)	600'	0.2	A	5	0.2	A	5
	WB Approach	-	10.7	B	-	11.0	B	-
	(WB Left)	100'	56.5	E	3	56.5	E	5
	(WB Thru/Right)	750'	10.6	B	288	10.9	B	293
	NB Approach	-	58.1	E	-	58.1	E	-
	(NB Left/Thru)	750'	58.8	E	13	58.8	E	13
	(NB Right)	50'	55.1	E	3	55.1	E	3
Overall	-	9.2	A	-	9.2	A	-	
Lancaster Avenue (E/W) (SR 0030) & Radnor Chester Road (N/S)	EB Approach	-	33.3	C	-	33.4	C	-
	(EB Left)	260'	63.1	E	258	60.6	E	252
	(EB Thru)	750'	29.4	C	528	29.8	C	533
	WB Approach	-	50.1	D	-	53.7	D	-
	(WB Left)	340'	46.6	D	228	48.0	D	228
	(WB Thru)	1800'	57.1	E	1313	61.9	F	1340
	(WB Right)	300'	28.5	C	713	28.8	C	445
	NB Approach	-	47.0	D	-	46.2	D	-
	(NB Left/Thru)	1000'+	45.7	D	357	45.0	D	353
	(NB Thru/Right)	100	48.3	D	350	47.6	D	348
	SB Approach	-	28.0	C	-	27.6	C	-
(SB Left)	160'	31.7	C	115	31.2	C	105	
(SB Thru)	350'	26.6	C	128	26.3	C	128	
Overall	-	43.2	D	-	44.9	D	-	

Table 12 – 2025 Build Conditions with Improvements Summary Table (Cont.)

		Available Storage Length	2025 No Build - PM Peak Hour			2025 Build Mit - PM Peak Hour		
			Delay (Secs)	LOS	95th % Queue	Delay (Secs)	LOS	95th % Queue
King of Prussia Road (N/S) & Matsonford Road (E/W)	EB Approach		18.0	B	-	18.0	B	-
	(EB Left)	50'	22.9	C	3	22.9	C	3
	(EB Thru/Right)	50'	17.0	B	10	17.0	B	10
	WB Approach	-	39.8	D	-	40.9	D	-
	(WB Left)	550'	47.9	D	620	49.4	D	638
	(WB Thru/Right)	950'	20.1	C	193	20.1	C	193
	SB Approach	-	31.6	C	-	32.6	C	-
	(SB Left)	100'	20.2	C	90	19.9	B	90
	(SB Thru/Right)	1000'+	33.4	C	733	34.7	C	756
	NB Approach	-	41.0	D	-	37.7	D	-
	(NB Left)	130'	37.5	D	10	38.2	D	8
(NB Thru)	1150'	41.0	D	542	37.7	D	200	
Overall	-	36.6	D	-	36.6	D	-	
King of Prussia Road (E/W) & Radnor Chester Road (N/S) (SR 1021)	EB Approach	-	39.5	D	-	45.2	D	-
	(EB Left)	75'	25.3	C	8	25.0	C	8
	(EB Thru)	1200'	39.7	D	992	45.4	D	1037
	WB Approach	-	31.1	C	-	30.7	C	-
	(WB Left)	160'	96.4	F	120	94.4	F	118
	(WB Thru/Right)	1100'	22.1	C	350	21.9	C	345
	NB Approach	-	212.9	F	-	212.6	F	-
	(NB Left/Thru)	1200'	281.3	F	1210	281.3	F	1210
	(NB Right)	280'	15.6	B	105	15.6	B	105
SB Approach	100'	53.0	D	143	52.5	D	143	
Overall	-	88.4	F	-	90.4	F	-	
King of Prussia Road (N/S) & Septa Driveway (W)	WB Approach	450'	132.3	F	305	41.0	E	113
	NB Approach	380'	0.0	A	0	0.0	A	0
	SB Approach	1200'	0.3	A	5	0.5	A	5
	Overall	-	18.7	C	-	4.4	A	-
King of Prussia Road (N/S) & Northern Driveway (W)	WB Approach	400'	18.4	C	13	-	-	-
	NB Approach	280'	0.0	A	0	-	-	-
	SB Approach	380'	0.0	A	0	-	-	-
	Overall	-	0.5	A	-	-	-	-
King of Prussia Road (N/S) & Raider Road/Driveway (W)	EB Approach	500'	33.4	D	28	28.3	C	45
	WB Approach	500'	-	-	-	38.5	D	-
	(WB Left)	500'	-	-	-	40.6	D	308
	(WB Thru/Right)	500'	-	-	-	28.7	C	60
	NB Approach	550'	0.8	A	3	9.2	A	-
	(NB Left)	75'	-	-	-	55.5	E	4
	(NB Thru)	550'	-	-	-	6.6	A	153
	(NB Right)	550'	-	-	-	5.6	A	45
	SB Approach	550'	0.0	A	0	41.9	D	-
	(SB Left)	75'	-	-	-	7.6	A	8
(SB Thru)	660'	-	-	-	42.3	F	1058	
Overall	-	1.1	A	-	33.8	C	-	
King of Prussia Road (N/S) & Southern Driveway (W)	WB Approach	600'	647.9	F	580	38.2	E	8
	NB Approach	500'	0.0	A	0	0.0	A	0
	SB Approach	550'	0.1	A	-	0.0	A	-
	(SB Left)	75'	8.0	A	0	8.2	A	0
	Overall	-	87.3	F	-	0.2	A	-

Table 12 – 2025 Build Conditions with Improvements Summary Table (Cont.)

		Available Storage Length	2025 No Build - PM Peak Hour			2025 Build Mit - PM Peak Hour		
			Delay (Secs)	LOS	95th % Queue	Delay (Secs)	LOS	95th % Queue
Lancaster Avenue (SR 0030) & I-476 NB Off Ramps/King of Prussia Road	EB Approach	-	64.6	E	-	56.1	E	-
	(EB Left)	800'	53.1	D	60	51.3	D	75
	(EB Thru)	800'	65.2	F	1393	56.4	F	1390
	WB Approach	600'	10.0	A	165	11.2	B	173
	NB Approach	-	52.3	D	-	57.3	E	-
	(NB Left)	500'	19.9	B	128	19.9	B	128
	(NB Thru)	1900'	60.3	E	323	75.1	E	356
	(NB Right)	500'	85.4	F	370	85.7	F	373
	SB Approach	500'+	94.1	F	368	88.1	F	235
Overall	-	60.5	E	-	56.5	E	-	
Lancaster Avenue (SR 0030) & I-476 SB Off Ramps	EB Approach	1800'	25.3	C	330	24.8	C	335
	WB Approach	-	35.5	D	-	19.6	B	-
	(WB Left)	600'	53.2	D	345	43.0	D	335
	(WB Thru)	800'	22.3	C	372	2.1	A	75
	NB Approach	1000'+	46.7	D	375	46.7	D	380
	Overall	-	34.3	C	-	27.0	C	-
Lancaster Avenue (SR 0030) & I-476 NB On Ramp/Hillside Circuit	EB Approach	-	8.7	A	-	8.0	A	-
	(EB Left)	400'	21.6	C	530	20.1	C	510
	(EB Thru/Right)	600'	0.2	A	5	0.2	A	5
	WB Approach	-	20.6	C	-	20.7	C	-
	(WB Left)	100'	59.3	E	10	59.3	E	10
	(WB Thru/Right)	750'	20.3	C	310	20.4	C	308
	NB Approach	-	56.7	E	-	56.6	E	-
	(NB Left/Thru)	750'	56.9	E	8	56.9	E	8
	(NB Right)	50'	56.2	E	3	56.0	E	3
Overall	-	11.1	B	-	10.6	B	-	
Lancaster Avenue (E/W) (SR 0030) & Radnor Chester Road (N/S)	EB Approach	-	67.7	E	-	69.2	E	-
	(EB Left)	260'	25.3	C	98	28.3	C	108
	(EB Thru)	750'	71.9	E	1148	73.3	E	1160
	WB Approach	-	47.0	D	-	42.5	D	-
	(WB Left)	340'	92.1	F	425	92.2	F	425
	(WB Thru)	1800'	41.7	D	605	36.1	D	570
	(WB Right)	300'	22.1	C	118	20.8	C	113
	NB Approach	-	34.3	C	-	34.4	C	-
	(NB Left/Thru)	1000'+	34.6	C	240	34.7	C	238
	(NB Thru/Right)	100	34.1	C	245	34.1	C	243
	SB Approach	-	86.4	F	-	86.9	F	-
	(SB Left)	160'	187.1	F	885	188.3	F	883
(SB Thru)	350'	24.1	C	305	24.1	C	300	
Overall	-	62.1	E	-	61.3	E	-	

CONCLUSIONS & RECOMMENDATIONS

The proposed 475,000 square foot development located at 145 King of Prussia Road in Radnor Township, Delaware County, Pennsylvania is expected to generate a total of **731 (577 entering and 154 exiting)** and **583 (158 entering and 425 exiting)** new trips generated by the site during the morning and afternoon peak hours, respectively. Access to the site will be provided through a 3 full access driveways. The primary site driveway will be a full access driveway located on King of Prussia Drive across from Raider Road. A second driveway will be located on the north side of the site and accessed via the existing Septa driveway on King of Prussia Road. The third site driveway is provides access to loading areas and is located at the southern corner of the site on King of Prussia Road approximately 550' north of Lancaster Avenue (SR 0030).

In conjunction with the proposed development the following roadway improvements are recommended:

- At King of Prussia Road and Matsonford Road/Park Driveway:
 - Modify AM signal timings to shift 3 seconds from the SB King of Prussia Road lead phase to the NB/SB King of Prussia phase (1 second) and the EB/WB Matsonford Road/Park Driveway Phase (2 seconds).
- At King of Prussia Road and Radnor-Chester Road:
 - Modify PM signal timings to shift 6 seconds from the EB/WB King of Prussia Road phase to the NB/SB Radnor Chester Road phase.
- At King of Prussia Road and Raider Road/Site Driveway :
 - Provide left turn lanes on both approaches of King of Prussia Road
 - Widen the east side of King of Prussia Road to provide two continuous northbound lanes from Lancaster Avenue to the signalized intersection at the Main Site Driveway/ Raider Road.
 - Install 2 phase semi-actuated traffic signal.
- At King of Prussia Road and South Site Driveway :
 - Restripe northbound King of Prussia Road at the southern site driveway to provide shared through/right turn lane.
 - Widen the east side of King of Prussia Road to provide two continuous northbound lanes from the south driveway to the Main Site Driveway/ Raider Road, with a transition into a dedicated right turn lane.
- At Lancaster Avenue and NB Off Ramps/King of Prussia Road:
 - Restripe northbound I-76 off-ramp at Lancaster Avenue to provide shared through/right turn lane
- At Lancaster Avenue and I-476 SB Off Ramp:
 - Modify PM signal timings to shift 1 second from the EB/WB Lancaster Avenue phase to the WB Lancaster Avenue lead phase.
- At Lancaster Avenue and I-476 NB On Ramp/Hillside Circuit:
 - Modify PM signal timings to shift 7 second from the EB/WB Lancaster Avenue phase to the EB Lancaster Avenue lead phase.
- At Lancaster Avenue and Radnor-Chester Road:
 - Modify AM signal timings to shift 12 seconds from the southbound Radnor-Chester Road lead phase and 1 second from the Lancaster Avenue Phase lead left phase to the EB/WB Lancaster Avenue EB/WB Phase.

Under the build Conditions with the identified improvements implemented, all of the study intersections maintain existing levels of service between the no-build and build conditions and operate at overall LOS D or better with the exception of those that operate at LOS E or F under no-build conditions.

Under the build Conditions with the identified improvements implemented, all of the study intersections maintain existing

Traffic Impact Study

145 King of Prussia Road

levels of service between the no-build and build conditions and operate at overall LOS D or better with the exception of those that operate at LOS E or F under no-build conditions.

Based on the comparison of the Intersection LOS and delay under no-build conditions and build conditions with the identified mitigation measures, the intersections meet the LOS requirements identified in the PennDOT's *Policies and Procedures for Traffic Impact Studies* at all of the study intersections. The Levels of Service exhibited are not a result of, nor is the need for additional mitigation measures triggered as a result of the trips generated by the proposed site.

In addition to the improvements identified within the is TIS, a bus shelter is to be constructed on King of Prussia Road southeast of the SEPTA Driveway to the extent that it is approved by SEPTA and the University of Pennsylvania Health System will partner with the Township to install a Traffic Adaptive Signal Coordination at the following intersections, subject to PennDOT review:

- Route 30 & I-476 Northbound Ramps
- Route 30 & I-476/King of Prussia Road
- Route 30 & I-476 Southbound Ramps.
- Route 30 & Radnor-Chester Road.
- Route 30 & Radnor Financial Center Eastern Driveway
- Route 30 & Radnor Financial Center Western Driveway
- King of Prussia Road & Radnor-Chester Road.
- King of Prussia Road & Matsonford Road.
- Matsonford Road & South Centennial Drive.
- Matsonford Road & North Centennial Drive
- King of Prussia Road & Raider Road.
- Radnor Chester and Raider Road
- Radnor Chester and Radnor Financial Center

APPENDIX

TRAFFIC IMPACT STUDY

MIXED MEDICAL FACILITY

145 KING OF PRUSSIA ROAD
RADNOR TOWNSHIP
DELAWARE COUNTY, PA

UPHS1507

APPENDIX A

Level of Service Criteria

TRAFFIC IMPACT STUDY

MIXED MEDICAL FACILITY

145 KING OF PRUSSIA ROAD
RADNOR TOWNSHIP
DELAWARE COUNTY, PA

UPHS1507

LEVEL OF SERVICE

Level of Service is a term used to describe vehicle operator satisfaction with the driving experience. Research has determined that operator satisfaction is based primarily on travel speed and delay. In urban environments these factors, travel speed and delay, are primarily controlled by the operation of intersections.

By utilizing models to simulate the flow of traffic at intersections, the average delay experienced by vehicles can be estimated. These models consider such factors as traffic volumes, roadway geometry, traffic control, and driver behavior. Levels of Service designations are based on a comparison of the average delays calculated by the models with perceived acceptable delays.

The following tables illustrate the guidelines used for designated Levels of Service at intersections:

Level of Service Criteria
for Signalized Intersections⁽¹⁾

Level of Service	Control Delay (Seconds per Vehicle)
A	≤ 10
B	>10-20
C	>20-35
D	>35-55
E	>55-80
F	> 80

⁽¹⁾ Exhibit 18-4, Level of Service from Control Delay (2010 HCM)

Level of Service Criteria
for Unsignalized Intersections⁽²⁾

Level of Service	Control Delay (Seconds per Vehicle)
A	0-10
B	>10-15
C	>15-25
D	>25-35
E	>35-50
F	> 50

⁽²⁾ Table Exhibit 19-1, Level of Service Criteria for TWSC and AWSC intersections (2010 HCM)

APPENDIX B

Existing Signal Permit Plans/Timing Directives

TRAFFIC IMPACT STUDY

MIXED MEDICAL FACILITY

145 KING OF PRUSSIA ROAD
RADNOR TOWNSHIP
DELAWARE COUNTY, PA

UPHS1507

TRAFFIC SIGNAL SYSTEM PERMIT PLAN

WEEKLY PROGRAM CHART		
EVENT	DAY	TIME
1	1-7	20:00 - 22:00
2	1-7	20:00 - 22:00
3	1-7	20:00 - 22:00
4	1-7	20:00 - 22:00
5	6,7	20:00 - 22:00

MINIMUM 15 MINUTE OFFSET REFERENCED TO START OF YELLOW ON LANCASTER AVE.

NOTES: - ALL SPLIT TIMES INCLUDE YELLOW AND RED TIMES FOR A GIVEN PHASE.
 - REFER TO SIGNAL PERMIT PLAN FOR MAX 1, MAX 2, CLEARANCE AND PED TIMES.

SYSTEM NOTES

- PROGRAM TO BE SELECTED BY CLOSED LOOP SYSTEM (TIME OF DAY) OR TBC BACKUP.
- OFFSETS ARE REFERENCED TO THE BEGINNING OF YELLOW ON LANCASTER AVENUE.
- SYSTEM LIMITS : LANCASTER AVENUE (8 INTERSECTIONS) FROM ST. DAVID'S RD TO VILLANOVA CENTER.
- PRIMARY COORDINATION: FIBER OPTIC CABLE.
- SECONDARY COORDINATION: TBC (DEFAULT TO BACKUP TBC).

GENERAL NOTES

NO MODIFICATIONS TO THIS INSTALLATION ARE PERMITTED UNLESS APPROVED BY THE ENGINEER OR A REPRESENTATIVE OF THE DEPARTMENT OF TRANSPORTATION.

REFER TO TRAFFIC SIGNAL PERMIT DRAWING FOR INDIVIDUAL INTERSECTION OPERATION, GEOMETRY, PHASING AND CRITICAL TIMES.

FOR CONSTRUCTION AND INSPECTION OF THE SYSTEM PERMIT DRAWING ALWAYS BE ACCOMPANIED WITH TRAFFIC SIGNAL PERMIT DRAWING.

TEST THE SYSTEM AT LOCAL INTERSECTION LEVEL, SYSTEM LEVEL, LOCAL INTERSECTION LEVEL AND PERSONAL COMPUTER READER/DIAL UP LEVEL.

GATHER THE SYSTEM FAILURE CRITICAL ALARMS REPORT AND ARCHIVE THEM WHERE APPLICABLE.

SET UP PENNDOT DISTRICT 6-0 COMPUTER WITH THE SYSTEM DATABASE AND GRAPHICS. MODIFY THE DATABASE AND GRAPHICS FOR SYSTEMS REVISIONS.

ASSIGN LOOP DETECTORS AND PROGRAM THE CONTROLLERS TO EXACT LOCATION OF DETECTORS SHALL BE DETERMINED PRIOR TO INSTALLATION BY A REPRESENTATIVE OF PENNDOT.

OBTAIN POLE ATTACHMENT PERMIT FOR AERIAL FIBER OPTIC INSTALLATION.

MAINTAIN MASTER CONTROLLER COMMUNICATION SUCH AS PHONE TAPERS.

UPON INSTALLATION THE CONTRACTOR SHALL CONSULT WITH THE LOCAL OFFICIALS AND UTILITY COMPANIES TO RESOLVE ANY PROBLEMS WHICH MAY BE CREATED DUE TO THE LOCATION OF UTILITIES.

THIS DRAWING CANNOT BE USED AS A CONSTRUCTION DRAWING UNLESS IT IS APPROVED BY THE ENGINEER OR A REPRESENTATIVE OF PENNDOT. PREVENTION OF DAMAGE TO UNDERGROUND UTILITIES EFFECTIVE DATE MARCH 29, 2007.

WHEN LIQUID FUELS MONEY IS USED, SIGNAL INSTALLATION MUST CONFORM TO FORM 408 AND A COPY OF THE PROPOSED INSTALLATION SHALL BE SUBMITTED TO THE DISTRICT TRAFFIC UNIT FOR REVIEW PRIOR TO BIDDING.

PERMITTEE SHALL OBTAIN A HIGHWAY OCCUPANCY PERMIT FOR ANY CHANGES IN INTERSECTION GEOMETRY REGARDING EXCAVATION.

CONCRETE INSTALLED IN BERMHOOD ROADWAY LESS THAN 5 YEARS OLD, OR CONCRETE ROADWAY REGARDLESS OF AGE, MUST BE BORED AND JACKED UNDER THE ROADWAY. INSTALL IN ACCORDANCE WITH FEDERAL SPECIFICATIONS 10-6860 SERIES.

PENNSYLVANIA DEPARTMENT OF TRANSPORTATION
 ENGINEERING DISTRICT 6-0


COUNTY: DELAWARE
 MUNICIPALITY: RADNOR TOWNSHIP
 INTERSECTION: TRAFFIC SIGNAL SYSTEM

REVIEWED:

PAUL M. LUTZ
 LOUIS R. BELMONT, P.E.
 DISTRICT TRAFFIC ENGINEER

NO.	REVISION	DATE	BY	DATE
1	AS-BUILT DRAWING	03/11/10		
2	ADDITIONAL TBC GEOMETRY	03/11/10		
3				
4				
5				
6				
7				
8				

INTERCONNECT PERMIT #1-0071 SHEET 1 OF 1

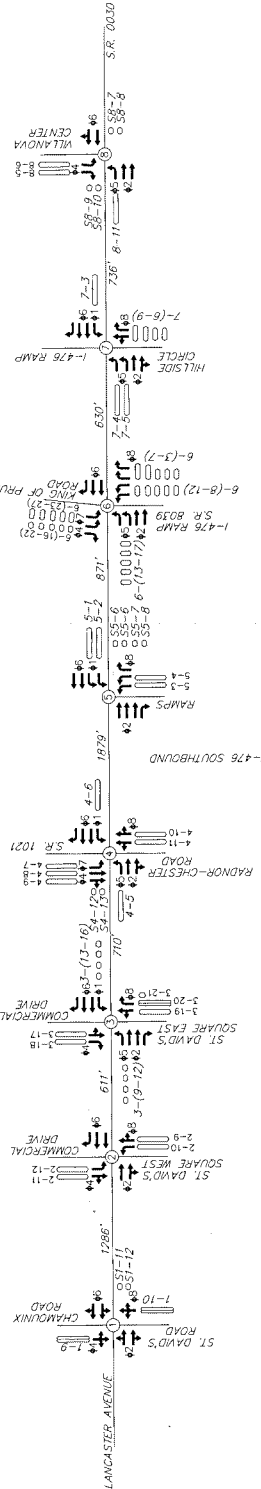

CYCLE/SPLIT/OFFSET

Program 1 = Intersections	File #	Master	Phase	Cycle	Offset
1	LANCASTER AVE & ST. DAVID'S/CHAMQUINX RD	0981	24	60	20
2	LANCASTER AVE & ST. DAVID'S SQUARE WEST	0082	38	120	34
3	LANCASTER AVE & ST. DAVID'S SQUARE EAST	0082	39	120	34
4	LANCASTER AVE & RADNOR-CHESTER RD	0083	52	120	22
5	LANCASTER AVE & 1-476 SOUTHBOUND RAMP	2530	48	110	65
6	LANCASTER AVE & 1-476 RAMP/HILLSIDE CIRCLE	2531	29	110	76
7	LANCASTER AVE & 1-476 RAMP/HILLSIDE CIRCLE	2531	25	110	66
8	LANCASTER AVE & VILLANOVA CENTER	3416	25	110	66

CYCLE/SPLIT/OFFSET

Program 2 = Intersections	File #	Master	Phase	Cycle	Offset
1	LANCASTER AVE & ST. DAVID'S/CHAMQUINX RD	0981	2	110	15
2	LANCASTER AVE & ST. DAVID'S SQUARE WEST	0082	7	110	5
3	LANCASTER AVE & ST. DAVID'S SQUARE EAST	0082	7	110	5
4	LANCASTER AVE & RADNOR-CHESTER RD	0083	13 (LEAD)	96	6.3
5	LANCASTER AVE & 1-476 SOUTHBOUND RAMP	2530	24 (LEAD)	96	5
6	LANCASTER AVE & 1-476 RAMP/HILLSIDE CIRCLE	2531	28 (LEAD)	96	1.5
7	LANCASTER AVE & 1-476 RAMP/HILLSIDE CIRCLE	2531	28 (LEAD)	96	1.5
8	LANCASTER AVE & VILLANOVA CENTER	3416	25 (LEAD)	96	8



CYCLE/SPLIT/OFFSET

Program 3 = Intersections	File #	Master	Phase	Cycle	Offset
1	LANCASTER AVE & ST. DAVID'S/CHAMQUINX RD	0981	29	100	66
2	LANCASTER AVE & ST. DAVID'S SQUARE WEST	0082	33	100	12
3	LANCASTER AVE & ST. DAVID'S SQUARE EAST	0082	33	100	12
4	LANCASTER AVE & RADNOR-CHESTER RD	0083	52	110	0
5	LANCASTER AVE & 1-476 SOUTHBOUND RAMP	2530	48	110	51
6	LANCASTER AVE & 1-476 RAMP/HILLSIDE CIRCLE	2531	29	110	88
7	LANCASTER AVE & 1-476 RAMP/HILLSIDE CIRCLE	2531	25	110	99
8	LANCASTER AVE & VILLANOVA CENTER	3416	25	110	83

LEGEND

- ◻ SYSTEM DETECTOR - LOOP NO. Y
- ◻ INTERSECTION X - LOOP NO. Y
- ◻ DETECTOR - INTERSECTION X - LOOP NO. Y
- ◻ PHASE

SCALE: NOT TO SCALE

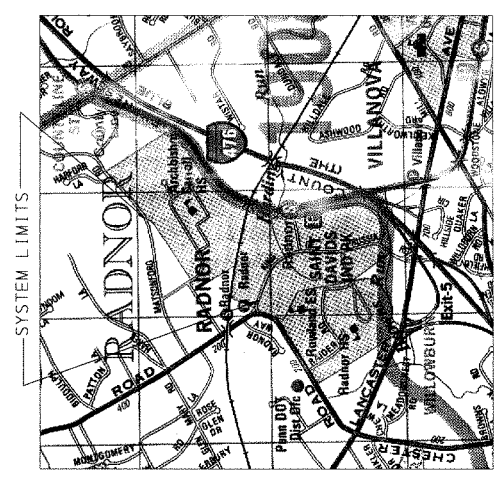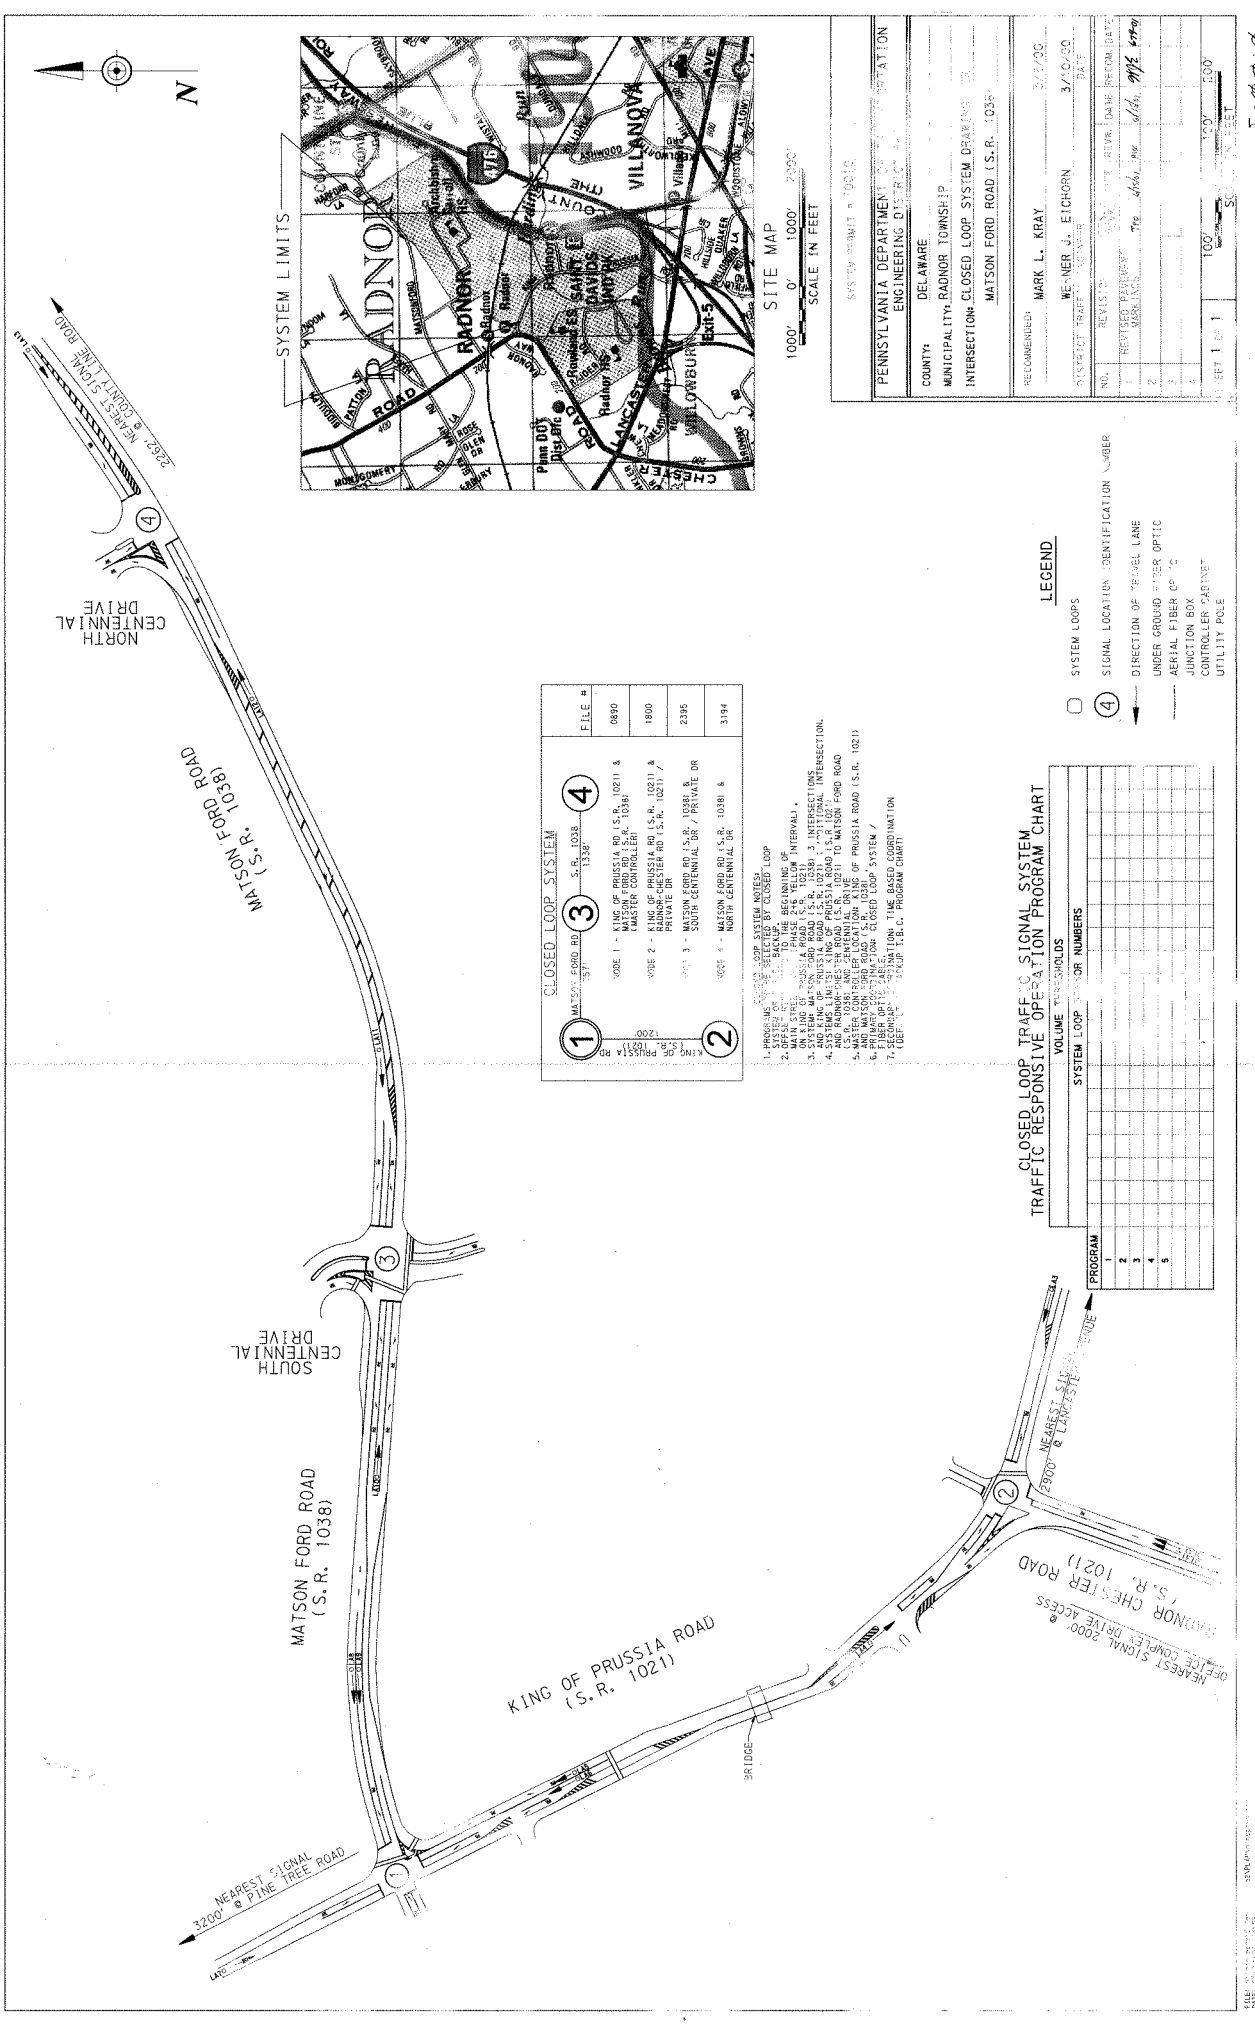

1000' 0' 1000' 2000'
SCALE IN FEET

PENNSYLVANIA DEPARTMENT OF TRANSPORTATION ENGINEERING DIVISION	
COUNTY:	DELAWARE
MUNICIPALITY:	RADNOR TOWNSHIP
INTERSECTION:	CLOSED LOOP SYSTEM DRAWING
	MATSON FORD ROAD (S.R. 1038)
RECOMMENDED BY:	MARK L. KRAY
DATE:	3/17/90
DESIGNED BY:	WEINER J. EICHORN
DATE:	3/10/90
NO.	REVISION
1	REVISION FOR THE PRELIM. DATE
2	REVISION FOR THE PRELIM. DATE
3	REVISION FOR THE PRELIM. DATE
4	REVISION FOR THE PRELIM. DATE
5	REVISION FOR THE PRELIM. DATE
6	REVISION FOR THE PRELIM. DATE
7	REVISION FOR THE PRELIM. DATE
8	REVISION FOR THE PRELIM. DATE
9	REVISION FOR THE PRELIM. DATE
10	REVISION FOR THE PRELIM. DATE

FILE #	DESCRIPTION
0890	1 - MATSON FORD RD (S.R. 1038) & KING OF PRUSSIA RD (S.R. 1021) & PRIVATE TR
1800	2 - KING OF PRUSSIA RD (S.R. 1021) & PRIVATE TR
2385	3 - MATSON FORD RD (S.R. 1038) & PRIVATE TR
3194	4 - MATSON FORD RD (S.R. 1038) & NORTH CENTENNIAL DR

CLOSED LOOP SYSTEM

1 - PROGRAMS TO BE SELECTED BY CLOSED LOOP SYSTEM

2 - OPERATIONAL PHASES

3 - MAIN STREET PHASE 2 & YELLOW INTERVAL

4 - SYSTEM MATSON FORD ROAD (S.R. 1038) & INTERSECTIONS

5 - SYSTEM KING OF PRUSSIA ROAD (S.R. 1021) & INTERSECTIONS

6 - SYSTEM MATSON FORD ROAD (S.R. 1038) & INTERSECTIONS

7 - SYSTEM KING OF PRUSSIA ROAD (S.R. 1021) & INTERSECTIONS

8 - SYSTEM MATSON FORD ROAD (S.R. 1038) & INTERSECTIONS

9 - SYSTEM KING OF PRUSSIA ROAD (S.R. 1021) & INTERSECTIONS

10 - SYSTEM MATSON FORD ROAD (S.R. 1038) & INTERSECTIONS

11 - SYSTEM KING OF PRUSSIA ROAD (S.R. 1021) & INTERSECTIONS

12 - SYSTEM MATSON FORD ROAD (S.R. 1038) & INTERSECTIONS

13 - SYSTEM KING OF PRUSSIA ROAD (S.R. 1021) & INTERSECTIONS

14 - SYSTEM MATSON FORD ROAD (S.R. 1038) & INTERSECTIONS

15 - SYSTEM KING OF PRUSSIA ROAD (S.R. 1021) & INTERSECTIONS

16 - SYSTEM MATSON FORD ROAD (S.R. 1038) & INTERSECTIONS

17 - SYSTEM KING OF PRUSSIA ROAD (S.R. 1021) & INTERSECTIONS

18 - SYSTEM MATSON FORD ROAD (S.R. 1038) & INTERSECTIONS

19 - SYSTEM KING OF PRUSSIA ROAD (S.R. 1021) & INTERSECTIONS

20 - SYSTEM MATSON FORD ROAD (S.R. 1038) & INTERSECTIONS

CLOSED LOOP TRAFFIC RESPONSIVE SIGNAL SYSTEM PROGRAM CHART

PROGRAM	VOLUME TRIP ENDORS	SYSTEM LOOP IDENTIFICATION NUMBER
1		
2		
3		
4		
5		

LEGEND


- SYSTEM LOOPS
- ④ SIGNAL LOCATION IDENTIFICATION NUMBER
- DIRECTION OF TRAVEL LANE
- UNDERGROUND FIBER OPTIC
- AERIAL FIBER OPTIC
- JUNCTION BOX
- CONTROLLER CABINET
- UTILITY POLE

GENERAL NOTES

NO MODIFICATIONS OF THIS INSTALLATION ARE PERMITTED UNLESS PRIOR APPROVAL IS GRANTED IN WRITING BY A REPRESENTATIVE OF THE DEPARTMENT OF TRANSPORTATION.
 ALL MAINTENANCE WORK INCLUDING THE TURNING OF WHEELS, CLEANING OF SIGNALS AND OVERHEAD SIGNALS, AND THE REMOVAL AND REINSTALLATION OF THE SIGNALS IS THE RESPONSIBILITY OF THE PERMITTEE.
 ALL SIGNS AND PAVEMENT MARKINGS INDICATED ON THIS DRAWING ARE CONSIDERED PART OF THE PERMIT AND SHALL BE INSTALLED AND MAINTAINED IN ACCORDANCE WITH PUBLICATION S-121 AND POST MOUNTED SIGNALS SHALL BE INSTALLED IN ACCORDANCE WITH THE SIGNAL AND PAVEMENT MARKING MANUAL. THE SIGNAL SHALL BE INSTALLED WITH THE FACE OF CURB OR THE EDGE OF THE SHOULDER. SUPPORT POLES FOR OVERHEAD SIGNALS SHALL ALSO HAVE A MINIMUM CLEARANCE HORIZONTALITY OF 2 FEET. SIGNALS MOUNTED OVER THE ROADWAY SHALL HAVE A MINIMUM CLEARANCE FROM THE ROADWAY OF 14 FEET. OVERHEAD SIGNALS SHALL BE A MINIMUM OF 8 FT. ABOVE THE SIDEWALK OR PAVEMENT.
 ALL OVERHEAD SIGNALS MUST BE RIGIDLY MOUNTED, TOP AND BOTTOM, AND EQUIPPED WITH BACKPLATES.
 THE MINIMUM HORIZONTAL DISTANCE BETWEEN SIGNALS MEASURED AT RIGHT ANGLES TO THE APPROACH SHALL BE AS FOLLOWS:
 EXACT LOCATION OF SIGNALS MUST BE DETERMINED PRIOR TO INSTALLATION OF THE SIGNALS BY REPRESENTATIVE OF PERMITTEE.
 SIGNALS SHALL BE INSTALLED BY MUNICIPALITY AND WHERE NOTED, SHALL BE PLAIN CEMENT CONCRETE CURB OR GRANITE CURB, INSTALLED IN ACCORDANCE WITH DEPARTMENT SPECIFICATIONS FORM 406.
 WORK TO OCCUR FROM THE CONTRACTOR SHALL CONSENT WITH THE SIGNALS AND UTILITY COMPANIES TO RESOLVE ANY PROBLEMS WHICH MAY BE CREATED DUE TO THE LOCATION OF UTILITIES.
 THIS DRAWING CANNOT BE USED AS A CONSTRUCTION DRAWING UNLESS IT IS APPROVED BY THE DEPARTMENT OF TRANSPORTATION LATEST AMENDMENT TO ACT 267, PREVENTION OF DAMAGE TO UNDERGROUND UTILITIES, DATED DECEMBER 20, 1974.
 WHEN LIQUID FUELS MONEY IS USED, SIGNAL INSTALLATION MUST BE IN ACCORDANCE WITH DEPARTMENT SPECIFICATIONS FOR LIQUID FUEL SIGNALS. ALL SIGNALS AND SPECIFICATIONS MUST BE SUBMITTED TO THE DISTRICT TRAFFIC UNIT, FOR REVIEW, PRIOR TO BIDDING.
 PERMITTEE SHALL OBTAIN A HIGHWAY OCCUPANCY PERMIT FOR ANY CHANGES IN INTERSECTION GEOMETRY REQUIRING EXCAVATION.
 CONDUIT INSTALLED IN BITUMINOUS ROADWAY LESS THAN 6 INCHES DEEP SHALL BE PROTECTED BY AN APPROPRIATE TYPE OF PROTECTIVE DECKING OR LACED UNDER THE ROADWAY. INSTALL IN ACCORDANCE WITH TRAFFIC SIGNAL STANDARDS TC-8600 SERIES.

SIGN DETAILS
 NOT TO SCALE


FONT: CLEARVIEW ONE



SIGN IY
 8" UPPER CASE
 6" LOWER CASE




SIGN IY
 28% REDUCTION
 8" UPPER CASE
 6" LOWER CASE



SIGN IY
 28% REDUCTION
 8" UPPER CASE
 6" LOWER CASE

EMERGENCY PRE-EMPTION PHASING
 MOVEMENT, SEQUENCE AND TIMING DIAGRAM

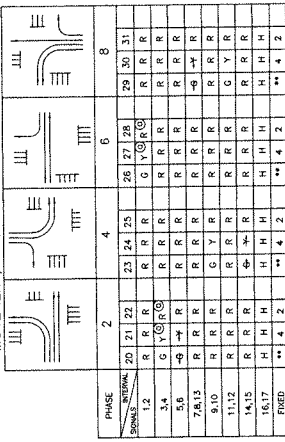

**** FOR DURATION OF PRE-EMPTION**
 NOTE:
 IF PRE-EMPTION EQUIPMENT HAS ENCODING CAPABILITIES FOR VEHICLE IDENTIFICATION, IT IS RECOMMENDED TO HAVE THE ZERO "00" FEATURE ON, TO GIVE UNCODED EMITTERS THE ABILITY TO ACTIVATE THE EMERGENCY PRE-EMPTION.

⊙ G WHEN RETURNING TO NORMAL OPERATION

EMERGENCY PRE-EMPTION NOTES:

- CONTROLLED TO BE EQUIPPED WITH EMERGENCY PRE-EMPTION FOR THE SOUTHBOUND APPROACH OF KING OF PRUSSIA ROAD AND THE NORTHBOUND APPROACH OF THE I-476 RAMP AND THE EASTBOUND & WESTBOUND APPROACHES OF LANCASTER AVE WITH A FAIL SAFE DEVICE FOR EACH DIRECTION OF OPERATION. THIS EMERGENCY BEACON SHALL CONSIST OF A FLASHING WHITE FLOOD LIGHT, AND OPERATION FOR THE APPROPRIATE APPROACH.
- IF THE SIGNALS, WHEN ACTIVATED BY AN EMERGENCY VEHICLE, SHALL TERMINATE RED CLEARANCE INTERVALS, ACCORDINGLY, THEN THE GREEN INTERVAL FOR THE PRE-EMPTED PHASE SHALL FOLLOW.
- IF THE SIGNALS, WHEN ACTIVATED BY AN EMERGENCY VEHICLE, SHALL TERMINATE RED CLEARANCE INTERVALS, ACCORDINGLY, THEN THE GREEN INTERVAL FOR THE PRE-EMPTED PHASE SHALL FOLLOW.
- IF SIGNAL HAS BEEN COVERED BY PEDESTRIAN PUSH BUTTON AND THE SIGNAL IS PRE-EMPTED, THE PEDESTRIAN TIME SHALL BE SPLIT BETWEEN RED AND FOLLOWED BY THE "RED HAND" INTERVAL. THIS INTERVAL SHALL TIME OUT FOLLOWED BY THE APPROPRIATE SELECTIVE CLEARANCES BEFORE GOING INTO EMERGENCY PRE-EMPTION.
- IF THE SIGNALS, WHEN ACTIVATED BY AN EMERGENCY VEHICLE, ARE FLASHING ALL SIGNALS SHALL REMAIN FLASHING.
- IF ADDITIONAL PRE-EMPTION PHASES ARE ACTIVATED WHILE IN PRE-EMPTION, THE ORIGINAL PRE-EMPTION PHASE SHALL TIME OUT BEFORE PROCEEDING TO THE NEXT PRE-EMPTION PHASE.
- UPON COMPLETION OF PRE-EMPTION PHASE 2, 4, 6 OR 8 IN RETURNING TO NORMAL OPERATION PHASE 2, 4, 6 INTERVAL 4 SHALL FOLLOW.
- NORMAL GREEN PHASE PRE-EMPTION, NO PRIORITY SHALL BE ESTABLISHED.
- PRE-EMPTION SHALL BE A "FIRST COME, FIRST SERVE" OPERATION.

SYSTEM PERMIT # 0071
 PENNSYLVANIA DEPARTMENT OF TRANSPORTATION
 ENGINEERING DISTRICT 6-0
 COUNTY: DELAWARE
 MUNICIPALITY: RAONOR TOWNSHIP
 INTERSECTION: LANCASTER AVENUE (S.R. 0030) & KING OF PRUSSIA RD/476 RAMP (S.R. 8039)

DATE: _____
 DATE: _____
 DATE: _____
 DATE: _____

RECOMMENDED: _____
 PAUL LUITZ
 LOUIS R. BELMONTÉ P.E.

NO.	REVISION	BY	DATE	REASON
1	AS-BUILT DRAWING	MCM	10/9/2013	5/14/13
2				
3				
4				
5				
6				
7				
8				

SHEET 3 OF 3 | PERMIT # 63-2930 | FILE # 2530

APPENDIX C

Traffic Count and Gap Data

TRAFFIC IMPACT STUDY

MIXED MEDICAL FACILITY

145 KING OF PRUSSIA ROAD
RADNOR TOWNSHIP
DELAWARE COUNTY, PA

UPHS1507

Study Name King of Prussia Rd/Septa Driveway
Start Date 04/27/2016
Start Time 7:00 AM

Northbound Left from Major

	2.0 - 4.0	4.0 - 6.0	6.0 - 8.0	8.0 - 10.0	10.0 - 12.0	12.0 - 14.0	14.0 - 16.0	16.0 - 18.0	18.0 - 20.0	20.0 - 22.0	22.0 - 24.0	24.0 - 26.0	26.0 - 28.0	28.0 - 31.6	Critical Gaps (4.1 sec)	Follow-up Gaps (2.2 sec)	Total Gaps
7:00 AM	6	2	4	4	3	3	2	3	2	2	0	2	0	11	38	285	323
7:15 AM	24	9	1	5	2	0	3	4	4	0	1	1	1	9	37	233	270
7:30 AM	19	6	3	3	2	3	4	4	4	0	0	0	1	7	34	236	270
7:45 AM	7	1	4	5	3	3	3	1	1	2	0	2	2	10	36	269	305
8:00 AM	8	3	4	4	3	2	5	2	2	2	0	2	2	8	39	264	303
8:15 AM	7	4	1	2	0	4	2	1	3	4	0	2	1	12	36	289	325
8:30 AM	10	4	2	0	2	2	2	2	0	3	2	2	0	9	30	309	339
8:45 AM	11	6	4	2	6	2	2	2	4	2	0	1	3	9	43	268	311
9:00 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
4:00 PM	56	14	11	8	7	5	1	1	2	1	1	0	1	0	51	108	159
4:15 PM	42	15	10	5	5	3	1	2	1	2	1	1	1	2	48	133	181
4:30 PM	68	17	15	5	6	1	0	0	0	0	2	1	0	0	47	67	114
4:45 PM	73	19	14	6	6	2	3	1	1	0	0	0	1	1	51	95	146
5:00 PM	88	13	8	4	2	1	1	0	0	1	0	0	0	0	28	32	60
5:15 PM	81	17	4	2	1	4	1	2	0	0	3	0	0	0	30	63	93
5:30 PM	84	25	18	5	0	2	1	3	1	0	0	0	0	0	54	58	112
5:45 PM	50	21	17	10	2	3	1	1	3	0	0	0	0	2	53	103	156
6:00 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
AM Peak	58	19	12	17	10	8	15	11	4	4	4	1	5	6	146	1002	1148
PM Peak	303	76	47	21	5	10	4	6	4	4	1	3	0	2	165	256	421

Study Name King of Prussia Rd/Septa Driveway
Start Date 04/27/2016
Start Time 7:00 AM

Southbound Left from Major

	2.0 - 4.0	4.0 - 6.0	6.0 - 8.0	8.0 - 10.0	10.0 - 12.0	12.0 - 14.0	14.0 - 16.0	16.0 - 18.0	18.0 - 20.0	20.0 - 22.0	22.0 - 24.0	24.0 - 26.0	26.0 - 28.0	28.0 - 131.6	Critical Gaps (4.1 sec)	Follow-up Gaps (2.2 sec)	Total Gaps
7:00 AM	44	9	9	2	3	2	3	2	2	1	2	1	0	5	41	166	207
7:15 AM	84	14	11	3	1	2	0	0	0	3	2	0	0	2	37	88	125
7:30 AM	95	5	8	3	0	2	1	0	0	0	0	0	0	1	19	38	57
7:45 AM	108	15	4	2	1	1	0	0	1	1	0	0	1	0	25	28	53
8:00 AM	107	16	5	3	2	0	0	2	1	0	0	0	0	1	30	41	71
8:15 AM	107	16	4	1	2	1	1	0	1	0	0	0	0	0	25	25	50
8:30 AM	90	16	5	4	3	0	2	0	2	0	0	1	0	1	34	71	105
8:45 AM	76	15	5	2	4	3	2	2	1	0	0	0	0	0	34	71	105
9:00 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
4:00 PM	16	7	10	9	2	2	6	1	2	1	1	3	2	5	54	240	294
4:15 PM	14	9	5	8	3	2	5	1	1	2	4	1	1	7	49	239	288
4:30 PM	26	5	4	5	5	3	1	2	0	0	0	0	0	12	39	261	300
4:45 PM	18	11	8	4	4	0	0	2	2	2	2	1	1	10	46	237	283
5:00 PM	12	3	5	1	2	3	5	4	3	3	3	1	0	7	38	285	323
5:15 PM	17	5	4	1	3	5	2	2	1	2	5	1	1	7	38	260	298
5:30 PM	9	5	7	6	2	3	3	3	3	3	3	1	3	7	48	262	310
5:45 PM	12	8	5	7	5	2	4	2	0	1	2	1	3	7	47	249	296
6:00 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
AM Peak	394	50	28	11	4	5	1	2	5	2	2	0	1	4	111	195	306
PM Peak	50	21	21	15	12	13	14	11	7	9	11	3	8	28	171	1056	1227

Study Name King of Prussia Rd/Septa Driveway
Start Date 04/27/2016
Start Time 7:00 AM

Eastbound Right from Minor

	2.0 - 4.0	4.0 - 6.0	6.0 - 8.0	8.0 - 10.0	10.0 - 12.0	12.0 - 14.0	14.0 - 16.0	16.0 - 18.0	18.0 - 20.0	20.0 - 22.0	22.0 - 24.0	24.0 - 26.0	26.0 - 28.0	28.0 - 31.6	Critical Gaps (6.2 sec)	Follow-up Gaps (3.3 sec)	Total Gaps
7:00 AM	6	2	4	4	3	3	2	3	4	2	0	2	2	11	36	162	198
7:15 AM	24	9	1	5	2	0	3	4	4	0	1	1	1	9	28	132	160
7:30 AM	19	6	3	3	2	3	4	4	4	0	0	0	1	7	28	134	162
7:45 AM	7	1	4	5	3	3	3	1	2	2	0	2	2	10	35	151	186
8:00 AM	8	3	4	4	3	2	5	2	2	2	0	2	2	8	36	146	182
8:15 AM	7	4	1	2	0	4	2	1	3	4	0	2	1	12	32	166	198
8:30 AM	10	4	2	0	2	2	2	2	0	3	2	2	0	9	26	183	209
8:45 AM	11	6	4	2	6	2	2	2	4	2	0	1	3	9	37	150	187
9:00 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
9:15 AM	56	14	11	8	7	5	1	1	2	1	1	0	1	0	38	44	82
9:30 AM	42	15	10	5	5	3	1	2	1	2	1	1	1	2	34	64	98
9:45 AM	68	17	15	5	6	1	0	0	0	0	2	1	0	0	28	25	53
10:00 AM	73	19	14	6	6	2	3	1	1	0	0	0	1	1	34	37	71
10:15 AM	88	13	8	4	2	1	1	0	0	1	0	0	0	0	17	9	26
10:30 AM	81	17	4	2	1	4	1	2	0	0	3	0	0	0	16	29	45
10:45 AM	84	25	18	5	0	2	1	3	1	0	0	0	0	0	29	18	47
11:00 AM	50	21	17	10	2	3	1	1	3	0	0	0	0	2	37	42	79
11:15 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
AM Peak	58	19	12	17	10	8	15	11	4	4	4	1	5	6	127	563	690
PM Peak	303	76	47	21	5	10	4	6	4	4	1	3	0	2	99	98	197

Study Name King of Prussia Rd/Septa Driveway
Start Date 04/27/2016
Start Time 7:00 AM

Westbound Right from Minor

	2.0 - 4.0	4.0 - 6.0	6.0 - 8.0	8.0 - 10.0	10.0 - 12.0	12.0 - 14.0	14.0 - 16.0	16.0 - 18.0	18.0 - 20.0	20.0 - 22.0	22.0 - 24.0	24.0 - 26.0	26.0 - 28.0	28.0 - 31.6	Critical Gaps (6.2 sec)	Follow-up Gaps (3.3 sec)	Total Gaps
7:00 AM	44	9	9	2	3	2	3	2	1	2	1	1	0	5	33	86	119
7:15 AM	84	14	11	3	1	2	0	0	0	2	0	0	0	2	24	41	65
7:30 AM	95	5	8	3	0	2	1	0	0	0	0	0	0	1	15	15	30
7:45 AM	108	15	4	2	1	1	0	0	1	0	0	0	1	0	10	12	22
8:00 AM	107	16	5	3	2	0	0	2	1	0	0	0	0	1	13	19	32
8:15 AM	107	16	4	1	2	1	1	0	1	0	0	0	0	0	9	9	18
8:30 AM	90	16	5	4	3	0	2	0	2	0	0	1	0	1	17	32	49
8:45 AM	76	15	5	2	4	3	2	2	1	0	0	2	0	0	19	31	50
9:00 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
4:00 PM	16	7	10	9	2	2	6	1	2	1	3	2	5	5	46	125	171
4:15 PM	14	9	5	8	3	2	5	1	1	2	4	1	1	7	39	130	169
4:30 PM	26	5	4	5	5	3	1	2	0	2	0	0	0	12	34	148	182
4:45 PM	18	11	8	4	4	0	0	2	2	2	2	1	1	10	36	130	166
5:00 PM	12	3	5	1	2	3	5	4	3	3	3	1	0	7	34	164	198
5:15 PM	17	5	4	1	3	5	2	2	1	2	5	1	1	7	34	146	180
5:30 PM	9	5	7	6	2	3	3	3	3	3	3	3	3	7	42	139	181
5:45 PM	12	8	5	7	5	2	4	2	0	1	2	1	3	7	37	137	174
6:00 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
AM Peak	394	50	28	11	4	5	1	2	5	2	0	0	1	4	62	87	149
PM Peak	50	21	21	15	12	13	14	11	7	9	11	3	8	28	147	586	733

Study Name King of Prussia Rd/Septa Driveway
Start Date 04/27/2016
Start Time 7:00 AM

Through Traffic on Minor

	2.0 - 4.0	4.0 - 6.0	6.0 - 8.0	8.0 - 10.0	10.0 - 12.0	12.0 - 14.0	14.0 - 16.0	16.0 - 18.0	18.0 - 20.0	20.0 - 22.0	22.0 - 24.0	24.0 - 26.0	26.0 - 28.0	28.0 - 31.6	Critical Gaps (6.5 sec)	Follow-up Gaps (4.0 sec)	Total Gaps
7:00 AM	41	13	11	7	7	6	1	1	3	1	0	0	0	2	35	35	70
7:15 AM	88	13	4	1	2	1	2	0	0	1	0	0	0	1	12	12	24
7:30 AM	92	7	6	1	1	1	0	0	0	0	0	0	0	0	8	2	10
7:45 AM	102	9	3	3	0	0	0	0	0	0	0	0	1	0	5	4	9
8:00 AM	97	10	4	2	1	1	0	1	1	0	0	0	0	0	8	6	14
8:15 AM	100	14	2	1	0	1	1	1	0	0	0	0	0	0	6	5	11
8:30 AM	100	19	5	3	0	0	2	0	2	1	0	0	0	0	10	13	23
8:45 AM	82	17	5	3	4	3	0	0	1	1	1	0	0	0	15	16	31
9:00 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
4:00 PM	70	16	13	9	5	2	0	2	0	0	0	0	0	0	30	10	40
4:15 PM	56	21	12	6	3	3	4	1	2	0	0	0	0	0	26	18	44
4:30 PM	79	13	13	2	3	1	0	0	0	1	1	0	0	0	20	10	30
4:45 PM	92	21	14	5	2	0	1	1	0	0	0	0	1	1	22	15	37
5:00 PM	69	14	6	3	2	1	2	0	0	0	0	0	0	0	13	6	19
5:15 PM	87	14	5	3	1	4	2	1	0	0	0	0	0	0	13	11	24
5:30 PM	95	20	14	4	3	1	0	2	0	0	0	0	0	0	20	8	28
5:45 PM	60	18	17	7	3	2	2	0	2	1	0	0	0	0	29	17	46
6:00 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
AM Peak	379	39	17	7	4	3	2	1	1	1	0	0	1	1	33	24	57
PM Peak	311	66	42	17	9	8	6	3	2	1	0	0	0	0	75	42	117

Study Name King of Prussia Rd/Septa Driveway
Start Date 04/27/2016
Start Time 7:00 AM

Left from Minor

	2.0 - 4.0	4.0 - 6.0	6.0 - 8.0	8.0 - 10.0	10.0 - 12.0	12.0 - 14.0	14.0 - 16.0	16.0 - 18.0	18.0 - 20.0	20.0 - 22.0	22.0 - 24.0	24.0 - 26.0	26.0 - 28.0	28.0 - 31.6	Critical Gaps (7.1 sec)	Follow-up Gaps (3.5 sec)	Total Gaps
7:00 AM	41	13	11	7	7	6	1	1	3	1	0	0	0	2	31	40	71
7:15 AM	88	13	4	1	2	1	2	0	0	1	0	0	0	1	10	15	25
7:30 AM	92	7	6	1	1	1	0	0	0	0	0	0	0	0	7	2	9
7:45 AM	102	9	3	3	0	0	0	0	0	0	0	0	1	0	5	5	10
8:00 AM	97	10	4	2	1	1	0	1	1	0	0	0	0	0	8	7	15
8:15 AM	100	14	2	1	0	1	1	1	0	0	0	0	0	0	4	5	9
8:30 AM	100	19	5	3	0	0	2	0	2	1	0	0	0	0	9	14	23
8:45 AM	82	17	5	3	4	3	0	0	1	1	1	0	0	0	13	17	30
9:00 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
4:00 PM	70	16	13	9	5	2	0	2	0	0	0	0	0	0	24	10	34
4:15 PM	56	21	12	6	3	3	4	1	2	0	0	0	0	0	21	20	41
4:30 PM	79	13	13	2	3	1	0	0	1	1	1	0	0	0	16	12	28
4:45 PM	92	21	14	5	2	0	1	1	0	0	0	0	1	1	15	16	31
5:00 PM	69	14	6	3	2	1	2	0	0	0	0	0	0	0	7	18	24
5:15 PM	87	14	5	3	1	4	2	1	0	0	0	0	0	0	12	12	24
5:30 PM	95	20	14	4	3	1	0	2	0	0	0	0	0	0	15	8	23
5:45 PM	60	18	17	7	3	2	2	0	2	1	0	0	0	0	23	16	39
6:00 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
AM Peak	379	39	17	7	4	3	2	1	1	1	0	0	1	1	30	29	59
PM Peak	311	66	42	17	9	8	6	3	2	1	0	0	0	0	61	43	104

Study Name King of Prussia Rd South Driveway Gap
Start Date 04/27/2016
Start Time 7:00 AM

Northbound Left from Major

	2.0 - 4.0	4.0 - 6.0	6.0 - 8.0	8.0 - 10.0	10.0 - 12.0	12.0 - 14.0	14.0 - 16.0	16.0 - 18.0	18.0 - 20.0	20.0 - 22.0	22.0 - 24.0	24.0 - 26.0	26.0 - 28.0	28.0 - 139.2	Critical Gaps (4.1 sec)	Follow-up Gaps (2.2 sec)	Total Gaps
7:00 AM	4	3	2	6	4	1	1	2	1	2	0	0	1	11	34	308	342
7:15 AM	17	10	9	5	6	3	3	1	0	1	0	0	1	9	47	237	284
7:30 AM	10	8	3	0	3	2	2	0	0	1	0	0	1	12	34	279	313
7:45 AM	9	0	3	5	2	2	4	0	0	3	1	2	0	9	31	282	313
8:00 AM	10	2	2	5	3	4	3	4	2	0	0	0	3	11	39	289	328
8:15 AM	4	3	4	2	1	3	0	3	2	2	3	0	4	10	34	283	317
8:30 AM	6	3	3	1	3	0	3	2	2	2	2	0	1	10	31	310	341
8:45 AM	12	6	1	4	2	5	1	4	5	0	1	1	1	9	40	276	316
9:00 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
4:00 PM	55	16	10	12	4	5	3	1	1	0	2	1	0	0	53	103	156
4:15 PM	30	19	10	5	5	2	1	2	1	1	2	1	1	2	52	135	187
4:30 PM	56	12	13	4	2	1	3	0	0	1	0	2	0	2	39	102	141
4:45 PM	35	10	13	8	6	4	1	3	0	0	0	0	0	2	48	117	165
5:00 PM	73	16	4	3	2	1	0	0	0	0	0	1	0	0	27	26	53
5:15 PM	65	14	5	1	1	3	2	1	1	2	1	0	0	1	30	70	100
5:30 PM	69	24	13	9	1	3	0	3	0	0	0	0	0	0	52	53	105
5:45 PM	57	23	13	6	5	1	1	3	2	0	0	0	0	2	54	92	146
6:00 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
AM Peak	46	20	17	15	14	11	10	4	10	3	2	0	5	41	151	1087	1238
PM Peak	264	77	35	19	9	8	3	7	3	2	1	1	0	3	163	241	404

Study Name King of Prussia Rd South Driveway Gap
Start Date 04/27/2016
Start Time 7:00 AM

Southbound Left from Major

	2.0 - 4.0	4.0 - 6.0	6.0 - 8.0	8.0 - 10.0	10.0 - 12.0	12.0 - 14.0	14.0 - 16.0	16.0 - 18.0	18.0 - 20.0	20.0 - 22.0	22.0 - 24.0	24.0 - 26.0	26.0 - 28.0	28.0 - 139.2	Critical Gaps (4.1 sec)	Follow-up Gaps (2.2 sec)	Total Gaps	
7:00 AM	50	11	5	2	6	1	2	0	0	4	0	0	0	1	3	37	117	154
7:15 AM	86	8	9	3	0	1	0	0	0	0	0	0	0	0	0	21	40	40
7:30 AM	114	4	1	1	0	2	0	0	0	0	0	0	0	0	0	8	11	19
7:45 AM	127	13	2	0	1	0	0	0	0	1	0	0	0	0	16	16	10	26
8:00 AM	102	10	5	6	3	1	1	1	0	1	0	0	0	1	27	27	54	81
8:15 AM	96	12	5	2	3	1	2	0	1	0	0	1	1	1	26	26	55	81
8:30 AM	85	12	7	5	4	2	1	1	3	0	0	1	1	1	36	36	95	131
8:45 AM	72	10	8	5	2	2	2	1	3	1	1	0	1	1	36	36	94	130
9:00 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
4:00 PM	16	14	7	4	2	3	4	2	1	3	3	1	4	5	52	219	271	271
4:15 PM	19	1	6	2	1	4	4	9	3	0	0	1	1	7	39	259	288	288
4:30 PM	30	9	6	5	2	2	2	2	1	1	1	3	0	8	41	221	262	262
4:45 PM	20	6	6	3	1	3	4	1	3	3	1	0	0	9	40	230	270	270
5:00 PM	14	5	5	1	8	1	3	5	3	5	1	0	1	6	43	245	288	288
5:15 PM	22	5	4	3	6	3	4	2	0	3	3	2	1	6	42	246	288	288
5:30 PM	16	8	5	1	3	2	5	2	3	2	2	3	1	5	42	219	261	261
5:45 PM	17	9	8	2	5	2	3	3	1	2	4	1	0	6	46	223	269	269
6:00 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
AM Peak	429	35	17	10	4	4	1	1	0	2	0	0	0	1	72	94	166	166
PM Peak	69	27	22	7	22	8	15	12	7	12	10	6	3	23	173	933	1106	1106

Study Name King of Prussia Rd South Driveway Gap
Start Date 04/27/2016
Start Time 7:00 AM

Eastbound Right from Minor

	2.0 - 4.0	4.0 - 6.0	6.0 - 8.0	8.0 - 10.0	10.0 - 12.0	12.0 - 14.0	14.0 - 16.0	16.0 - 18.0	18.0 - 20.0	20.0 - 22.0	22.0 - 24.0	24.0 - 26.0	26.0 - 28.0	28.0 - 139.2	Critical Gaps (6.2 sec)	Follow-up Gaps (3.3 sec)	Total Gaps
7:00 AM	4	3	2	6	4	1	1	2	1	2	0	0	1	11	30	182	212
7:15 AM	17	10	9	5	6	3	3	1	0	1	0	0	1	9	37	131	168
7:30 AM	10	8	3	0	3	2	2	0	0	1	0	0	1	12	26	166	192
7:45 AM	9	0	3	5	2	2	4	0	0	3	2	0	0	9	30	165	195
8:00 AM	10	2	2	5	3	4	3	4	2	0	0	0	3	11	37	162	199
8:15 AM	4	3	4	2	1	3	0	3	2	2	3	0	4	10	32	165	197
8:30 AM	6	3	3	1	3	0	3	2	2	2	2	0	1	10	29	185	214
8:45 AM	12	6	1	4	2	5	1	4	5	0	1	1	1	9	33	160	193
9:00 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
4:00 PM	55	16	10	12	4	5	3	1	1	0	2	1	0	0	36	39	75
4:15 PM	30	19	10	5	5	2	1	2	1	1	2	1	1	2	33	63	96
4:30 PM	56	12	13	4	2	1	3	0	0	1	0	2	0	2	28	47	75
4:45 PM	35	10	13	8	6	4	1	3	0	0	0	0	0	2	36	50	86
5:00 PM	73	16	4	3	2	1	0	0	0	0	0	1	0	0	10	9	19
5:15 PM	65	14	5	1	1	3	2	1	1	2	1	0	0	1	17	33	50
5:30 PM	69	24	13	9	1	3	0	3	0	0	0	0	0	0	27	17	44
5:45 PM	57	23	13	6	5	1	1	3	2	0	0	0	0	2	31	38	69
6:00 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
AM Peak	46	20	17	15	14	11	10	4	10	3	2	0	5	41	130	624	754
PM Peak	264	77	35	19	9	8	3	7	3	2	1	1	0	3	85	97	182

Study Name King of Prussia Rd South Driveway Gap
Start Date 04/27/2016
Start Time 7:00 AM

Westbound Right from Minor

	2.0 - 4.0	4.0 - 6.0	6.0 - 8.0	8.0 - 10.0	10.0 - 12.0	12.0 - 14.0	14.0 - 16.0	16.0 - 18.0	18.0 - 20.0	20.0 - 22.0	22.0 - 24.0	24.0 - 26.0	26.0 - 28.0	28.0 - 139.2	Critical Gaps (6.2 sec)	Follow-up Gaps (3.3 sec)	Total Gaps	
7:00 AM	50	11	5	2	6	1	2	0	0	2	4	0	0	1	3	24	61	85
7:15 AM	86	8	9	3	0	1	0	0	0	0	0	0	0	0	0	13	3	16
7:30 AM	114	4	1	1	0	2	0	0	0	0	0	0	0	0	0	4	4	8
7:45 AM	127	13	2	0	1	0	0	0	0	0	1	0	0	0	0	4	5	9
8:00 AM	102	10	5	6	3	1	1	1	0	0	1	0	0	1	18	18	24	42
8:15 AM	96	12	5	2	3	1	2	0	0	0	0	0	1	1	16	16	24	40
8:30 AM	85	12	7	5	4	2	1	1	3	0	0	1	1	1	26	26	44	70
8:45 AM	72	10	8	5	2	2	2	1	3	1	1	0	1	1	26	26	44	70
9:00 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
9:15 AM	16	14	7	4	2	3	4	2	1	3	3	3	1	4	38	38	118	156
9:30 AM	19	1	6	2	1	4	4	9	3	0	0	0	1	1	7	38	142	180
9:45 AM	30	9	6	5	2	2	2	2	1	1	1	3	0	8	33	33	123	156
10:00 AM	20	6	6	3	1	3	4	1	3	3	3	1	0	9	33	33	126	159
10:15 AM	14	5	5	1	8	1	3	5	3	5	5	1	0	1	38	38	136	174
10:30 AM	22	5	4	3	6	3	4	2	0	3	3	3	2	1	6	36	135	171
10:45 AM	16	8	5	1	3	2	5	2	3	2	2	3	1	5	34	34	118	152
11:00 AM	17	9	8	2	5	2	3	3	3	1	2	4	1	6	36	36	121	157
11:15 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
AM Peak	429	35	17	10	4	4	1	1	0	2	2	0	0	1	39	36	75	75
PM Peak	69	27	22	7	22	8	15	12	7	12	10	6	3	23	144	510	654	

Study Name King of Prussia Rd South Driveway Gap
Start Date 04/27/2016
Start Time 7:00 AM

Through Traffic on Minor

	2.0 - 4.0	4.0 - 6.0	6.0 - 8.0	8.0 - 10.0	10.0 - 12.0	12.0 - 14.0	14.0 - 16.0	16.0 - 18.0	18.0 - 20.0	20.0 - 22.0	22.0 - 24.0	24.0 - 26.0	26.0 - 28.0	28.0 - 139.2	Critical Gaps (6.5 sec)	Follow-up Gaps (4.0 sec)	Total Gaps	
7:00 AM	48	17	6	2	6	0	4	2	1	2	0	0	0	1	1	24	34	58
7:15 AM	77	7	6	2	0	0	0	0	0	0	0	0	0	0	0	7	0	7
7:30 AM	102	3	3	1	0	1	0	0	0	0	0	0	0	0	0	3	1	4
7:45 AM	108	12	1	1	0	0	0	0	1	0	0	0	0	0	0	2	3	5
8:00 AM	94	11	6	7	1	1	0	0	1	1	0	0	0	0	15	8	23	
8:15 AM	90	13	6	2	2	2	1	0	0	0	1	0	1	0	14	13	27	
8:30 AM	93	13	6	6	7	2	2	0	0	0	0	0	0	1	21	15	36	
8:45 AM	79	15	7	9	3	0	1	3	0	0	2	0	0	0	25	17	42	
9:00 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
4:00 PM	62	23	9	9	1	2	3	0	0	1	1	0	0	0	19	15	34	
4:15 PM	43	18	10	5	7	7	2	2	0	1	0	0	0	0	30	21	51	
4:30 PM	66	16	12	4	3	0	1	0	0	0	1	0	0	1	18	10	28	
4:45 PM	47	16	12	3	4	2	2	0	1	0	1	0	0	1	21	22	43	
5:00 PM	63	11	3	3	0	1	0	0	0	0	0	1	0	0	5	5	10	
5:15 PM	68	12	3	4	0	2	2	1	0	1	0	0	1	0	13	13	26	
5:30 PM	81	22	9	5	2	0	1	0	0	0	0	0	0	0	13	4	17	
5:45 PM	78	23	11	3	2	2	1	0	1	1	0	0	0	0	18	12	30	
6:00 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
AM Peak	381	33	16	11	1	2	0	0	2	1	0	0	0	0	27	12	39	
PM Peak	290	68	26	15	4	5	4	1	1	2	0	1	1	0	49	34	83	

Study Name King of Prussia Rd South Driveway Gap
Start Date 04/27/2016
Start Time 7:00 AM

Left from Minor

	2.0 - 4.0	4.0 - 6.0	6.0 - 8.0	8.0 - 10.0	10.0 - 12.0	12.0 - 14.0	14.0 - 16.0	16.0 - 18.0	18.0 - 20.0	20.0 - 22.0	22.0 - 24.0	24.0 - 26.0	26.0 - 28.0	28.0 - 139.2	Critical Gaps (7.1 sec)	Follow-up Gaps (3.5 sec)	Total Gaps
7:00 AM	48	17	6	2	6	0	4	2	1	2	0	0	0	1	1	23	62
7:15 AM	77	7	6	2	0	0	0	0	0	0	0	0	0	0	0	4	4
7:30 AM	102	3	3	1	0	1	0	0	0	0	0	0	0	0	0	2	3
7:45 AM	108	12	1	1	0	0	0	0	1	0	0	0	0	0	0	2	5
8:00 AM	94	11	6	7	1	1	0	0	1	1	0	0	0	0	13	8	21
8:15 AM	90	13	6	2	2	2	1	0	0	0	1	0	1	0	11	14	25
8:30 AM	93	13	6	6	7	2	2	0	0	0	0	0	0	1	20	15	35
8:45 AM	79	15	7	9	3	0	1	3	0	0	2	0	0	0	19	19	38
9:00 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
9:15 AM	62	23	9	9	1	2	3	0	0	1	1	0	0	0	18	17	35
9:30 AM	43	18	10	5	7	7	2	2	0	1	0	0	0	0	29	51	22
9:45 AM	66	16	12	4	3	0	1	0	0	0	1	0	0	1	14	12	26
10:00 AM	47	16	12	3	4	2	2	0	1	0	1	0	0	1	15	24	39
10:15 AM	63	11	3	3	0	1	0	0	0	0	0	1	0	0	5	10	29
10:30 AM	68	12	3	4	0	2	2	1	0	1	0	0	1	0	13	16	29
10:45 AM	81	22	9	5	2	0	1	0	0	0	0	0	0	0	9	4	13
11:00 AM	78	23	11	3	2	2	1	0	1	1	0	0	0	0	15	13	28
11:15 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
AM Peak	381	33	16	11	1	2	0	0	2	1	0	0	0	0	21	12	33
PM Peak	290	68	26	15	4	5	4	1	1	2	0	1	1	0	42	38	80



www.TSTData.com
184 Baker Rd

Coatesville, Pennsylvania, United States 19320
610-466-1469
Serving Transportation Professionals Since 1995


Montgomery County, PA
King of Prussia Rd/Driveway (Septa)
Thursday, September 8, 2016
Location: 40.041752, -
75.355913

Count Name: King of Prussia Rd / Driveway
Site Code:
Start Date: 09/08/2016
Page No: 1

Turning Movement Data

Start Time	King of Prussia Rd Southbound					Driveway Westbound					King of Prussia Rd Northbound					Int. Total
	Thru	Left	U-Turn	Peds	App. Total	Right	Left	U-Turn	Peds	App. Total	Right	Thru	U-Turn	Peds	App. Total	
7:00 AM	49	13	0	3	62	2	1	0	5	3	5	204	0	2	209	274
7:15 AM	97	13	0	5	110	5	1	0	3	6	12	245	0	0	257	373
7:30 AM	51	14	0	5	65	8	2	0	2	10	11	210	0	0	221	296
7:45 AM	52	14	0	1	66	4	0	0	3	4	13	236	0	2	249	319
Hourly Total	249	54	0	14	303	19	4	0	13	23	41	895	0	4	936	1262
8:00 AM	42	19	0	6	61	9	2	0	2	11	20	242	0	0	262	334
8:15 AM	44	9	0	3	53	5	1	0	1	6	10	246	0	0	256	315
8:30 AM	49	9	0	5	58	5	0	0	2	5	4	224	0	0	228	291
8:45 AM	54	5	0	3	59	3	0	0	1	3	3	263	0	0	266	328
Hourly Total	189	42	0	17	231	22	3	0	6	25	37	975	0	0	1012	1268
9:00 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
*** BREAK ***	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Hourly Total	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
4:00 PM	194	7	0	2	201	11	6	0	1	17	0	94	0	2	94	312
4:15 PM	164	5	0	1	169	9	4	0	0	13	0	89	0	0	89	271
4:30 PM	201	6	0	0	207	16	14	0	17	30	0	98	0	18	98	335
4:45 PM	191	5	0	1	196	5	8	0	3	13	0	77	0	0	77	286
Hourly Total	750	23	0	4	773	41	32	0	21	73	0	358	0	20	358	1204
5:00 PM	285	11	0	5	296	14	21	0	2	35	1	73	0	0	74	405
5:15 PM	221	6	1	0	228	8	5	0	4	13	0	90	0	7	90	331
5:30 PM	227	8	0	1	235	12	7	0	1	19	0	85	0	0	85	339
5:45 PM	207	4	0	0	211	7	0	0	1	7	0	86	0	0	86	304
Hourly Total	940	29	1	6	970	41	33	0	8	74	1	334	0	7	335	1379
6:00 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Grand Total	2128	148	1	41	2277	123	72	0	48	195	79	2562	0	31	2641	5113
Approach %	93.5	6.5	0.0	-	-	63.1	36.9	0.0	-	-	3.0	97.0	0.0	-	-	-
Total %	41.6	2.9	0.0	-	44.5	2.4	1.4	0.0	-	3.8	1.5	50.1	0.0	-	51.7	-
Lights	2094	117	1	-	2212	90	70	0	-	160	77	2496	0	-	2573	4945
% Lights	98.4	79.1	100.0	-	97.1	73.2	97.2	-	-	82.1	97.5	97.4	-	-	97.4	96.7
Buses	30	30	0	-	60	33	0	0	-	33	0	55	0	-	55	148
% Buses	1.4	20.3	0.0	-	2.6	26.8	0.0	-	-	16.9	0.0	2.1	-	-	2.1	2.9
Trucks	4	1	0	-	5	0	2	0	-	2	2	11	0	-	13	20
% Trucks	0.2	0.7	0.0	-	0.2	0.0	2.8	-	-	1.0	2.5	0.4	-	-	0.5	0.4
Bicycles on Crosswalk	-	-	-	0	-	-	-	-	0	-	-	-	-	0	-	-
% Bicycles on Crosswalk	-	-	-	0.0	-	-	-	-	0.0	-	-	-	-	0.0	-	-
Pedestrians	-	-	-	41	-	-	-	-	48	-	-	-	-	31	-	-
% Pedestrians	-	-	-	100.0	-	-	-	-	100.0	-	-	-	-	100.0	-	-

Montgomery County, PA
King of Prussia Rd/Driveway (Septa)
Thursday, September 8, 2016
Location: 40.041752, -
75.355913

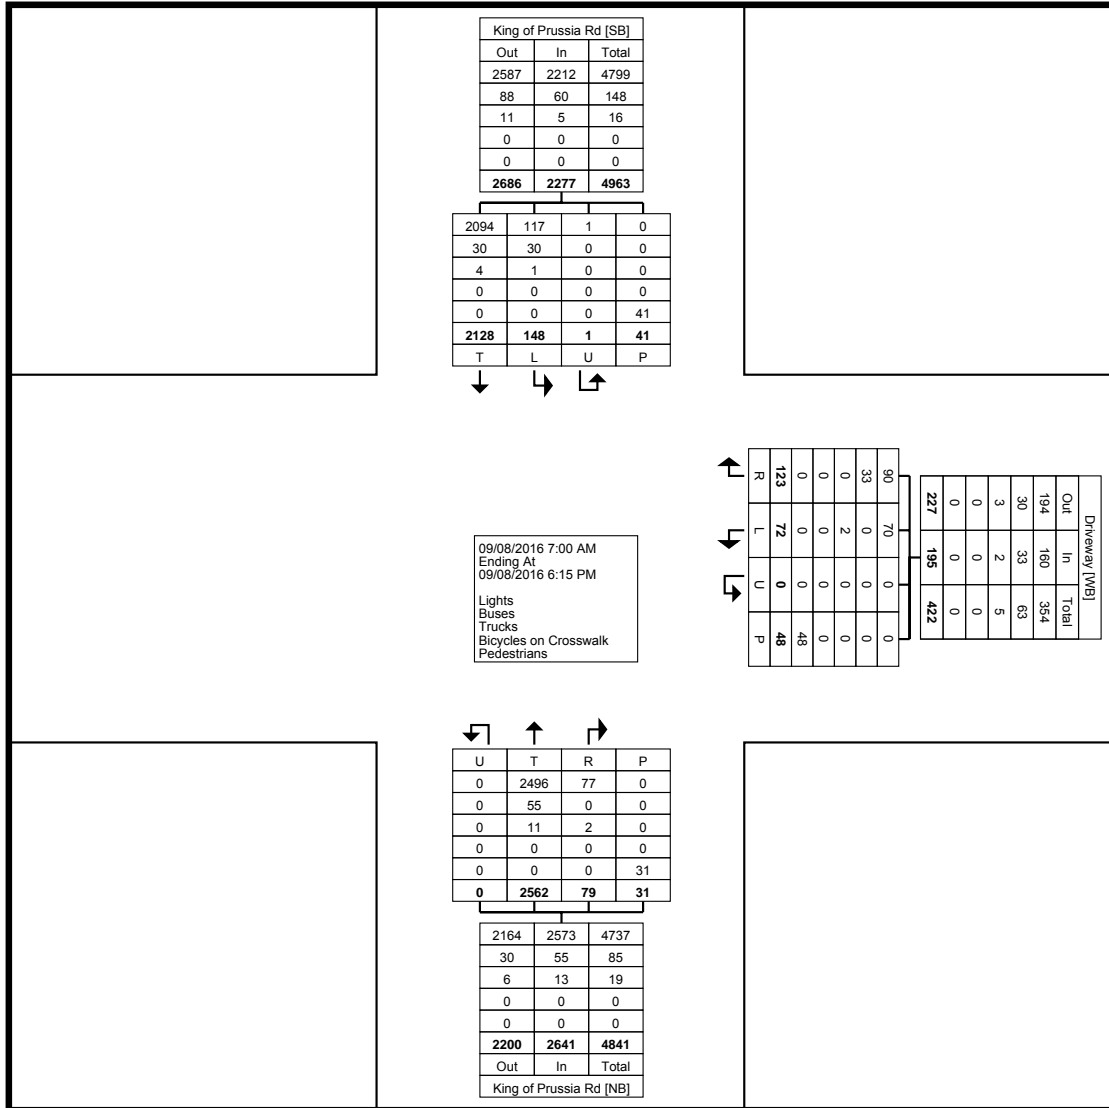

Turning Movement Data Plot



www.TSTData.com
184 Baker Rd

Coatesville, Pennsylvania, United States 19320
610-466-1469
Serving Transportation Professionals Since 1995


Montgomery County, PA
King of Prussia Rd/Driveway (Septa)
Thursday, September 8, 2016
Location: 40.041752, -
75.355913

Count Name: King of Prussia Rd / Driveway
Site Code:
Start Date: 09/08/2016
Page No: 3

Turning Movement Peak Hour Data (7:15 AM)

Start Time	King of Prussia Rd Southbound					Driveway Westbound					King of Prussia Rd Northbound					Int. Total
	Thru	Left	U-Turn	Peds	App. Total	Right	Left	U-Turn	Peds	App. Total	Right	Thru	U-Turn	Peds	App. Total	
7:15 AM	97	13	0	5	110	5	1	0	3	6	12	245	0	0	257	373
7:30 AM	51	14	0	5	65	8	2	0	2	10	11	210	0	0	221	296
7:45 AM	52	14	0	1	66	4	0	0	3	4	13	236	0	2	249	319
8:00 AM	42	19	0	6	61	9	2	0	2	11	20	242	0	0	262	334
Total	242	60	0	17	302	26	5	0	10	31	56	933	0	2	989	1322
Approach %	80.1	19.9	0.0	-	-	83.9	16.1	0.0	-	-	5.7	94.3	0.0	-	-	-
Total %	18.3	4.5	0.0	-	22.8	2.0	0.4	0.0	-	2.3	4.2	70.6	0.0	-	74.8	-
PHF	0.624	0.789	0.000	-	0.686	0.722	0.625	0.000	-	0.705	0.700	0.952	0.000	-	0.944	0.886
Lights	231	47	0	-	278	15	5	0	-	20	56	910	0	-	966	1264
% Lights	95.5	78.3	-	-	92.1	57.7	100.0	-	-	64.5	100.0	97.5	-	-	97.7	95.6
Buses	10	12	0	-	22	11	0	0	-	11	0	20	0	-	20	53
% Buses	4.1	20.0	-	-	7.3	42.3	0.0	-	-	35.5	0.0	2.1	-	-	2.0	4.0
Trucks	1	1	0	-	2	0	0	0	-	0	0	3	0	-	3	5
% Trucks	0.4	1.7	-	-	0.7	0.0	0.0	-	-	0.0	0.0	0.3	-	-	0.3	0.4
Bicycles on Crosswalk	-	-	-	0	-	-	-	-	0	-	-	-	-	0	-	-
% Bicycles on Crosswalk	-	-	-	0.0	-	-	-	-	0.0	-	-	-	-	0.0	-	-
Pedestrians	-	-	-	17	-	-	-	-	10	-	-	-	-	2	-	-
% Pedestrians	-	-	-	100.0	-	-	-	-	100.0	-	-	-	-	100.0	-	-

Montgomery County, PA
King of Prussia Rd/Driveway (Septa)
Thursday, September 8, 2016
Location: 40.041752, -
75.355913

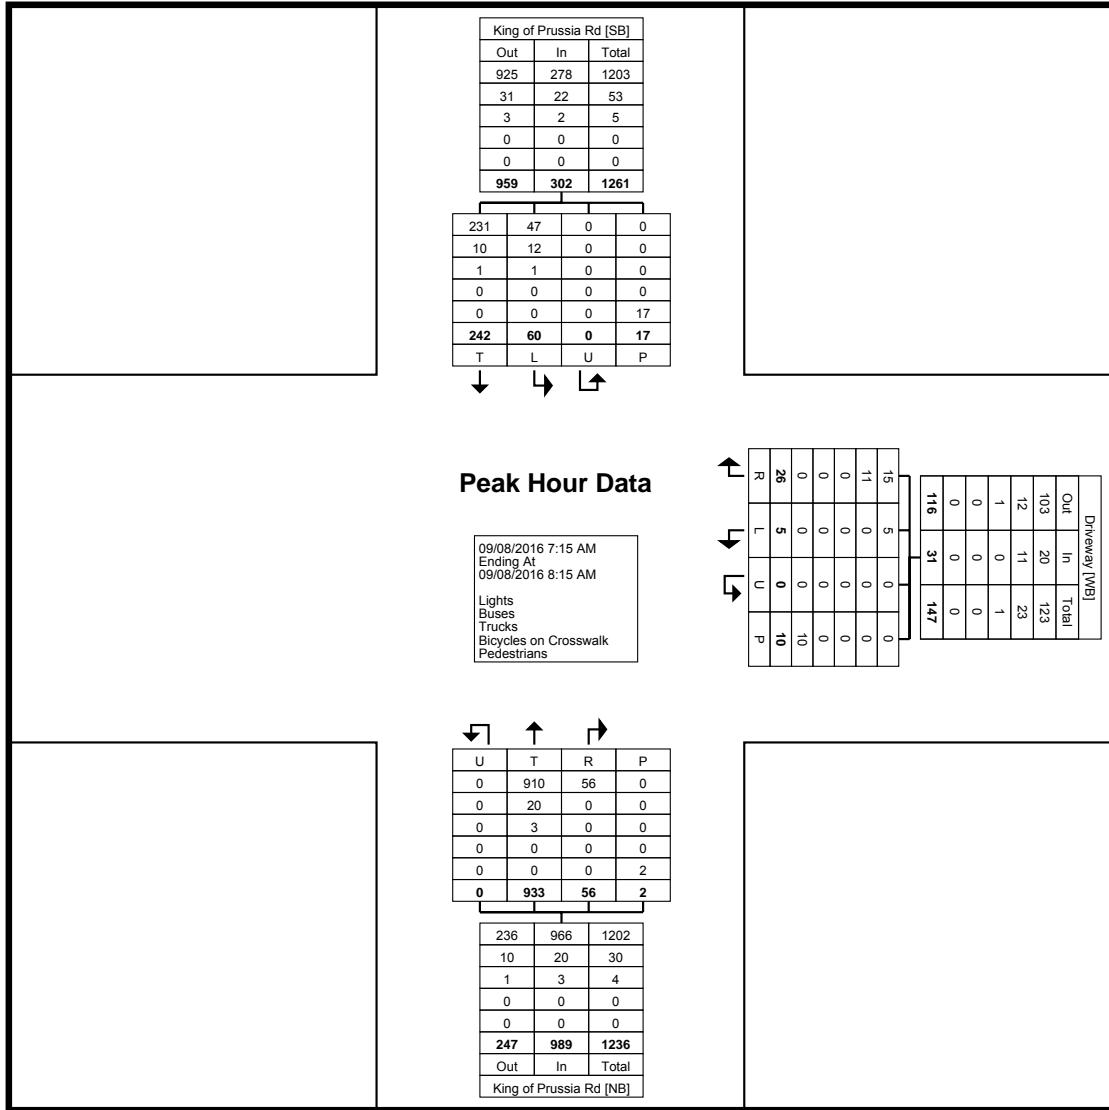

Turning Movement Peak Hour Data Plot (7:15 AM)



www.TSTData.com
184 Baker Rd


Coatesville, Pennsylvania, United States 19320
610-466-1469
Serving Transportation Professionals Since 1995

Montgomery County, PA
King of Prussia Rd/Driveway (Septa)
Thursday, September 8, 2016
Location: 40.041752, -
75.355913

Count Name: King of Prussia Rd / Driveway
Site Code:
Start Date: 09/08/2016
Page No: 5

Turning Movement Peak Hour Data (5:00 PM)

Start Time	King of Prussia Rd Southbound					Driveway Westbound					King of Prussia Rd Northbound					Int. Total
	Thru	Left	U-Turn	Peds	App. Total	Right	Left	U-Turn	Peds	App. Total	Right	Thru	U-Turn	Peds	App. Total	
5:00 PM	285	11	0	5	296	14	21	0	2	35	1	73	0	0	74	405
5:15 PM	221	6	1	0	228	8	5	0	4	13	0	90	0	7	90	331
5:30 PM	227	8	0	1	235	12	7	0	1	19	0	85	0	0	85	339
5:45 PM	207	4	0	0	211	7	0	0	1	7	0	86	0	0	86	304
Total	940	29	1	6	970	41	33	0	8	74	1	334	0	7	335	1379
Approach %	96.9	3.0	0.1	-	-	55.4	44.6	0.0	-	-	0.3	99.7	0.0	-	-	-
Total %	68.2	2.1	0.1	-	70.3	3.0	2.4	0.0	-	5.4	0.1	24.2	0.0	-	24.3	-
PHF	0.825	0.659	0.250	-	0.819	0.732	0.393	0.000	-	0.529	0.250	0.928	0.000	-	0.931	0.851
Lights	935	24	1	-	960	34	33	0	-	67	1	331	0	-	332	1359
% Lights	99.5	82.8	100.0	-	99.0	82.9	100.0	-	-	90.5	100.0	99.1	-	-	99.1	98.5
Buses	4	5	0	-	9	7	0	0	-	7	0	3	0	-	3	19
% Buses	0.4	17.2	0.0	-	0.9	17.1	0.0	-	-	9.5	0.0	0.9	-	-	0.9	1.4
Trucks	1	0	0	-	1	0	0	0	-	0	0	0	0	-	0	1
% Trucks	0.1	0.0	0.0	-	0.1	0.0	0.0	-	-	0.0	0.0	0.0	-	-	0.0	0.1
Bicycles on Crosswalk	-	-	-	0	-	-	-	-	0	-	-	-	-	0	-	-
% Bicycles on Crosswalk	-	-	-	0.0	-	-	-	-	0.0	-	-	-	-	0.0	-	-
Pedestrians	-	-	-	6	-	-	-	-	8	-	-	-	-	7	-	-
% Pedestrians	-	-	-	100.0	-	-	-	-	100.0	-	-	-	-	100.0	-	-

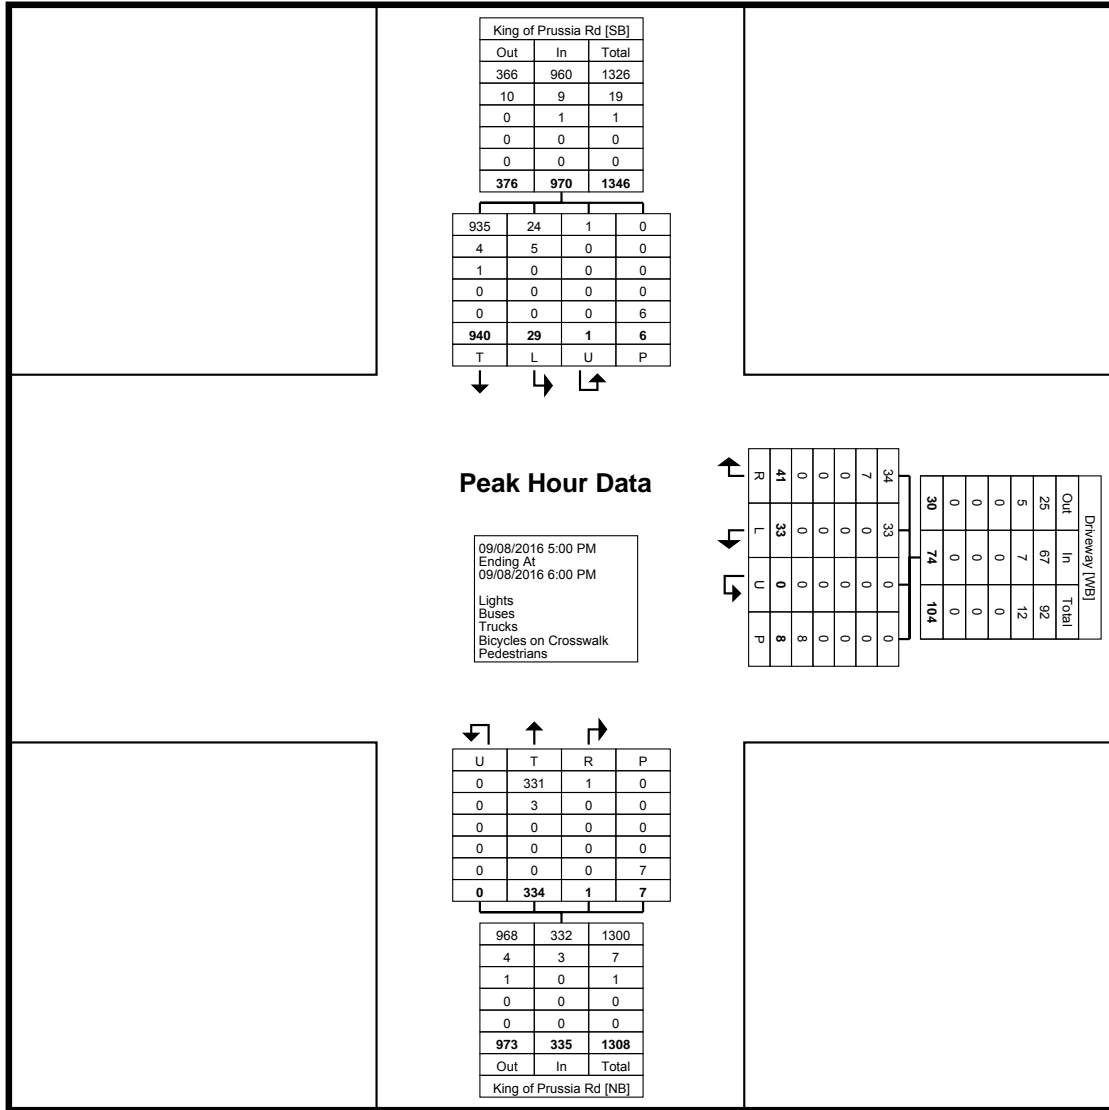

Turning Movement Peak Hour Data Plot (5:00 PM)



Montgomery County, PA
 King of Prussia Rd Northern
 Driveway
 Wednesday, April 27, 2016
 Location: 40.0417473175836, -
 75.3559260070324

www.TSTData.com
 184 Baker Rd

Coatesville, Pennsylvania, United States 19320
 610-466-1469
 Serving Transportation Professionals Since 1995

Count Name: King of Prussia
 Rd/North Driveway
 Site Code:
 Start Date: 04/27/2016
 Page No: 1

Combined Direction

Start Time	2.0 - 4.0	4.0 - 6.0	6.0 - 8.0	8.0 - 10.0	10.0 - 12.0	12.0 - 14.0	14.0 - 16.0	16.0 - 18.0	18.0 - 20.0	20.0 - 22.0	22.0 - 24.0	24.0 - 26.0	26.0 - 28.0	28.0 - 131.6	Total
7:00 AM	41	13	11	7	7	6	1	1	3	1	0	0	0	2	93
7:15 AM	88	13	4	1	2	1	2	0	0	1	0	0	0	1	113
7:30 AM	92	7	6	1	1	1	0	0	0	0	0	0	0	0	108
7:45 AM	102	9	3	3	0	0	0	0	0	0	0	0	1	0	118
8:00 AM	97	10	4	2	1	1	0	1	1	0	0	0	0	0	117
8:15 AM	100	14	2	1	0	1	1	1	0	0	0	0	0	0	120
8:30 AM	100	19	5	3	0	0	2	0	2	1	0	0	0	0	132
8:45 AM	82	17	5	3	4	3	0	0	1	1	1	0	0	0	117
9:00 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
4:00 PM	70	16	13	9	5	2	0	2	0	0	0	0	0	0	117
4:15 PM	56	21	12	6	3	3	4	1	2	0	0	0	0	0	108
4:30 PM	79	13	13	2	3	1	0	0	0	1	1	0	0	0	113
4:45 PM	92	21	14	5	2	0	1	1	0	0	0	0	1	1	138
5:00 PM	69	14	6	3	2	1	2	0	0	0	0	0	0	0	97
5:15 PM	87	14	5	3	1	4	2	1	0	0	0	0	0	0	117
5:30 PM	95	20	14	4	3	1	0	2	0	0	0	0	0	0	139
5:45 PM	60	18	17	7	3	2	2	0	2	1	0	0	0	0	112
6:00 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Total	1310	239	134	60	37	27	17	10	11	6	2	0	2	4	1859
Total %	70.5	12.9	7.2	3.2	2.0	1.5	0.9	0.5	0.6	0.3	0.1	0.0	0.1	0.2	100.0



Montgomery County, PA
 King of Prussia Rd Northern
 Driveway
 Wednesday, April 27, 2016
 Location: 40.0417473175836, -
 75.3559260070324

www.TSTData.com
 184 Baker Rd

Coatesville, Pennsylvania, United States 19320
 610-466-1469
 Serving Transportation Professionals Since 1995

Count Name: King of Prussia
 Rd/North Driveway
 Site Code:
 Start Date: 04/27/2016
 Page No: 2

Southbound (Southbound)

Start Time	2.0 - 4.0	4.0 - 6.0	6.0 - 8.0	8.0 - 10.0	10.0 - 12.0	12.0 - 14.0	14.0 - 16.0	16.0 - 18.0	18.0 - 20.0	20.0 - 22.0	22.0 - 24.0	24.0 - 26.0	26.0 - 28.0	28.0 - 131.6	Total
7:00 AM	6	2	4	4	3	3	2	3	2	0	2	2	0	11	44
7:15 AM	24	9	1	5	2	0	3	4	0	1	1	1	1	9	61
7:30 AM	19	6	3	3	2	3	4	4	0	1	0	0	1	7	53
7:45 AM	7	1	4	5	3	3	3	1	2	0	0	2	2	10	43
8:00 AM	8	3	4	4	3	2	5	2	2	2	0	2	2	8	47
8:15 AM	7	4	1	2	0	4	2	1	3	4	0	2	1	12	43
8:30 AM	10	4	2	0	2	2	2	2	0	3	2	2	0	9	40
8:45 AM	11	6	4	2	6	2	2	2	4	2	0	1	3	9	54
9:00 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
4:00 PM	56	14	11	8	7	5	1	1	2	1	1	0	1	0	108
4:15 PM	42	15	10	5	5	3	1	2	1	2	2	1	1	2	92
4:30 PM	68	17	15	5	6	1	0	0	0	0	2	1	0	0	115
4:45 PM	73	19	14	6	6	2	3	1	1	0	0	0	1	1	127
5:00 PM	88	13	8	4	2	1	1	0	0	1	0	0	0	0	118
5:15 PM	81	17	4	2	1	4	1	2	0	0	3	0	0	0	115
5:30 PM	84	25	18	5	0	2	1	3	1	0	0	0	0	0	139
5:45 PM	50	21	17	10	2	3	1	1	3	0	0	0	0	2	110
6:00 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Total	634	176	120	70	50	40	32	29	21	17	13	14	13	80	1309
Total %	48.4	13.4	9.2	5.3	3.8	3.1	2.4	2.2	1.6	1.3	1.0	1.1	1.0	6.1	100.0



Montgomery County, PA
 King of Prussia Rd Northern
 Driveway
 Wednesday, April 27, 2016
 Location: 40.0417473175836, -
 75.3559260070324

www.TSTData.com
 184 Baker Rd

Coatesville, Pennsylvania, United States 19320
 610-466-1469
 Serving Transportation Professionals Since 1995

Count Name: King of Prussia
 Rd/North Driveway
 Site Code:
 Start Date: 04/27/2016
 Page No: 3

Northbound (Northbound)

Start Time	2.0 - 4.0	4.0 - 6.0	6.0 - 8.0	8.0 - 10.0	10.0 - 12.0	12.0 - 14.0	14.0 - 16.0	16.0 - 18.0	18.0 - 20.0	20.0 - 22.0	22.0 - 24.0	24.0 - 26.0	26.0 - 28.0	28.0 - 131.6	Total
7:00 AM	44	9	9	2	3	2	3	2	1	2	1	3	0	5	86
7:15 AM	84	14	11	3	1	2	0	0	3	2	0	0	0	2	122
7:30 AM	95	5	8	3	0	2	1	0	0	0	0	0	0	1	115
7:45 AM	108	15	4	2	1	1	0	0	1	0	0	0	1	0	133
8:00 AM	107	16	5	3	2	0	0	2	1	0	0	0	0	1	137
8:15 AM	107	16	4	1	2	1	1	0	1	0	0	0	0	0	133
8:30 AM	90	16	5	4	3	0	2	0	2	0	0	1	0	1	124
8:45 AM	76	15	5	2	4	3	2	2	1	0	0	2	0	0	112
9:00 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
4:00 PM	16	7	10	9	2	2	6	1	2	1	3	2	5	5	71
4:15 PM	14	9	5	8	3	2	5	1	1	2	4	1	1	7	63
4:30 PM	26	5	4	5	5	3	1	2	0	2	0	0	0	12	65
4:45 PM	18	11	8	4	4	0	0	2	2	2	2	1	1	10	65
5:00 PM	12	3	5	1	2	3	5	4	3	3	1	0	1	7	50
5:15 PM	17	5	4	1	3	5	2	2	1	2	5	1	1	7	56
5:30 PM	9	5	7	6	2	3	3	3	3	3	3	1	3	7	58
5:45 PM	12	8	5	7	5	2	4	2	0	1	2	1	3	7	59
6:00 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Total	835	159	99	61	42	31	35	23	22	20	21	13	16	72	1449
Total %	57.6	11.0	6.8	4.2	2.9	2.1	2.4	1.6	1.5	1.4	1.4	0.9	1.1	5.0	100.0



www.TSTData.com
184 Baker Rd

Coatesville, Pennsylvania, United States 19320
610-466-1469
Serving Transportation Professionals Since 1995

Count Name: King of Prussia Rd
South Driveway Gap
Site Code:
Start Date: 04/27/2016
Page No: 1

Montgomery County, PA
King of Prussia Rd South
Driveway
Wednesday, April 27, 2016
Location: 40.0399194154879, -
75.3558924794197

Combined Direction

Start Time	2.0 - 4.0	4.0 - 6.0	6.0 - 8.0	8.0 - 10.0	10.0 - 12.0	12.0 - 14.0	14.0 - 16.0	16.0 - 18.0	18.0 - 20.0	20.0 - 22.0	22.0 - 24.0	24.0 - 26.0	26.0 - 28.0	28.0 - 139.2	Total
7:00 AM	48	17	6	2	6	0	4	2	1	2	0	0	1	1	90
7:15 AM	77	7	6	2	0	0	0	0	0	0	0	0	0	0	92
7:30 AM	102	3	3	1	0	1	0	0	0	0	0	0	0	0	110
7:45 AM	108	12	1	1	0	0	0	0	1	0	0	0	0	0	123
8:00 AM	94	11	6	7	1	1	0	0	1	1	0	0	0	0	122
8:15 AM	90	13	6	2	2	2	1	0	0	0	1	0	1	0	118
8:30 AM	93	13	6	6	7	2	2	0	0	0	0	0	0	1	130
8:45 AM	79	15	7	9	3	0	1	3	0	0	2	0	0	0	119
9:00 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
4:00 PM	62	23	9	9	1	2	3	0	0	1	1	0	0	0	111
4:15 PM	43	18	10	5	7	7	2	2	0	1	0	0	0	0	95
4:30 PM	66	16	12	4	3	0	1	0	0	0	1	0	0	1	104
4:45 PM	47	16	12	3	4	2	2	0	1	0	1	0	0	1	89
5:00 PM	63	11	3	3	0	1	0	0	0	0	0	1	0	0	82
5:15 PM	68	12	3	4	0	2	2	1	0	1	0	0	1	0	94
5:30 PM	81	22	9	5	2	0	1	0	0	0	0	0	0	0	120
5:45 PM	78	23	11	3	2	2	1	0	1	1	0	0	0	0	122
6:00 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Total	1199	232	110	66	38	22	20	8	5	7	6	1	3	4	1721
Total %	69.7	13.5	6.4	3.8	2.2	1.3	1.2	0.5	0.3	0.4	0.3	0.1	0.2	0.2	100.0



www.TSTData.com
184 Baker Rd

Coatesville, Pennsylvania, United States 19320
610-466-1469
Serving Transportation Professionals Since 1995

Montgomery County, PA
King of Prussia Rd South
Driveway
Wednesday, April 27, 2016
Location: 40.0399194154879, -
75.3558924794197

Count Name: King of Prussia Rd
South Driveway Gap
Site Code:
Start Date: 04/27/2016
Page No: 2

Southbound (Southbound)

Start Time	2.0 - 4.0	4.0 - 6.0	6.0 - 8.0	8.0 - 10.0	10.0 - 12.0	12.0 - 14.0	14.0 - 16.0	16.0 - 18.0	18.0 - 20.0	20.0 - 22.0	22.0 - 24.0	24.0 - 26.0	26.0 - 28.0	28.0 - 139.2	Total
7:00 AM	4	3	2	6	4	1	1	2	1	2	0	0	1	11	38
7:15 AM	17	10	9	5	6	3	1	0	3	1	0	0	1	9	65
7:30 AM	10	8	3	0	3	2	2	0	2	1	0	0	1	12	44
7:45 AM	9	0	3	5	2	2	4	0	3	1	2	0	0	9	40
8:00 AM	10	2	2	5	3	4	3	4	2	0	0	0	3	11	49
8:15 AM	4	3	4	2	1	3	0	3	1	2	3	0	4	10	40
8:30 AM	6	3	3	1	3	0	3	2	2	2	2	0	1	10	38
8:45 AM	12	6	1	4	2	5	1	4	5	0	1	1	1	9	52
9:00 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
4:00 PM	55	16	10	12	4	5	3	1	1	0	2	1	0	0	110
4:15 PM	30	19	10	5	5	2	1	2	1	1	2	2	1	2	83
4:30 PM	56	12	13	4	2	1	3	0	0	1	0	2	0	2	96
4:45 PM	35	10	13	8	6	4	1	3	0	0	0	1	0	2	83
5:00 PM	73	16	4	3	2	1	0	0	0	0	0	1	0	0	100
5:15 PM	65	14	5	1	1	3	2	1	1	2	1	0	0	1	97
5:30 PM	69	24	13	9	1	3	0	3	0	0	0	0	0	0	122
5:45 PM	57	23	13	6	5	1	1	3	2	0	0	0	0	2	113
6:00 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Total	512	169	108	76	50	40	26	28	24	13	13	8	13	90	1170
Total %	43.8	14.4	9.2	6.5	4.3	3.4	2.2	2.4	2.1	1.1	1.1	0.7	1.1	7.7	100.0



www.TSTData.com
184 Baker Rd


Coatesville, Pennsylvania, United States 19320
610-466-1469
Serving Transportation Professionals Since 1995

Count Name: King of Prussia Rd
South Driveway Gap
Site Code:
Start Date: 04/27/2016
Page No: 3

Montgomery County, PA
King of Prussia Rd South
Driveway
Wednesday, April 27, 2016
Location: 40.0399194154879, -
75.3558924794197

Northbound (Northbound)

Start Time	2.0 - 4.0	4.0 - 6.0	6.0 - 8.0	8.0 - 10.0	10.0 - 12.0	12.0 - 14.0	14.0 - 16.0	16.0 - 18.0	18.0 - 20.0	20.0 - 22.0	22.0 - 24.0	24.0 - 26.0	26.0 - 28.0	28.0 - 139.2	Total
7:00 AM	50	11	5	2	6	1	2	0	2	4	0	0	1	3	87
7:15 AM	86	8	9	3	0	1	0	0	0	0	0	0	0	0	107
7:30 AM	114	4	1	1	0	2	0	0	0	0	0	0	0	0	122
7:45 AM	127	13	2	0	1	0	0	0	0	1	0	0	0	0	144
8:00 AM	102	10	5	6	3	1	1	1	0	1	0	0	0	1	131
8:15 AM	96	12	5	2	3	1	2	0	1	0	0	1	1	0	124
8:30 AM	85	12	7	5	4	2	1	1	3	0	0	1	1	1	123
8:45 AM	72	10	8	5	2	2	2	1	3	1	1	0	1	1	109
9:00 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
4:00 PM	16	14	7	4	2	3	4	2	1	3	3	1	4	5	69
4:15 PM	19	1	6	2	1	4	4	9	3	0	0	1	1	7	58
4:30 PM	30	9	6	5	2	2	2	2	1	1	1	3	0	8	72
4:45 PM	20	6	6	3	1	3	4	1	3	3	1	0	0	9	60
5:00 PM	14	5	5	1	8	1	3	5	3	5	1	0	1	6	58
5:15 PM	22	5	4	3	6	3	4	2	0	3	3	2	1	6	64
5:30 PM	16	8	5	1	3	2	5	2	3	2	2	3	1	5	58
5:45 PM	17	9	8	2	5	2	3	3	1	2	4	1	0	6	63
6:00 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Total	886	137	89	45	47	30	37	29	24	26	16	13	12	58	1449
Total %	61.1	9.5	6.1	3.1	3.2	2.1	2.6	2.0	1.7	1.8	1.1	0.9	0.8	4.0	100.0

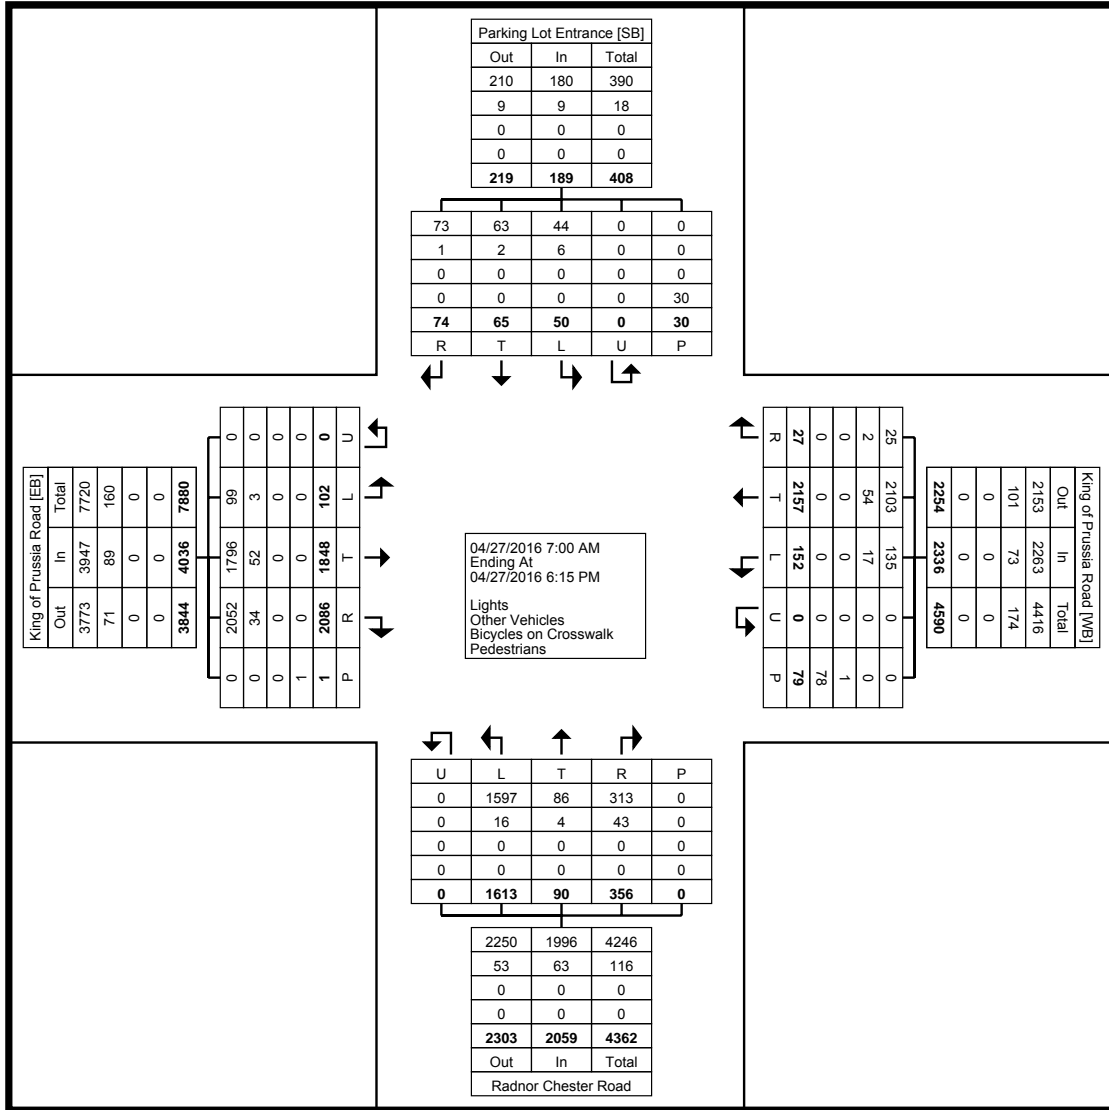

Turning Movement Data Plot



Montgomery County, PA
 Radnor-Chester Rd-King of Prussia Rd
 Wednesday, April 27, 2016
 Location: 40.0436560224454, -75.3591030836105


www.TSTData.com
 184 Baker Rd

Coatesville, Pennsylvania, United States 19320
 610-466-1469
 Serving Transportation Professionals Since 1995

Count Name: Radnor Chester Rd/King of Prussia Rd
 Site Code:
 Start Date: 04/27/2016
 Page No: 3

Turning Movement Peak Hour Data (7:30 AM)

Start Time	Parking Lot Entrance Southbound							King of Prussia Road Westbound							Radnor Chester Road Northbound							King of Prussia Road Eastbound							Int. Total
	Righ t	Righ t on Red	Thru	Left	U-Turn	Ped s	App. Total	Righ t	Righ t on Red	Thru	Left	U-Turn	Ped s	App. Total	Righ t	Righ t on Red	Thru	Left	U-Turn	Ped s	App. Total	Righ t	Thru	Left	U-Turn	Ped s	App. Total		
7:30 AM	2	0	0	0	0	2	2	0	0	204	5	0	2	209	5	7	5	141	0	0	158	102	86	9	0	0	197	566	
7:45 AM	1	0	1	0	0	1	2	1	0	206	10	0	6	217	13	3	9	118	0	0	143	138	65	9	0	0	212	574	
8:00 AM	1	0	0	1	0	0	2	2	0	192	5	0	4	199	5	2	6	117	0	0	130	103	57	4	0	0	164	495	
8:15 AM	1	1	0	1	0	0	3	4	0	188	5	0	7	197	8	6	12	118	0	0	144	117	51	15	0	0	183	527	
Total	5	1	1	2	0	3	9	7	0	790	25	0	19	822	31	18	32	494	0	0	575	460	259	37	0	0	756	2162	
Approach %	55.6	11.1	11.1	22.2	0.0	-	-	0.9	0.0	96.1	3.0	0.0	-	-	5.4	3.1	5.6	85.9	0.0	-	-	60.8	34.3	4.9	0.0	-	-	-	
Total %	0.2	0.0	0.0	0.1	0.0	-	0.4	0.3	0.0	36.5	1.2	0.0	-	38.0	1.4	0.8	1.5	22.8	0.0	-	26.6	21.3	12.0	1.7	0.0	-	35.0	-	
PHF	0.625	0.250	0.250	0.500	0.000	-	0.750	0.438	0.000	0.959	0.625	0.000	-	0.947	0.596	0.643	0.667	0.876	0.000	-	0.910	0.833	0.753	0.617	0.000	-	0.892	0.942	
Lights	5	1	1	1	0	-	8	6	0	776	23	0	-	805	28	18	32	490	0	-	568	446	246	37	0	-	729	2110	
% Lights	100.0	100.0	100.0	50.0	-	-	88.9	85.7	-	98.2	92.0	-	-	97.9	90.3	100.0	100.0	99.2	-	-	98.8	97.0	95.0	100.0	-	-	96.4	97.6	
Other Vehicles	0	0	0	1	0	-	1	1	0	14	2	0	-	17	3	0	0	4	0	-	7	14	13	0	0	-	27	52	
% Other Vehicles	0.0	0.0	0.0	50.0	-	-	11.1	14.3	-	1.8	8.0	-	-	2.1	9.7	0.0	0.0	0.8	-	-	1.2	3.0	5.0	0.0	-	-	3.6	2.4	
Bicycles on Crosswalk	-	-	-	-	-	0	-	-	-	-	-	-	0	-	-	-	-	-	-	0	-	-	-	-	-	0	-	-	
% Bicycles on Crosswalk	-	-	-	-	-	0.0	-	-	-	-	-	-	0.0	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
Pedestrians	-	-	-	-	-	3	-	-	-	-	-	-	19	-	-	-	-	-	-	0	-	-	-	-	-	0	-	-	
% Pedestrians	-	-	-	-	-	100.0	-	-	-	-	-	-	100.0	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	

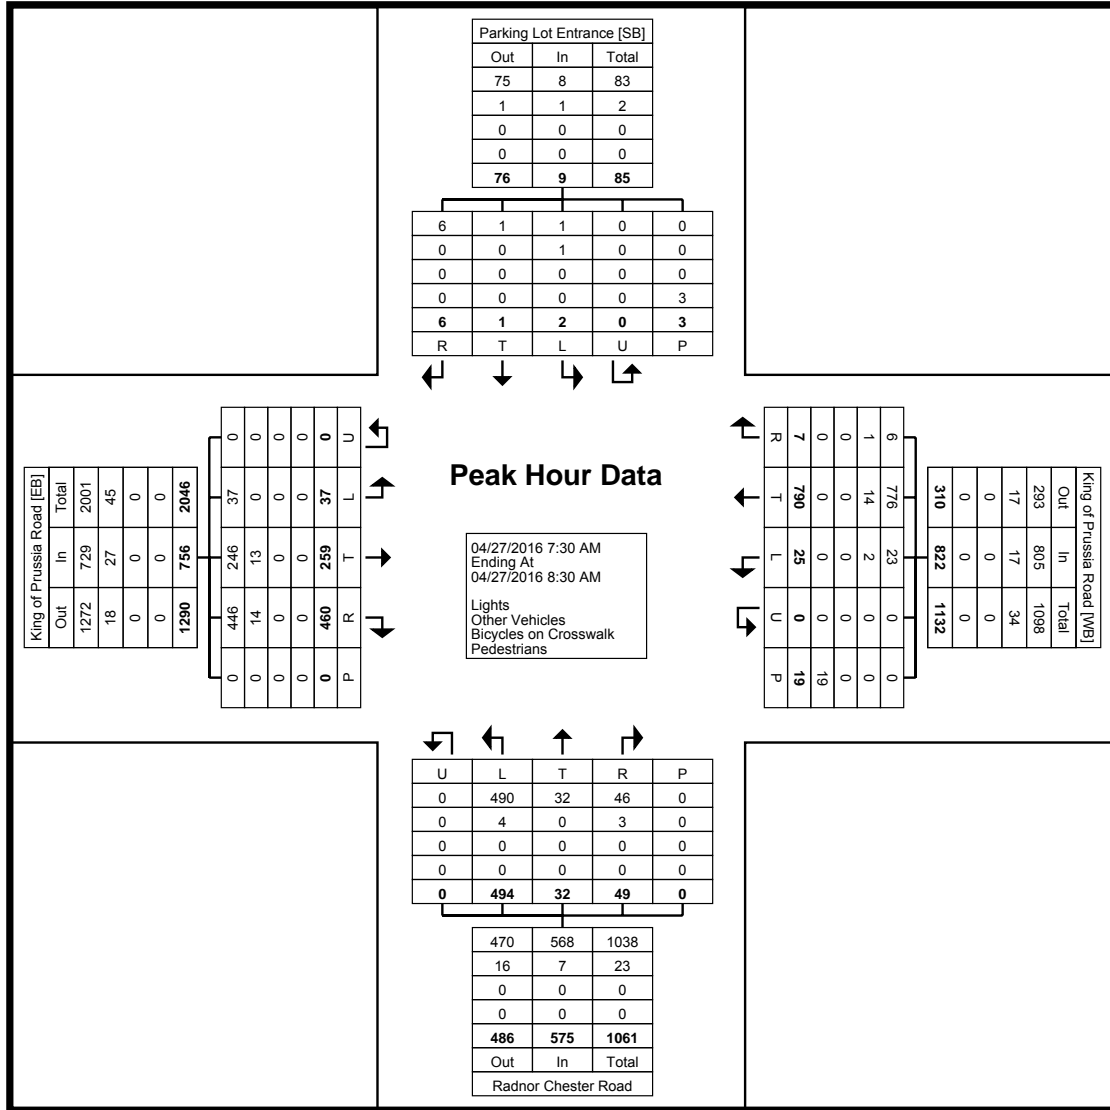

Turning Movement Peak Hour Data Plot (7:30 AM)



Montgomery County, PA
 Radnor-Chester Rd-King of Prussia Rd
 Wednesday, April 27, 2016
 Location: 40.0436560224454, -75.3591030836105


www.TSTData.com
 184 Baker Rd

Coatesville, Pennsylvania, United States 19320
 610-466-1469
 Serving Transportation Professionals Since 1995


Count Name: Radnor Chester Rd/King of Prussia Rd
 Site Code:
 Start Date: 04/27/2016
 Page No: 5

Turning Movement Peak Hour Data (4:45 PM)


Start Time	Parking Lot Entrance Southbound							King of Prussia Road Westbound							Radnor Chester Road Northbound							King of Prussia Road Eastbound							Int. Total
	Right	Right on Red	Thru	Left	U-Turn	Peds	App. Total	Right	Right on Red	Thru	Left	U-Turn	Peds	App. Total	Right	Right on Red	Thru	Left	U-Turn	Peds	App. Total	Right	Thru	Left	U-Turn	Peds	App. Total		
4:45 PM	1	5	6	5	0	1	17	0	0	83	11	0	4	94	18	15	2	93	0	0	128	150	160	2	0	0	312	551	
5:00 PM	18	3	13	14	0	6	48	0	0	73	18	0	10	91	19	8	3	109	0	0	139	145	193	2	0	0	340	618	
5:15 PM	8	4	7	7	0	1	26	0	0	85	13	0	1	98	21	19	0	85	0	0	125	168	183	2	0	0	353	602	
5:30 PM	5	4	10	5	0	3	24	1	0	76	7	0	7	84	29	8	2	108	0	0	147	191	169	2	0	1	362	617	
Total	32	16	36	31	0	11	115	1	0	317	49	0	22	367	87	50	7	395	0	0	539	654	705	8	0	1	1367	2388	
Approach %	27.8	13.9	31.3	27.0	0.0	-	-	0.3	0.0	86.4	13.4	0.0	-	-	16.1	9.3	1.3	73.3	0.0	-	-	47.8	51.6	0.6	0.0	-	-	-	
Total %	1.3	0.7	1.5	1.3	0.0	-	4.8	0.0	0.0	13.3	2.1	0.0	-	15.4	3.6	2.1	0.3	16.5	0.0	-	22.6	27.4	29.5	0.3	0.0	-	57.2	-	
PHF	0.44 4	0.800	0.692	0.554	0.000	-	0.599	0.250	0.000	0.932	0.681	0.000	-	0.936	0.750	0.658	0.583	0.906	0.000	-	0.917	0.856	0.913	1.000	0.000	-	0.944	0.966	
Lights	32	15	35	30	0	-	112	0	0	313	43	0	-	356	84	48	6	393	0	-	531	651	700	8	0	-	1359	2358	
% Lights	100.0	93.8	97.2	96.8	-	-	97.4	0.0	-	98.7	87.8	-	-	97.0	96.6	96.0	85.7	99.5	-	-	98.5	99.5	99.3	100.0	-	-	99.4	98.7	
Other Vehicles	0	1	1	1	0	-	3	1	0	4	6	0	-	11	3	2	1	2	0	-	8	3	5	0	0	-	8	30	
% Other Vehicles	0.0	6.3	2.8	3.2	-	-	2.6	100.0	-	1.3	12.2	-	-	3.0	3.4	4.0	14.3	0.5	-	-	1.5	0.5	0.7	0.0	-	-	0.6	1.3	
Bicycles on Crosswalk	-	-	-	-	-	0	-	-	-	-	-	-	1	-	-	-	-	-	-	0	-	-	-	-	-	0	-	-	
% Bicycles on Crosswalk	-	-	-	-	-	0.0	-	-	-	-	-	-	4.5	-	-	-	-	-	-	-	-	-	-	-	-	0.0	-	-	
Pedestrians	-	-	-	-	-	11	-	-	-	-	-	-	21	-	-	-	-	-	-	0	-	-	-	-	-	1	-	-	
% Pedestrians	-	-	-	-	-	100.0	-	-	-	-	-	-	95.5	-	-	-	-	-	-	-	-	-	-	-	-	100.0	-	-	

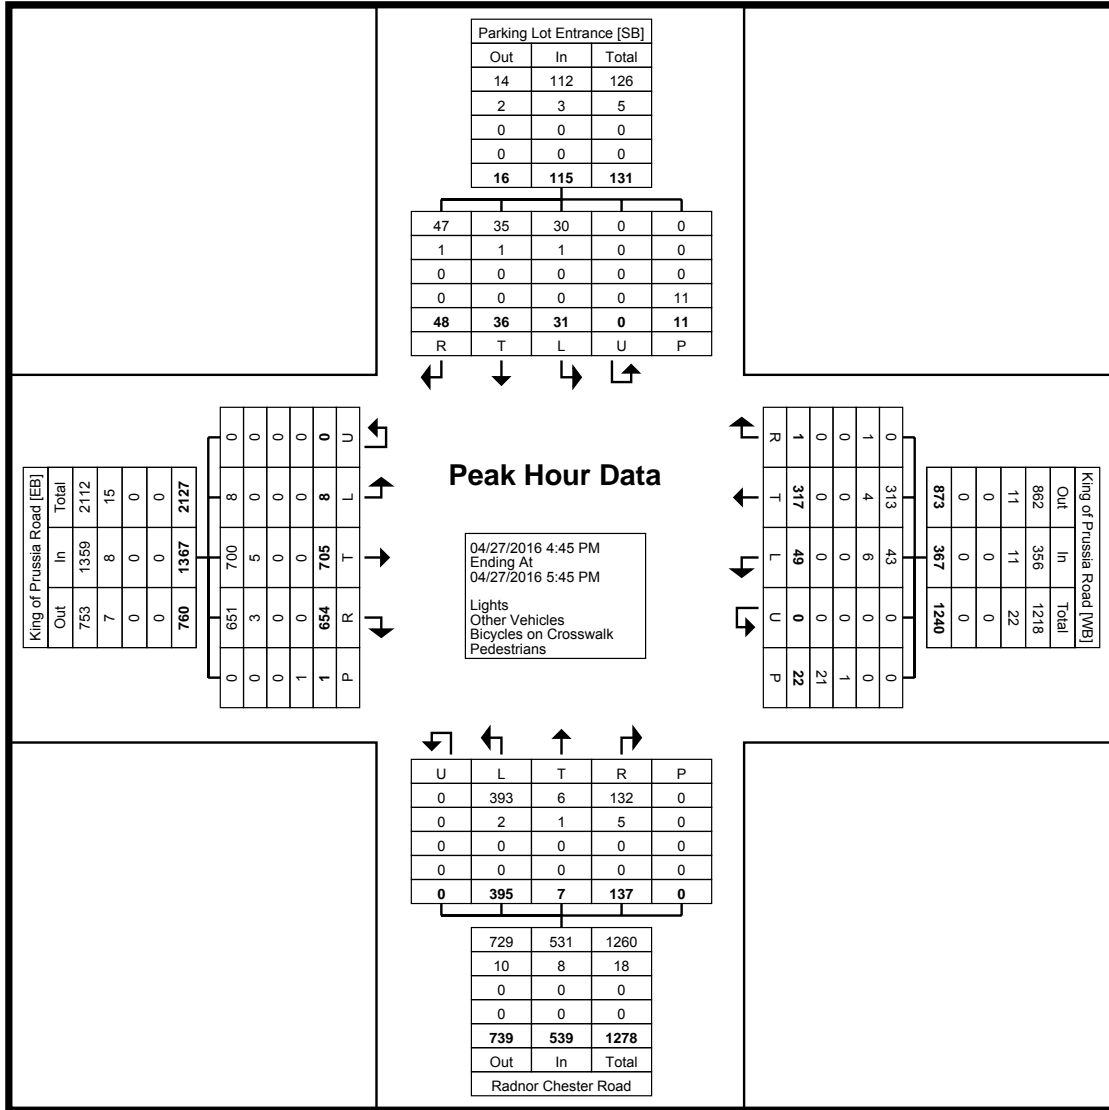


Turning Movement Peak Hour Data Plot (4:45 PM)

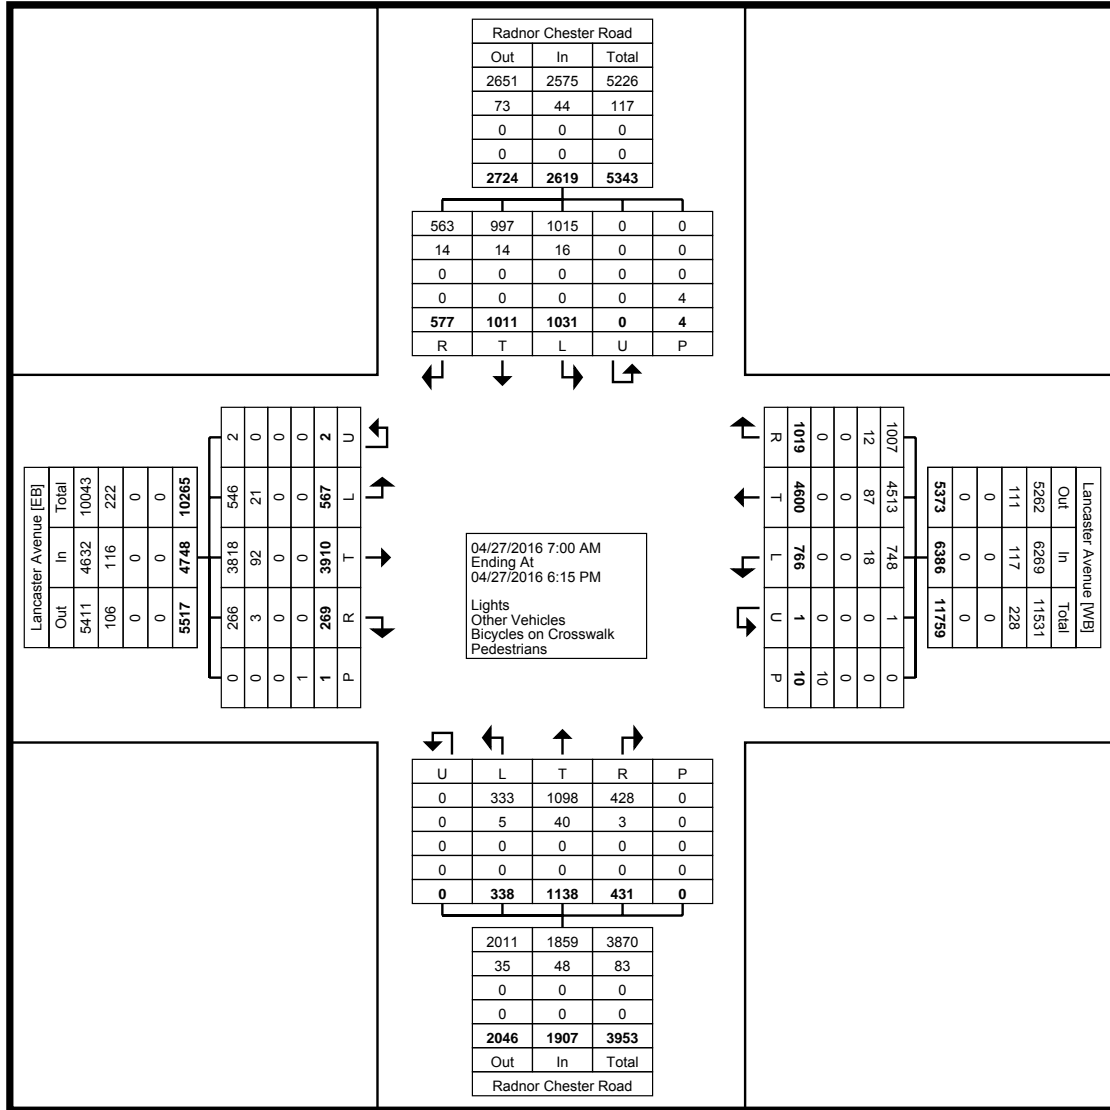

Turning Movement Data Plot

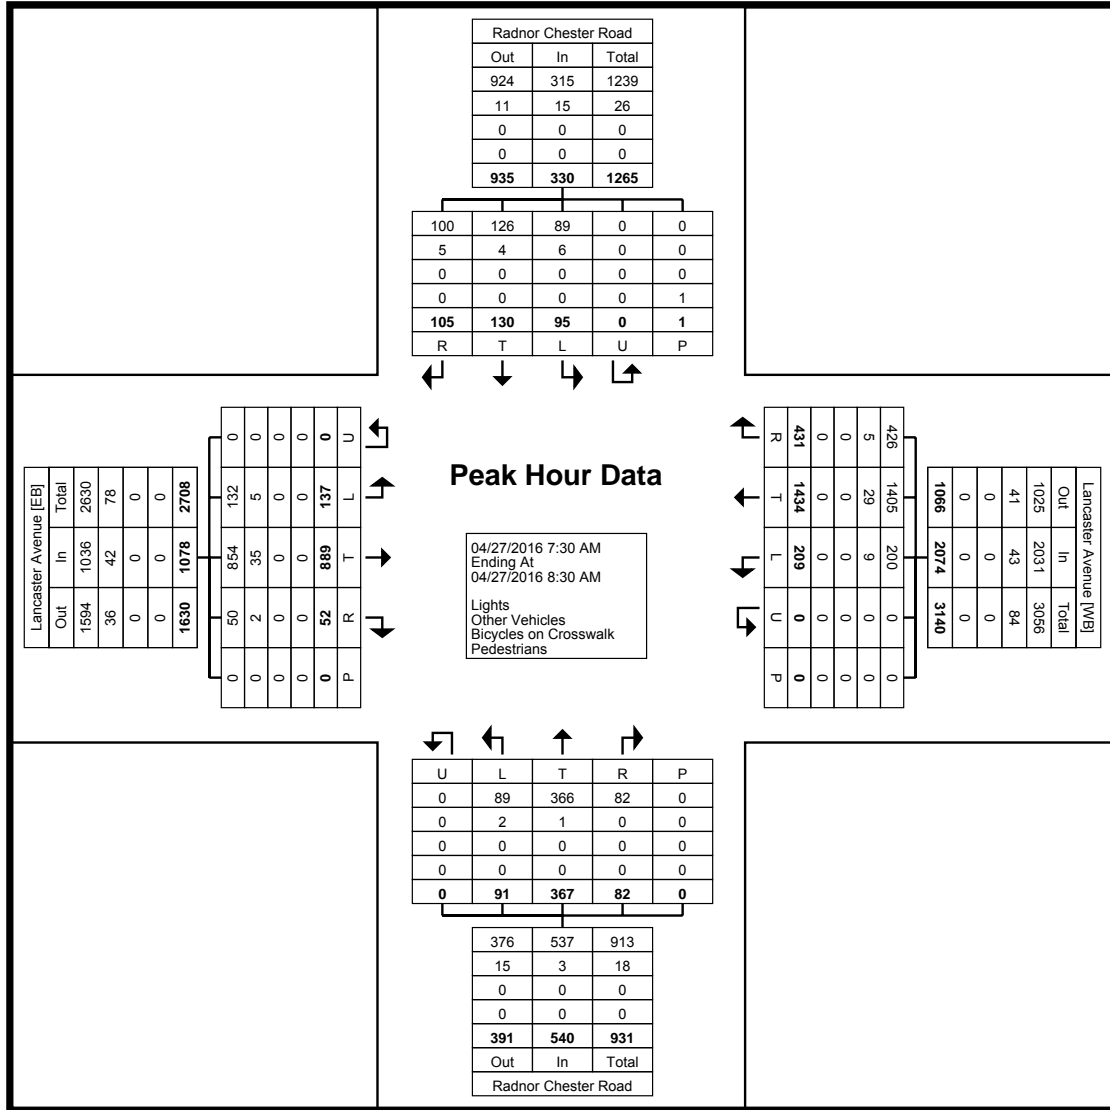

Turning Movement Peak Hour Data Plot (7:30 AM)

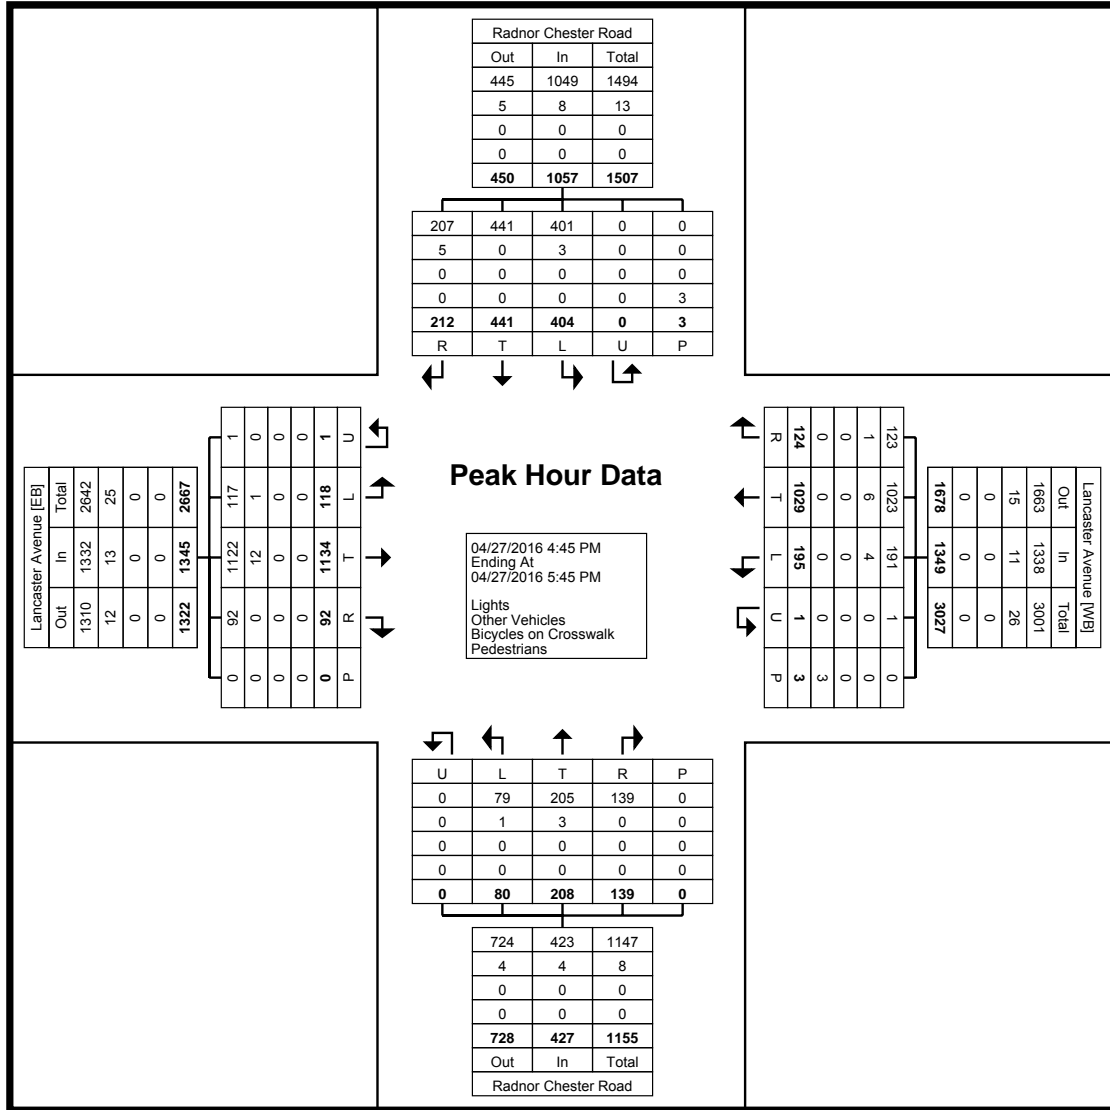

Turning Movement Peak Hour Data Plot (4:45 PM)

Pennoni Associates

Location: Montgomery County, PA
 Intersection: K of P Rd/Raider Rd
 Date: Wednesday, November 18, 2015
 Counter: PB

File Name : SS1118-1
 Site Code :
 Start Date : 11/18/2015
 Page No : 1


Groups Printed- Cars - Heavy Vehicles

Start Time	King of Prussia Road Northbound					King of Prussia Road Southbound					Raider Road Eastbound					Driveway Westbound					Int. Total
	Left	Thru	Right	Peds	App. Total	Left	Thru	Right	Peds	App. Total	Left	Thru	Right	Peds	App. Total	Left	Thru	Right	Peds	App. Total	
07:00 AM	49	191	0	0	240	0	26	12	0	38	5	0	21	0	26	0	0	0	0	0	304
07:15 AM	132	217	0	0	349	0	42	41	0	83	4	0	65	7	76	0	0	0	0	0	508
07:30 AM	29	263	0	0	292	0	60	14	0	74	3	0	52	0	55	0	0	0	0	0	421
07:45 AM	4	238	0	0	242	0	72	1	0	73	1	0	7	1	9	0	0	0	0	0	324
Total	214	909	0	0	1123	0	200	68	0	268	13	0	145	8	166	0	0	0	0	0	1557
08:00 AM	5	256	0	0	261	0	64	1	0	65	1	0	4	0	5	0	0	0	0	0	331
08:15 AM	3	298	0	0	301	0	54	1	0	55	0	0	6	1	7	0	0	0	0	0	363
08:30 AM	7	289	0	0	296	0	51	3	0	54	3	0	3	0	6	0	0	0	0	0	356
08:45 AM	9	304	0	0	313	0	56	5	0	61	2	0	5	0	7	0	0	0	0	0	381
Total	24	1147	0	0	1171	0	225	10	0	235	6	0	18	1	25	0	0	0	0	0	1431
04:00 PM	2	92	0	0	94	0	186	1	0	187	6	0	12	3	21	0	0	0	0	0	302
04:15 PM	4	86	0	0	90	0	197	0	0	197	5	0	5	2	12	0	0	0	0	0	299
04:30 PM	1	73	0	0	74	0	226	0	0	226	2	0	17	3	22	0	0	0	0	0	322
04:45 PM	11	73	0	0	84	0	206	3	0	209	2	0	12	0	14	0	0	0	0	0	307
Total	18	324	0	0	342	0	815	4	0	819	15	0	46	8	69	0	0	0	0	0	1230
05:00 PM	9	58	0	0	67	0	273	0	0	273	3	0	14	2	19	0	0	0	0	0	359
05:15 PM	3	68	0	0	71	0	281	1	0	282	1	0	13	1	15	0	0	0	0	0	368
05:30 PM	5	53	0	0	58	0	263	0	0	263	1	0	9	0	10	0	0	0	0	0	331
05:45 PM	6	90	0	0	96	0	216	4	0	220	0	0	4	0	4	0	0	0	0	0	320
Total	23	269	0	0	292	0	1033	5	0	1038	5	0	40	3	48	0	0	0	0	0	1378
Grand Total	279	2649	0	0	2928	0	2273	87	0	2360	39	0	249	20	308	0	0	0	0	0	5596
Apprch %	9.5	90.5	0	0		0	96.3	3.7	0		12.7	0	80.8	6.5		0	0	0	0		
Total %	5	47.3	0	0	52.3	0	40.6	1.6	0	42.2	0.7	0	4.4	0.4	5.5	0	0	0	0	0	
Cars	269	2603	0	0	2872	0	2229	84	0	2313	33	0	234	20	287	0	0	0	0	0	5472
% Cars	96.4	98.3	0	0	98.1	0	98.1	96.6	0	98	84.6	0	94	100	93.2	0	0	0	0	0	97.8
Heavy Vehicles																					
% Heavy Vehicles	3.6	1.7	0	0	1.9	0	1.9	3.4	0	2	15.4	0	6	0	6.8	0	0	0	0	0	2.2

Pennoni Associates

Location: Montgomery County, PA
 Intersection: K of P Rd/Raider Rd
 Date: Wednesday, November 18, 2015
 Counter: PB

File Name : SS1118-1
 Site Code :
 Start Date : 11/18/2015
 Page No : 2

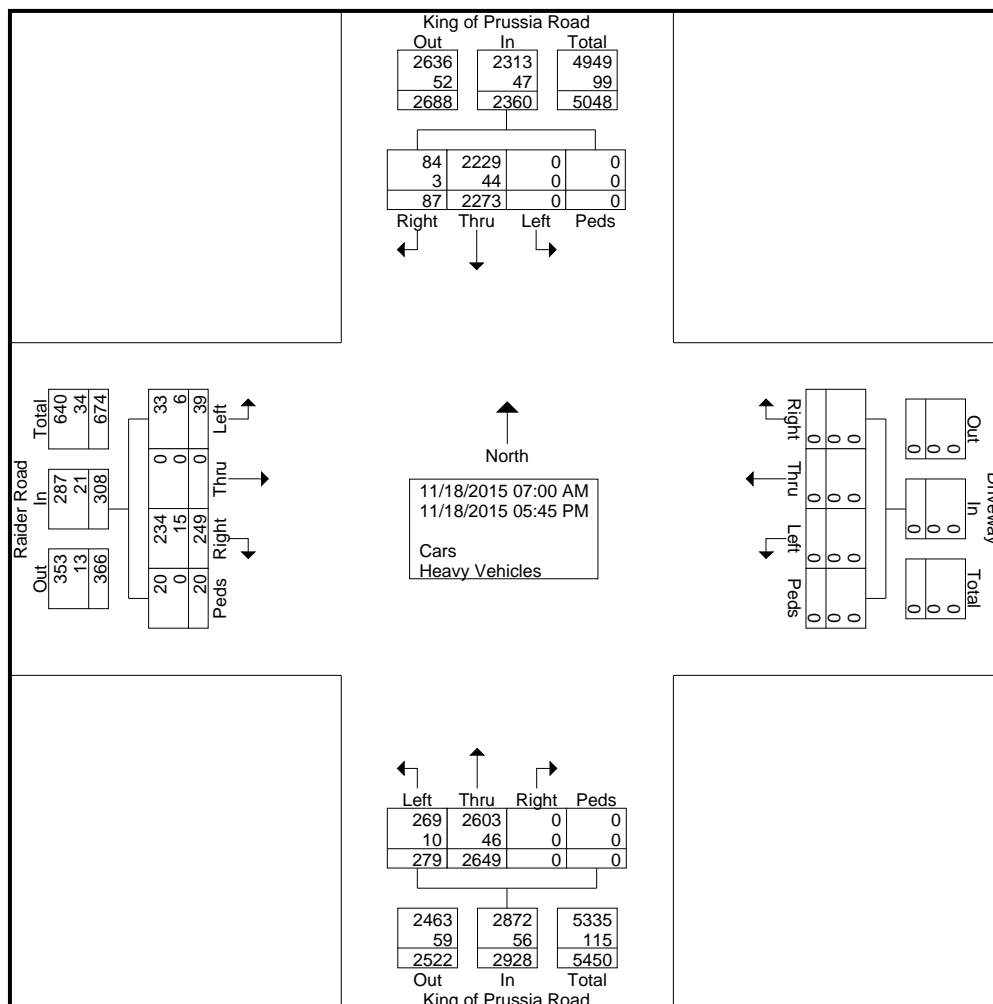


Pennoni Associates

Location: Montgomery County, PA
 Intersection: K of P Rd/Raider Rd
 Date: Wednesday, November 18, 2015
 Counter: PB

File Name : SS1118-1
 Site Code :
 Start Date : 11/18/2015
 Page No : 3

Start Time	King of Prussia Road Northbound					King of Prussia Road Southbound					Raider Road Eastbound					Driveway Westbound					Int. Total
	Left	Thru	Right	Peds	App. Total	Left	Thru	Right	Peds	App. Total	Left	Thru	Right	Peds	App. Total	Left	Thru	Right	Peds	App. Total	
Peak Hour Analysis From 07:15 AM to 08:00 AM - Peak 1 of 1																					
Peak Hour for Entire Intersection Begins at 07:15 AM																					
07:15 AM	132				349	0	42	41		83	4		65	7	76	0	0	0	0	0	508
07:30 AM	29	263	0	0	292	0	60	14	0	74	3	0	52	0	55	0	0	0	0	0	421
07:45 AM	4	238	0	0	242	0	72	1	0	73	1	0	7	1	9	0	0	0	0	0	324
08:00 AM	5	256	0	0	261	0	64	1	0	65	1	0	4	0	5	0	0	0	0	0	331
Total Volume	170	974	0	0	1144	0	238	57	0	295	9	0	128	8	145	0	0	0	0	0	1584
% App. Total	14.9	85.1	0	0		0	80.7	19.3	0		6.2	0	88.3	5.5		0	0	0	0	0	
PHF	.322	.926	.000	.000	.819	.000	.826	.348	.000	.889	.563	.000	.492	.286	.477	.000	.000	.000	.000	.000	.780
Cars	170	956	0	0	1126	0	214	57	0	271	8	0	123	8	139	0	0	0	0	0	1536
% Cars	100	98.2					89.9				88.9	0	96.1	100	95.9						97.0
Heavy Vehicles																					
% Heavy Vehicles	0	1.8	0	0	1.6	0	10.1	0	0	8.1	11.1	0	3.9	0	4.1	0	0	0	0	0	3.0

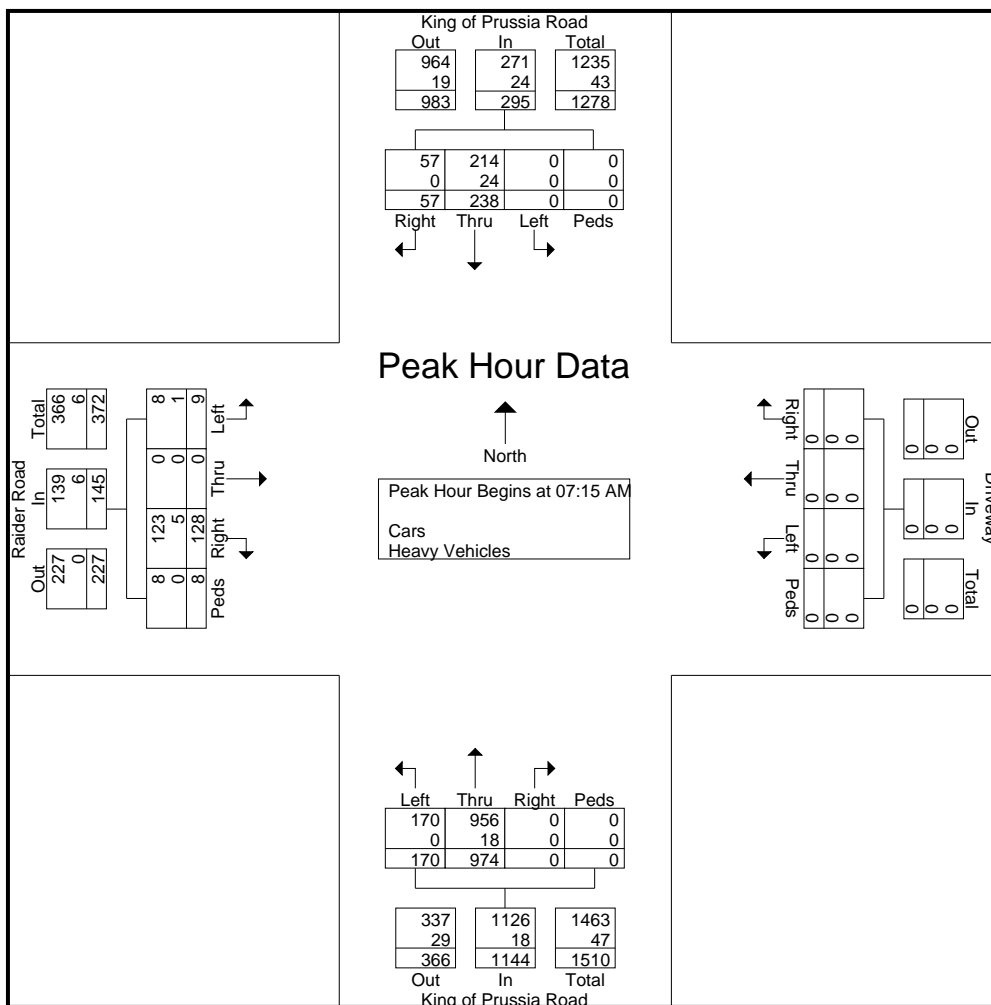


Pennoni Associates

Location: Montgomery County, PA
 Intersection: K of P Rd/Raider Rd
 Date: Wednesday, November 18, 2015
 Counter: PB

File Name : SS1118-1
 Site Code :
 Start Date : 11/18/2015
 Page No : 4


Start Time	King of Prussia Road Northbound					King of Prussia Road Southbound					Raider Road Eastbound					Driveway Westbound					Int. Total
	Left	Thru	Right	Peds	App. Total	Left	Thru	Right	Peds	App. Total	Left	Thru	Right	Peds	App. Total	Left	Thru	Right	Peds	App. Total	
Peak Hour Analysis From 05:00 PM to 05:45 PM - Peak 1 of 1																					
Peak Hour for Entire Intersection Begins at 05:00 PM																					
05:00 PM	9										3	14	2	19	0	0	0	0	0	0	359
05:15 PM	3	68	0	0	71	0	281	1	0	282	1	0	13	1	15	0	0	0	0	0	368
05:30 PM	5	53	0	0	58	0	263	0	0	263	1	0	9	0	10	0	0	0	0	0	331
05:45 PM	6	90	0	0	96	0	216			4											
Total Volume	23	269	0	0	292	0	1033	5	0	1038	5	0	40	3	48	0	0	0	0	0	1378
% App. Total	7.9	92.1	0	0		0	99.5	0.5	0		10.4	0	83.3	6.2		0	0	0	0		
PHF	.639	.747	.000	.000	.760	.000	.919	.313	.000	.920	.417	.000	.714	.375	.632	.000	.000	.000	.000	.000	.936
Cars	23	267	0	0	290	0	1030				0	0	100	100	100	0	0	0	0	0	99.6
% Cars	100	99.3	0	0	99.3	0	99.7	100	0	99.7	100	0	100	100	100	0	0	0	0	0	
Heavy Vehicles	0	2	0	0	2	0	3	0	0	3	0	0	0	0	0	0	0	0	0	0	5
% Heavy Vehicles	0	0.7	0	0	0.7	0	0.3	0	0	0.3	0	0	0	0	0	0	0	0	0	0	0.4

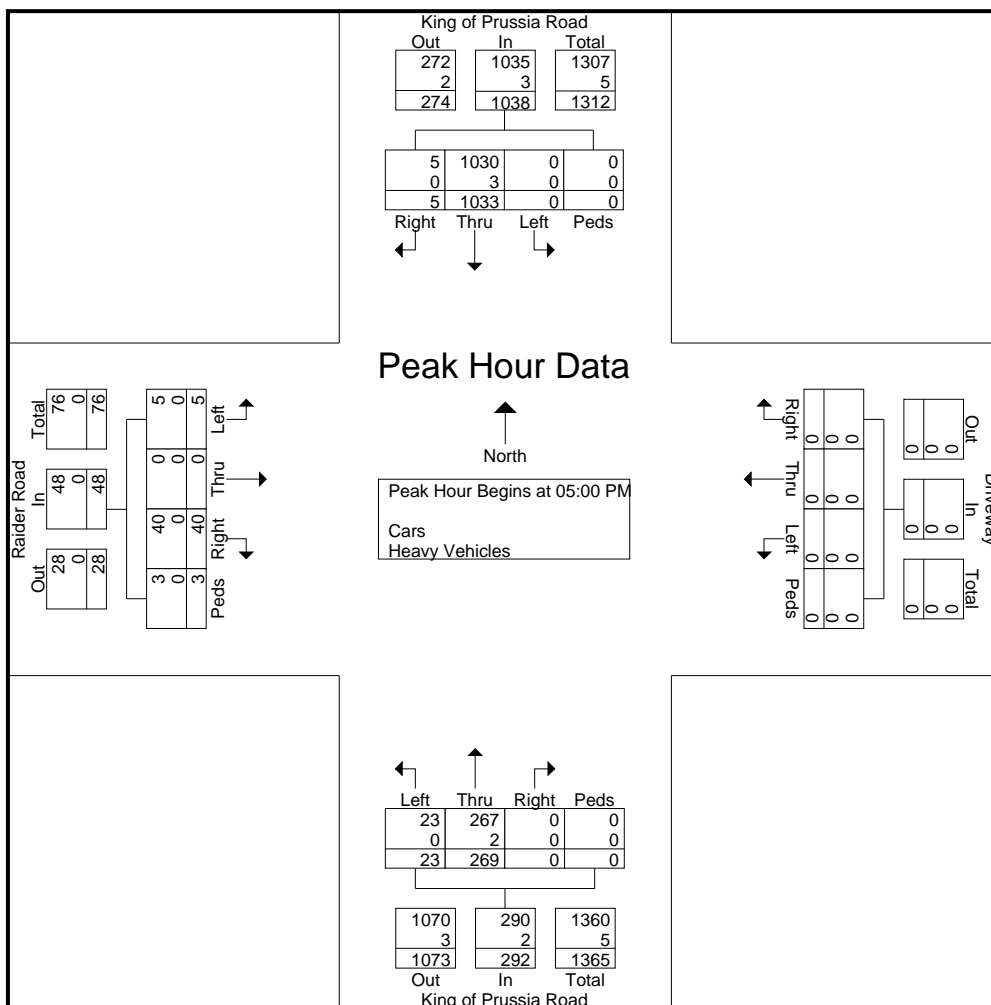

Pennoni Associates

Location: Montgomery County, PA
 Intersection: K of P Rd/Matson Ford Rd
 Date: Wednesday, November 18, 2015
 Tech: RZ

File Name : SS1118-2
 Site Code : 00000000
 Start Date : 11/18/2015
 Page No : 2

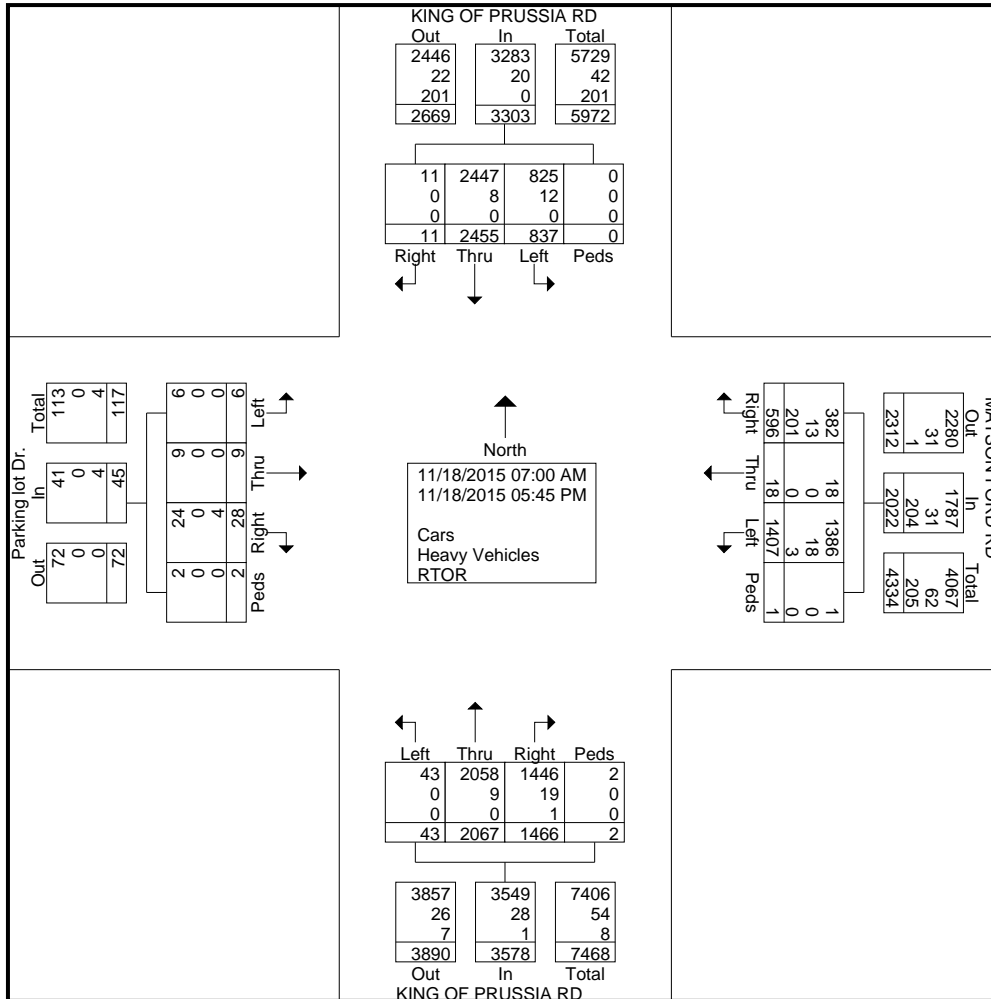

Pennoni Associates

Location: Montgomery County, PA
 Intersection: K of P Rd/Matson Ford Rd
 Date: Wednesday, November 18, 2015
 Tech: RZ

File Name : SS1118-2
 Site Code : 00000000
 Start Date : 11/18/2015
 Page No : 3


	KING OF PRUSSIA RD Northbound					KING OF PRUSSIA RD Southbound					Parking lot Dr. Eastbound					MATSON FORD RD Westbound					
Start Time	Left	Thru	Right	Peds	App. Total	Left	Thru	Right	Peds	App. Total	Left	Thru	Right	Peds	App. Total	Left	Thru	Right	Peds	App. Total	Int. Total
Peak Hour Analysis From 07:15 AM to 08:00 AM - Peak 1 of 1																					
Peak Hour for Entire Intersection Begins at 07:15 AM																					
07:15 AM	2	123	133	0	258	80	144									84	1	34	0	119	679
07:30 AM	1	153	178	0	332	104	124	0	0	228	0	0	0	0	0	75	1	26	0	102	639
07:45 AM	4	162	139	0	305	95	136	1		232	0	0	0	0	0	53	5	18	1		
08:00 AM	5										1		2	0	3						
Total Volume	12	592	576	0	1180	361	532	2	0	895	1	0	2	0	3	263	7	100	1	371	2449
% App. Total	1	50.2	48.8	0		40.3	59.4	0.2	0		33.3	0	66.7	0		70.9	1.9	27	0.3		
PHF	.600	.914	.809	.000	.889	.868	.924	.500	.000	.964	.250	.000	.250	.000	.250	.783	.350	.735	.250	.779	.902
Cars	12	588	568	0	1168	352	529	2	0	883	1	0	2	0	3	250	7	46	1	304	2358
% Cars	100	99.3	98.6	0	99.0	97.5	99.4	100	0	98.7	100	0	100	0	100	95.1	100	46.0	100	81.9	96.3
Heavy Vehicles	0	4	7	0	11	9	3	0	0	12	0	0	0	0	0	10	0	9	0	19	42
% Heavy Vehicles	0	0.7	1.2	0	0.9	2.5	0.6	0	0	1.3	0	0	0	0	0	3.8	0	9.0	0	5.1	1.7
RTOR	0	0	1	0	1	0	0	0	0	0	0	0	0	0	0	3	0	45	0	48	49
% RTOR	0	0	0.2	0	0.1	0	0	0	0	0	0	0	0	0	0	1.1	0	45.0	0	12.9	2.0

Pennoni Associates

Location: Montgomery County, PA
 Intersection: K of P Rd/Matson Ford Rd
 Date: Wednesday, November 18, 2015
 Tech: RZ

File Name : SS1118-2
 Site Code : 00000000
 Start Date : 11/18/2015
 Page No : 4


	KING OF PRUSSIA RD Northbound					KING OF PRUSSIA RD Southbound					Parking lot Dr. Eastbound					MATSON FORD RD Westbound					
Start Time	Left	Thru	Right	Peds	App. Total	Left	Thru	Right	Peds	App. Total	Left	Thru	Right	Peds	App. Total	Left	Thru	Right	Peds	App. Total	Int. Total
Peak Hour Analysis From 05:00 PM to 05:45 PM - Peak 1 of 1																					
Peak Hour for Entire Intersection Begins at 05:00 PM																					
05:00 PM	3			2					1		2	2			8	126	0	57	0	183	558
05:15 PM	1	108	74		183	35	183	0	0	218	1	0	1	0	2	150	1	56	0	207	610
05:30 PM	0	101	51	0	152	18	172	0	0	190	0	1	1	0	2	130	0	65			
05:45 PM	3	108	50	0	161	38	189	0	0	227	0	1	5	0	6	105	0	34	0	139	533
Total Volume	7	423	231	2	663	118	716	1	0	835	3	4	9	2	18	511	1	212	0	724	2240
% App. Total	1.1	63.8	34.8	0.3		14.1	85.7	0.1	0		16.7	22.2	50	11.1		70.6	0.1	29.3	0		
PHF	.583	.979	.780	.250	.906	.776	.947	.250	.000	.920	.375	.500	.450	.250	.563	.852	.250	.815	.000	.874	.918
Cars	7	423	231	2	663	118	716	1	0	835	3	4	9	2	18	510	1	141	0	652	2168
% Cars	100	100	100	100	100	100	100	100	0	100	100	100	100	100	100	99.8	100	66.5	0	90.1	96.8
Heavy Vehicles	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	1	1
% Heavy Vehicles	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0.2	0	0	0	0.1	0.0
RTOR	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	71	0	71	71
% RTOR	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	33.5	0	9.8	3.2

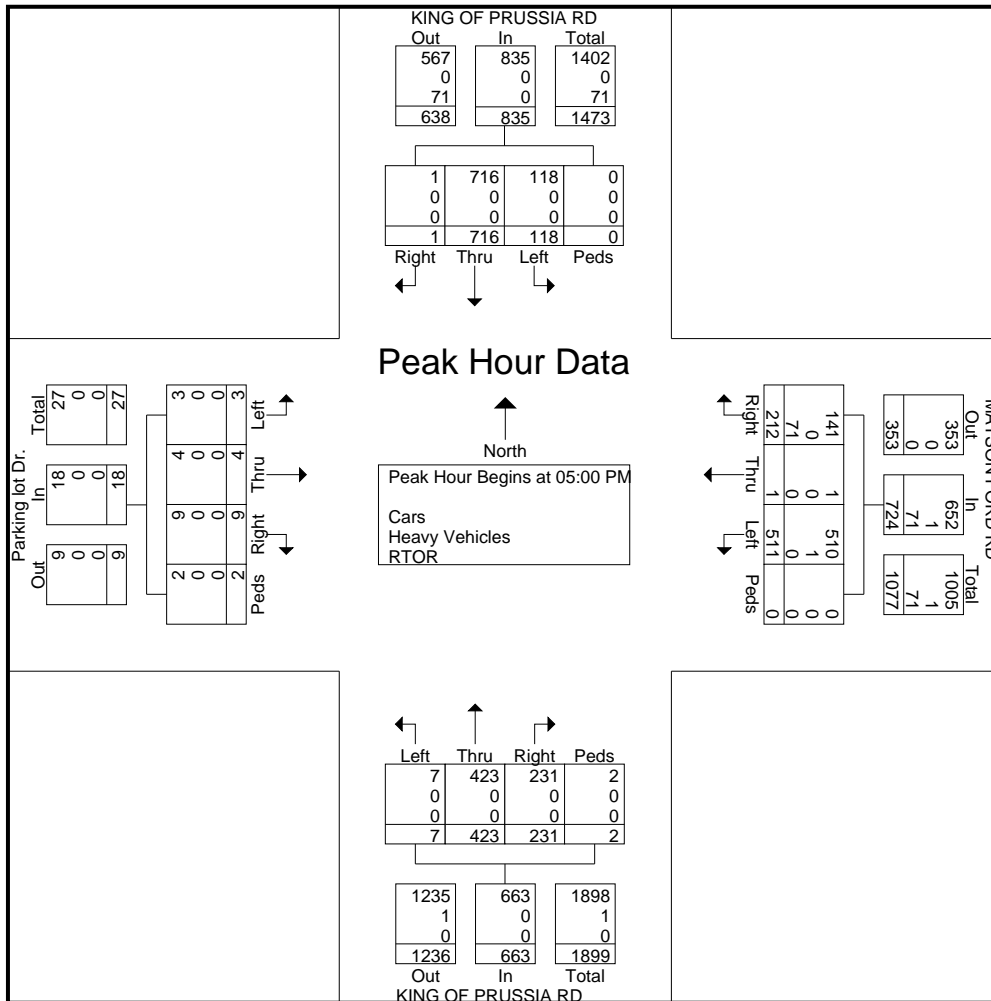

Pennoni Associates

Location: Montgomery County, PA
 Intersection: I476 NB Ramp/Route 30
 Date: Wednesday, November 18, 2015
 Counter: ET/JT

File Name : SS1118-3
 Site Code : 00000000
 Start Date : 11/18/2015
 Page No : 2

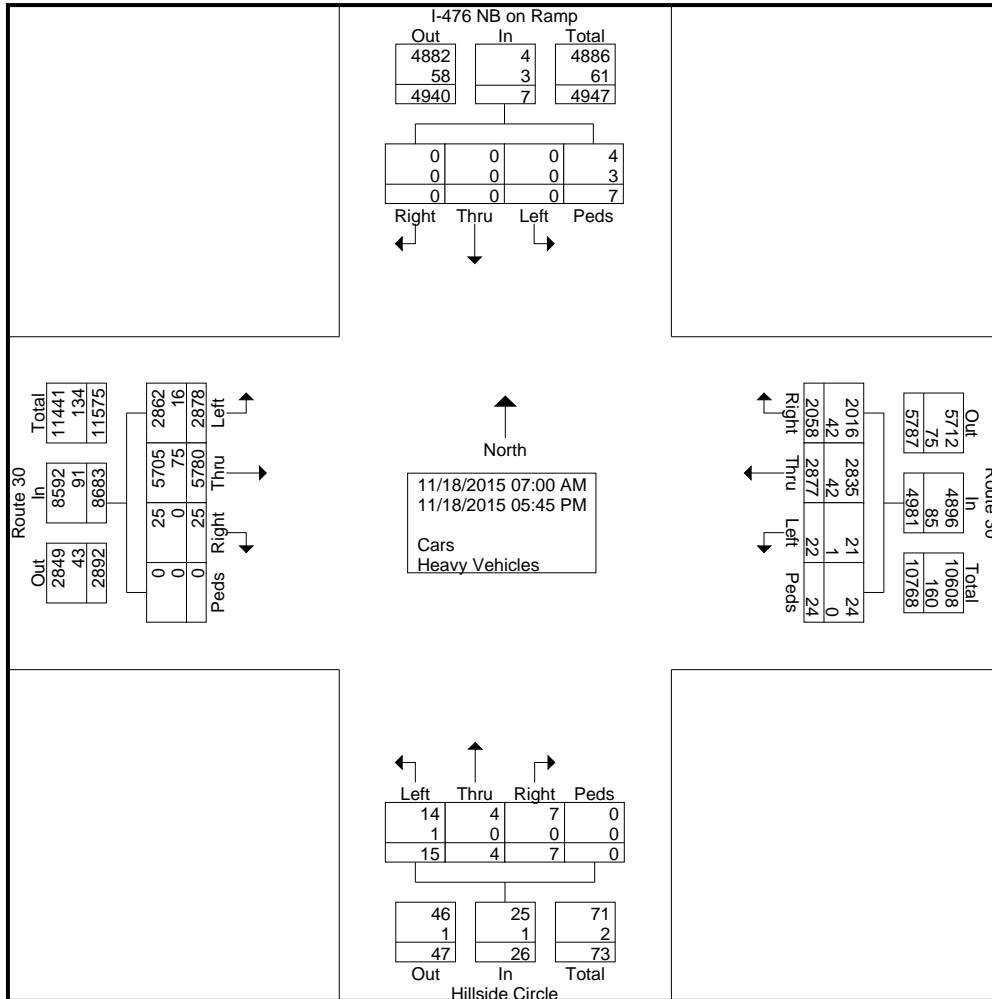


Pennoni Associates

Location: Montgomery County, PA
 Intersection: I476 NB Ramp/Route 30
 Date: Wednesday, November 18, 2015
 Counter: ET/JT

File Name : SS1118-3
 Site Code : 00000000
 Start Date : 11/18/2015
 Page No : 3

Start Time	Hillside Circle Northbound					I-476 NB on Ramp Southbound					Route 30 Eastbound					Route 30 Westbound					Int. Total
	Left	Thru	Right	Peds	App. Total	Left	Thru	Right	Peds	App. Total	Left	Thru	Right	Peds	App. Total	Left	Thru	Right	Peds	App. Total	
Peak Hour Analysis From 07:15 AM to 08:00 AM - Peak 1 of 1																					
Peak Hour for Entire Intersection Begins at 07:15 AM																					
07:15 AM	3															211					729
07:30 AM	1	0	0	0	1	0	0	0	2	2	152	404			557	0	157	126	11		
07:45 AM	1	2	2	0	5	0	0	0	0	0	121	404	2	0	527	0	200	128	0	328	860
08:00 AM	1	0	0	0	1	0	0	0	0	0	152	392	0	0	544	2					
Total Volume	6	2	2	0	10	0	0	0	2	2	533	1506	4	0	2043	2	751	476	11	1240	3295
% App. Total																					
PHF	.500	.250	.250	.000	.500	.000	.000	.000	.250	.250	.877	.932	.500	.000	.917	.250	.890	.930	.250	.945	.958

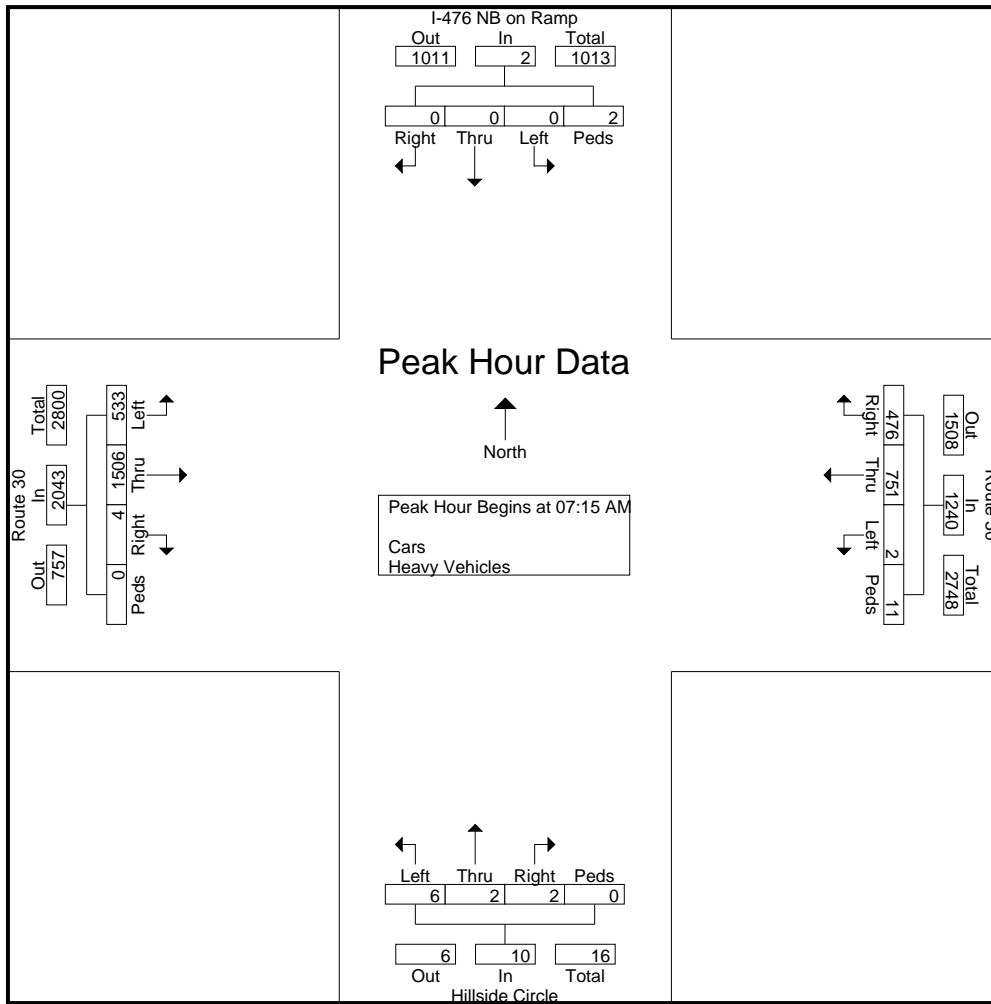


Pennoni Associates

Location: Montgomery County, PA
 Intersection: I476 NB Ramp/Route 30
 Date: Wednesday, November 18, 2015
 Counter: ET/JT

File Name : SS1118-3
 Site Code : 00000000
 Start Date : 11/18/2015
 Page No : 4

Start Time	Hillside Circle Northbound					I-476 NB on Ramp Southbound					Route 30 Eastbound					Route 30 Westbound					Int. Total
	Left	Thru	Right	Peds	App. Total	Left	Thru	Right	Peds	App. Total	Left	Thru	Right	Peds	App. Total	Left	Thru	Right	Peds	App. Total	
Peak Hour Analysis From 05:00 PM to 05:45 PM - Peak 1 of 1																					
Peak Hour for Entire Intersection Begins at 05:00 PM																					
05:00 PM	0	0	0	0	0	0	0	0	0	0	270										
05:15 PM	0	0	0	0	0	0	0	0	0	0	269	400	2	0	671	1	188	179	2	370	1041
05:30 PM	1	0	0	0	1	0	0	0	0	0	251	450			701	1	139	132	0	272	974
05:45 PM	2	1	2		5	0	0	0	2	2	255	421	11	0	687	3			4		
Total Volume	3	1	2	0	6	0	0	0	2	2	1045	1647	14	0	2706	6	676	573	9	1264	3978
% App. Total																					
PHF	.375	.250	.250	.000	.300	.000	.000	.000	.250	.250	.968	.915	.318	.000	.965	.500	.899	.800	.563	.854	.955

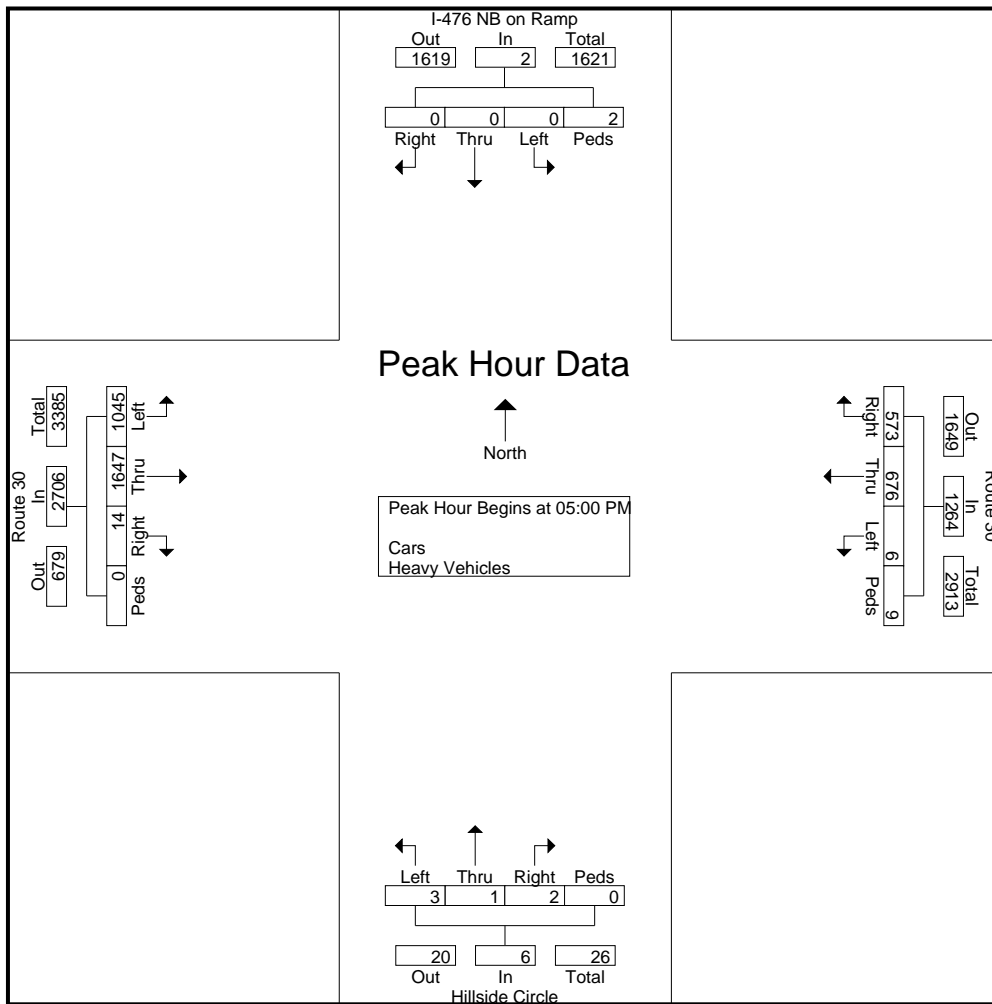

Pennoni Associates

Location: Montgomery County, PA
 Intersection: K of P Rd/North Driveway
 Date: Wednesday, November 18, 2015
 Counter: ACB

File Name : ss1118-4
 Site Code :
 Start Date : 11/18/2015
 Page No : 1


Groups Printed- Cars - Heavy Vehicles

Start Time	King of Prussia Road Northbound					King of Prussia Road Southbound					Eastbound	North Driveway Westbound					Int. Total
	Left	Thru	Right	Peds	App. Total	Left	Thru	Right	Peds	App. Total	App. Total	Left	Thru	Right	Peds	App. Total	
07:00 AM	0	196	0	0	196	0	38	0	0	38	0	0	0	0	0	0	234
07:15 AM	0	221	0	0	221	0	83	0	0	83	0	0	0	0	0	0	304
07:30 AM	0	266	0	0	266	0	74	0	0	74	0	0	0	0	0	0	340
07:45 AM	0	239	0	0	239	0	73	0	0	73	0	0	0	0	0	0	312
Total	0	922	0	0	922	0	268	0	0	268	0	0	0	0	0	0	1190
08:00 AM	0	257	0	0	257	0	65	0	0	65	0	0	0	0	0	0	322
08:15 AM	0	298	0	0	298	0	55	0	0	55	0	0	0	0	0	0	353
08:30 AM	0	292	0	0	292	0	54	0	0	54	0	0	0	0	0	0	346
08:45 AM	0	306	0	0	306	0	61	0	0	61	0	0	0	0	0	0	367
Total	0	1153	0	0	1153	0	235	0	0	235	0	0	0	0	0	0	1388
04:00 PM	0	92	0	0	92	0	193	0	0	193	0	0	0	0	0	0	285
04:15 PM	0	86	0	0	86	0	202	0	0	202	0	0	0	0	0	0	288
04:30 PM	0	73	0	0	73	0	228	0	0	228	0	0	0	0	0	0	301
04:45 PM	0	73	0	0	73	0	211	0	0	211	0	0	0	0	0	0	284
Total	0	324	0	0	324	0	834	0	0	834	0	0	0	0	0	0	1158
05:00 PM	0	58	0	0	58	0	276	0	0	276	0	0	0	0	0	0	334
05:15 PM	0	68	0	0	68	0	283	0	0	283	0	0	0	0	0	0	351
05:30 PM	0	53	0	0	53	0	263	0	0	263	0	0	0	0	0	0	316
05:45 PM	0	90	0	0	90	0	220	0	0	220	0	0	0	0	0	0	310
Total	0	269	0	0	269	0	1042	0	0	1042	0	0	0	0	0	0	1311
Grand Total	0	2668	0	0	2668	0	2379	0	0	2379	0	0	0	0	0	0	5047
Apprch %	0	100	0	0		0	100	0	0		0	0	0	0	0		
Total %	0	52.9	0	0	52.9	0	47.1	0	0	47.1	0	0	0	0	0	0	
Cars	0	2616	0	0	2616	0	2332	0	0	2332	0	0	0	0	0	0	4948
% Cars	0	98.1	0	0	98.1	0	98	0	0	98	0	0	0	0	0	0	98
Heavy Vehicles	0	52	0	0	52	0	47	0	0	47	0	0	0	0	0	0	99
% Heavy Vehicles	0	1.9	0	0	1.9	0	2	0	0	2	0	0	0	0	0	0	2

Pennoni Associates

Location: Montgomery County, PA
 Intersection: K of P Rd/North Driveway
 Date: Wednesday, November 18, 2015
 Counter: ACB

File Name : ss1118-4
 Site Code :
 Start Date : 11/18/2015
 Page No : 2

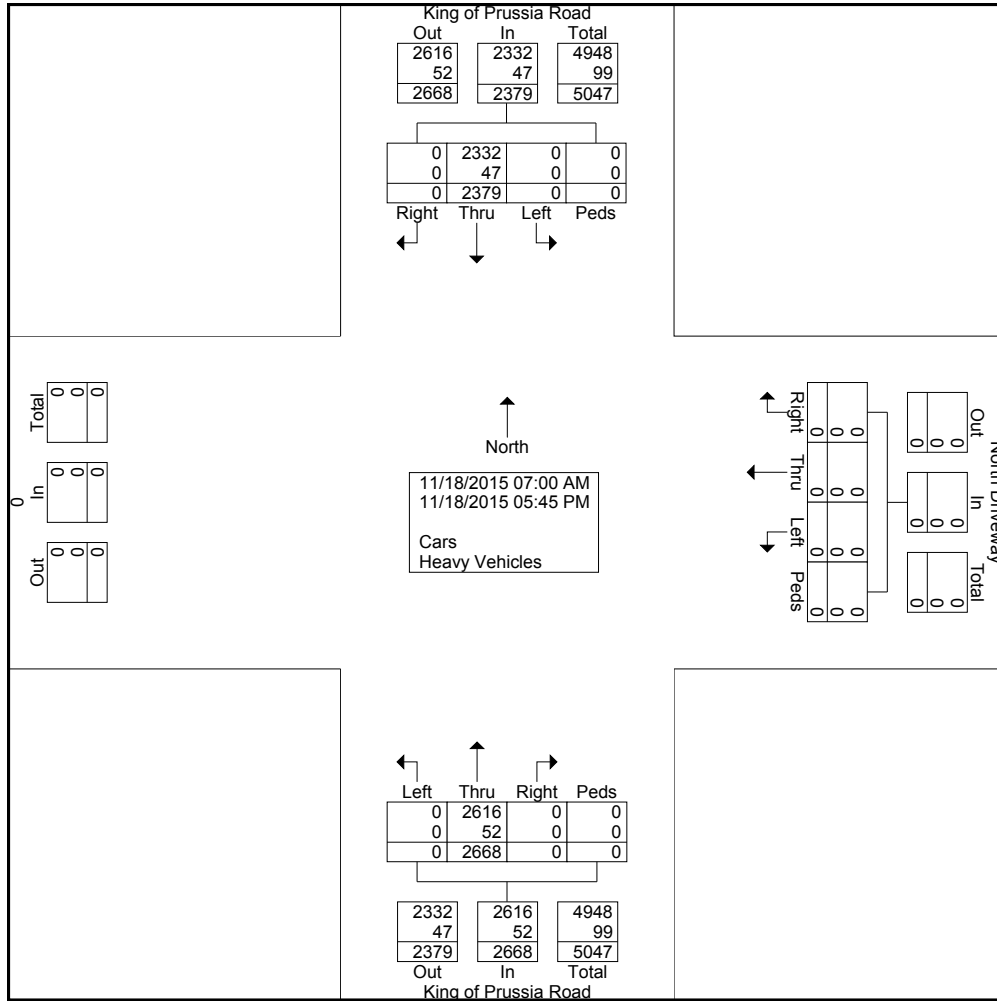


Pennoni Associates

Location: Montgomery County, PA
 Intersection: K of P Rd/North Driveway
 Date: Wednesday, November 18, 2015
 Counter: ACB

File Name : ss1118-4
 Site Code :
 Start Date : 11/18/2015
 Page No : 3

Start Time	King of Prussia Road Northbound					King of Prussia Road Southbound					Eastbound	North Driveway Westbound					Int. Total
	Left	Thru	Right	Peds	App. Total	Left	Thru	Right	Peds	App. Total		App. Total	Left	Thru	Right	Peds	
Peak Hour Analysis From 07:15 AM to 08:00 AM - Peak 1 of 1																	
Peak Hour for Entire Intersection Begins at 07:15 AM																	
07:15 AM	0	221	0	0	221	0	83	0	0	83	0	0	0	0	0	0	0
07:30 AM	0	266	0	0	266	0	74	0	0	74	0	0	0	0	0	0	0
07:45 AM	0	239	0	0	239	0	73	0	0	73	0	0	0	0	0	0	0
08:00 AM	0	257	0	0	257	0	65	0	0	65	0	0	0	0	0	0	0
Total Volume	0	983	0	0	983	0	295	0	0	295	0	0	0	0	0	0	0
% App. Total	0	100	0	0		0	100	0	0			0	0	0	0		
PHF	.000	.924	.000	.000	.924	.000	.889	.000	.000	.889	.000	.000	.000	.000	.000	.000	.940
Cars	0	964	0	0	964	0	271	0	0	271	0	0	0	0	0	0	1235
% Cars	0	98.1	0	0	98.1	0	91.9	0	0	91.9	0	0	0	0	0	0	96.6
Heavy Vehicles	0	19	0	0	19	0	24	0	0	24	0	0	0	0	0	0	43
% Heavy Vehicles	0	1.9	0	0	1.9	0	8.1	0	0	8.1	0	0	0	0	0	0	3.4

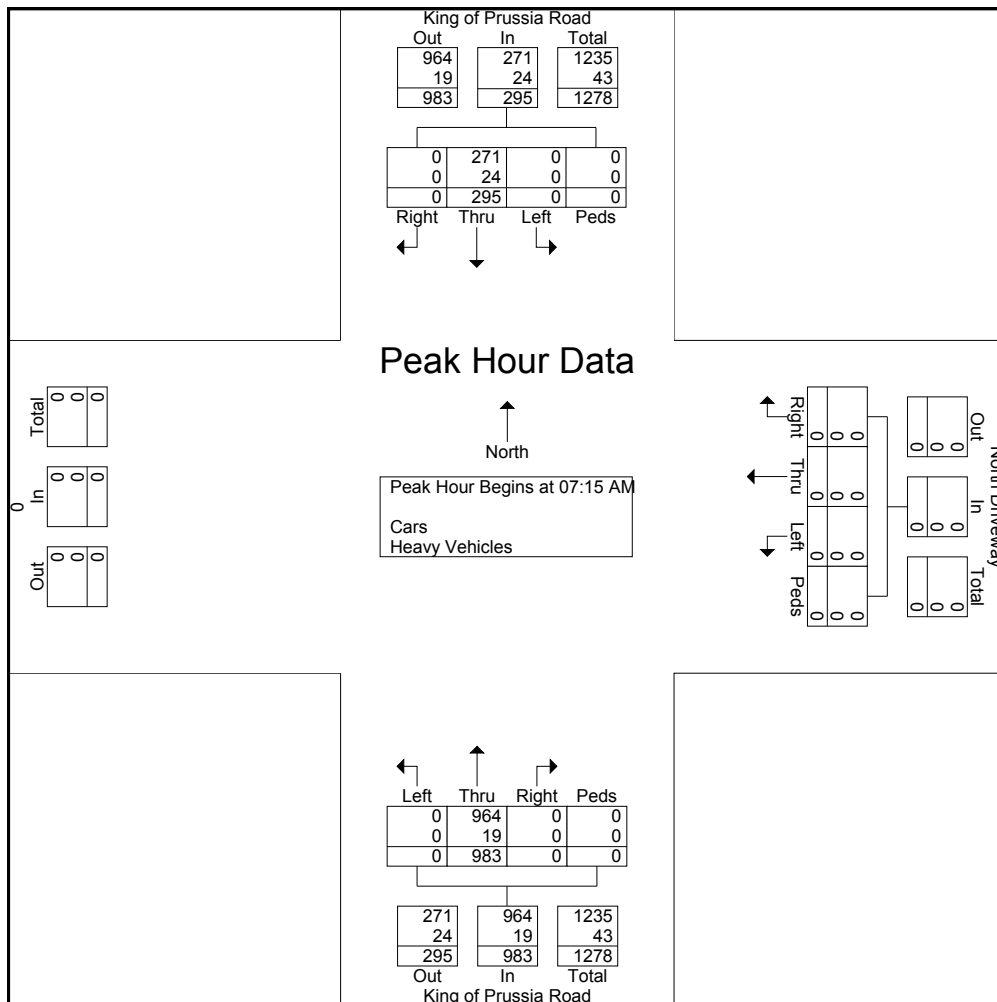

Pennoni Associates

Location: Montgomery County, PA
 Intersection: K of P Rd/North Driveway
 Date: Wednesday, November 18, 2015
 Counter: ACB

File Name : ss1118-4
 Site Code :
 Start Date : 11/18/2015
 Page No : 4

Start Time	King of Prussia Road Northbound					King of Prussia Road Southbound					Eastbound	North Driveway Westbound					Int. Total
	Left	Thru	Right	Peds	App. Total	Left	Thru	Right	Peds	App. Total	App. Total	Left	Thru	Right	Peds	App. Total	
Peak Hour Analysis From 05:00 PM to 05:45 PM - Peak 1 of 1																	
Peak Hour for Entire Intersection Begins at 05:00 PM																	
05:00 PM	0	58	0	0	58	0	276	0	0	276	0	0	0	0	0	0	334
05:15 PM	0	68	0	0	68	0	283	0	0	283	0	0	0	0	0	0	351
05:30 PM	0	53	0	0	53	0	263	0	0	263	0	0	0	0	0	0	316
05:45 PM	0	90	0	0	90	0	220	0	0	220	0	0	0	0	0	0	310
Total Volume	0	269	0	0	269	0	1042	0	0	1042	0	0	0	0	0	0	1311
% App. Total	0	100	0	0		0	100	0	0		0	0	0	0	0		
PHF	.000	.747	.000	.000	.747	.000	.920	.000	.000	.920	.000	.000	.000	.000	.000	.000	.934
Cars	0	267	0	0	267	0	1039	0	0	1039	0	0	0	0	0	0	1306
% Cars	0	99.3	0	0	99.3	0	99.7	0	0	99.7	0	0	0	0	0	0	99.6
Heavy Vehicles	0	2	0	0	2	0	3	0	0	3	0	0	0	0	0	0	5
% Heavy Vehicles	0	0.7	0	0	0.7	0	0.3	0	0	0.3	0	0	0	0	0	0	0.4

Pennoni Associates

Location: Montgomery County, PA
 South Driveway
 Date: Wednesday, November 18, 2015
 Counter: PG

File Name : SS1118-5
 Site Code :
 Start Date : 11/18/2015
 Page No : 1


Groups Printed- Cars - Heavy Vehicles

Start Time	King of Prussia Road Northbound					King of Prussia Road Southbound					Eastbound	South Driveway Westbound					Int. Total
	Left	Thru	Right	Peds	App. Total	Left	Thru	Right	Peds	App. Total	App. Total	Left	Thru	Right	Peds	App. Total	
07:00 AM	0	240	0	0	240	0	47	0	0	47	0	0	0	0	0	0	287
07:15 AM	0	349	0	0	349	0	107	0	0	107	0	0	0	0	0	0	456
07:30 AM	0	292	0	0	292	0	112	0	0	112	0	0	0	0	0	0	404
07:45 AM	0	242	0	0	242	0	79	0	0	79	0	0	0	0	0	0	321
Total	0	1123	0	0	1123	0	345	0	0	345	0	0	0	0	0	0	1468
08:00 AM	0	261	0	0	261	0	68	0	0	68	0	0	0	0	0	0	329
08:15 AM	0	301	0	0	301	0	60	0	0	60	0	0	0	0	0	0	361
08:30 AM	0	296	0	0	296	0	54	0	0	54	0	0	0	0	0	0	350
08:45 AM	0	313	0	0	313	0	61	0	0	61	0	0	0	0	0	0	374
Total	0	1171	0	0	1171	0	243	0	0	243	0	0	0	0	0	0	1414
04:00 PM	0	94	0	0	94	0	198	0	0	198	0	0	0	0	0	0	292
04:15 PM	0	90	0	0	90	0	202	0	0	202	0	0	0	0	0	0	292
04:30 PM	0	74	0	0	74	0	243	0	0	243	0	0	0	0	0	0	317
04:45 PM	0	84	0	0	84	0	218	0	0	218	0	0	0	0	0	0	302
Total	0	342	0	0	342	0	861	0	0	861	0	0	0	0	0	0	1203
05:00 PM	0	67	0	0	67	0	287	0	0	287	0	0	0	0	0	0	354
05:15 PM	0	71	0	0	71	0	294	0	0	294	0	0	0	0	0	0	365
05:30 PM	0	58	0	0	58	0	272	0	0	272	0	0	0	0	0	0	330
05:45 PM	0	96	0	0	96	0	220	0	0	220	0	0	0	0	0	0	316
Total	0	292	0	0	292	0	1073	0	0	1073	0	0	0	0	0	0	1365
Grand Total	0	2928	0	0	2928	0	2522	0	0	2522	0	0	0	0	0	0	5450
Apprch %	0	100	0	0		0	100	0	0		0	0	0	0	0		
Total %	0	53.7	0	0	53.7	0	46.3	0	0	46.3	0	0	0	0	0	0	
Cars	0	2872	0	0	2872	0	2463	0	0	2463	0	0	0	0	0	0	5335
% Cars	0	98.1	0	0	98.1	0	97.7	0	0	97.7	0	0	0	0	0	0	97.9
Heavy Vehicles	0	56	0	0	56	0	59	0	0	59	0	0	0	0	0	0	115
% Heavy Vehicles	0	1.9	0	0	1.9	0	2.3	0	0	2.3	0	0	0	0	0	0	2.1

Pennoni Associates

Location: Montgomery County, PA
 South Driveway
 Date: Wednesday, November 18, 2015
 Counter: PG

File Name : SS1118-5
 Site Code :
 Start Date : 11/18/2015
 Page No : 2

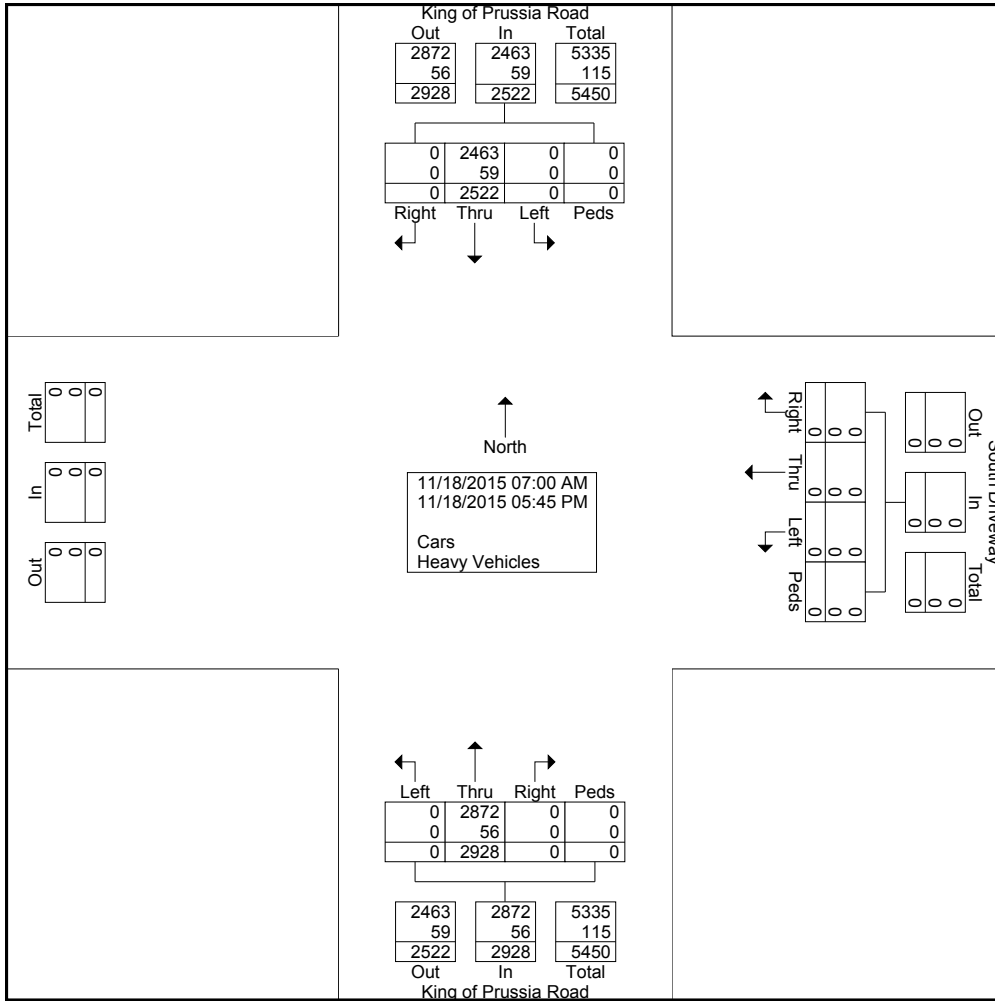

Pennoni Associates

Location: Montgomery County, PA
 South Driveway
 Date: Wednesday, November 18, 2015
 Counter: PG

File Name : SS1118-5
 Site Code :
 Start Date : 11/18/2015
 Page No : 3


Start Time	King of Prussia Road Northbound					King of Prussia Road Southbound					Eastbound	South Driveway Westbound					Int. Total
	Left	Thru	Right	Peds	App. Total	Left	Thru	Right	Peds	App. Total	App. Total	Left	Thru	Right	Peds	App. Total	
Peak Hour Analysis From 07:15 AM to 08:00 AM - Peak 1 of 1																	
Peak Hour for Entire Intersection Begins at 07:15 AM																	
07:15 AM	0	349	0	0	349	0	107	0	0	107	0	0	0	0	0	0	456
07:30 AM	0	292	0	0	292	0	112	0	0	112	0	0	0	0	0	0	404
07:45 AM	0	242	0	0	242	0	79	0	0	79	0	0	0	0	0	0	321
08:00 AM	0	261	0	0	261	0	68	0	0	68	0	0	0	0	0	0	329
Total Volume	0	1144	0	0	1144	0	366	0	0	366	0	0	0	0	0	0	1510
% App. Total	0	100	0	0		0	100	0	0			0	0	0	0		
PHF	.000	.819	.000	.000	.819	.000	.817	.000	.000	.817	.000	.000	.000	.000	.000	.000	.828
Cars	0	1126	0	0	1126	0	337	0	0	337	0	0	0	0	0	0	1463
% Cars	0	98.4	0	0	98.4	0	92.1	0	0	92.1	0	0	0	0	0	0	96.9
Heavy Vehicles	0	18	0	0	18	0	29	0	0	29	0	0	0	0	0	0	47
% Heavy Vehicles	0	1.6	0	0	1.6	0	7.9	0	0	7.9	0	0	0	0	0	0	3.1

Pennoni Associates

Location: Montgomery County, PA
 South Driveway
 Date: Wednesday, November 18, 2015
 Counter: PG

File Name : SS1118-5
 Site Code :
 Start Date : 11/18/2015
 Page No : 4

Start Time	King of Prussia Road Northbound					King of Prussia Road Southbound					Eastbound	South Driveway Westbound					Int. Total	
	Left	Thru	Right	Peds	App. Total	Left	Thru	Right	Peds	App. Total		App. Total	Left	Thru	Right	Peds		App. Total
Peak Hour Analysis From 05:00 PM to 05:45 PM - Peak 1 of 1																		
Peak Hour for Entire Intersection Begins at 05:00 PM																		
05:00 PM	0	67	0	0	67	0	287	0	0	287	0	0	0	0	0	0	0	354
05:15 PM	0	71	0	0	71	0	294	0	0	294	0	0	0	0	0	0	0	365
05:30 PM	0	58	0	0	58	0	272	0	0	272	0	0	0	0	0	0	0	330
05:45 PM	0	96	0	0	96	0	220	0	0	220	0	0	0	0	0	0	0	316
Total Volume	0	292	0	0	292	0	1073	0	0	1073	0	0	0	0	0	0	0	1365
% App. Total	0	100	0	0	100	0	100	0	0	100	0	0	0	0	0	0	0	100
PHF	.000	.760	.000	.000	.760	.000	.912	.000	.000	.912	.000	.000	.000	.000	.000	.000	.000	.935
Cars	0	290	0	0	290	0	1070	0	0	1070	0	0	0	0	0	0	0	1360
% Cars	0	99.3	0	0	99.3	0	99.7	0	0	99.7	0	0	0	0	0	0	0	99.6
Heavy Vehicles	0	2	0	0	2	0	3	0	0	3	0	0	0	0	0	0	0	5
% Heavy Vehicles	0	0.7	0	0	0.7	0	0.3	0	0	0.3	0	0	0	0	0	0	0	0.4

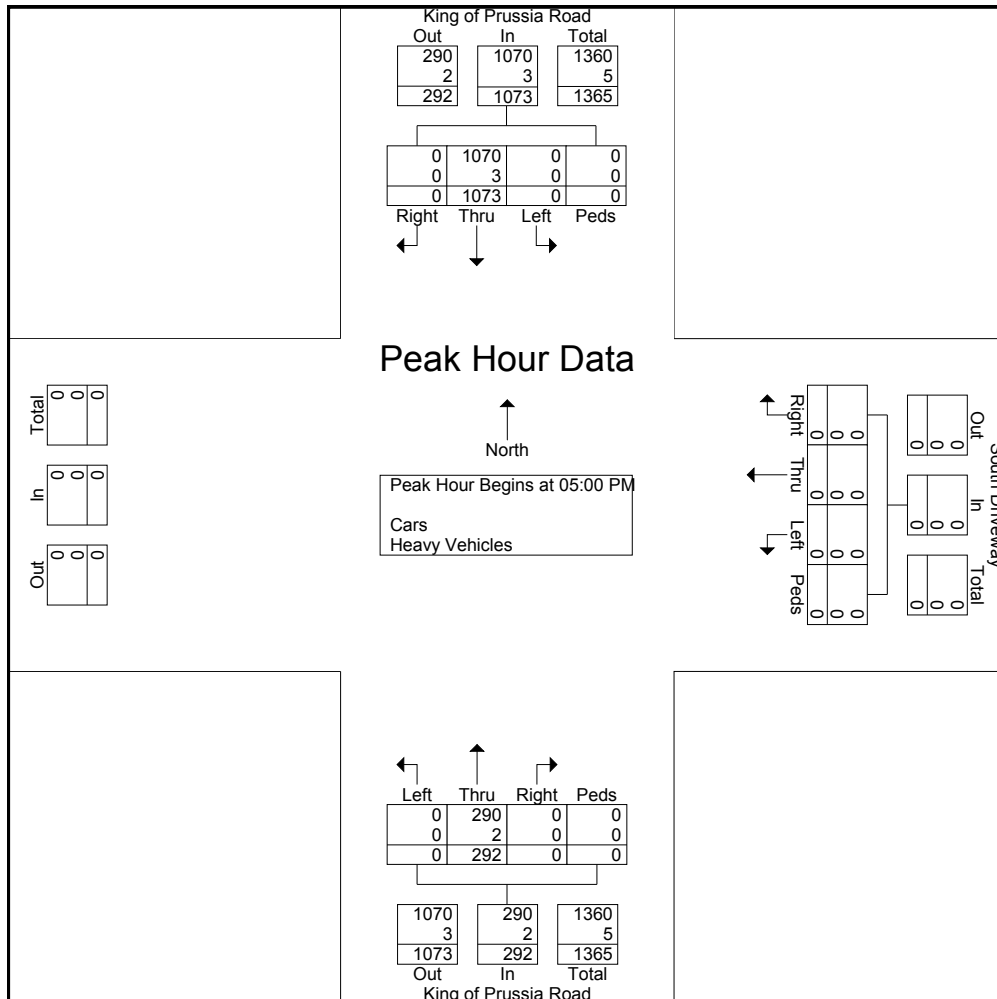

Pennoni Associates

Location: Montgomery County, PA
 Intersection: 476NB Off/Rt. 30/ KOP Rd.
 Date: Tuesday, November 24, 2015
 Counter: ET / JT

File Name : SS1124-1
 Site Code : 00000000
 Start Date : 11/24/2015
 Page No : 1


Groups Printed- Cars - Heavy Vehicles - RTOR

Start Time	I-476 NB Off Ramp Northbound					King of Prussia Road Southbound					Route 30 Eastbound					Route 30 Westbound					Int. Total
	Left	Thru	Right	Peds	App. Total	Left	Thru	Right	Peds	App. Total	Left	Thru	Right	Peds	App. Total	Left	Thru	Right	Peds	App. Total	
07:00 AM	147	182	66	0	395	35	0	13	0	48	42	231	0	0	273	0	92	43	0	135	851
07:15 AM	170	186	68	0	424	59	0	42	0	101	78	278	0	0	356	0	103	110	0	213	1094
07:30 AM	192	173	85	0	450	82	0	30	0	112	29	325	0	0	354	0	148	58	0	206	1122
07:45 AM	216	153	88	0	457	58	0	16	0	74	18	321	0	0	339	0	145	53	0	198	1068
Total	725	694	307	0	1726	234	0	101	0	335	167	1155	0	0	1322	0	488	264	0	752	4135
08:00 AM	167	186	90	0	443	51	0	16	1	68	43	333	0	0	376	0	128	33	0	161	1048
08:15 AM	188	183	88	0	459	47	0	13	0	60	56	327	0	0	383	0	147	49	0	196	1098
08:30 AM	170	161	92	0	423	33	7	8	0	48	68	333	0	0	401	0	147	50	0	197	1069
08:45 AM	126	124	87	0	337	42	0	12	0	54	73	312	0	0	385	0	166	60	1	227	1003
Total	651	654	357	0	1662	173	7	49	1	230	240	1305	0	0	1545	0	588	192	1	781	4218
*** BREAK ***																					
04:00 PM	67	54	40	0	161	138	0	74	2	214	19	374	0	0	393	0	167	24	0	191	959
04:15 PM	80	52	42	1	175	114	0	59	0	173	21	383	0	0	404	0	149	29	0	178	930
04:30 PM	69	36	34	0	139	176	0	87	0	263	12	387	0	0	399	0	123	24	0	147	948
04:45 PM	77	45	55	0	177	125	0	83	1	209	12	378	0	0	390	0	135	27	0	162	938
Total	293	187	171	1	652	553	0	303	3	859	64	1522	0	0	1586	0	574	104	0	678	3775
05:00 PM	62	37	50	0	149	184	0	98	0	282	11	362	0	0	373	0	149	31	0	180	984
05:15 PM	73	49	45	0	167	180	0	87	0	267	16	394	0	0	410	0	151	39	0	190	1034
05:30 PM	77	43	62	0	182	164	0	64	0	228	10	392	0	0	402	0	124	32	1	157	969
05:45 PM	55	67	53	6	181	122	0	50	0	172	9	361	0	0	370	0	143	43	0	186	909
Total	267	196	210	6	679	650	0	299	0	949	46	1509	0	0	1555	0	567	145	1	713	3896
Grand Total	1936	1731	1045	7	4719	1610					5491	0	0	6008	0	2217					
Cars	1926	1722	1029	6	4683	1576	7	653	3	2239	517	5426	0	0	5943	0	2195	483	2	2680	15545
% Cars	99.5	99.5	98.5	85.7	99.2	97.9	100	86.8	75	94.4	100	98.8	0	0	98.9	0	99	68.5	100	91.7	97
Heavy Vehicles	10	8	7	1	26	34	0	11	1	46	0	65	0	0	65	0	21	21	0	42	179
% Heavy Vehicles	0.5	0.5	0.7	14.3	0.6	2.1	0	1.5	25	1.9	0	1.2	0	0	1.1	0	0.9	3	0	1.4	1.1
RTOR	0	1	9	0	10	0	0	88	0	88	0	0	0	0	0	0	1	201	0	202	300
% RTOR	0	0.1	0.9	0	0.2	0	0	11.7	0	3.7	0	0	0	0	0	0	0	28.5	0	6.9	1.9

Pennoni Associates

Location: Montgomery County, PA
 Intersection: 476NB Off/Rt. 30/ KOP Rd.
 Date: Tuesday, November 24, 2015
 Counter: ET / JT

File Name : SS1124-1
 Site Code : 00000000
 Start Date : 11/24/2015
 Page No : 2

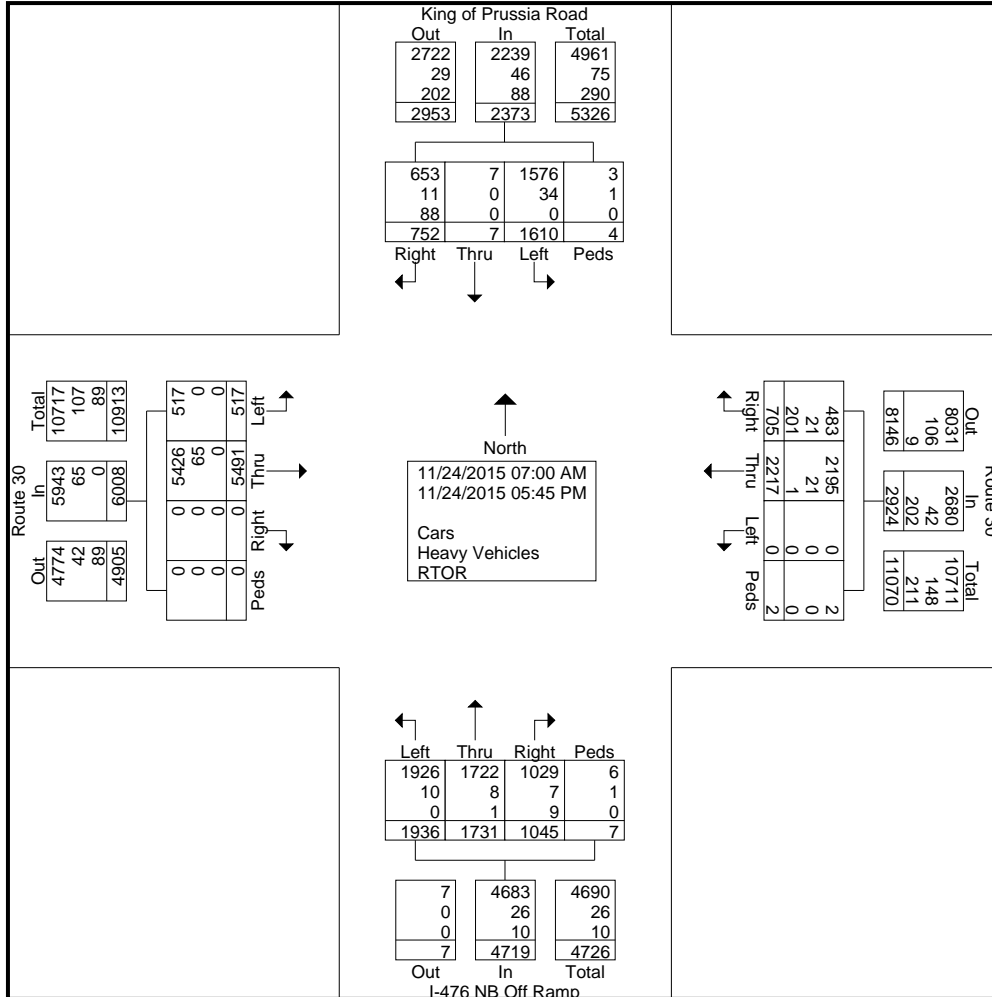


Pennoni Associates

Location: Montgomery County, PA
 Intersection: 476NB Off/Rt. 30/ KOP Rd.
 Date: Tuesday, November 24, 2015
 Counter: ET / JT

File Name : SS1124-1
 Site Code : 00000000
 Start Date : 11/24/2015
 Page No : 3

Start Time	I-476 NB Off Ramp Northbound					King of Prussia Road Southbound					Route 30 Eastbound					Route 30 Westbound					Int. Total
	Left	Thru	Right	Peds	App. Total	Left	Thru	Right	Peds	App. Total	Left	Thru	Right	Peds	App. Total	Left	Thru	Right	Peds	App. Total	
Peak Hour Analysis From 07:15 AM to 08:00 AM - Peak 1 of 1																					
Peak Hour for Entire Intersection Begins at 07:15 AM																					
07:15 AM	170	186	68	0	424	59	0	42	0	101	78	278	0	0	356	0	103	110	0	213	1094
07:30 AM	192	173	85	0	450	82	0	30	0	112	29	325	0	0	354	0	148	58	0	206	1122
07:45 AM	216	153	88	0	457	58	0	16	0	74	18	321	0	0	339	0	145	53	0	198	1068
08:00 AM	167	186	90	0	443	51	0	16	1	68	43	333	0	0	376	0	128	33	0	161	1048
Total Volume	745	698	331	0	1774	250	0	104	1	355	168	1257	0	0	1425	0	524	254	0	778	4332
% App. Total																					
PHF	.862	.938	.919	.000	.970	.762	.000	.619	.250	.792	.538	.944	.000	.000	.947	.000	.885	.577	.000	.913	.965
Cars	741	694	326	0	1761	233	0	75	0	308	168	1228	0	0	1396	0	518	169	0	687	4152
% Cars	99.5	99.4	98.5	0	99.3	93.2	0	72.1	0	86.8	100	97.7	0	0	98.0	0	98.9	66.5	0	88.3	95.8
Heavy Vehicles																					
% Heavy Vehicles	0.5	0.6	0.9	0	0.6	6.8	0	5.8	100	6.8	0	2.3	0	0	2.0	0	1.0	2.4	0	1.4	1.7
RTOR	0	0	2	0	2	0	0	23	0	23	0	0	0	0	0	0	1	79	0	80	105
% RTOR	0	0	0.6	0	0.1	0	0	22.1	0	6.5	0	0	0	0	0	0	0.2	31.1	0	10.3	2.4

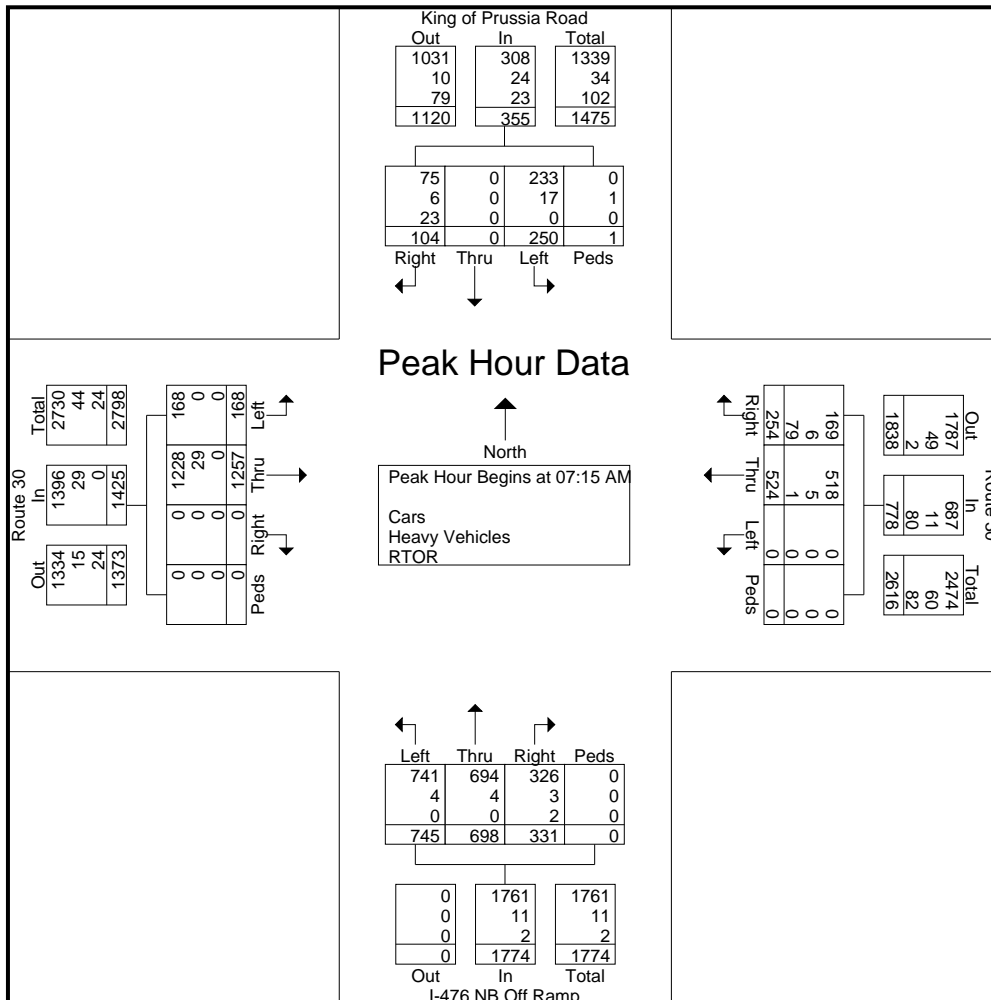



Pennoni Associates

Location: Montgomery County, PA
 Intersection: 476NB Off/Rt. 30/ KOP Rd.
 Date: Tuesday, November 24, 2015
 Counter: ET / JT


File Name : SS1124-1
 Site Code : 00000000
 Start Date : 11/24/2015
 Page No : 4

Start Time	I-476 NB Off Ramp Northbound					King of Prussia Road Southbound					Route 30 Eastbound					Route 30 Westbound					Int. Total
	Left	Thru	Right	Peds	App. Total	Left	Thru	Right	Peds	App. Total	Left	Thru	Right	Peds	App. Total	Left	Thru	Right	Peds	App. Total	
Peak Hour Analysis From 05:00 PM to 05:45 PM - Peak 1 of 1																					
Peak Hour for Entire Intersection Begins at 05:00 PM																					
05:00 PM	62	37	50	0	149	184	0	98	0	282	11	362	0	0	373	0	149	31	0	180	984
05:15 PM	73	49	45	0	167	180	0	87	0	267	16	394	0	0	410	0	151	39	0	190	1034
05:30 PM	77	43	62	0	182	164	0	64	0	228	10	392	0	0	402	0	124	32	1	157	969
05:45 PM	55	67	53	6	181	122	0	50	0	172	9	361	0	0	370	0	143	43	0	186	909
Total Volume	267	196	210	6	679	650	0	299	0	949	46	1509	0	0	1555	0	567	145	1	713	3896
% App. Total	.867	.731	.847	.250	.933	.883	.000	.763	.000	.841	.719	.957	.000	.000	.948	.000	.939	.843	.250	.938	.942
PHF	.867	.731	.847	.250	.933	.883	.000	.763	.000	.841	.719	.957	.000	.000	.948	.000	.939	.843	.250	.938	.942
Cars	264	196	208	6	674	648	0	266	0	914	46	1507	0	0	1553	0	566	118	1	685	3826
% Cars	98.9	100	99.0	100	99.3	99.7	0	89.0	0	96.3	100	99.9	0	0	99.9	0	99.8	81.4	100	96.1	98.2
Heavy Vehicles	1.1	0	0	0	0.4	0.3	0	0	0	0.2	0	0.1	0	0	0.1	0	0.2	0.7	0	0.3	0.2
% Heavy Vehicles	1.1	0	0	0	0.4	0.3	0	0	0	0.2	0	0.1	0	0	0.1	0	0.2	0.7	0	0.3	0.2
RTOR	0	0	2	0	2	0	0	33	0	33	0	0	0	0	0	0	0	26	0	26	61
% RTOR	0	0	1.0	0	0.3	0	0	11.0	0	3.5	0	0	0	0	0	0	0	17.9	0	3.6	1.6

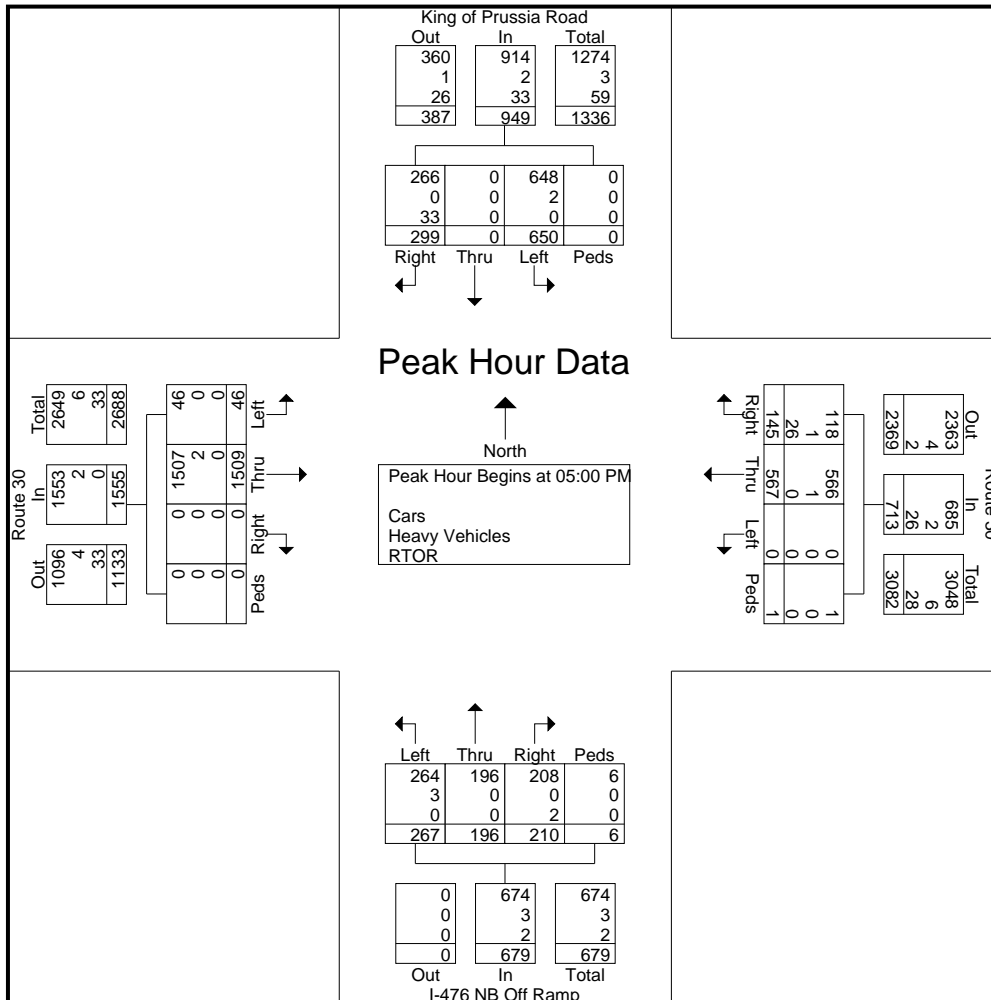


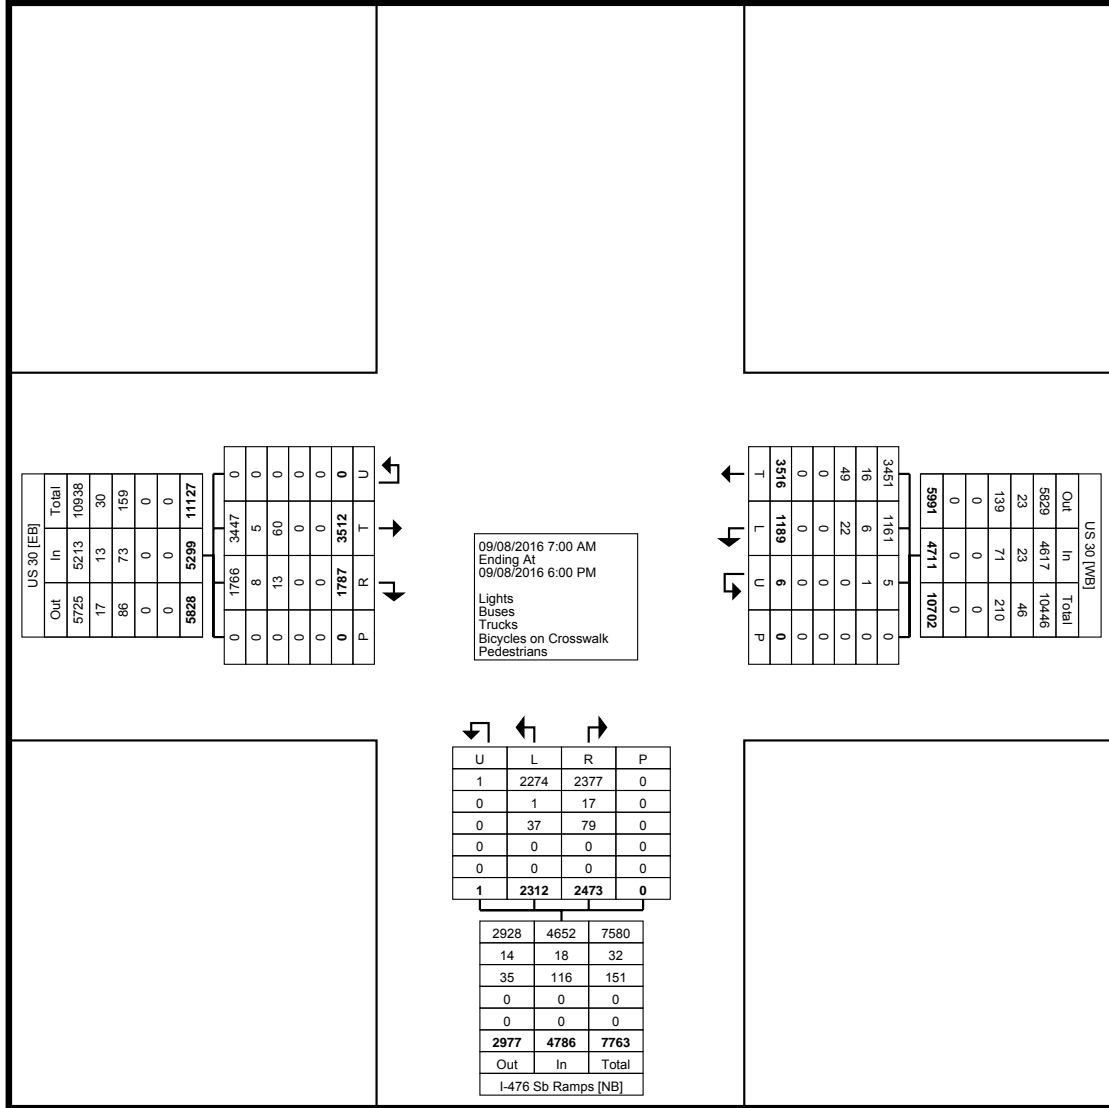

Turning Movement Data Plot

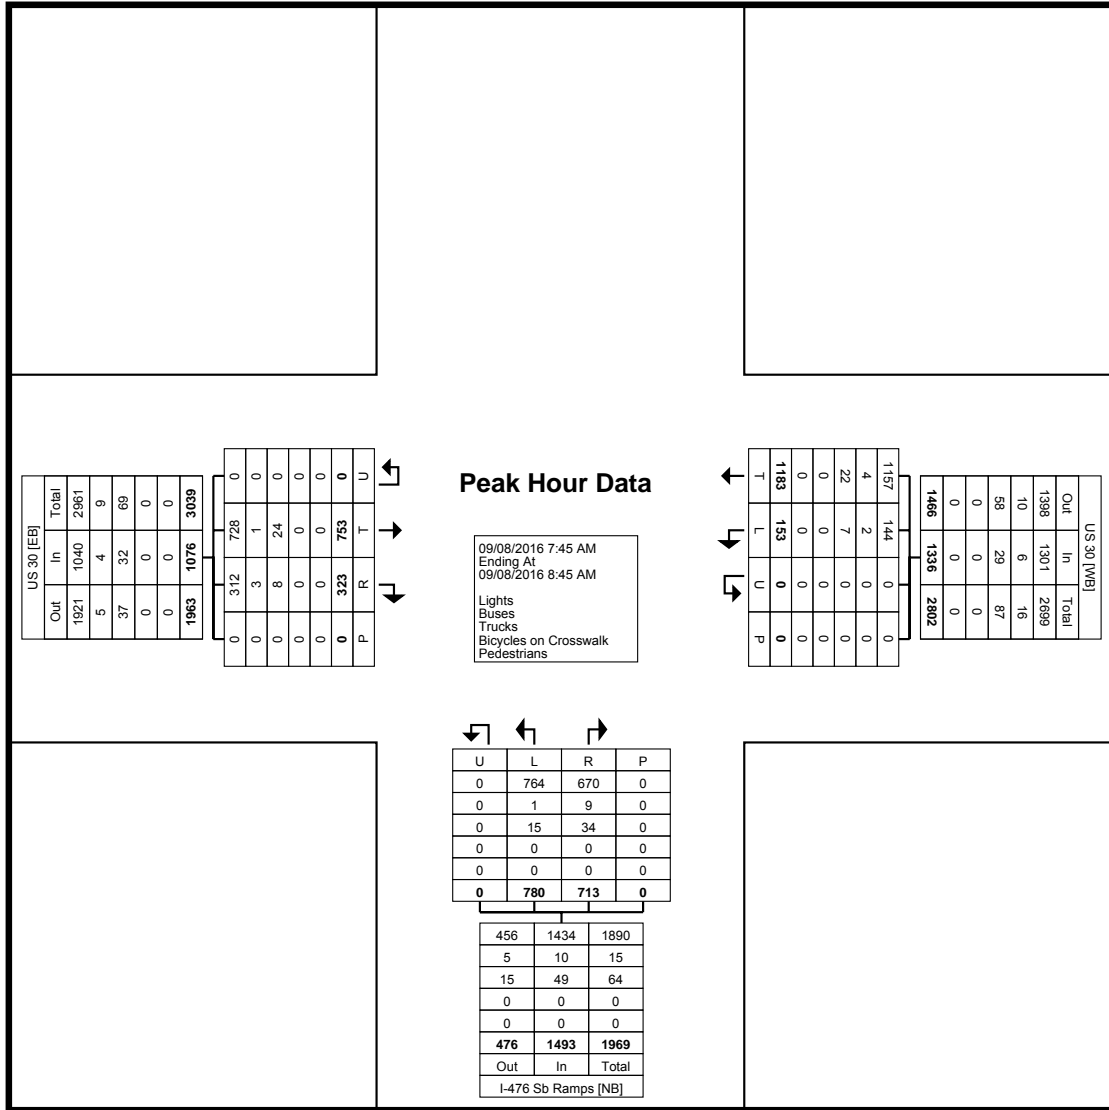

Turning Movement Peak Hour Data Plot (7:45 AM)

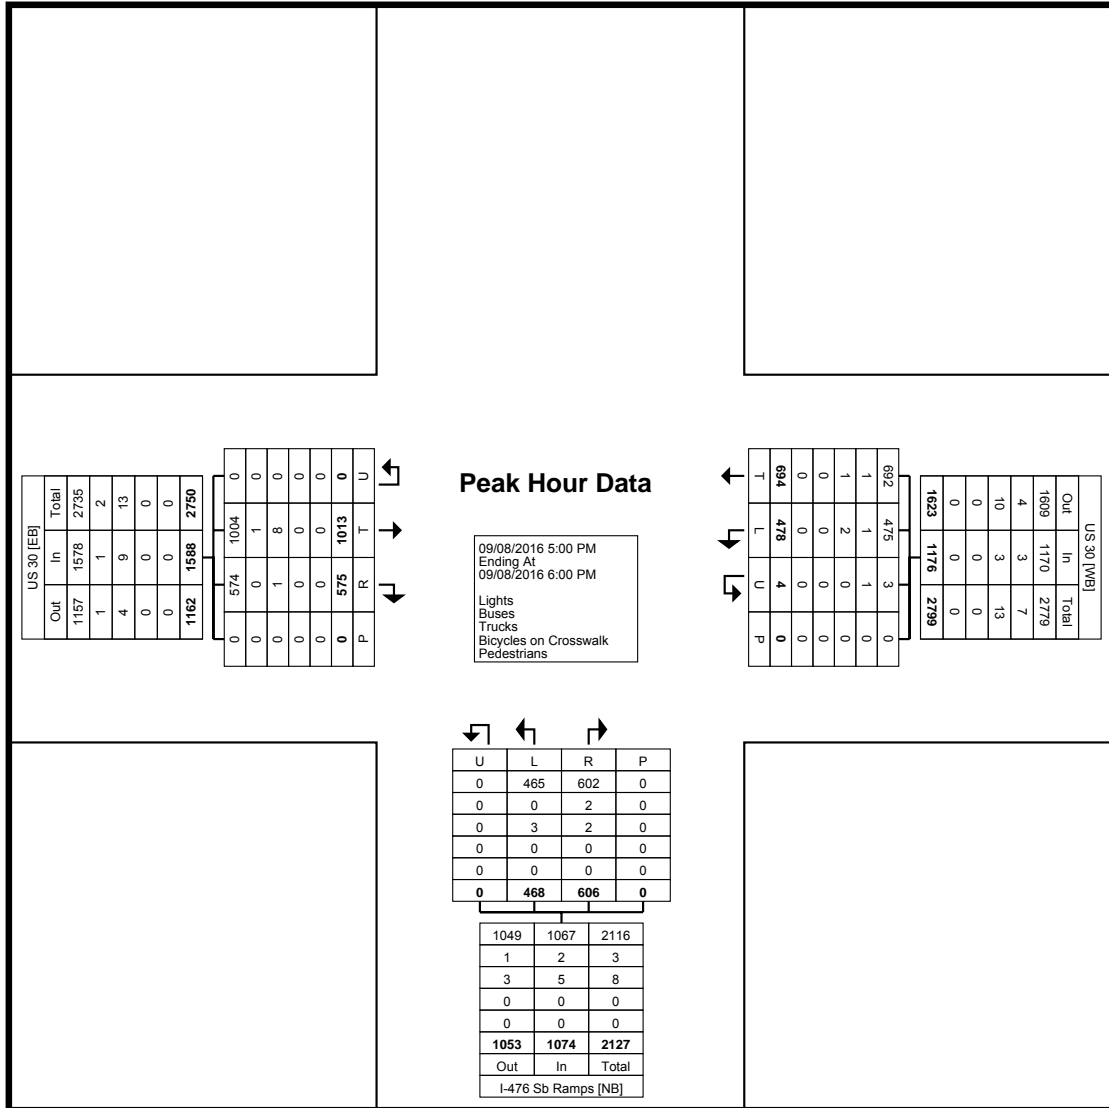

Turning Movement Peak Hour Data Plot (5:00 PM)

APPENDIX D

Existing Condition Capacity Analysis Worksheets

TRAFFIC IMPACT STUDY


MIXED MEDICAL FACILITY

145 KING OF PRUSSIA ROAD
RADNOR TOWNSHIP
DELAWARE COUNTY, PA

UPHS1507

HCM 2010 Signalized Intersection Summary
 2: Radnor Chester Rd & King of Prussia Rd

01/05/2018



Movement	EBL	EBT	EBR	WBL	WBT	WBR	NEL	NET	NER	SWL	SWT	SWR
Lane Configurations												
Traffic Volume (veh/h)	37	259	460	25	790	7	494	32	46	2	1	6
Future Volume (veh/h)	37	259	460	25	790	7	494	32	46	2	1	6
Number	5	2	12	1	6	16	7	4	14	3	8	18
Initial Q (Qb), veh	0	0	0	0	0	0	0	0	0	0	0	0
Ped-Bike Adj(A_pbT)	1.00		1.00	1.00		1.00	1.00		0.97	1.00		0.97
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Adj Sat Flow, veh/h/ln	1800	1714	1817	1717	1816	1854	1782	1629	1835	1809	1628	1809
Adj Flow Rate, veh/h	39	276	0	27	840	7	526	34	49	2	1	6
Adj No. of Lanes	1	1	1	1	1	0	0	1	1	0	1	0
Peak Hour Factor	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94
Percent Heavy Veh, %	0	5	3	8	2	2	0	0	1	0	0	0
Cap, veh/h	124	857	772	512	899	7	226	10	574	49	37	73
Arrive On Green	0.50	0.50	0.00	0.50	0.50	0.50	0.38	0.38	0.38	0.38	0.38	0.38
Sat Flow, veh/h	661	1714	1545	1068	1798	15	393	25	1520	0	97	194
Grp Volume(v), veh/h	39	276	0	27	0	847	560	0	49	9	0	0
Grp Sat Flow(s),veh/h/ln	661	1714	1545	1068	0	1813	418	0	1520	290	0	0
Q Serve(g_s), s	5.3	8.6	0.0	1.4	0.0	39.4	0.0	0.0	1.9	0.0	0.0	0.0
Cycle Q Clear(g_c), s	44.2	8.6	0.0	10.0	0.0	39.4	34.0	0.0	1.9	34.0	0.0	0.0
Prop In Lane	1.00		1.00	1.00		0.01	0.94		1.00	0.22		0.67
Lane Grp Cap(c), veh/h	124	857	772	512	0	907	236	0	574	159	0	0
V/C Ratio(X)	0.31	0.32	0.00	0.05	0.00	0.93	2.38	0.00	0.09	0.06	0.00	0.00
Avail Cap(c_a), veh/h	124	857	772	512	0	907	236	0	574	159	0	0
HCM Platoon Ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(I)	0.72	0.72	0.00	1.00	0.00	1.00	1.00	0.00	1.00	1.00	0.00	0.00
Uniform Delay (d), s/veh	41.6	13.4	0.0	16.4	0.0	21.1	33.6	0.0	18.0	21.6	0.0	0.0
Incr Delay (d2), s/veh	4.7	0.7	0.0	0.2	0.0	17.7	632.5	0.0	0.1	0.1	0.0	0.0
Initial Q Delay(d3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
%ile BackOfQ(95%),veh/lr	2.0	7.1	0.0	0.8	0.0	32.0	85.0	0.0	1.4	0.3	0.0	0.0
LnGrp Delay(d),s/veh	46.3	14.1	0.0	16.6	0.0	38.8	666.0	0.0	18.1	21.8	0.0	0.0
LnGrp LOS	D	B		B		D	F		B	C		
Approach Vol, veh/h		315			874			609			9	
Approach Delay, s/veh		18.1			38.1			613.9			21.8	
Approach LOS		B			D			F			C	
Timer	1	2	3	4	5	6	7	8				
Assigned Phs		2		4		6		8				
Phs Duration (G+Y+Rc), s		50.0		40.0		50.0		40.0				
Change Period (Y+Rc), s		6.0		7.0		6.0		7.0				
Max Green Setting (Gmax), s		44.0		33.0		44.0		33.0				
Max Q Clear Time (g_c+I1), s		46.7		36.0		41.4		36.0				
Green Ext Time (p_c), s		0.0		0.0		1.8		0.0				
Intersection Summary												
HCM 2010 Ctrl Delay			228.6									
HCM 2010 LOS			F									

HCM 2010 TWSC
 3: King of Prussia Rd & Septa Driveway

01/05/2018

Intersection						
Int Delay, s/veh	1.2					
Movement	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations						
Traffic Vol, veh/h	5	26	933	56	60	242
Future Vol, veh/h	5	26	933	56	60	242
Conflicting Peds, #/hr	2	10	0	17	17	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	None	-	None	-	None
Storage Length	0	-	-	-	100	-
Veh in Median Storage, #	0	-	0	-	-	0
Grade, %	0	-	0	-	-	0
Peak Hour Factor	87	87	87	87	87	87
Heavy Vehicles, %	0	42	2	0	22	5
Mvmt Flow	6	30	1072	64	69	278

Major/Minor	Minor1	Major1	Major2		
Conflicting Flow All	1540	1132	0	0	1154
Stage 1	1122	-	-	-	-
Stage 2	418	-	-	-	-
Critical Hdwy	6.4	6.62	-	-	4.32
Critical Hdwy Stg 1	5.4	-	-	-	-
Critical Hdwy Stg 2	5.4	-	-	-	-
Follow-up Hdwy	3.5	3.678	-	-	2.398
Pot Cap-1 Maneuver	128	206	-	-	539
Stage 1	314	-	-	-	-
Stage 2	669	-	-	-	-
Platoon blocked, %			-	-	-
Mov Cap-1 Maneuver	110	201	-	-	535
Mov Cap-2 Maneuver	229	-	-	-	-
Stage 1	310	-	-	-	-
Stage 2	582	-	-	-	-

Approach	WB	NB	SB
HCM Control Delay, s	26.2	0	2.5
HCM LOS	D		

Minor Lane/Major Mvmt	NBT	NBRWBLn1	SBL	SBT
Capacity (veh/h)	-	-	205	535
HCM Lane V/C Ratio	-	-	0.174	0.129
HCM Control Delay (s)	-	-	26.2	12.7
HCM Lane LOS	-	-	D	B
HCM 95th %tile Q(veh)	-	-	0.6	0.4

HCM 2010 TWSC
4: King of Prussia Rd & Northern Driveway

01/05/2018

Intersection						
Int Delay, s/veh	0					
Movement	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations	↔		↑			↑
Traffic Vol, veh/h	0	0	983	0	0	295
Future Vol, veh/h	0	0	983	0	0	295
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	None	-	None	-	None
Storage Length	0	-	-	-	-	-
Veh in Median Storage, #	0	-	0	-	-	0
Grade, %	0	-	0	-	-	0
Peak Hour Factor	94	94	94	94	94	94
Heavy Vehicles, %	0	0	2	0	0	8
Mvmt Flow	0	0	1046	0	0	314

Major/Minor	Minor1	Major1	Major2			
Conflicting Flow All	1360	1046	0	-	-	-
Stage 1	1046	-	-	-	-	-
Stage 2	314	-	-	-	-	-
Critical Hdwy	6.4	6.2	-	-	-	-
Critical Hdwy Stg 1	5.4	-	-	-	-	-
Critical Hdwy Stg 2	5.4	-	-	-	-	-
Follow-up Hdwy	3.5	3.3	-	-	-	-
Pot Cap-1 Maneuver	165	280	-	0	0	-
Stage 1	341	-	-	0	0	-
Stage 2	745	-	-	0	0	-
Platoon blocked, %			-			-
Mov Cap-1 Maneuver	165	280	-	-	-	-
Mov Cap-2 Maneuver	274	-	-	-	-	-
Stage 1	341	-	-	-	-	-
Stage 2	745	-	-	-	-	-

Approach	WB	NB	SB
HCM Control Delay, s	0	0	0
HCM LOS	A		

Minor Lane/Major Mvmt	NBTWBLn1	SBT
Capacity (veh/h)	-	-
HCM Lane V/C Ratio	-	-
HCM Control Delay (s)	-	0
HCM Lane LOS	-	A
HCM 95th %tile Q(veh)	-	-

Intersection												
Int Delay, s/veh	5.6											
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		↕						↕			↕	
Traffic Vol, veh/h	9	0	128	0	0	0	171	978	0	0	239	57
Future Vol, veh/h	9	0	128	0	0	0	171	978	0	0	239	57
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	8	8	0	0
Sign Control	Stop	Stop	Stop	Stop	Stop	Stop	Free	Free	Free	Free	Free	Free
RT Channelized	-	-	None	-	-	None	-	-	None	-	-	None
Storage Length	-	-	-	-	-	-	-	-	-	-	-	-
Veh in Median Storage, #	-	0	-	-	-	-	-	0	-	-	0	-
Grade, %	-	0	-	-	0	-	-	0	-	-	0	-
Peak Hour Factor	78	78	78	78	78	78	78	78	78	78	78	78
Heavy Vehicles, %	11	0	4	0	0	0	0	2	0	0	10	0
Mvmt Flow	12	0	164	0	0	0	219	1254	0	0	306	73

Major/Minor	Minor2			Major1			Major2					
Conflicting Flow All	2035	2043	343				379	0	0	1262	0	0
Stage 1	343	343	-				-	-	-	-	-	-
Stage 2	1692	1700	-				-	-	-	-	-	-
Critical Hdwy	6.51	6.5	6.24				4.1	-	-	4.1	-	-
Critical Hdwy Stg 1	5.51	5.5	-				-	-	-	-	-	-
Critical Hdwy Stg 2	5.51	5.5	-				-	-	-	-	-	-
Follow-up Hdwy	3.599	4	3.336				2.2	-	-	2.2	-	-
Pot Cap-1 Maneuver	59	57	695				1191	-	-	558	-	-
Stage 1	699	641	-				-	-	-	-	-	-
Stage 2	156	149	-				-	-	-	-	-	-
Platoon blocked, %												
Mov Cap-1 Maneuver	23	0	695				1191	-	-	558	-	-
Mov Cap-2 Maneuver	23	0	-				-	-	-	-	-	-
Stage 1	699	0	-				-	-	-	-	-	-
Stage 2	61	0	-				-	-	-	-	-	-

Approach	EB	NB	SB
HCM Control Delay, s	53.4	1.3	0
HCM LOS	F		

Minor Lane/Major Mvmt	NBL	NBT	NBR	EBLn1	SBL	SBT	SBR
Capacity (veh/h)	1191	-	-	238	558	-	-
HCM Lane V/C Ratio	0.184	-	-	0.738	-	-	-
HCM Control Delay (s)	8.7	0	-	53.4	0	-	-
HCM Lane LOS	A	A	-	F	A	-	-
HCM 95th %tile Q(veh)	0.7	-	-	5.1	0	-	-

Intersection						
Int Delay, s/veh	0					
Movement	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations	↘↗		↑	↗↘	↘↗	↑
Traffic Vol, veh/h	0	0	1144	0	0	366
Future Vol, veh/h	0	0	1144	0	0	366
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	None	-	None	-	None
Storage Length	0	-	-	0	100	-
Veh in Median Storage, #	0	-	0	-	-	0
Grade, %	0	-	0	-	-	0
Peak Hour Factor	83	83	83	83	83	83
Heavy Vehicles, %	0	0	2	0	0	8
Mvmt Flow	0	0	1378	0	0	441


Major/Minor	Minor1	Major1	Major2		
Conflicting Flow All	1819	1378	0	0	1378
Stage 1	1378	-	-	-	-
Stage 2	441	-	-	-	-
Critical Hdwy	6.4	6.2	-	-	4.1
Critical Hdwy Stg 1	5.4	-	-	-	-
Critical Hdwy Stg 2	5.4	-	-	-	-
Follow-up Hdwy	3.5	3.3	-	-	2.2
Pot Cap-1 Maneuver	86	179	-	-	504
Stage 1	236	-	-	-	-
Stage 2	653	-	-	-	-
Platoon blocked, %			-	-	-
Mov Cap-1 Maneuver	86	179	-	-	504
Mov Cap-2 Maneuver	86	-	-	-	-
Stage 1	236	-	-	-	-
Stage 2	653	-	-	-	-

Approach	WB	NB	SB
HCM Control Delay, s	0	0	0
HCM LOS	A		

Minor Lane/Major Mvmt	NBT	NBRWBLn1	SBL	SBT
Capacity (veh/h)	-	-	504	-
HCM Lane V/C Ratio	-	-	-	-
HCM Control Delay (s)	-	-	0	0
HCM Lane LOS	-	-	A	A
HCM 95th %tile Q(veh)	-	-	0	0

HCM 2010 Signalized Intersection Summary
 7: I-476 Off Ramp/King of Prussia Rd & Lancaster Ave


01/05/2018



Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↹↹	↱↱			↱↱	↗	↹↹	↱	↗	↹↹		↗
Traffic Volume (veh/h)	169	1262	0	0	526	255	748	701	332	251	0	104
Future Volume (veh/h)	169	1262	0	0	526	255	748	701	332	251	0	104
Number	5	2	12	1	6	16	3	8	18	7	4	14
Initial Q (Qb), veh	0	0	0	0	0	0	0	0	0	0	0	0
Ped-Bike Adj(A_pbT)	1.00		1.00	1.00		1.00	1.00		1.00	1.00		1.00
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Adj Sat Flow, veh/h/ln	1791	1756	0	0	1800	1854	1764	1764	1764	1665	0	1748
Adj Flow Rate, veh/h	174	1301	0	0	542	0	771	723	342	259	0	107
Adj No. of Lanes	2	2	0	0	2	1	2	1	1	2	0	1
Peak Hour Factor	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97
Percent Heavy Veh, %	0	2	0	0	1	2	1	1	1	7	0	6
Cap, veh/h	282	1334	0	0	921	425	1660	690	586	363	0	0
Arrive On Green	0.06	0.27	0.00	0.00	0.54	0.00	0.51	0.39	0.39	0.07	0.00	0.01
Sat Flow, veh/h	3309	3424	0	0	3510	1576	3260	1764	1500	3077	259	
Grp Volume(v), veh/h	174	1301	0	0	542	0	771	723	342	259	57.1	
Grp Sat Flow(s),veh/h/ln	1655	1668	0	0	1710	1576	1630	1764	1500	1539	E	
Q Serve(g_s), s	5.7	42.5	0.0	0.0	11.8	0.0	16.7	43.0	19.8	8.0		
Cycle Q Clear(g_c), s	5.7	42.5	0.0	0.0	11.8	0.0	16.7	43.0	19.8	8.0		
Prop In Lane	1.00		0.00	0.00		1.00	1.00		1.00	1.00		
Lane Grp Cap(c), veh/h	282	1334	0	0	921	425	1660	690	586	363		
V/C Ratio(X)	0.62	0.97	0.00	0.00	0.59	0.00	0.46	1.05	0.58	0.71		
Avail Cap(c_a), veh/h	451	1334	0	0	921	425	1660	690	586	363		
HCM Platoon Ratio	0.67	0.67	1.00	1.00	2.00	2.00	1.00	1.00	1.00	1.00		
Upstream Filter(I)	0.92	0.92	0.00	0.00	0.94	0.00	1.00	1.00	1.00	1.00		
Uniform Delay (d), s/veh	50.1	39.7	0.0	0.0	21.2	0.0	17.4	33.5	26.4	50.7		
Incr Delay (d2), s/veh	2.0	18.4	0.0	0.0	2.6	0.0	0.2	47.6	1.5	6.4		
Initial Q Delay(d3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
%ile BackOfQ(95%),veh/ln	4.8	30.6	0.0	0.0	9.6	0.0	12.0	54.0	13.2	1.6		
LnGrp Delay(d),s/veh	52.1	58.1	0.0	0.0	23.8	0.0	17.6	81.1	27.9	57.1		
LnGrp LOS	D	E			C		B	F	C	E		
Approach Vol, veh/h		1475			542			1836				
Approach Delay, s/veh		57.4			23.8			44.5				
Approach LOS		E			C			D				
Timer	1	2	3	4	5	6	7	8				
Assigned Phs		2	3		5	6	7	8				
Phs Duration (G+Y+Rc), s		49.0	61.0		14.4	34.6	13.0	48.0				
Change Period (Y+Rc), s		6.0	6.0		6.0	6.0	6.0	6.0				
Max Green Setting (Gmax), s		43.0	42.0		14.0	23.0	7.0	42.0				
Max Q Clear Time (g_c+I1), s		45.0	19.2		8.2	14.3	10.5	45.5				
Green Ext Time (p_c), s		0.0	3.0		0.2	6.8	0.0	0.0				
Intersection Summary												
HCM 2010 Ctrl Delay			47.2									
HCM 2010 LOS			D									
Notes												

HCM 2010 Signalized Intersection Summary
 8: I-476 SB Off Ramp & Lancaster Ave

01/05/2018



Movement	EBT	EBR	WBL	WBT	NBL	NBR		
Lane Configurations	↑↑↑		↵↵	↑↑	↵↵	↵		
Traffic Volume (veh/h)	753	0	153	1183	780	713		
Future Volume (veh/h)	753	0	153	1183	780	713		
Number	4	14	3	8	5	12		
Initial Q (Qb), veh	0	0	0	0	0	0		
Ped-Bike Adj(A_pbT)		1.00	1.00		1.00	1.00		
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00		
Adj Sat Flow, veh/h/ln	1730	0	1715	1782	1800	1785		
Adj Flow Rate, veh/h	768	0	156	1207	796	0		
Adj No. of Lanes	3	0	2	2	2	1		
Peak Hour Factor	0.98	0.98	0.98	0.98	0.98	0.98		
Percent Heavy Veh, %	3	0	6	2	2	7		
Cap, veh/h	2356	0	256	2117	945	431		
Arrive On Green	0.50	0.00	0.03	0.21	0.28	0.00		
Sat Flow, veh/h	5035	0	3169	3476	3326	1517		
Grp Volume(v), veh/h	768	0	156	1207	796	0		
Grp Sat Flow(s),veh/h/ln	1574	0	1584	1693	1663	1517		
Q Serve(g_s), s	10.7	0.0	5.4	35.3	24.8	0.0		
Cycle Q Clear(g_c), s	10.7	0.0	5.4	35.3	24.8	0.0		
Prop In Lane		0.00	1.00		1.00	1.00		
Lane Grp Cap(c), veh/h	2356	0	256	2117	945	431		
V/C Ratio(X)	0.33	0.00	0.61	0.57	0.84	0.00		
Avail Cap(c_a), veh/h	2356	0	317	2117	1421	648		
HCM Platoon Ratio	1.00	1.00	0.33	0.33	1.00	1.00		
Upstream Filter(I)	1.00	0.00	0.67	0.67	1.00	0.00		
Uniform Delay (d), s/veh	16.5	0.0	51.8	30.4	37.1	0.0		
Incr Delay (d2), s/veh	0.4	0.0	1.6	0.7	3.0	0.0		
Initial Q Delay(d3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0		
%ile BackOfQ(95%),veh/ln	8.3	0.0	4.3	22.3	17.4	0.0		
LnGrp Delay(d),s/veh	16.9	0.0	53.4	31.1	40.1	0.0		
LnGrp LOS	B		D	C	D			
Approach Vol, veh/h	768			1363	796			
Approach Delay, s/veh	16.9			33.7	40.1			
Approach LOS	B			C	D			
Timer	1	2	3	4	5	6	7	8
Assigned Phs		2	3	4				8
Phs Duration (G+Y+Rc), s		36.2	13.9	59.9				73.8
Change Period (Y+Rc), s		6.0	6.0	6.0				6.0
Max Green Setting (Gmax), s		46.0	10.0	36.0				52.0
Max Q Clear Time (g_c+I1), s		27.3	7.9	13.2				37.8
Green Ext Time (p_c), s		3.0	0.1	15.0				10.5
Intersection Summary								
HCM 2010 Ctrl Delay			31.0					
HCM 2010 LOS			C					

HCM 2010 Signalized Intersection Summary
 9: Hillside Circuit & Lancaster Ave

01/05/2018



Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↔↔	↑↔		↔	↑↑	↔		↔	↔			
Traffic Volume (veh/h)	535	1512	4	2	754	478	6	2	2	0	0	0
Future Volume (veh/h)	535	1512	4	2	754	478	6	2	2	0	0	0
Number	5	2	12	1	6	16	3	8	18			
Initial Q (Qb), veh	0	0	0	0	0	0	0	0	0			
Ped-Bike Adj(A_pbT)	1.00		1.00	1.00		1.00	1.00		0.88			
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00			
Adj Sat Flow, veh/h/ln	1782	1748	1800	1800	1765	1835	1800	1800	1800			
Adj Flow Rate, veh/h	557	1575	4	2	785	0	6	2	2			
Adj No. of Lanes	2	2	0	1	2	1	0	1	1			
Peak Hour Factor	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96			
Percent Heavy Veh, %	1	3	3	0	2	2	0	0	0			
Cap, veh/h	658	2843	7	18	2171	1010	21	7	22			
Arrive On Green	0.40	1.00	1.00	0.01	0.65	0.00	0.02	0.02	0.02			
Sat Flow, veh/h	3293	3398	9	1714	3353	1560	1301	434	1345			
Grp Volume(v), veh/h	557	769	810	2	785	0	8	0	2			
Grp Sat Flow(s),veh/h/ln	1646	1660	1746	1714	1676	1560	1735	0	1345			
Q Serve(g_s), s	16.9	0.0	0.0	0.1	11.9	0.0	0.5	0.0	0.2			
Cycle Q Clear(g_c), s	16.9	0.0	0.0	0.1	11.9	0.0	0.5	0.0	0.2			
Prop In Lane	1.00		0.00	1.00		1.00	0.75		1.00			
Lane Grp Cap(c), veh/h	658	1389	1461	18	2171	1010	28	0	22			
V/C Ratio(X)	0.85	0.55	0.55	0.11	0.36	0.00	0.28	0.00	0.09			
Avail Cap(c_a), veh/h	928	1389	1461	109	2171	1010	110	0	86			
HCM Platoon Ratio	2.00	2.00	2.00	1.00	1.00	1.00	1.00	1.00	1.00			
Upstream Filter(I)	0.25	0.25	0.25	1.00	1.00	0.00	1.00	0.00	1.00			
Uniform Delay (d), s/veh	31.5	0.0	0.0	53.9	8.9	0.0	53.5	0.0	53.3			
Incr Delay (d2), s/veh	1.4	0.4	0.4	2.6	0.5	0.0	5.4	0.0	1.8			
Initial Q Delay(d3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
%ile BackOfQ(95%),veh/ln	0.0	0.3	0.3	0.1	9.5	0.0	0.5	0.0	0.1			
LnGrp Delay(d),s/veh	32.9	0.4	0.4	56.5	9.4	0.0	58.8	0.0	55.1			
LnGrp LOS	C	A	A	E	A		E		E			
Approach Vol, veh/h		2136			787			10				
Approach Delay, s/veh		8.9			9.5			58.1				
Approach LOS		A			A			E				
Timer	1	2	3	4	5	6	7	8				
Assigned Phs	1	2			5	6		8				
Phs Duration (G+Y+Rc), s	6.2	97.0			27.0	76.2		6.8				
Change Period (Y+Rc), s	6.0	6.0			6.0	6.0		6.0				
Max Green Setting (Gmax), s	6.0	80.0			30.0	56.0		6.0				
Max Q Clear Time (g_c+1/2), s	6.0	2.5			19.4	14.4		2.7				
Green Ext Time (p_c), s	0.0	36.5			1.6	26.5		0.0				
Intersection Summary												
HCM 2010 Ctrl Delay				9.2								
HCM 2010 LOS				A								
Notes												

HCM 2010 Signalized Intersection Summary

10: Radnor Chester Rd


01/05/2018



Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (veh/h)	137	889	52	209	1434	431	91	367	82	95	130	105
Future Volume (veh/h)	137	889	52	209	1434	431	91	367	82	95	130	105
Number	5	2	12	1	6	16	3	8	18	7	4	14
Initial Q (Qb), veh	0	0	0	0	0	0	0	0	0	0	0	0
Ped-Bike Adj(A_pbT)	1.00		1.00	1.00		1.00	1.00		1.00	1.00		1.00
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Adj Sat Flow, veh/h/ln	1739	1739	1809	1713	1747	1764	1764	1746	1764	1690	1724	1791
Adj Flow Rate, veh/h	143	926	54	218	1494	449	95	382	85	99	135	109
Adj No. of Lanes	1	2	0	1	2	1	0	2	0	1	2	0
Peak Hour Factor	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96
Percent Heavy Veh, %	4	4	4	4	2	1	1	1	1	6	3	3
Cap, veh/h	186	1382	81	297	1446	652	151	491	110	246	634	476
Arrive On Green	0.07	0.44	0.44	0.07	0.44	0.44	0.24	0.24	0.24	0.07	0.36	0.36
Sat Flow, veh/h	1657	3174	185	1632	3319	1497	454	2078	466	1609	1785	1339
Grp Volume(v), veh/h	143	482	498	218	1494	449	287	0	275	99	123	121
Grp Sat Flow(s),veh/h/ln	1657	1652	1706	1632	1660	1497	1492	0	1506	1609	1638	1486
Q Serve(g_s), s	5.1	25.6	25.6	8.0	47.9	26.6	18.2	0.0	18.7	4.8	5.8	6.3
Cycle Q Clear(g_c), s	5.1	25.6	25.6	8.0	47.9	26.6	20.0	0.0	18.7	4.8	5.8	6.3
Prop In Lane	1.00		0.11	1.00		1.00	0.33		0.31	1.00		0.90
Lane Grp Cap(c), veh/h	186	720	743	297	1446	652	396	0	356	246	582	528
V/C Ratio(X)	0.77	0.67	0.67	0.73	1.03	0.69	0.73	0.00	0.77	0.40	0.21	0.23
Avail Cap(c_a), veh/h	186	720	743	297	1446	652	450	0	411	391	789	716
HCM Platoon Ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(I)	1.00	1.00	1.00	1.00	1.00	1.00	1.00	0.00	1.00	1.00	1.00	1.00
Uniform Delay (d), s/veh	25.0	24.7	24.7	21.1	31.0	25.0	39.6	0.0	39.2	28.3	24.7	24.9
Incr Delay (d2), s/veh	17.6	4.9	4.8	9.1	32.7	5.9	5.0	0.0	7.6	1.1	0.2	0.2
Initial Q Delay(d3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
%ile BackOfQ(95%),veh/ln	5.7	18.5	18.9	6.2	51.2	17.7	13.6	0.0	13.3	3.9	4.7	4.7
LnGrp Delay(d),s/veh	42.6	29.6	29.5	30.2	63.7	30.9	44.6	0.0	46.9	29.4	24.9	25.1
LnGrp LOS	D	C	C	C	F	C	D		D	C	C	C
Approach Vol, veh/h		1123			2161			562			343	
Approach Delay, s/veh		31.2			53.5			45.7			26.3	
Approach LOS		C			D			D			C	
Timer	1	2	3	4	5	6	7	8				
Assigned Phs	1	2		4	5	6	7	8				
Phs Duration (G+Y+Rc), s	3.0	52.9		44.1	13.0	52.9	13.1	31.0				
Change Period (Y+Rc), s	6.0	6.0		6.0	6.0	6.0	6.0	6.0				
Max Green Setting (Gmax), s	7.0	33.0		52.0	7.0	33.0	17.0	29.0				
Max Q Clear Time (g_c+1.0), s	5.0	28.1		8.3	7.6	50.4	7.3	22.0				
Green Ext Time (p_c), s	0.0	4.6		6.2	0.0	0.0	0.1	2.9				
Intersection Summary												
HCM 2010 Ctrl Delay			44.3									
HCM 2010 LOS			D									

HCM 2010 Signalized Intersection Summary
 1: King of Prussia Rd & Parking Drive/Matsonford Rd

01/05/2018




Movement	EBL	EBT	EBR	WBL	WBT	WBR	SEL	SET	SER	NWL	NWT	NWR
Lane Configurations												
Traffic Volume (veh/h)	3	4	9	513	1	213	118	719	1	7	425	232
Future Volume (veh/h)	3	4	9	513	1	213	118	719	1	7	425	232
Number	3	8	18	7	4	14	5	2	12	1	6	16
Initial Q (Qb), veh	0	0	0	0	0	0	0	0	0	0	0	0
Ped-Bike Adj(A_pbT)	1.00		1.00	1.00		1.00	1.00		1.00	1.00		1.00
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Adj Sat Flow, veh/h/ln	1800	1800	1800	1782	1872	1872	1800	1872	1872	1800	1800	1835
Adj Flow Rate, veh/h	3	4	10	558	1	232	128	782	1	8	462	0
Adj No. of Lanes	1	1	0	1	1	0	1	1	0	1	1	1
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
Percent Heavy Veh, %	0	0	0	1	0	0	0	0	0	0	0	2
Cap, veh/h	387	167	419	596	3	581	382	976	1	209	696	603
Arrive On Green	0.37	0.37	0.37	0.37	0.37	0.37	0.08	0.52	0.52	0.39	0.39	0.00
Sat Flow, veh/h	1166	457	1142	1408	7	1585	1714	1869	2	701	1800	1560
Grp Volume(v), veh/h	3	0	14	558	0	233	128	0	783	8	462	0
Grp Sat Flow(s),veh/h/ln	1166	0	1599	1408	0	1592	1714	0	1872	701	1800	1560
Q Serve(g_s), s	0.2	0.0	0.5	33.0	0.0	9.8	3.7	0.0	30.9	0.8	19.1	0.0
Cycle Q Clear(g_c), s	9.4	0.0	0.5	33.0	0.0	9.8	3.7	0.0	30.9	19.1	19.1	0.0
Prop In Lane	1.00		0.71	1.00		1.00	1.00		0.00	1.00		1.00
Lane Grp Cap(c), veh/h	387	0	586	596	0	584	382	0	977	209	696	603
V/C Ratio(X)	0.01	0.00	0.02	0.94	0.00	0.40	0.33	0.00	0.80	0.04	0.66	0.00
Avail Cap(c_a), veh/h	387	0	586	596	0	584	398	0	977	209	696	603
HCM Platoon Ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(I)	1.00	0.00	1.00	1.00	0.00	1.00	1.00	0.00	1.00	0.94	0.94	0.00
Uniform Delay (d), s/veh	24.5	0.0	18.2	29.7	0.0	21.1	15.4	0.0	17.7	30.3	22.8	0.0
Incr Delay (d2), s/veh	0.0	0.0	0.0	22.4	0.0	0.4	0.5	0.0	6.9	0.3	4.6	0.0
Initial Q Delay(d3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
%ile BackOfQ(95%),veh/ln	0.1	0.0	0.4	24.4	0.0	7.8	3.2	0.0	24.7	0.3	15.3	0.0
LnGrp Delay(d),s/veh	24.5	0.0	18.2	52.1	0.0	21.6	15.9	0.0	24.5	30.6	27.4	0.0
LnGrp LOS	C		B	D		C	B		C	C	C	
Approach Vol, veh/h		17			791			911			470	
Approach Delay, s/veh		19.3			43.1			23.3			27.5	
Approach LOS		B			D			C			C	
Timer	1	2	3	4	5	6	7	8				
Assigned Phs		2		4	5	6		8				
Phs Duration (G+Y+Rc), s		52.0		38.0	12.2	39.8		38.0				
Change Period (Y+Rc), s		6.0		6.0	6.0	6.0		6.0				
Max Green Setting (Gmax), s		46.0		32.0	7.0	33.0		32.0				
Max Q Clear Time (g_c+I1), s		32.9		35.5	6.2	21.6		11.9				
Green Ext Time (p_c), s		6.8		0.0	0.0	6.2		3.2				
Intersection Summary												
HCM 2010 Ctrl Delay			31.3									
HCM 2010 LOS			C									

HCM 2010 Signalized Intersection Summary

2: Radnor Chester Rd & King of Prussia Rd

01/05/2018



Movement	EBL	EBT	EBR	WBL	WBT	WBR	NEL	NET	NER	SWL	SWT	SWR
Lane Configurations												
Traffic Volume (veh/h)	8	705	654	49	317	1	395	7	137	31	36	48
Future Volume (veh/h)	8	705	654	49	317	1	395	7	137	31	36	48
Number	5	2	12	1	6	16	7	4	14	3	8	18
Initial Q (Qb), veh	0	0	0	0	0	0	0	0	0	0	0	0
Ped-Bike Adj(A_pbT)	1.00		1.00	1.00		1.00	1.00		0.97	1.00		0.97
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Adj Sat Flow, veh/h/ln	1782	1782	1872	1836	1835	1854	1782	1664	1835	1809	1743	1809
Adj Flow Rate, veh/h	8	734	0	51	330	1	411	7	143	32	38	50
Adj No. of Lanes	1	1	1	1	1	0	0	1	1	0	1	0
Peak Hour Factor	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96
Percent Heavy Veh, %	1	1	0	1	1	1	14	14	1	3	3	3
Cap, veh/h	497	891	796	192	914	3	256	3	574	51	57	41
Arrive On Green	0.50	0.50	0.00	0.50	0.50	0.50	0.38	0.38	0.38	0.38	0.38	0.38
Sat Flow, veh/h	1054	1782	1591	749	1829	6	466	8	1520	0	151	108
Grp Volume(v), veh/h	8	734	0	51	0	331	418	0	143	120	0	0
Grp Sat Flow(s),veh/h/ln	1054	1782	1591	749	0	1834	474	0	1520	258	0	0
Q Serve(g_s), s	0.4	31.5	0.0	5.6	0.0	9.9	0.0	0.0	5.8	0.0	0.0	0.0
Cycle Q Clear(g_c), s	9.8	31.5	0.0	37.1	0.0	9.9	34.0	0.0	5.8	34.0	0.0	0.0
Prop In Lane	1.00		1.00	1.00		0.00	0.98		1.00	0.27		0.42
Lane Grp Cap(c), veh/h	497	891	796	192	0	917	259	0	574	148	0	0
V/C Ratio(X)	0.02	0.82	0.00	0.27	0.00	0.36	1.62	0.00	0.25	0.81	0.00	0.00
Avail Cap(c_a), veh/h	497	891	796	192	0	917	259	0	574	148	0	0
HCM Platoon Ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(I)	0.21	0.21	0.00	1.00	0.00	1.00	1.00	0.00	1.00	1.00	0.00	0.00
Uniform Delay (d), s/veh	16.6	19.1	0.0	34.9	0.0	13.7	33.2	0.0	19.2	23.4	0.0	0.0
Incr Delay (d2), s/veh	0.0	1.9	0.0	3.3	0.0	1.1	294.7	0.0	0.2	27.4	0.0	0.0
Initial Q Delay(d3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
%ile BackOfQ(95%),veh/ln	0.2	18.8	0.0	2.4	0.0	9.0	49.6	0.0	4.4	5.6	0.0	0.0
LnGrp Delay(d),s/veh	16.6	21.1	0.0	38.2	0.0	14.8	328.0	0.0	19.5	50.8	0.0	0.0
LnGrp LOS	B	C		D		B	F		B	D		
Approach Vol, veh/h		742			382			561			120	
Approach Delay, s/veh		21.0			18.0			249.3			50.8	
Approach LOS		C			B			F			D	
Timer	1	2	3	4	5	6	7	8				
Assigned Phs		2		4		6		8				
Phs Duration (G+Y+Rc), s		50.0		40.0		50.0		40.0				
Change Period (Y+Rc), s		6.0		7.0		6.0		7.0				
Max Green Setting (Gmax), s		44.0		33.0		44.0		33.0				
Max Q Clear Time (g_c+I1), s		34.0		36.0		39.6		36.0				
Green Ext Time (p_c), s		5.1		0.0		2.7		0.0				
Intersection Summary												
HCM 2010 Ctrl Delay				93.3								
HCM 2010 LOS				F								

HCM 2010 TWSC
 3: King of Prussia Rd & Septa Driveway

01/05/2018

Intersection						
Int Delay, s/veh	1.2					
Movement	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations	↔		↔		↔	↔
Traffic Vol, veh/h	33	41	334	1	29	940
Future Vol, veh/h	33	41	334	1	29	940
Conflicting Peds, #/hr	2	10	0	17	17	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	None	-	None	-	None
Storage Length	0	-	-	-	100	-
Veh in Median Storage, #	0	-	0	-	-	0
Grade, %	0	-	0	-	-	0
Peak Hour Factor	85	85	85	85	85	85
Heavy Vehicles, %	0	17	1	0	17	1
Mvmt Flow	39	48	393	1	34	1106

Major/Minor	Minor1	Major1	Major2		
Conflicting Flow All	1587	421	0	0	411
Stage 1	411	-	-	-	-
Stage 2	1176	-	-	-	-
Critical Hdwy	6.4	6.37	-	-	4.27
Critical Hdwy Stg 1	5.4	-	-	-	-
Critical Hdwy Stg 2	5.4	-	-	-	-
Follow-up Hdwy	3.5	3.453	-	-	2.353
Pot Cap-1 Maneuver	120	602	-	-	1072
Stage 1	674	-	-	-	-
Stage 2	296	-	-	-	-
Platoon blocked, %					
Mov Cap-1 Maneuver	114	589	-	-	1063
Mov Cap-2 Maneuver	224	-	-	-	-
Stage 1	664	-	-	-	-
Stage 2	286	-	-	-	-

Approach	WB	NB	SB
HCM Control Delay, s	19.1	0	0.3
HCM LOS	C		

Minor Lane/Major Mvmt	NBT	NBRWBLn1	SBL	SBT
Capacity (veh/h)	-	-	341	1063
HCM Lane V/C Ratio	-	-	0.255	0.032
HCM Control Delay (s)	-	-	19.1	8.5
HCM Lane LOS	-	-	C	A
HCM 95th %tile Q(veh)	-	-	1	0.1

HCM 2010 TWSC
 4: King of Prussia Rd & Northern Driveway

01/05/2018

Intersection						
Int Delay, s/veh	0					
Movement	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations	↔		↑			↑
Traffic Vol, veh/h	0	0	269	0	0	1042
Future Vol, veh/h	0	0	269	0	0	1042
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	None	-	None	-	None
Storage Length	0	-	-	-	-	-
Veh in Median Storage, #	0	-	0	-	-	0
Grade, %	0	-	0	-	-	0
Peak Hour Factor	94	94	93	94	94	93
Heavy Vehicles, %	0	0	1	0	0	1
Mvmt Flow	0	0	289	0	0	1120

Major/Minor	Minor1	Major1	Major2			
Conflicting Flow All	1409	289	0	-	-	-
Stage 1	289	-	-	-	-	-
Stage 2	1120	-	-	-	-	-
Critical Hdwy	6.4	6.2	-	-	-	-
Critical Hdwy Stg 1	5.4	-	-	-	-	-
Critical Hdwy Stg 2	5.4	-	-	-	-	-
Follow-up Hdwy	3.5	3.3	-	-	-	-
Pot Cap-1 Maneuver	154	755	-	0	0	-
Stage 1	765	-	-	0	0	-
Stage 2	315	-	-	0	0	-
Platoon blocked, %			-			-
Mov Cap-1 Maneuver	154	755	-	-	-	-
Mov Cap-2 Maneuver	257	-	-	-	-	-
Stage 1	765	-	-	-	-	-
Stage 2	315	-	-	-	-	-

Approach	WB	NB	SB
HCM Control Delay, s	0	0	0
HCM LOS	A		

Minor Lane/Major Mvmt	NBTWBLn1	SBT
Capacity (veh/h)	-	-
HCM Lane V/C Ratio	-	-
HCM Control Delay (s)	-	0
HCM Lane LOS	-	A
HCM 95th %tile Q(veh)	-	-

Intersection												
Int Delay, s/veh	1											
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		↕						↕			↕	
Traffic Vol, veh/h	5	0	40	0	0	0	23	270	0	0	1037	5
Future Vol, veh/h	5	0	40	0	0	0	23	270	0	0	1037	5
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	8	8	0	0
Sign Control	Stop	Stop	Stop	Stop	Stop	Stop	Free	Free	Free	Free	Free	Free
RT Channelized	-	-	None	-	-	None	-	-	None	-	-	None
Storage Length	-	-	-	-	-	-	-	-	-	-	-	-
Veh in Median Storage, #	-	0	-	-	-	-	-	0	-	-	0	-
Grade, %	-	0	-	-	0	-	-	0	-	-	0	-
Peak Hour Factor	94	94	94	94	94	94	94	94	94	94	94	94
Heavy Vehicles, %	0	0	0	0	0	0	0	1	0	0	1	0
Mvmt Flow	5	0	43	0	0	0	24	287	0	0	1103	5

Major/Minor	Minor2			Major1			Major2					
Conflicting Flow All	1442	1450	1106				1109	0	0	295	0	0
Stage 1	1106	1106	-				-	-	-	-	-	-
Stage 2	336	344	-				-	-	-	-	-	-
Critical Hdwy	6.4	6.5	6.2				4.1	-	-	4.1	-	-
Critical Hdwy Stg 1	5.4	5.5	-				-	-	-	-	-	-
Critical Hdwy Stg 2	5.4	5.5	-				-	-	-	-	-	-
Follow-up Hdwy	3.5	4	3.3				2.2	-	-	2.2	-	-
Pot Cap-1 Maneuver	147	132	258				637	-	-	1278	-	-
Stage 1	320	289	-				-	-	-	-	-	-
Stage 2	728	640	-				-	-	-	-	-	-
Platoon blocked, %												
Mov Cap-1 Maneuver	140	0	258				637	-	-	1278	-	-
Mov Cap-2 Maneuver	140	0	-				-	-	-	-	-	-
Stage 1	320	0	-				-	-	-	-	-	-
Stage 2	695	0	-				-	-	-	-	-	-

Approach	EB	NB	SB
HCM Control Delay, s	24.1	0.9	0
HCM LOS	C		

Minor Lane/Major Mvmt	NBL	NBT	NBR	EBLn1	SBL	SBT	SBR
Capacity (veh/h)	637	-	-	236	1278	-	-
HCM Lane V/C Ratio	0.038	-	-	0.203	-	-	-
HCM Control Delay (s)	10.9	0	-	24.1	0	-	-
HCM Lane LOS	B	A	-	C	A	-	-
HCM 95th %tile Q(veh)	0.1	-	-	0.7	0	-	-

Intersection						
Int Delay, s/veh	0					
Movement	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations	↘↗		↑	↗↘	↘↗	↑
Traffic Vol, veh/h	0	0	292	0	0	1073
Future Vol, veh/h	0	0	292	0	0	1073
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	None	-	None	-	None
Storage Length	0	-	-	0	100	-
Veh in Median Storage, #	0	-	0	-	-	0
Grade, %	0	-	0	-	-	0
Peak Hour Factor	94	94	94	94	94	94
Heavy Vehicles, %	0	0	1	0	0	1
Mvmt Flow	0	0	311	0	0	1141



























Major/Minor	Minor1	Major1	Major2		
Conflicting Flow All	1452	311	0	0	311
Stage 1	311	-	-	-	-
Stage 2	1141	-	-	-	-
Critical Hdwy	6.4	6.2	-	-	4.1
Critical Hdwy Stg 1	5.4	-	-	-	-
Critical Hdwy Stg 2	5.4	-	-	-	-
Follow-up Hdwy	3.5	3.3	-	-	2.2
Pot Cap-1 Maneuver	145	734	-	-	1261
Stage 1	748	-	-	-	-
Stage 2	307	-	-	-	-
Platoon blocked, %			-	-	-
Mov Cap-1 Maneuver	145	734	-	-	1261
Mov Cap-2 Maneuver	145	-	-	-	-
Stage 1	748	-	-	-	-
Stage 2	307	-	-	-	-

Approach	WB	NB	SB
HCM Control Delay, s	0	0	0
HCM LOS	A		

Minor Lane/Major Mvmt	NBT	NBRWBLn1	SBL	SBT
Capacity (veh/h)	-	-	-	1261
HCM Lane V/C Ratio	-	-	-	-
HCM Control Delay (s)	-	-	0	0
HCM Lane LOS	-	-	A	A
HCM 95th %tile Q(veh)	-	-	-	0


HCM 2010 Signalized Intersection Summary
 7: I-476 Off Ramp/King of Prussia Rd & Lancaster Ave

01/05/2018

												
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	 	 			 		 			 		
Traffic Volume (veh/h)	46	1515	0	0	569	146	268	197	211	652	0	300
Future Volume (veh/h)	46	1515	0	0	569	146	268	197	211	652	0	300
Number	5	2	12	1	6	16	3	8	18	7	4	14
Initial Q (Qb), veh	0	0	0	0	0	0	0	0	0	0	0	0
Ped-Bike Adj(A_pbT)	1.00		1.00	1.00		1.00	1.00		1.00	1.00		1.00
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Adj Sat Flow, veh/h/ln	1791	1773	0	0	1800	1872	1764	1782	1782	1764	0	1853
Adj Flow Rate, veh/h	49	1612	0	0	605	0	285	210	224	694	0	319
Adj No. of Lanes	2	2	0	0	2	1	2	1	1	2	0	1
Peak Hour Factor	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94
Percent Heavy Veh, %	0	1	0	0	1	1	1	0	0	1	0	0
Cap, veh/h	127	1623	0	0	1361	633	1393	292	248	859	0	0
Arrive On Green	0.03	0.32	0.00	0.00	0.80	0.00	0.43	0.16	0.16	0.22	0.00	0.01
Sat Flow, veh/h	3309	3458	0	0	3510	1591	3260	1782	1515	3260	694	
Grp Volume(v), veh/h	49	1612	0	0	605	0	285	210	224	694	47.5	
Grp Sat Flow(s),veh/h/ln	1655	1685	0	0	1710	1591	1630	1782	1515	1630	D	
Q Serve(g_s), s	1.6	52.5	0.0	0.0	6.1	0.0	6.0	12.3	16.0	23.0		
Cycle Q Clear(g_c), s	1.6	52.5	0.0	0.0	6.1	0.0	6.0	12.3	16.0	23.0		
Prop In Lane	1.00		0.00	0.00		1.00	1.00		1.00	1.00		
Lane Grp Cap(c), veh/h	127	1623	0	0	1361	633	1393	292	248	859		
V/C Ratio(X)	0.39	0.99	0.00	0.00	0.44	0.00	0.20	0.72	0.90	0.81		
Avail Cap(c_a), veh/h	391	1623	0	0	1361	633	1393	292	248	859		
HCM Platoon Ratio	0.67	0.67	1.00	1.00	2.00	2.00	1.00	1.00	1.00	1.00		
Upstream Filter(I)	0.90	0.90	0.00	0.00	0.91	0.00	1.00	1.00	1.00	1.00		
Uniform Delay (d), s/veh	52.3	37.1	0.0	0.0	7.4	0.0	19.8	43.6	45.1	41.7		
Incr Delay (d2), s/veh	1.7	19.6	0.0	0.0	1.0	0.0	0.1	8.4	32.9	5.8		
Initial Q Delay(d3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
%ile BackOfQ(95%),veh/ln	1.4	37.1	0.0	0.0	5.1	0.0	4.9	11.0	13.8	16.3		
LnGrp Delay(d),s/veh	54.0	56.7	0.0	0.0	8.3	0.0	19.8	52.0	78.0	47.5		
LnGrp LOS	D	E			A		B	D	E	D		
Approach Vol, veh/h		1661			605			719				
Approach Delay, s/veh		56.6			8.3			47.4				
Approach LOS		E			A			D				
Timer	1	2	3	4	5	6	7	8				
Assigned Phs		2	3		5	6	7	8				
Phs Duration (G+Y+Rc), s		58.0	52.0		9.2	48.8	29.0	23.0				
Change Period (Y+Rc), s		6.0	6.0		6.0	6.0	6.0	6.0				
Max Green Setting (Gmax), s		52.0	23.0		12.0	34.0	23.0	17.0				
Max Q Clear Time (g_c+I1), s		55.0	8.5		4.1	8.6	25.5	18.5				
Green Ext Time (p_c), s		0.0	0.8		0.0	18.4	0.0	0.0				
Intersection Summary												
HCM 2010 Ctrl Delay			45.1									
HCM 2010 LOS			D									

HCM 2010 Signalized Intersection Summary
 8: I-476 SB Off Ramp & Lancaster Ave

01/05/2018



Movement	EBT	EBR	WBL	WBT	NBL	NBR		
Lane Configurations	↑↑↑		↵↵	↑↑	↵↵	↵		
Traffic Volume (veh/h)	1013	0	478	694	606	468		
Future Volume (veh/h)	1013	0	478	694	606	468		
Number	4	14	3	8	5	12		
Initial Q (Qb), veh	0	0	0	0	0	0		
Ped-Bike Adj(A_pbT)		1.00	1.00		1.00	1.00		
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00		
Adj Sat Flow, veh/h/ln	1730	0	1800	1782	1818	1891		
Adj Flow Rate, veh/h	1034	0	488	708	618	0		
Adj No. of Lanes	3	0	2	2	2	1		
Peak Hour Factor	0.98	0.98	0.98	0.98	0.98	0.98		
Percent Heavy Veh, %	3	0	1	2	1	1		
Cap, veh/h	2154	0	621	2331	742	355		
Arrive On Green	0.46	0.00	0.06	0.23	0.22	0.00		
Sat Flow, veh/h	5035	0	3326	3476	3359	1607		
Grp Volume(v), veh/h	1034	0	488	708	618	0		
Grp Sat Flow(s),veh/h/ln	1574	0	1663	1693	1679	1607		
Q Serve(g_s), s	16.8	0.0	15.9	19.1	19.3	0.0		
Cycle Q Clear(g_c), s	16.8	0.0	15.9	19.1	19.3	0.0		
Prop In Lane		0.00	1.00		1.00	1.00		
Lane Grp Cap(c), veh/h	2154	0	621	2331	742	355		
V/C Ratio(X)	0.48	0.00	0.79	0.30	0.83	0.00		
Avail Cap(c_a), veh/h	2154	0	816	2331	916	438		
HCM Platoon Ratio	1.00	1.00	0.33	0.33	1.00	1.00		
Upstream Filter(I)	1.00	0.00	0.85	0.85	1.00	0.00		
Uniform Delay (d), s/veh	20.8	0.0	49.4	20.6	40.9	0.0		
Incr Delay (d2), s/veh	0.8	0.0	3.2	0.3	5.5	0.0		
Initial Q Delay(d3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0		
%ile BackOfQ(95%),veh/ln	1.9	0.0	11.8	13.6	14.6	0.0		
LnGrp Delay(d),s/veh	21.6	0.0	52.6	20.9	46.5	0.0		
LnGrp LOS	C		D	C	D			
Approach Vol, veh/h	1034			1196	618			
Approach Delay, s/veh	21.6			33.9	46.5			
Approach LOS	C			C	D			
Timer	1	2	3	4	5	6	7	8
Assigned Phs		2	3	4				8
Phs Duration (G+Y+Rc), s		29.3	25.6	55.2				80.7
Change Period (Y+Rc), s		6.0	6.0	6.0				6.0
Max Green Setting (Gmax), s		29.0	26.0	37.0				69.0
Max Q Clear Time (g_c+I1), s		21.8	18.4	19.3				21.6
Green Ext Time (p_c), s		1.5	1.1	11.1				18.3
Intersection Summary								
HCM 2010 Ctrl Delay			32.1					
HCM 2010 LOS			C					

HCM 2010 Signalized Intersection Summary
 9: Hillside Circuit & Lancaster Ave

01/05/2018



Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↔	↑		↔	↑↑	↔		↑	↔			
Traffic Volume (veh/h)	1049	1653	14	6	679	575	3	1	2	0	0	0
Future Volume (veh/h)	1049	1653	14	6	679	575	3	1	2	0	0	0
Number	5	2	12	1	6	16	3	8	18			
Initial Q (Qb), veh	0	0	0	0	0	0	0	0	0			
Ped-Bike Adj(A_pbT)	1.00		1.00	1.00		1.00	1.00		0.88			
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00			
Adj Sat Flow, veh/h/ln	1782	1731	1800	1800	1782	1853	1800	1800	1800			
Adj Flow Rate, veh/h	1093	1722	15	6	707	0	3	1	2			
Adj No. of Lanes	2	2	0	1	2	1	0	1	1			
Peak Hour Factor	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96			
Percent Heavy Veh, %	1	4	4	0	1	1	0	0	0			
Cap, veh/h	1018	2795	24	23	1832	852	18	6	18			
Arrive On Green	0.62	1.00	1.00	0.01	0.54	0.00	0.01	0.01	0.01			
Sat Flow, veh/h	3293	3342	29	1714	3386	1575	1301	434	1345			
Grp Volume(v), veh/h	1093	847	890	6	707	0	4	0	2			
Grp Sat Flow(s),veh/h/ln	1646	1645	1726	1714	1693	1575	1735	0	1345			
Q Serve(g_s), s	34.0	0.0	0.0	0.4	13.3	0.0	0.3	0.0	0.2			
Cycle Q Clear(g_c), s	34.0	0.0	0.0	0.4	13.3	0.0	0.3	0.0	0.2			
Prop In Lane	1.00		0.02	1.00		1.00	0.75		1.00			
Lane Grp Cap(c), veh/h	1018	1376	1444	23	1832	852	24	0	18			
V/C Ratio(X)	1.07	0.62	0.62	0.26	0.39	0.00	0.17	0.00	0.11			
Avail Cap(c_a), veh/h	1018	1376	1444	109	1832	852	110	0	86			
HCM Platoon Ratio	2.00	2.00	2.00	1.00	1.00	1.00	1.00	1.00	1.00			
Upstream Filter(I)	0.14	0.14	0.14	1.00	1.00	0.00	1.00	0.00	1.00			
Uniform Delay (d), s/veh	21.0	0.0	0.0	53.7	14.7	0.0	53.6	0.0	53.6			
Incr Delay (d2), s/veh	36.4	0.3	0.3	5.6	0.6	0.0	3.3	0.0	2.6			
Initial Q Delay(d3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
%ile BackOfQ(95%),veh/ln	66.2	0.2	0.2	0.4	10.5	0.0	0.3	0.0	0.1			
LnGrp Delay(d),s/veh	57.4	0.3	0.3	59.3	15.3	0.0	56.9	0.0	56.2			
LnGrp LOS	F	A	A	E	B		E		E			
Approach Vol, veh/h		2830			713			6				
Approach Delay, s/veh		22.4			15.6			56.7				
Approach LOS		C			B			E				
Timer	1	2	3	4	5	6	7	8				
Assigned Phs	1	2			5	6		8				
Phs Duration (G+Y+Rc), s	6.5	97.0			39.0	64.5		6.5				
Change Period (Y+Rc), s	6.0	6.0			6.0	6.0		6.0				
Max Green Setting (Gmax), s	6.0	80.0			33.0	53.0		6.0				
Max Q Clear Time (g_c+12), s	6.0	2.5			36.5	15.8		2.7				
Green Ext Time (p_c), s	0.0	40.2			0.0	26.1		0.0				
Intersection Summary												
HCM 2010 Ctrl Delay				21.1								
HCM 2010 LOS				C								
Notes												

HCM 2010 Signalized Intersection Summary
 10: Radnor Chester Rd.

01/05/2018



Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (veh/h)	118	1134	92	195	1029	124	80	208	139	404	441	212
Future Volume (veh/h)	118	1134	92	195	1029	124	80	208	139	404	441	212
Number	5	2	12	1	6	16	3	8	18	7	4	14
Initial Q (Qb), veh	0	0	0	0	0	0	0	0	0	0	0	0
Ped-Bike Adj(A_pbT)	1.00		1.00	1.00		1.00	1.00		1.00	1.00		1.00
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Adj Sat Flow, veh/h/ln	1791	1792	1809	1747	1764	1764	1764	1752	1764	1773	1779	1791
Adj Flow Rate, veh/h	122	1169	95	201	1061	128	82	214	143	416	455	219
Adj No. of Lanes	1	2	0	1	2	1	0	2	0	1	2	0
Peak Hour Factor	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97
Percent Heavy Veh, %	1	1	1	2	1	1	1	1	1	1	0	0
Cap, veh/h	252	1234	100	219	1315	587	147	341	231	330	851	406
Arrive On Green	0.07	0.39	0.39	0.08	0.39	0.39	0.25	0.25	0.25	0.08	0.38	0.38
Sat Flow, veh/h	1706	3190	259	1664	3352	1496	386	1348	914	1689	2221	1061
Grp Volume(v), veh/h	122	623	641	201	1061	128	215	0	224	416	345	329
Grp Sat Flow(s),veh/h/ln	1706	1703	1746	1664	1676	1496	1216	0	1432	1689	1690	1591
Q Serve(g_s), s	4.1	35.4	35.5	7.3	28.1	5.7	12.2	0.0	13.8	8.0	15.8	16.0
Cycle Q Clear(g_c), s	4.1	35.4	35.5	7.3	28.1	5.7	15.6	0.0	13.8	8.0	15.8	16.0
Prop In Lane	1.00		0.15	1.00		1.00	0.38		0.64	1.00		0.67
Lane Grp Cap(c), veh/h	252	659	676	219	1315	587	357	0	362	330	648	610
V/C Ratio(X)	0.48	0.95	0.95	0.92	0.81	0.22	0.60	0.00	0.62	1.26	0.53	0.54
Avail Cap(c_a), veh/h	278	659	676	219	1315	587	459	0	487	330	795	748
HCM Platoon Ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(I)	1.00	1.00	1.00	1.00	1.00	1.00	1.00	0.00	1.00	1.00	1.00	1.00
Uniform Delay (d), s/veh	20.7	29.6	29.7	23.5	27.0	20.2	33.3	0.0	33.1	34.7	23.9	24.0
Incr Delay (d2), s/veh	1.4	24.1	24.1	38.6	5.4	0.9	1.6	0.0	1.7	139.9	0.7	0.7
Initial Q Delay(d3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
%ile BackOfQ(95%),veh/lr	3.7	28.6	29.2	9.6	20.1	4.5	9.4	0.0	9.5	32.7	12.0	11.5
LnGrp Delay(d),s/veh	22.2	53.7	53.7	62.2	32.4	21.0	34.9	0.0	34.8	174.7	24.6	24.7
LnGrp LOS	C	D	D	E	C	C	C		C	F	C	C
Approach Vol, veh/h		1386			1390			439			1090	
Approach Delay, s/veh		51.0			35.7			34.8			81.9	
Approach LOS		D			D			C			F	
Timer	1	2	3	4	5	6	7	8				
Assigned Phs	1	2		4	5	6	7	8				
Phs Duration (G+Y+Rc), s	3.0	43.7		43.3	12.5	44.2	13.0	30.3				
Change Period (Y+Rc), s	6.0	6.0		6.0	6.0	6.0	6.0	6.0				
Max Green Setting (Gmax), s	3.0	29.0		46.0	8.0	28.0	7.0	33.0				
Max Q Clear Time (g_c+1/3), s	3.0	37.9		18.3	6.6	30.6	10.5	17.6				
Green Ext Time (p_c), s	0.0	0.0		8.5	0.0	0.0	0.0	6.6				
Intersection Summary												
HCM 2010 Ctrl Delay					52.2							
HCM 2010 LOS					D							

APPENDIX E

Volume Development Worksheets

TRAFFIC IMPACT STUDY

MIXED MEDICAL FACILITY

145 KING OF PRUSSIA ROAD
RADNOR TOWNSHIP
DELAWARE COUNTY, PA

UPHS1507

Volume Development Table

University of Pennsylvania Health Systems Weekday AM Traffic Volumes		Count	2016 base	Existing Site Trips			2020 Base	2025 Base	2020 No Build	2025 No Build	New Trips			Total Trips	AM 2020 Build	AM 2025 Build	
mvrmt	mvrmt no	Data	538	%			vol	%	vol	%	vol	%			%	AM 2020 Build	AM 2025 Build
				in	73	out						5/77	in	154			
King of Prussia Road (N/S) and Parking Drive/ Matsonford Road (E/W)	1 2 3 4 5 6 7 8 9 10 11 12	1 2 2 263 7 100 12 594 578 362 534 2	1 0 0 8 0 0 0 0 0 15 81 0	0 0 0 43 0 0 0 0 0 0 81 0	0 0 0 0 0 0 0 0 0 15 0 0	0 0 0 0 0 0 0 0 0 11 6 0	1 2 268 7 102 12 603 587 368 542 2	1 0 2 273 7 104 12 615 598 375 553 38	1 0 2 311 7 102 12 392 467 27 834 511	23 2 316 7 104 12 626 604 375 633 38	0 0 0 46 0 0 0 0 0 15 87 0	0 0 0 0 0 0 0 0 0 8 0 0	0 0 0 46 0 0 0 0 0 23 35 0	0 0 0 46 0 0 0 0 0 15 87 0	1 0 2 314 7 102 12 396 467 28 837 502	1 0 2 319 7 104 12 401 476 29 853 511	
King of Prussia Road (E/W) and Radnor Chester Road (N/S)	1 2 3 4 5 6 7 8 9 10 11 12	37 259 460 25 790 7 494 32 46 2 1 6	0 23 0 0 0 0 0 0 2 11 0 0	0 124 0 0 0 0 0 0 1 11 0 0	0 0 0 2 23 0 0 0 2 17 0 0	0 0 0 1 17 0 0 0 1 11 0 0	5 26 933 56 60 242 494 32 46 2 1 6	5 27 965 58 62 250 511 33 48 2 1 1	23 34 976 192 116 331 511 33 58 2 2 6	0 0 0 0 0 0 0 0 0 23 10 12 23 15	0 0 0 0 0 0 0 0 0 10 10 15 0 0	0 0 0 3 35 0 0 0 0 2 2 6	0 0 0 3 35 0 0 0 0 2 2 6	20 42 970 115 147 303 502 32 58 2 1 6	21 42 988 116 149 308 511 33 59 2 2 6		
King of Prussia Road (N/S) and Septia Driveway (W)	1 2 3 4 5 6	5 28 983 933 56 60	0 0 25 15 10	0 0 135 54	0 0 0 0	18 7 11 54	5 28 998 300	5 27 965 305	23 34 976 398	0 0 0 0	0 0 0 0	0 0 0 0	0 0 0 0	0 0 0 0	1079 373	1098 378	
King of Prussia Road (N/S) and N. Driveway (Exit Only)	1 2 3 4	9 0 983 295	0 0 25 15	0 0 81 25	0 0 18 18	0 0 7 99	9 998 300	9 1017 305	9 1159 404	0 0 0	0 0 0	0 0 0	0 0 0	9 0 0	9 0 0		
King of Prussia Road (N/S) and Ratder Road(E/W)	1 2 3 4 5 6 7 8 9 10 11	9 128 170 974 0 238 57 0	0 0 171 978 0 239 57 0	0 0 0 10 5 30 0 0	0 0 0 7 0 22 0 0	0 0 0 142 27 76 0 0	9 128 170 993 27 243 58	9 133 1012 305	9 133 1012 305	133 177 1153 404	0 0 0 0	0 0 0 0	0 0 0 0	9 99 22 173 369 52 264 58	9 99 22 177 369 52 268 59		
King of Prussia Road (N/S) and Southern Driveway (E/W)	1 2 3 4 5 6	0 0 1144 0 0 366	0 0 30 45 10 0	0 0 161 242 54 0	0 0 0 0 0 0	33 7 161 242 54 22	0 0 1161 0 0 372	0 0 1184 0 0 379	0 0 1345 242 54 401	33 7 1345 242 54 401	0 0 0 0	0 0 0 0	0 0 0 0	2 2 1588 6 6 486	2 2 1611 6 6 493		

Volume Development Table

University of Pennsylvania Health Systems Weekday AM Traffic Volumes	m/vmrt	m/vmrt no	Count Data	2016 base	Existing Site Trips					2020 Base	2025 Base	2020 No Build	2025 No Build	New Trips					Total Trips	AM 2020 Build	AM 2025 Build
					538 %	in vol	73 %	out vol	577 %					in vol	154 %	out vol					
Lancaster Avenue (E/W) and I-476 NB Off Ramps/ King of Prussia Road (N/S)	1	168	169	35	188	0	0	188	171	174	360	363	35	202	0	0	202	373	376		
	2	1257	1262	0	0	0	0	0	1281	1306	1281	1306	0	0	0	0	1281	1306			
	3	524	526	0	0	0	0	0	534	544	534	544	0	0	0	0	534	544			
	4	254	255	20	108	0	0	108	259	264	366	371	20	115	0	0	115	374	379		
	5	745	748	0	0	0	0	0	759	774	759	774	0	0	0	0	759	774			
	6	698	701	20	108	0	0	108	711	725	819	833	20	115	0	0	115	827	840		
	7	331	332	0	0	0	0	0	337	344	337	344	0	0	0	0	337	344			
	8	250	251	0	0	40	29	29	255	260	284	289	0	40	62	62	316	321			
	9	104	104	0	0	35	26	26	106	108	132	134	0	35	54	54	160	162			
Lancaster Avenue (E/W) and I-476 SB Off Ramps (N/S)	1	753	753	15	81	0	0	81	765	779	845	860	15	87	0	0	87	851	866		
	2	323	323	0	0	0	0	0	328	334	328	334	0	0	0	0	328	334			
	3	153	153	0	0	20	15	15	155	158	170	173	0	0	20	20	186	189			
	4	1183	1183	0	0	15	11	11	1201	1224	1212	1235	0	0	15	23	1224	1247			
	5	780	780	0	0	0	0	0	792	807	792	807	0	0	0	0	792	807			
	6	713	713	20	108	0	0	108	724	738	831	845	20	115	0	0	115	839	853		
	7	533	535	0	0	20	15	15	543	554	558	568	0	0	20	31	574	584			
	8	1506	1512	0	0	20	15	15	1535	1564	1549	1579	0	0	20	31	1566	1595			
	9	4	4	0	0	0	0	0	4	4	4	4	0	0	0	0	4	4			
Lancaster Avenue (E/W) and Radnor Chester Road (N/S)	1	137	137	0	0	0	0	0	139	142	139	142	0	0	0	0	139	142			
	2	889	889	15	81	0	0	81	903	920	983	1001	15	87	0	0	87	989	1006		
	3	52	52	0	0	0	0	0	53	54	53	54	0	0	0	0	53	54			
	4	209	209	0	0	0	0	0	212	216	212	216	0	0	0	0	212	216			
	5	1434	1434	0	0	15	11	11	1456	1484	1467	1495	0	0	15	23	1479	1507			
	6	431	431	0	0	0	0	0	438	446	438	446	0	0	0	0	438	446			
	7	91	91	0	0	0	0	0	92	94	92	94	0	0	0	0	92	94			
	8	367	367	0	0	0	0	0	373	380	373	380	0	0	0	0	373	380			
	9	82	82	0	0	0	0	0	83	85	83	85	0	0	0	0	83	85			
10	95	95	0	0	0	0	0	96	98	96	98	0	0	0	0	96	98				
11	130	130	0	0	0	0	0	132	135	132	135	0	0	0	0	132	135				
12	105	105	0	0	0	0	0	107	109	107	109	0	0	0	0	107	109				

APPENDIX F

2020 and 2025 No Build Condition Capacity Analysis Worksheets

TRAFFIC IMPACT STUDY

MIXED MEDICAL FACILITY

145 KING OF PRUSSIA ROAD

RADNOR TOWNSHIP

DELAWARE COUNTY, PA

UPHS1507

HCM 2010 Signalized Intersection Summary

1: King of Prussia Rd & Parking Drive/Matsonford Rd

01/05/2018

Movement	EBL	EBT	EBR	WBL	WBT	WBR	SEL	SET	SER	NWL	NWT	NWR
Lane Configurations												
Traffic Volume (veh/h)	1	0	2	311	7	102	368	623	2	12	614	593
Future Volume (veh/h)	1	0	2	311	7	102	368	623	2	12	614	593
Number	3	8	18	7	4	14	5	2	12	1	6	16
Initial Q (Qb), veh	0	0	0	0	0	0	0	0	0	0	0	0
Ped-Bike Adj(A_pbT)	1.00		1.00	1.00		1.00	1.00		1.00	1.00		1.00
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Adj Sat Flow, veh/h/ln	1800	1800	1800	1748	1744	1891	1730	1835	1853	1773	1755	1808
Adj Flow Rate, veh/h	1	0	2	346	8	113	409	692	2	13	682	0
Adj No. of Lanes	1	1	0	1	1	0	1	1	0	1	1	1
Peak Hour Factor	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90
Percent Heavy Veh, %	0	0	0	4	0	0	3	1	1	0	1	2
Cap, veh/h	333	0	391	437	25	357	392	1158	3	372	683	598
Arrive On Green	0.26	0.00	0.26	0.26	0.26	0.26	0.19	0.63	0.63	0.39	0.39	0.00
Sat Flow, veh/h	1291	0	1530	1396	99	1398	1648	1829	5	750	1755	1537
Grp Volume(v), veh/h	1	0	2	346	0	121	409	0	694	13	682	0
Grp Sat Flow(s),veh/h/ln	1291	0	1530	1396	0	1497	1648	0	1834	750	1755	1537
Q Serve(g_s), s	0.1	0.0	0.1	22.1	0.0	5.9	17.0	0.0	20.1	1.0	34.9	0.0
Cycle Q Clear(g_c), s	5.4	0.0	0.1	22.1	0.0	5.9	17.0	0.0	20.1	1.0	34.9	0.0
Prop In Lane	1.00		1.00	1.00		0.93	1.00		0.00	1.00		1.00
Lane Grp Cap(c), veh/h	333	0	391	437	0	383	392	0	1162	372	683	598
V/C Ratio(X)	0.00	0.00	0.01	0.79	0.00	0.32	1.04	0.00	0.60	0.03	1.00	0.00
Avail Cap(c_a), veh/h	333	0	391	437	0	383	392	0	1162	372	683	598
HCM Platoon Ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(I)	1.00	0.00	1.00	1.00	0.00	1.00	1.00	0.00	1.00	1.00	1.00	0.00
Uniform Delay (d), s/veh	29.1	0.0	25.0	33.2	0.0	27.1	27.5	0.0	9.7	17.1	27.5	0.0
Incr Delay (d2), s/veh	0.0	0.0	0.0	9.6	0.0	0.5	57.5	0.0	2.3	0.2	34.2	0.0
Initial Q Delay(d3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
%ile BackOfQ(95%),veh/ln	0.0	0.0	0.1	14.7	0.0	4.4	28.7	0.0	16.1	0.4	31.3	0.0
LnGrp Delay(d),s/veh	29.1	0.0	25.0	42.8	0.0	27.6	84.9	0.0	12.0	17.3	61.7	0.0
LnGrp LOS	C		C	D		C	F		B	B	E	
Approach Vol, veh/h		3			467			1103			695	
Approach Delay, s/veh		26.4			38.8			39.0			60.9	
Approach LOS		C			D			D			E	
Timer	1	2	3	4	5	6	7	8				
Assigned Phs	2		4		5		6		8			
Phs Duration (G+Y+Rc), s	62.0		28.0		22.0		40.0		28.0			
Change Period (Y+Rc), s	6.0		6.0		6.0		6.0		6.0			
Max Green Setting (Gmax), s	56.0		22.0		16.0		34.0		22.0			
Max Q Clear Time (g_c+11), s	22.1		24.6		19.5		37.4		7.9			
Green Ext Time (p_c), s	12.1		0.0		0.0		0.0		1.5			
Intersection Summary												
HCM 2010 Ctrl Delay			45.7									
HCM 2010 LOS			D									

HCM 2010 Signalized Intersection Summary
2: Radnor Chester Rd & King of Prussia Rd

01/05/2018



Movement	EBL	EBT	EBR	WBL	WBT	WBR	NEL	NET	NER	SWL	SWT	SWR
Lane Configurations	↰	↑	↱	↰	↱			↰	↱		↰	↱
Traffic Volume (veh/h)	38	387	467	27	819	7	502	32	57	2	1	6
Future Volume (veh/h)	38	387	467	27	819	7	502	32	57	2	1	6
Number	5	2	12	1	6	16	7	4	14	3	8	18
Initial Q (Qb), veh	0	0	0	0	0	0	0	0	0	0	0	0
Ped-Bike Adj(A_pbT)	1.00		1.00	1.00		1.00	1.00		0.97	1.00		0.97
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Adj Sat Flow, veh/h/ln	1800	1714	1817	1717	1816	1854	1782	1629	1835	1809	1628	1809
Adj Flow Rate, veh/h	40	412	0	29	871	7	534	34	61	2	1	6
Adj No. of Lanes	1	1	1	1	1	0	0	1	1	0	1	0
Peak Hour Factor	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94
Percent Heavy Veh, %	0	5	3	8	2	2	0	0	1	0	0	0
Cap, veh/h	103	857	772	402	899	7	226	9	574	49	37	73
Arrive On Green	0.50	0.50	0.00	0.50	0.50	0.50	0.38	0.38	0.38	0.38	0.38	0.38
Sat Flow, veh/h	642	1714	1545	943	1799	14	393	25	1520	0	97	194
Grp Volume(v), veh/h	40	412	0	29	0	878	568	0	61	9	0	0
Grp Sat Flow(s),veh/h/ln	642	1714	1545	943	0	1813	418	0	1520	290	0	0
Q Serve(g_s), s	3.3	14.2	0.0	1.9	0.0	42.2	0.0	0.0	2.3	0.0	0.0	0.0
Cycle Q Clear(g_c), s	45.0	14.2	0.0	16.1	0.0	42.2	34.0	0.0	2.3	34.0	0.0	0.0
Prop In Lane	1.00		1.00	1.00		0.01	0.94		1.00	0.22		0.67
Lane Grp Cap(c), veh/h	103	857	772	402	0	907	236	0	574	159	0	0
V/C Ratio(X)	0.39	0.48	0.00	0.07	0.00	0.97	2.41	0.00	0.11	0.06	0.00	0.00
Avail Cap(c_a), veh/h	103	857	772	402	0	907	236	0	574	159	0	0
HCM Platoon Ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(I)	0.59	0.59	0.00	1.00	0.00	1.00	1.00	0.00	1.00	1.00	0.00	0.00
Uniform Delay (d), s/veh	44.1	14.8	0.0	20.1	0.0	21.8	33.6	0.0	18.2	21.6	0.0	0.0
Incr Delay (d2), s/veh	6.4	1.1	0.0	0.3	0.0	23.1	648.0	0.0	0.1	0.1	0.0	0.0
Initial Q Delay(d3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
%ile BackOfQ(95%),veh/ln	2.1	10.2	0.0	1.0	0.0	35.3	86.8	0.0	1.8	0.3	0.0	0.0
LnGrp Delay(d),s/veh	50.4	16.0	0.0	20.5	0.0	45.0	681.6	0.0	18.2	21.8	0.0	0.0
LnGrp LOS	D	B		C		D	F		B	C		
Approach Vol, veh/h		452			907			629			9	
Approach Delay, s/veh		19.0			44.2			617.3			21.8	
Approach LOS		B			D			F			C	
Timer	1	2	3	4	5	6	7	8				
Assigned Phs		2		4		6		8				
Phs Duration (G+Y+Rc), s		50.0		40.0		50.0		40.0				
Change Period (Y+Rc), s		6.0		7.0		6.0		7.0				
Max Green Setting (Gmax), s		44.0		33.0		44.0		33.0				
Max Q Clear Time (g_c+I1), s		47.5		36.0		44.2		36.0				
Green Ext Time (p_c), s		0.0		0.0		0.0		0.0				
Intersection Summary												
HCM 2010 Ctrl Delay				218.9								
HCM 2010 LOS				F								

HCM 2010 TWSC
 3: King of Prussia Rd & Septa Driveway

01/05/2018

Intersection						
Int Delay, s/veh	2.5					
Movement	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations						
Traffic Vol, veh/h	23	34	958	191	115	326
Future Vol, veh/h	23	34	958	191	115	326
Conflicting Peds, #/hr	2	10	0	17	17	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	None	-	None	-	None
Storage Length	0	-	-	-	100	-
Veh in Median Storage, #	0	-	0	-	-	0
Grade, %	0	-	0	-	-	0
Peak Hour Factor	87	87	87	87	87	87
Heavy Vehicles, %	0	42	2	0	22	5
Mvmt Flow	26	39	1101	220	132	375

Major/Minor	Minor1	Major1	Major2		
Conflicting Flow All	1869	1238	0	0	1338
Stage 1	1228	-	-	-	-
Stage 2	641	-	-	-	-
Critical Hdwy	6.4	6.62	-	-	4.32
Critical Hdwy Stg 1	5.4	-	-	-	-
Critical Hdwy Stg 2	5.4	-	-	-	-
Follow-up Hdwy	3.5	3.678	-	-	2.398
Pot Cap-1 Maneuver	80	177	-	-	455
Stage 1	279	-	-	-	-
Stage 2	528	-	-	-	-
Platoon blocked, %			-	-	-
Mov Cap-1 Maneuver	56	173	-	-	451
Mov Cap-2 Maneuver	169	-	-	-	-
Stage 1	275	-	-	-	-
Stage 2	373	-	-	-	-

Approach	WB	NB	SB
HCM Control Delay, s	38.6	0	4.2
HCM LOS	E		

Minor Lane/Major Mvmt	NBT	NBRWBLn1	SBL	SBT
Capacity (veh/h)	-	-	171	451
HCM Lane V/C Ratio	-	-	0.383	0.293
HCM Control Delay (s)	-	-	38.6	16.3
HCM Lane LOS	-	-	E	C
HCM 95th %tile Q(veh)	-	-	1.7	1.2

HCM 2010 TWSC
 4: King of Prussia Rd & Northern Driveway

01/05/2018

Intersection						
Int Delay, s/veh	0.1					
Movement	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations	↘↗		↑			↑
Traffic Vol, veh/h	4	4	1140	0	0	398
Future Vol, veh/h	4	4	1140	0	0	398
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	None	-	None	-	None
Storage Length	0	-	-	-	-	-
Veh in Median Storage, #	0	-	0	-	-	0
Grade, %	0	-	0	-	-	0
Peak Hour Factor	94	94	94	94	94	94
Heavy Vehicles, %	0	0	2	0	0	8
Mvmt Flow	4	4	1213	0	0	423

Major/Minor	Minor1	Major1	Major2			
Conflicting Flow All	1636	1213	0	-	-	-
Stage 1	1213	-	-	-	-	-
Stage 2	423	-	-	-	-	-
Critical Hdwy	6.4	6.2	-	-	-	-
Critical Hdwy Stg 1	5.4	-	-	-	-	-
Critical Hdwy Stg 2	5.4	-	-	-	-	-
Follow-up Hdwy	3.5	3.3	-	-	-	-
Pot Cap-1 Maneuver	112	224	-	0	0	-
Stage 1	284	-	-	0	0	-
Stage 2	665	-	-	0	0	-
Platoon blocked, %			-			-
Mov Cap-1 Maneuver	112	224	-	-	-	-
Mov Cap-2 Maneuver	222	-	-	-	-	-
Stage 1	284	-	-	-	-	-
Stage 2	665	-	-	-	-	-

Approach	WB	NB	SB
HCM Control Delay, s	21.8	0	0
HCM LOS	C		

Minor Lane/Major Mvmt	NBTWBLn1	SBT
Capacity (veh/h)	- 223	-
HCM Lane V/C Ratio	- 0.038	-
HCM Control Delay (s)	- 21.8	-
HCM Lane LOS	- C	-
HCM 95th %tile Q(veh)	- 0.1	-

Intersection												
Int Delay, s/veh	2											
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		↕						↕			↕	
Traffic Vol, veh/h	9	0	130	0	0	0	173	1134	27	27	318	58
Future Vol, veh/h	9	0	130	0	0	0	173	1134	27	27	318	58
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	8	8	0	0
Sign Control	Stop	Stop	Stop	Stop	Stop	Stop	Free	Free	Free	Free	Free	Free
RT Channelized	-	-	None	-	-	None	-	-	None	-	-	None
Storage Length	-	-	-	-	-	-	-	-	-	-	-	-
Veh in Median Storage, #	-	0	-	-	-	-	-	0	-	-	0	-
Grade, %	-	0	-	-	0	-	-	0	-	-	0	-
Peak Hour Factor	78	78	78	78	78	78	78	78	78	78	78	78
Heavy Vehicles, %	11	0	4	0	0	0	0	2	0	0	10	0
Mvmt Flow	12	0	167	0	0	0	222	1454	35	35	408	74

Major/Minor	Minor2			Major1			Major2					
Conflicting Flow All	2429	2454	445				482	0	0	1496	0	0
Stage 1	514	514	-				-	-	-	-	-	-
Stage 2	1915	1940	-				-	-	-	-	-	-
Critical Hdwy	6.51	6.5	6.24				4.1	-	-	4.1	-	-
Critical Hdwy Stg 1	5.51	5.5	-				-	-	-	-	-	-
Critical Hdwy Stg 2	5.51	5.5	-				-	-	-	-	-	-
Follow-up Hdwy	3.599	4	3.336				2.2	-	-	2.2	-	-
Pot Cap-1 Maneuver	33	31	609				1091	-	-	454	-	-
Stage 1	582	539	-				-	-	-	-	-	-
Stage 2	120	113	-				-	-	-	-	-	-
Platoon blocked, %												
Mov Cap-1 Maneuver	0	0	609				1091	-	-	454	-	-
Mov Cap-2 Maneuver	0	0	-				-	-	-	-	-	-
Stage 1	520	0	-				-	-	-	-	-	-
Stage 2	0	0	-				-	-	-	-	-	-

Approach	EB	NB	SB
HCM Control Delay, s	13.3	1.2	0.9
HCM LOS	B		

Minor Lane/Major Mvmt	NBL	NBT	NBR	EBLn1	SBL	SBT	SBR
Capacity (veh/h)	1091	-	-	609	454	-	-
HCM Lane V/C Ratio	0.203	-	-	0.293	0.076	-	-
HCM Control Delay (s)	9.1	0	-	13.3	13.6	0	-
HCM Lane LOS	A	A	-	B	B	A	-
HCM 95th %tile Q(veh)	0.8	-	-	1.2	0.2	-	-

HCM 2010 TWSC
6: King of Prussia Rd & Southern Driveway

01/05/2018

Intersection						
Int Delay, s/veh	5.6					
Movement	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations	Y		↑	↑	↑	↑
Traffic Vol, veh/h	33	7	1323	242	54	393
Future Vol, veh/h	33	7	1323	242	54	393
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	None	-	None	-	None
Storage Length	0	-	-	0	100	-
Veh in Median Storage, #	0	-	0	-	-	0
Grade, %	0	-	0	-	-	0
Peak Hour Factor	83	83	83	83	83	83
Heavy Vehicles, %	0	0	2	0	0	8
Mvmt Flow	40	8	1594	292	65	473






















Major/Minor	Minor1	Major1	Major2		
Conflicting Flow All	2198	1594	0	0	1594
Stage 1	1594	-	-	-	-
Stage 2	604	-	-	-	-
Critical Hdwy	6.4	6.2	-	-	4.1
Critical Hdwy Stg 1	5.4	-	-	-	-
Critical Hdwy Stg 2	5.4	-	-	-	-
Follow-up Hdwy	3.5	3.3	-	-	2.2
Pot Cap-1 Maneuver	50	133	-	-	417
Stage 1	185	-	-	-	-
Stage 2	550	-	-	-	-
Platoon blocked, %			-	-	-
Mov Cap-1 Maneuver	42	133	-	-	417
Mov Cap-2 Maneuver	42	-	-	-	-
Stage 1	185	-	-	-	-
Stage 2	464	-	-	-	-

Approach	WB	NB	SB
HCM Control Delay, s	265	0	1.8
HCM LOS	F		

Minor Lane/Major Mvmt	NBT	NBRWBLn1	SBL	SBT
Capacity (veh/h)	-	-	48	417
HCM Lane V/C Ratio	-	-	1.004	0.156
HCM Control Delay (s)	-	-	265	15.2
HCM Lane LOS	-	-	F	C
HCM 95th %tile Q(veh)	-	-	4.3	0.5


HCM 2010 Signalized Intersection Summary
7: I-476 Off Ramp/King of Prussia Rd & Lancaster Ave

01/05/2018

												
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (veh/h)	360	1281	0	0	534	366	759	819	337	284	0	132
Future Volume (veh/h)	360	1281	0	0	534	366	759	819	337	284	0	132
Number	5	2	12	1	6	16	3	8	18	7	4	14
Initial Q (Qb), veh	0	0	0	0	0	0	0	0	0	0	0	0
Ped-Bike Adj(A_pbT)	1.00		1.00	1.00		1.00	1.00		1.00	1.00		1.00
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Adj Sat Flow, veh/h/ln	1791	1756	0	0	1800	1854	1764	1764	1764	1665	0	1748
Adj Flow Rate, veh/h	371	1321	0	0	551	0	782	844	347	293	0	136
Adj No. of Lanes	2	2	0	0	2	1	2	1	1	2	0	1
Peak Hour Factor	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97
Percent Heavy Veh, %	0	2	0	0	1	2	1	1	1	7	0	6
Cap, veh/h	451	1334	0	0	746	344	1660	690	586	362	0	0
Arrive On Green	0.09	0.27	0.00	0.00	0.07	0.00	0.51	0.39	0.39	0.07	0.00	0.01
Sat Flow, veh/h	3309	3424	0	0	3510	1576	3260	1764	1500	3077	293	
Grp Volume(v), veh/h	371	1321	0	0	551	0	782	844	347	293	63.9	
Grp Sat Flow(s),veh/h/ln	1655	1668	0	0	1710	1576	1630	1764	1500	1539	E	
Q Serve(g_s), s	12.1	43.4	0.0	0.0	17.4	0.0	17.0	43.0	20.2	8.0		
Cycle Q Clear(g_c), s	12.1	43.4	0.0	0.0	17.4	0.0	17.0	43.0	20.2	8.0		
Prop In Lane	1.00		0.00	0.00		1.00	1.00		1.00	1.00		
Lane Grp Cap(c), veh/h	451	1334	0	0	746	344	1660	690	586	362		
V/C Ratio(X)	0.82	0.99	0.00	0.00	0.74	0.00	0.47	1.22	0.59	0.81		
Avail Cap(c_a), veh/h	451	1334	0	0	746	344	1660	690	586	362		
HCM Platoon Ratio	0.67	0.67	1.00	1.00	0.33	0.33	1.00	1.00	1.00	1.00		
Upstream Filter(I)	0.88	0.88	0.00	0.00	0.91	0.00	1.00	1.00	1.00	1.00		
Uniform Delay (d), s/veh	48.7	40.0	0.0	0.0	48.0	0.0	17.4	33.5	26.5	51.2		
Incr Delay (d2), s/veh	10.4	20.9	0.0	0.0	5.9	0.0	0.2	113.4	1.6	12.8		
Initial Q Delay(d3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
%ile BackOfQ(95%),veh/ln	10.1	31.5	0.0	0.0	13.5	0.0	12.2	76.7	13.3	3.1		
LnGrp Delay(d),s/veh	59.1	60.9	0.0	0.0	53.9	0.0	17.6	146.9	28.1	63.9		
LnGrp LOS	E	E			D		B	F	C	E		
Approach Vol, veh/h		1692			551			1973				
Approach Delay, s/veh		60.5			53.9			74.8				
Approach LOS		E			D			E				
Timer	1	2	3	4	5	6	7	8				
Assigned Phs	2		3	5		6	7	8				
Phs Duration (G+Y+Rc), s	49.0		61.0	20.0		29.0	13.0	48.0				
Change Period (Y+Rc), s	6.0		6.0	6.0		6.0	6.0	6.0				
Max Green Setting (Gmax), s	43.0		42.0	14.0		23.0	7.0	42.0				
Max Q Clear Time (g_c+I1), s	45.9		19.5	14.6		19.9	10.5	45.5				
Green Ext Time (p_c), s	0.0		3.0	0.0		2.7	0.0	0.0				
Intersection Summary												
HCM 2010 Ctrl Delay			66.2									
HCM 2010 LOS			E									

HCM 2010 Signalized Intersection Summary
 8: I-476 SB Off Ramp & Lancaster Ave

01/05/2018



Movement	EBT	EBR	WBL	WBT	NBL	NBR		
Lane Configurations	↑↑↑		↵↵	↑↑	↵↵	↵		
Traffic Volume (veh/h)	845	0	170	1212	792	831		
Future Volume (veh/h)	845	0	170	1212	792	831		
Number	4	14	3	8	5	12		
Initial Q (Qb), veh	0	0	0	0	0	0		
Ped-Bike Adj(A_pbT)		1.00	1.00		1.00	1.00		
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00		
Adj Sat Flow, veh/h/ln	1730	0	1715	1782	1800	1785		
Adj Flow Rate, veh/h	862	0	173	1237	808	0		
Adj No. of Lanes	3	0	2	2	2	1		
Peak Hour Factor	0.98	0.98	0.98	0.98	0.98	0.98		
Percent Heavy Veh, %	3	0	6	2	2	7		
Cap, veh/h	2313	0	273	2104	957	436		
Arrive On Green	0.49	0.00	0.03	0.21	0.29	0.00		
Sat Flow, veh/h	5035	0	3169	3476	3326	1517		
Grp Volume(v), veh/h	862	0	173	1237	808	0		
Grp Sat Flow(s),veh/h/ln	1574	0	1584	1693	1663	1517		
Q Serve(g_s), s	12.5	0.0	5.9	36.3	25.1	0.0		
Cycle Q Clear(g_c), s	12.5	0.0	5.9	36.3	25.1	0.0		
Prop In Lane		0.00	1.00		1.00	1.00		
Lane Grp Cap(c), veh/h	2313	0	273	2104	957	436		
V/C Ratio(X)	0.37	0.00	0.63	0.59	0.84	0.00		
Avail Cap(c_a), veh/h	2313	0	317	2104	1421	648		
HCM Platoon Ratio	1.00	1.00	0.33	0.33	1.00	1.00		
Upstream Filter(I)	1.00	0.00	0.63	0.63	1.00	0.00		
Uniform Delay (d), s/veh	17.5	0.0	51.7	31.0	36.9	0.0		
Incr Delay (d2), s/veh	0.5	0.0	2.0	0.8	3.2	0.0		
Initial Q Delay(d3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0		
%ile BackOfQ(95%),veh/ln	9.4	0.0	4.8	22.7	17.7	0.0		
LnGrp Delay(d),s/veh	18.0	0.0	53.8	31.8	40.0	0.0		
LnGrp LOS	B		D	C	D			
Approach Vol, veh/h	862			1410	808			
Approach Delay, s/veh	18.0			34.5	40.0			
Approach LOS	B			C	D			
Timer	1	2	3	4	5	6	7	8
Assigned Phs		2	3	4				8
Phs Duration (G+Y+Rc), s		36.6	14.5	58.9				73.4
Change Period (Y+Rc), s		6.0	6.0	6.0				6.0
Max Green Setting (Gmax), s		46.0	10.0	36.0				52.0
Max Q Clear Time (g_c+I1), s		27.6	8.4	15.0				38.8
Green Ext Time (p_c), s		3.0	0.1	14.9				10.3
Intersection Summary								
HCM 2010 Ctrl Delay			31.3					
HCM 2010 LOS			C					

HCM 2010 Signalized Intersection Summary
 9: Hillside Circuit & Lancaster Ave

01/05/2018



Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↔↔	↑↔		↔	↑↑	↔		↔	↔			
Traffic Volume (veh/h)	558	1549	4	2	873	485	6	2	2	0	0	0
Future Volume (veh/h)	558	1549	4	2	873	485	6	2	2	0	0	0
Number	5	2	12	1	6	16	3	8	18			
Initial Q (Qb), veh	0	0	0	0	0	0	0	0	0			
Ped-Bike Adj(A_pbT)	1.00		1.00	1.00		1.00	1.00		0.88			
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00			
Adj Sat Flow, veh/h/ln	1782	1748	1800	1800	1765	1835	1800	1800	1800			
Adj Flow Rate, veh/h	581	1614	4	2	909	0	6	2	2			
Adj No. of Lanes	2	2	0	1	2	1	0	1	1			
Peak Hour Factor	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96			
Percent Heavy Veh, %	1	3	3	0	2	2	0	0	0			
Cap, veh/h	680	2843	7	18	2149	1000	21	7	22			
Arrive On Green	0.41	1.00	1.00	0.01	0.64	0.00	0.02	0.02	0.02			
Sat Flow, veh/h	3293	3398	8	1714	3353	1560	1301	434	1345			
Grp Volume(v), veh/h	581	788	830	2	909	0	8	0	2			
Grp Sat Flow(s),veh/h/ln	1646	1660	1746	1714	1676	1560	1735	0	1345			
Q Serve(g_s), s	17.6	0.0	0.0	0.1	14.7	0.0	0.5	0.0	0.2			
Cycle Q Clear(g_c), s	17.6	0.0	0.0	0.1	14.7	0.0	0.5	0.0	0.2			
Prop In Lane	1.00		0.00	1.00		1.00	0.75		1.00			
Lane Grp Cap(c), veh/h	680	1389	1461	18	2149	1000	28	0	22			
V/C Ratio(X)	0.85	0.57	0.57	0.11	0.42	0.00	0.28	0.00	0.09			
Avail Cap(c_a), veh/h	928	1389	1461	109	2149	1000	110	0	86			
HCM Platoon Ratio	2.00	2.00	2.00	1.00	1.00	1.00	1.00	1.00	1.00			
Upstream Filter(I)	0.17	0.17	0.17	1.00	1.00	0.00	1.00	0.00	1.00			
Uniform Delay (d), s/veh	30.8	0.0	0.0	53.9	9.7	0.0	53.5	0.0	53.3			
Incr Delay (d2), s/veh	1.0	0.3	0.3	2.6	0.6	0.0	5.4	0.0	1.8			
Initial Q Delay(d3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
%ile BackOfQ(95%),veh/ln	9.9	0.2	0.2	0.1	11.2	0.0	0.5	0.0	0.1			
LnGrp Delay(d),s/veh	31.8	0.3	0.3	56.5	10.3	0.0	58.8	0.0	55.1			
LnGrp LOS	C	A	A	E	B		E		E			
Approach Vol, veh/h		2199			911			10				
Approach Delay, s/veh		8.6			10.4			58.1				
Approach LOS		A			B			E				
Timer	1	2	3	4	5	6	7	8				
Assigned Phs	1	2			5	6		8				
Phs Duration (G+Y+Rc), s	6.2	97.0			27.7	75.5		6.8				
Change Period (Y+Rc), s	6.0	6.0			6.0	6.0		6.0				
Max Green Setting (Gmax), s	6.0	80.0			30.0	56.0		6.0				
Max Q Clear Time (g_c+12), s	6.0	2.5			20.1	17.2		2.7				
Green Ext Time (p_c), s	0.0	41.4			1.6	27.3		0.0				
Intersection Summary												
HCM 2010 Ctrl Delay				9.3								
HCM 2010 LOS				A								
Notes												

HCM 2010 Signalized Intersection Summary
 10: Radnor Chester Rd

01/05/2018



Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (veh/h)	139	983	53	212	1467	438	92	373	83	96	132	107
Future Volume (veh/h)	139	983	53	212	1467	438	92	373	83	96	132	107
Number	5	2	12	1	6	16	3	8	18	7	4	14
Initial Q (Qb), veh	0	0	0	0	0	0	0	0	0	0	0	0
Ped-Bike Adj(A_pbT)	1.00		1.00	1.00		1.00	1.00		1.00	1.00		1.00
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Adj Sat Flow, veh/h/ln	1739	1739	1809	1713	1747	1764	1764	1746	1764	1690	1724	1791
Adj Flow Rate, veh/h	145	1024	55	221	1528	456	96	389	86	100	138	111
Adj No. of Lanes	1	2	0	1	2	1	0	2	0	1	2	0
Peak Hour Factor	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96
Percent Heavy Veh, %	4	4	4	4	2	1	1	1	1	6	3	3
Cap, veh/h	186	1442	77	282	1501	677	151	497	111	215	606	453
Arrive On Green	0.07	0.45	0.45	0.07	0.45	0.45	0.24	0.24	0.24	0.05	0.34	0.34
Sat Flow, veh/h	1657	3190	171	1632	3319	1497	452	2080	464	1609	1787	1337
Grp Volume(v), veh/h	145	530	549	221	1528	456	292	0	279	100	126	123
Grp Sat Flow(s),veh/h/ln	1657	1652	1709	1632	1660	1497	1489	0	1507	1609	1638	1487
Q Serve(g_s), s	5.0	28.5	28.5	8.0	49.7	26.4	18.6	0.0	19.1	5.0	6.0	6.6
Cycle Q Clear(g_c), s	5.0	28.5	28.5	8.0	49.7	26.4	20.3	0.0	19.1	5.0	6.0	6.6
Prop In Lane	1.00		0.10	1.00		1.00	0.33		0.31	1.00		0.90
Lane Grp Cap(c), veh/h	186	747	773	282	1501	677	399	0	360	215	555	504
V/C Ratio(X)	0.78	0.71	0.71	0.78	1.02	0.67	0.73	0.00	0.78	0.47	0.23	0.25
Avail Cap(c_a), veh/h	186	747	773	282	1501	677	449	0	411	215	610	554
HCM Platoon Ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(I)	1.00	1.00	1.00	1.00	1.00	1.00	1.00	0.00	1.00	1.00	1.00	1.00
Uniform Delay (d), s/veh	24.9	24.3	24.3	21.5	30.1	23.7	39.5	0.0	39.1	29.7	26.0	26.2
Incr Delay (d2), s/veh	18.9	5.7	5.5	13.5	27.9	5.3	5.3	0.0	8.0	1.6	0.2	0.3
Initial Q Delay(d3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
%ile BackOfQ(95%),veh/ln	5.8	20.3	20.8	7.4	51.4	17.4	13.8	0.0	13.6	4.1	5.0	4.9
LnGrp Delay(d),s/veh	43.8	30.0	29.8	35.0	58.0	29.0	44.7	0.0	47.1	31.3	26.2	26.5
LnGrp LOS	D	C	C	C	F	C	D		D	C	C	C
Approach Vol, veh/h		1224			2205			571			349	
Approach Delay, s/veh		31.5			49.7			45.9			27.8	
Approach LOS		C			D			D			C	
Timer	1	2	3	4	5	6	7	8				
Assigned Phs	1	2		4	5	6	7	8				
Phs Duration (G+Y+Rc), s	3.0	54.7		42.3	13.0	54.7	11.0	31.3				
Change Period (Y+Rc), s	6.0	6.0		6.0	6.0	6.0	6.0	6.0				
Max Green Setting (Gmax), s	6.0	45.0		40.0	7.0	45.0	5.0	29.0				
Max Q Clear Time (g_c+1), s	6.0	31.0		8.6	7.5	52.2	7.5	22.3				
Green Ext Time (p_c), s	0.0	12.7		6.0	0.0	0.0	0.0	2.9				
Intersection Summary												
HCM 2010 Ctrl Delay				42.3								
HCM 2010 LOS				D								

HCM 2010 Signalized Intersection Summary
 1: King of Prussia Rd & Parking Drive/Matsonford Rd


01/03/2018

Movement	EBL	EBT	EBR	WBL	WBT	WBR	SEL	SET	SER	NWL	NWT	NWR
Lane Configurations												
Traffic Volume (veh/h)	3	4	9	528	1	216	120	744	1	7	500	272
Future Volume (veh/h)	3	4	9	528	1	216	120	744	1	7	500	272
Number	3	8	18	7	4	14	5	2	12	1	6	16
Initial Q (Qb), veh	0	0	0	0	0	0	0	0	0	0	0	0
Ped-Bike Adj(A_pbT)	1.00		1.00	1.00		1.00	1.00		1.00	1.00		1.00
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Adj Sat Flow, veh/h/ln	1800	1800	1800	1800	1891	1891	1773	1844	1844	1782	1782	1817
Adj Flow Rate, veh/h	3	4	10	574	1	235	130	809	1	8	543	0
Adj No. of Lanes	1	1	0	1	1	0	1	1	0	1	1	1
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
Percent Heavy Veh, %	0	0	0	1	0	0	0	0	0	0	0	2
Cap, veh/h	386	167	419	601	2	587	317	962	1	184	687	595
Arrive On Green	0.37	0.37	0.37	0.37	0.37	0.37	0.08	0.52	0.52	0.39	0.39	0.00
Sat Flow, veh/h	1162	457	1142	1422	7	1601	1689	1841	2	677	1782	1544
Grp Volume(v), veh/h	3	0	14	574	0	236	130	0	810	8	543	0
Grp Sat Flow(s),veh/h/ln	1162	0	1599	1422	0	1608	1689	0	1844	677	1782	1544
Q Serve(g_s), s	0.2	0.0	0.5	33.0	0.0	9.8	3.8	0.0	33.7	0.9	24.2	0.0
Cycle Q Clear(g_c), s	9.5	0.0	0.5	33.0	0.0	9.8	3.8	0.0	33.7	21.8	24.2	0.0
Prop In Lane	1.00		0.71	1.00		1.00	1.00		0.00	1.00		1.00
Lane Grp Cap(c), veh/h	386	0	586	601	0	590	317	0	963	184	687	595
V/C Ratio(X)	0.01	0.00	0.02	0.95	0.00	0.40	0.41	0.00	0.84	0.04	0.79	0.00
Avail Cap(c_a), veh/h	386	0	586	601	0	590	330	0	963	184	687	595
HCM Platoon Ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(I)	1.00	0.00	1.00	1.00	0.00	1.00	1.00	0.00	1.00	1.00	1.00	0.00
Uniform Delay (d), s/veh	24.5	0.0	18.2	30.0	0.0	21.2	17.1	0.0	18.3	32.6	24.4	0.0
Incr Delay (d2), s/veh	0.0	0.0	0.0	25.8	0.0	0.4	0.8	0.0	8.8	0.4	9.0	0.0
Initial Q Delay(d3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
%ile BackOfQ(95%),veh/ln	0.1	0.0	0.4	25.6	0.0	7.8	3.3	0.0	26.4	0.3	19.7	0.0
LnGrp Delay(d),s/veh	24.5	0.0	18.2	55.8	0.0	21.6	18.0	0.0	27.1	33.1	33.5	0.0
LnGrp LOS	C		B	E		C	B		C	C	C	
Approach Vol, veh/h		17			810			940			551	
Approach Delay, s/veh		19.3			45.9			25.9			33.5	
Approach LOS		B			D			C			C	
Timer	1	2	3	4	5	6	7	8				
Assigned Phs		2		4	5	6		8				
Phs Duration (G+Y+Rc), s		52.0		38.0	12.3	39.7		38.0				
Change Period (Y+Rc), s		6.0		6.0	6.0	6.0		6.0				
Max Green Setting (Gmax), s		46.0		32.0	7.0	33.0		32.0				
Max Q Clear Time (g_c+I1), s		35.7		35.5	6.3	26.7		12.0				
Green Ext Time (p_c), s		6.2		0.0	0.0	4.2		3.3				
Intersection Summary												
HCM 2010 Ctrl Delay			34.6									
HCM 2010 LOS			C									

HCM 2010 Signalized Intersection Summary

2: Radnor Chester Rd & King of Prussia Rd

01/03/2018



Movement	EBL	EBT	EBR	WBL	WBT	WBR	NEL	NET	NER	SWL	SWT	SWR
Lane Configurations												
Traffic Volume (veh/h)	8	738	664	59	428	1	401	7	141	31	37	49
Future Volume (veh/h)	8	738	664	59	428	1	401	7	141	31	37	49
Number	5	2	12	1	6	16	7	4	14	3	8	18
Initial Q (Qb), veh	0	0	0	0	0	0	0	0	0	0	0	0
Ped-Bike Adj(A_pbT)	1.00		1.00	1.00		1.00	1.00		0.98	1.00		0.98
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Adj Sat Flow, veh/h/ln	1782	1782	1872	1836	1835	1854	1782	1664	1835	1809	1743	1809
Adj Flow Rate, veh/h	8	769	0	61	446	1	418	7	147	32	39	51
Adj No. of Lanes	1	1	1	1	1	0	0	1	1	0	1	0
Peak Hour Factor	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96
Percent Heavy Veh, %	1	1	0	1	1	1	14	14	1	3	3	3
Cap, veh/h	351	812	725	111	834	2	270	3	644	50	58	42
Arrive On Green	0.46	0.46	0.00	0.46	0.46	0.46	0.42	0.42	0.42	0.42	0.42	0.42
Sat Flow, veh/h	948	1782	1591	725	1830	4	453	8	1525	0	138	99
Grp Volume(v), veh/h	8	769	0	61	0	447	425	0	147	122	0	0
Grp Sat Flow(s),veh/h/ln	948	1782	1591	725	0	1834	460	0	1525	237	0	0
Q Serve(g_s), s	0.5	37.2	0.0	3.8	0.0	15.8	0.0	0.0	5.5	0.0	0.0	0.0
Cycle Q Clear(g_c), s	15.8	37.2	0.0	41.0	0.0	15.8	38.0	0.0	5.5	38.0	0.0	0.0
Prop In Lane	1.00		1.00	1.00		0.00	0.98		1.00	0.26		0.42
Lane Grp Cap(c), veh/h	351	812	725	111	0	836	274	0	644	151	0	0
V/C Ratio(X)	0.02	0.95	0.00	0.55	0.00	0.53	1.55	0.00	0.23	0.81	0.00	0.00
Avail Cap(c_a), veh/h	351	812	725	111	0	836	274	0	644	151	0	0
HCM Platoon Ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(I)	0.14	0.14	0.00	1.00	0.00	1.00	1.00	0.00	1.00	1.00	0.00	0.00
Uniform Delay (d), s/veh	23.2	23.5	0.0	44.0	0.0	17.6	31.5	0.0	16.6	22.1	0.0	0.0
Incr Delay (d2), s/veh	0.0	4.6	0.0	18.3	0.0	2.4	266.2	0.0	0.2	27.2	0.0	0.0
Initial Q Delay(d3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
%ile BackOfQ(95%),veh/ln	0.3	21.9	0.0	3.7	0.0	13.3	48.6	0.0	4.2	5.5	0.0	0.0
LnGrp Delay(d),s/veh	23.2	28.1	0.0	62.4	0.0	20.1	297.7	0.0	16.8	49.3	0.0	0.0
LnGrp LOS	C	C		E		C	F		B	D		
Approach Vol, veh/h		777			508			572			122	
Approach Delay, s/veh		28.1			25.2			225.5			49.3	
Approach LOS		C			C			F			D	
Timer	1	2	3	4	5	6	7	8				
Assigned Phs		2		4		6		8				
Phs Duration (G+Y+Rc), s		46.0		44.0		46.0		44.0				
Change Period (Y+Rc), s		6.0		7.0		6.0		7.0				
Max Green Setting (Gmax), s		40.0		37.0		40.0		37.0				
Max Q Clear Time (g_c+I1), s		39.7		40.0		43.5		40.0				
Green Ext Time (p_c), s		0.2		0.0		0.0		0.0				
Intersection Summary												
HCM 2010 Ctrl Delay				85.7								
HCM 2010 LOS				F								

HCM 2010 TWSC
 3: King of Prussia Rd & Septa Driveway

01/03/2018

Intersection						
Int Delay, s/veh	17.1					
Movement	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations	↖↗		↖		↖	↗
Traffic Vol, veh/h	149	88	408	25	39	969
Future Vol, veh/h	149	88	408	25	39	969
Conflicting Peds, #/hr	2	10	0	17	17	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	None	-	None	-	None
Storage Length	0	-	-	-	100	-
Veh in Median Storage, #	0	-	0	-	-	0
Grade, %	0	-	0	-	-	0
Peak Hour Factor	85	85	85	85	85	85
Heavy Vehicles, %	0	17	1	0	17	1
Mvmt Flow	175	104	480	29	46	1140

Major/Minor	Minor1	Major1	Major2		
Conflicting Flow All	1746	522	0	0	526
Stage 1	512	-	-	-	-
Stage 2	1234	-	-	-	-
Critical Hdwy	6.4	6.37	-	-	4.27
Critical Hdwy Stg 1	5.4	-	-	-	-
Critical Hdwy Stg 2	5.4	-	-	-	-
Follow-up Hdwy	3.5	3.453	-	-	2.353
Pot Cap-1 Maneuver	~ 96	526	-	-	969
Stage 1	606	-	-	-	-
Stage 2	277	-	-	-	-
Platoon blocked, %					
Mov Cap-1 Maneuver	~ 90	514	-	-	961
Mov Cap-2 Maneuver	200	-	-	-	-
Stage 1	597	-	-	-	-
Stage 2	263	-	-	-	-

Approach	WB	NB	SB
HCM Control Delay, s	120	0	0.3
HCM LOS	F		

Minor Lane/Major Mvmt	NBT	NBRWBLn1	SBL	SBT
Capacity (veh/h)	-	-	259	961
HCM Lane V/C Ratio	-	-	1.077	0.048
HCM Control Delay (s)	-	-	120	8.9
HCM Lane LOS	-	-	F	A
HCM 95th %tile Q(veh)	-	-	11.5	0.1

Notes
 ~: Volume exceeds capacity \$: Delay exceeds 300s +: Computation Not Defined *: All major volume in platoon

HCM 2010 TWSC
 4: King of Prussia Rd & Northern Driveway

01/03/2018

Intersection						
Int Delay, s/veh	0.5					
Movement	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations	Y		↑			↑
Traffic Vol, veh/h	23	23	343	0	0	1188
Future Vol, veh/h	23	23	343	0	0	1188
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	None	-	None	-	None
Storage Length	0	-	-	-	-	-
Veh in Median Storage, #	0	-	0	-	-	0
Grade, %	0	-	0	-	-	0
Peak Hour Factor	93	93	93	93	93	93
Heavy Vehicles, %	0	0	1	0	0	1
Mvmt Flow	25	25	369	0	0	1277

Major/Minor	Minor1	Major1	Major2			
Conflicting Flow All	1646	369	0	-	-	-
Stage 1	369	-	-	-	-	-
Stage 2	1277	-	-	-	-	-
Critical Hdwy	6.4	6.2	-	-	-	-
Critical Hdwy Stg 1	5.4	-	-	-	-	-
Critical Hdwy Stg 2	5.4	-	-	-	-	-
Follow-up Hdwy	3.5	3.3	-	-	-	-
Pot Cap-1 Maneuver	111	681	-	0	0	-
Stage 1	704	-	-	0	0	-
Stage 2	264	-	-	0	0	-
Platoon blocked, %			-			-
Mov Cap-1 Maneuver	111	681	-	-	-	-
Mov Cap-2 Maneuver	212	-	-	-	-	-
Stage 1	704	-	-	-	-	-
Stage 2	264	-	-	-	-	-

Approach	WB	NB	SB
HCM Control Delay, s	18.2	0	0
HCM LOS	C		

Minor Lane/Major Mvmt	NBTWBLn1	SBT
Capacity (veh/h)	- 323	-
HCM Lane V/C Ratio	- 0.153	-
HCM Control Delay (s)	- 18.2	-
HCM Lane LOS	- C	-
HCM 95th %tile Q(veh)	- 0.5	-

Intersection												
Int Delay, s/veh	1.1											
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		↕						↕			↕	
Traffic Vol, veh/h	5	0	41	0	0	0	23	344	5	5	1201	5
Future Vol, veh/h	5	0	41	0	0	0	23	344	5	5	1201	5
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	8	8	0	0
Sign Control	Stop	Stop	Stop	Stop	Stop	Stop	Free	Free	Free	Free	Free	Free
RT Channelized	-	-	None	-	-	None	-	-	None	-	-	None
Storage Length	-	-	-	-	-	-	-	-	-	-	-	-
Veh in Median Storage, #	-	0	-	-	-	-	-	0	-	-	0	-
Grade, %	-	0	-	-	0	-	-	0	-	-	0	-
Peak Hour Factor	94	94	94	94	94	94	94	94	94	94	94	94
Heavy Vehicles, %	0	0	0	0	0	0	0	1	0	0	1	0
Mvmt Flow	5	0	44	0	0	0	24	366	5	5	1278	5

Major/Minor	Minor2			Major1			Major2					
Conflicting Flow All	1709	1719	1280				1283	0	0	379	0	0
Stage 1	1291	1291	-				-	-	-	-	-	-
Stage 2	418	428	-				-	-	-	-	-	-
Critical Hdwy	6.4	6.5	6.2				4.1	-	-	4.1	-	-
Critical Hdwy Stg 1	5.4	5.5	-				-	-	-	-	-	-
Critical Hdwy Stg 2	5.4	5.5	-				-	-	-	-	-	-
Follow-up Hdwy	3.5	4	3.3				2.2	-	-	2.2	-	-
Pot Cap-1 Maneuver	101	91	204				548	-	-	1191	-	-
Stage 1	260	236	-				-	-	-	-	-	-
Stage 2	669	588	-				-	-	-	-	-	-
Platoon blocked, %												
Mov Cap-1 Maneuver	94	0	204				548	-	-	1191	-	-
Mov Cap-2 Maneuver	94	0	-				-	-	-	-	-	-
Stage 1	256	0	-				-	-	-	-	-	-
Stage 2	632	0	-				-	-	-	-	-	-

Approach	EB	NB	SB
HCM Control Delay, s	32.1	0.7	0
HCM LOS	D		

Minor Lane/Major Mvmt	NBL	NBT	NBR	EBLn1	SBL	SBT	SBR
Capacity (veh/h)	548	-	-	181	1191	-	-
HCM Lane V/C Ratio	0.045	-	-	0.27	0.004	-	-
HCM Control Delay (s)	11.9	0	-	32.1	8	0	-
HCM Lane LOS	B	A	-	D	A	A	-
HCM 95th %tile Q(veh)	0.1	-	-	1	0	-	-

Intersection						
Int Delay, s/veh	83.9					
Movement	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations	↘↗		↑	↑	↘	↑
Traffic Vol, veh/h	208	46	325	43	10	1228
Future Vol, veh/h	208	46	325	43	10	1228
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	None	-	None	-	None
Storage Length	0	-	-	0	100	-
Veh in Median Storage, #	0	-	0	-	-	0
Grade, %	0	-	0	-	-	0
Peak Hour Factor	94	94	94	94	94	94
Heavy Vehicles, %	0	0	1	0	0	1
Mvmt Flow	221	49	346	46	11	1306

Major/Minor	Minor1	Major1	Major2		
Conflicting Flow All	1674	346	0	0	346
Stage 1	346	-	-	-	-
Stage 2	1328	-	-	-	-
Critical Hdwy	6.4	6.2	-	-	4.1
Critical Hdwy Stg 1	5.4	-	-	-	-
Critical Hdwy Stg 2	5.4	-	-	-	-
Follow-up Hdwy	3.5	3.3	-	-	2.2
Pot Cap-1 Maneuver	~ 106	702	-	-	1224
Stage 1	721	-	-	-	-
Stage 2	250	-	-	-	-
Platoon blocked, %			-	-	-
Mov Cap-1 Maneuver	~ 105	702	-	-	1224
Mov Cap-2 Maneuver	~ 105	-	-	-	-
Stage 1	721	-	-	-	-
Stage 2	248	-	-	-	-




























Approach	WB	NB	SB
HCM Control Delay, s\$	613.8	0	0.1
HCM LOS	F		

Minor Lane/Major Mvmt	NBT	NBRWBLn1	SBL	SBT
Capacity (veh/h)	-	-	124	1224
HCM Lane V/C Ratio	-	-	2.179	0.009
HCM Control Delay (s)	-	-	\$ 613.8	8
HCM Lane LOS	-	-	F	A
HCM 95th %tile Q(veh)	-	-	22.7	0

Notes
 ~: Volume exceeds capacity \$: Delay exceeds 300s +: Computation Not Defined *: All major volume in platoon


HCM 2010 Signalized Intersection Summary
 7: I-476 Off Ramp/King of Prussia Rd & Lancaster Ave

01/03/2018

												
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	 	 			 		 	 		 		
Traffic Volume (veh/h)	80	1538	0	0	578	167	272	219	214	847	0	466
Future Volume (veh/h)	80	1538	0	0	578	167	272	219	214	847	0	466
Number	5	2	12	1	6	16	3	8	18	7	4	14
Initial Q (Qb), veh	0	0	0	0	0	0	0	0	0	0	0	0
Ped-Bike Adj(A_pbT)	1.00		1.00	1.00		1.00	1.00		1.00	1.00		1.00
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Adj Sat Flow, veh/h/ln	1800	1782	0	0	1782	1853	1782	1800	1800	1782	0	1872
Adj Flow Rate, veh/h	85	1636	0	0	615	0	289	233	228	901	0	496
Adj No. of Lanes	2	2	0	0	2	1	2	1	1	2	0	1
Peak Hour Factor	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94
Percent Heavy Veh, %	0	1	0	0	1	1	1	0	0	1	0	0
Cap, veh/h	192	1632	0	0	1282	597	1407	295	250	866	0	0
Arrive On Green	0.04	0.32	0.00	0.00	0.76	0.00	0.43	0.16	0.16	0.22	0.00	0.01
Sat Flow, veh/h	3326	3475	0	0	3475	1575	3293	1800	1530	3293	901	
Grp Volume(v), veh/h	85	1636	0	0	615	0	289	233	228	901	85.8	
Grp Sat Flow(s),veh/h/ln	1663	1693	0	0	1693	1575	1646	1800	1530	1646	F	
Q Serve(g_s), s	2.7	53.0	0.0	0.0	7.6	0.0	6.1	13.7	16.1	24.0		
Cycle Q Clear(g_c), s	2.7	53.0	0.0	0.0	7.6	0.0	6.1	13.7	16.1	24.0		
Prop In Lane	1.00		0.00	0.00		1.00	1.00		1.00	1.00		
Lane Grp Cap(c), veh/h	192	1632	0	0	1282	597	1407	295	250	866		
V/C Ratio(X)	0.44	1.00	0.00	0.00	0.48	0.00	0.21	0.79	0.91	1.04		
Avail Cap(c_a), veh/h	393	1632	0	0	1282	597	1407	295	250	866		
HCM Platoon Ratio	0.67	0.67	1.00	1.00	2.00	2.00	1.00	1.00	1.00	1.00		
Upstream Filter(I)	0.88	0.88	0.00	0.00	0.88	0.00	1.00	1.00	1.00	1.00		
Uniform Delay (d), s/veh	51.1	37.2	0.0	0.0	9.2	0.0	19.8	44.2	45.2	44.2		
Incr Delay (d2), s/veh	1.4	21.5	0.0	0.0	1.1	0.0	0.1	13.6	34.1	41.6		
Initial Q Delay(d3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
%ile BackOfQ(95%),veh/ln	2.3	53.4	0.0	0.0	6.5	0.0	4.9	12.5	14.1	13.1		
LnGrp Delay(d),s/veh	52.5	58.8	0.0	0.0	10.3	0.0	19.8	57.8	79.3	85.8		
LnGrp LOS	D	F			B		B	E	E	F		
Approach Vol, veh/h		1721			615			750				
Approach Delay, s/veh		58.5			10.3			49.7				
Approach LOS		E			B			D				
Timer	1	2	3	4	5	6	7	8				
Assigned Phs		2	3		5	6	7	8				
Phs Duration (G+Y+Rc), s		58.0	52.0		11.3	46.7	29.0	23.0				
Change Period (Y+Rc), s		6.0	6.0		6.0	6.0	6.0	6.0				
Max Green Setting (Gmax), s		52.0	23.0		12.0	34.0	23.0	17.0				
Max Q Clear Time (g_c+I1), s		55.5	8.6		5.2	10.1	26.5	18.6				
Green Ext Time (p_c), s		0.0	0.8		0.1	17.8	0.0	0.0				
Intersection Summary												
HCM 2010 Ctrl Delay			55.6									
HCM 2010 LOS			E									

HCM 2010 Signalized Intersection Summary
 8: I-476 SB Off Ramp & Lancaster Ave

01/03/2018



Movement	EBT	EBR	WBL	WBT	NBL	NBR		
Lane Configurations	↑↑↑		↵↵	↑↑	↵↵	↵		
Traffic Volume (veh/h)	1043	0	578	774	615	494		
Future Volume (veh/h)	1043	0	578	774	615	494		
Number	4	14	3	8	5	12		
Initial Q (Qb), veh	0	0	0	0	0	0		
Ped-Bike Adj(A_pbT)		1.00	1.00		1.00	1.00		
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00		
Adj Sat Flow, veh/h/ln	1730	0	1800	1782	1818	1891		
Adj Flow Rate, veh/h	1064	0	590	790	628	0		
Adj No. of Lanes	3	0	2	2	2	1		
Peak Hour Factor	0.98	0.98	0.98	0.98	0.98	0.98		
Percent Heavy Veh, %	3	0	1	2	1	1		
Cap, veh/h	1998	0	722	2322	751	359		
Arrive On Green	0.42	0.00	0.07	0.23	0.22	0.00		
Sat Flow, veh/h	5035	0	3326	3476	3359	1607		
Grp Volume(v), veh/h	1064	0	590	790	628	0		
Grp Sat Flow(s),veh/h/ln	1574	0	1663	1693	1679	1607		
Q Serve(g_s), s	18.5	0.0	19.2	21.5	19.6	0.0		
Cycle Q Clear(g_c), s	18.5	0.0	19.2	21.5	19.6	0.0		
Prop In Lane		0.00	1.00		1.00	1.00		
Lane Grp Cap(c), veh/h	1998	0	722	2322	751	359		
V/C Ratio(X)	0.53	0.00	0.82	0.34	0.84	0.00		
Avail Cap(c_a), veh/h	1998	0	847	2322	916	438		
HCM Platoon Ratio	1.00	1.00	0.33	0.33	1.00	1.00		
Upstream Filter(I)	1.00	0.00	0.76	0.76	1.00	0.00		
Uniform Delay (d), s/veh	23.6	0.0	48.9	21.7	40.8	0.0		
Incr Delay (d2), s/veh	1.0	0.0	4.2	0.3	5.8	0.0		
Initial Q Delay(d3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0		
%ile BackOfQ(95%),veh/ln	2.9	0.0	13.7	14.8	14.8	0.0		
LnGrp Delay(d),s/veh	24.6	0.0	53.1	22.0	46.6	0.0		
LnGrp LOS	C		D	C	D			
Approach Vol, veh/h	1064			1380	628			
Approach Delay, s/veh	24.6			35.3	46.6			
Approach LOS	C			D	D			
Timer	1	2	3	4	5	6	7	8
Assigned Phs		2	3	4				8
Phs Duration (G+Y+Rc), s		29.6	28.9	51.5				80.4
Change Period (Y+Rc), s		6.0	6.0	6.0				6.0
Max Green Setting (Gmax), s		29.0	27.0	36.0				69.0
Max Q Clear Time (g_c+11), s		22.1	21.7	21.0				24.0
Green Ext Time (p_c), s		1.4	1.1	10.4				19.7
Intersection Summary								
HCM 2010 Ctrl Delay			33.9					
HCM 2010 LOS			C					

HCM 2010 Signalized Intersection Summary

9: Hillside Circuit & Lancaster Ave

01/03/2018



Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (veh/h)	1157	1771	14	6	708	584	3	1	2	0	0	0
Future Volume (veh/h)	1157	1771	14	6	708	584	3	1	2	0	0	0
Number	5	2	12	1	6	16	3	8	18			
Initial Q (Qb), veh	0	0	0	0	0	0	0	0	0			
Ped-Bike Adj(A_pbT)	1.00		1.00	1.00		1.00	1.00		0.88			
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00			
Adj Sat Flow, veh/h/ln	1782	1731	1800	1800	1782	1853	1800	1800	1800			
Adj Flow Rate, veh/h	1205	1845	15	6	738	0	3	1	2			
Adj No. of Lanes	2	2	0	1	2	1	0	1	1			
Peak Hour Factor	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96			
Percent Heavy Veh, %	1	4	4	0	1	1	0	0	0			
Cap, veh/h	1197	2797	23	23	1647	766	18	6	18			
Arrive On Green	0.73	1.00	1.00	0.01	0.49	0.00	0.01	0.01	0.01			
Sat Flow, veh/h	3293	3344	27	1714	3386	1575	1301	434	1345			
Grp Volume(v), veh/h	1205	906	954	6	738	0	4	0	2			
Grp Sat Flow(s),veh/h/ln	1646	1645	1726	1714	1693	1575	1735	0	1345			
Q Serve(g_s), s	40.0	0.0	0.0	0.4	15.7	0.0	0.3	0.0	0.2			
Cycle Q Clear(g_c), s	40.0	0.0	0.0	0.4	15.7	0.0	0.3	0.0	0.2			
Prop In Lane	1.00		0.02	1.00		1.00	0.75		1.00			
Lane Grp Cap(c), veh/h	1197	1376	1444	23	1647	766	24	0	18			
V/C Ratio(X)	1.01	0.66	0.66	0.26	0.45	0.00	0.17	0.00	0.11			
Avail Cap(c_a), veh/h	1197	1376	1444	109	1647	766	110	0	86			
HCM Platoon Ratio	2.00	2.00	2.00	1.00	1.00	1.00	1.00	1.00	1.00			
Upstream Filter(I)	0.09	0.09	0.09	1.00	1.00	0.00	1.00	0.00	1.00			
Uniform Delay (d), s/veh	15.0	0.0	0.0	53.7	18.6	0.0	53.6	0.0	53.6			
Incr Delay (d2), s/veh	9.4	0.2	0.2	5.6	0.9	0.0	3.3	0.0	2.6			
Initial Q Delay(d3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
%ile BackOfQ(95%),veh/ln	33.7	0.2	0.2	0.4	12.1	0.0	0.3	0.0	0.1			
LnGrp Delay(d),s/veh	24.4	0.2	0.2	59.3	19.4	0.0	56.9	0.0	56.2			
LnGrp LOS	F	A	A	E	B		E		E			
Approach Vol, veh/h		3065			744			6				
Approach Delay, s/veh		9.7			19.8			56.7				
Approach LOS		A			B			E				
Timer	1	2	3	4	5	6	7	8				
Assigned Phs	1	2			5	6		8				
Phs Duration (G+Y+Rc), s	6.5	97.0			45.0	58.5		6.5				
Change Period (Y+Rc), s	6.0	6.0			6.0	6.0		6.0				
Max Green Setting (Gmax), s	6.0	80.0			39.0	47.0		6.0				
Max Q Clear Time (g_c+12), s	6.0	2.5			42.5	18.2		2.7				
Green Ext Time (p_c), s	0.0	45.7			0.0	22.9		0.0				
Intersection Summary												
HCM 2010 Ctrl Delay					11.8							
HCM 2010 LOS					B							
Notes												

HCM 2010 Signalized Intersection Summary
 10: Radnor Chester Rd.


01/03/2018



Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (veh/h)	120	1166	93	198	1114	126	81	211	141	410	448	215
Future Volume (veh/h)	120	1166	93	198	1114	126	81	211	141	410	448	215
Number	5	2	12	1	6	16	3	8	18	7	4	14
Initial Q (Qb), veh	0	0	0	0	0	0	0	0	0	0	0	0
Ped-Bike Adj(A_pbT)	1.00		1.00	1.00		1.00	1.00		1.00	1.00		1.00
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Adj Sat Flow, veh/h/ln	1791	1792	1809	1747	1764	1764	1764	1752	1764	1773	1779	1791
Adj Flow Rate, veh/h	124	1202	96	204	1148	130	84	218	145	423	462	222
Adj No. of Lanes	1	2	0	1	2	1	0	2	0	1	2	0
Peak Hour Factor	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97
Percent Heavy Veh, %	1	1	1	2	1	1	1	1	1	1	0	0
Cap, veh/h	230	1220	97	209	1294	578	149	345	234	331	863	412
Arrive On Green	0.08	0.38	0.38	0.08	0.39	0.39	0.26	0.26	0.26	0.08	0.39	0.39
Sat Flow, veh/h	1706	3195	255	1664	3352	1496	385	1338	906	1689	2222	1060
Grp Volume(v), veh/h	124	640	658	204	1148	130	218	0	229	423	351	333
Grp Sat Flow(s),veh/h/ln	1706	1703	1747	1664	1676	1496	1195	0	1433	1689	1690	1591
Q Serve(g_s), s	4.3	37.2	37.4	7.6	32.0	5.8	12.6	0.0	14.1	8.0	16.0	16.2
Cycle Q Clear(g_c), s	4.3	37.2	37.4	7.6	32.0	5.8	16.1	0.0	14.1	8.0	16.0	16.2
Prop In Lane	1.00		0.15	1.00		1.00	0.39		0.63	1.00		0.67
Lane Grp Cap(c), veh/h	230	650	667	209	1294	578	359	0	370	331	656	618
V/C Ratio(X)	0.54	0.98	0.99	0.98	0.89	0.23	0.61	0.00	0.62	1.28	0.53	0.54
Avail Cap(c_a), veh/h	255	650	667	209	1294	578	453	0	487	331	795	748
HCM Platoon Ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(I)	1.00	1.00	1.00	1.00	1.00	1.00	1.00	0.00	1.00	1.00	1.00	1.00
Uniform Delay (d), s/veh	22.4	30.6	30.7	24.3	28.7	20.6	33.1	0.0	32.7	34.5	23.6	23.7
Incr Delay (d2), s/veh	2.0	31.7	31.9	55.0	9.2	0.9	1.7	0.0	1.7	145.8	0.7	0.7
Initial Q Delay(d3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
%ile BackOfQ(95%),veh/ln	3.8	31.0	31.8	13.7	23.0	4.6	9.5	0.0	9.7	33.9	12.0	11.7
LnGrp Delay(d),s/veh	24.3	62.3	62.5	79.4	37.9	21.5	34.8	0.0	34.4	180.3	24.3	24.4
LnGrp LOS	C	E	E	E	D	C	C		C	F	C	C
Approach Vol, veh/h		1422			1482			447			1107	
Approach Delay, s/veh		59.1			42.2			34.6			83.9	
Approach LOS		E			D			C			F	
Timer	1	2	3	4	5	6	7	8				
Assigned Phs	1	2		4	5	6	7	8				
Phs Duration (G+Y+Rc), s	3.0	43.2		43.8	12.6	43.6	13.0	30.8				
Change Period (Y+Rc), s	6.0	6.0		6.0	6.0	6.0	6.0	6.0				
Max Green Setting (Gmax), s	29.0			46.0	8.0	28.0	7.0	33.0				
Max Q Clear Time (g_c+110), s	39.7			18.5	6.8	34.5	10.5	18.1				
Green Ext Time (p_c), s	0.0	0.0		8.7	0.0	0.0	0.0	6.6				
Intersection Summary												
HCM 2010 Ctrl Delay				57.2								
HCM 2010 LOS				E								

HCM 2010 Signalized Intersection Summary
 2: Radnor Chester Rd & King of Prussia Rd

01/03/2018



Movement	EBL	EBT	EBR	WBL	WBT	WBR	NEL	NET	NER	SWL	SWT	SWR
Lane Configurations												
Traffic Volume (veh/h)	38	392	476	27	834	7	511	33	58	2	1	6
Future Volume (veh/h)	38	392	476	27	834	7	511	33	58	2	1	6
Number	5	2	12	1	6	16	7	4	14	3	8	18
Initial Q (Qb), veh	0	0	0	0	0	0	0	0	0	0	0	0
Ped-Bike Adj(A_pbT)	1.00		1.00	1.00		1.00	1.00		0.97	1.00		0.97
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Adj Sat Flow, veh/h/ln	1800	1714	1817	1717	1816	1854	1782	1629	1835	1809	1628	1809
Adj Flow Rate, veh/h	40	417	0	29	887	7	544	35	62	2	1	6
Adj No. of Lanes	1	1	1	1	1	0	0	1	1	0	1	0
Peak Hour Factor	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94
Percent Heavy Veh, %	0	5	3	8	2	2	0	0	1	0	0	0
Cap, veh/h	92	857	772	399	900	7	226	10	574	49	37	73
Arrive On Green	0.50	0.50	0.00	0.50	0.50	0.50	0.38	0.38	0.38	0.38	0.38	0.38
Sat Flow, veh/h	632	1714	1545	939	1799	14	393	25	1520	0	97	194
Grp Volume(v), veh/h	40	417	0	29	0	894	579	0	62	9	0	0
Grp Sat Flow(s),veh/h/ln	632	1714	1545	939	0	1813	418	0	1520	290	0	0
Q Serve(g_s), s	1.7	14.5	0.0	1.9	0.0	43.8	0.0	0.0	2.4	0.0	0.0	0.0
Cycle Q Clear(g_c), s	45.0	14.5	0.0	16.4	0.0	43.8	34.0	0.0	2.4	34.0	0.0	0.0
Prop In Lane	1.00		1.00	1.00		0.01	0.94		1.00	0.22		0.67
Lane Grp Cap(c), veh/h	92	857	772	399	0	907	236	0	574	159	0	0
V/C Ratio(X)	0.43	0.49	0.00	0.07	0.00	0.99	2.46	0.00	0.11	0.06	0.00	0.00
Avail Cap(c_a), veh/h	92	857	772	399	0	907	236	0	574	159	0	0
HCM Platoon Ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(I)	0.57	0.57	0.00	1.00	0.00	1.00	1.00	0.00	1.00	1.00	0.00	0.00
Uniform Delay (d), s/veh	44.7	14.9	0.0	20.3	0.0	22.2	33.6	0.0	18.2	21.6	0.0	0.0
Incr Delay (d2), s/veh	8.3	1.1	0.0	0.4	0.0	26.7	668.6	0.0	0.1	0.1	0.0	0.0
Initial Q Delay(d3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
%ile BackOfQ(95%),veh/ln	2.2	10.4	0.0	1.0	0.0	37.1	89.2	0.0	1.8	0.3	0.0	0.0
LnGrp Delay(d),s/veh	53.0	16.0	0.0	20.6	0.0	48.9	702.2	0.0	18.2	21.8	0.0	0.0
LnGrp LOS	D	B		C		D	F		B	C		
Approach Vol, veh/h		457			923			641			9	
Approach Delay, s/veh		19.2			48.0			636.0			21.8	
Approach LOS		B			D			F			C	
Timer	1	2	3	4	5	6	7	8				
Assigned Phs		2		4		6		8				
Phs Duration (G+Y+Rc), s		50.0		40.0		50.0		40.0				
Change Period (Y+Rc), s		6.0		7.0		6.0		7.0				
Max Green Setting (Gmax), s		44.0		33.0		44.0		33.0				
Max Q Clear Time (g_c+I1), s		47.5		36.0		45.8		36.0				
Green Ext Time (p_c), s		0.0		0.0		0.0		0.0				
Intersection Summary												
HCM 2010 Ctrl Delay				227.1								
HCM 2010 LOS				F								

HCM 2010 TWSC
 3: King of Prussia Rd & Septa Driveway

01/03/2018

Intersection						
Int Delay, s/veh	2.5					
Movement	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations						
Traffic Vol, veh/h	23	34	976	192	116	331
Future Vol, veh/h	23	34	976	192	116	331
Conflicting Peds, #/hr	2	10	0	17	17	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	None	-	None	-	None
Storage Length	0	-	-	-	100	-
Veh in Median Storage, #	0	-	0	-	-	0
Grade, %	0	-	0	-	-	0
Peak Hour Factor	87	87	87	87	87	87
Heavy Vehicles, %	0	42	2	0	22	5
Mvmt Flow	26	39	1122	221	133	380

Major/Minor	Minor1	Major1	Major2		
Conflicting Flow All	1898	1259	0	0	1360
Stage 1	1249	-	-	-	-
Stage 2	649	-	-	-	-
Critical Hdwy	6.4	6.62	-	-	4.32
Critical Hdwy Stg 1	5.4	-	-	-	-
Critical Hdwy Stg 2	5.4	-	-	-	-
Follow-up Hdwy	3.5	3.678	-	-	2.398
Pot Cap-1 Maneuver	77	172	-	-	446
Stage 1	273	-	-	-	-
Stage 2	524	-	-	-	-
Platoon blocked, %			-	-	-
Mov Cap-1 Maneuver	53	168	-	-	442
Mov Cap-2 Maneuver	165	-	-	-	-
Stage 1	269	-	-	-	-
Stage 2	366	-	-	-	-

Approach	WB	NB	SB
HCM Control Delay, s	39.8	0	4.3
HCM LOS	E		

Minor Lane/Major Mvmt	NBT	NBRWBLn1	SBL	SBT
Capacity (veh/h)	-	-	167	442
HCM Lane V/C Ratio	-	-	0.392	0.302
HCM Control Delay (s)	-	-	39.8	16.6
HCM Lane LOS	-	-	E	C
HCM 95th %tile Q(veh)	-	-	1.7	1.3

HCM 2010 TWSC
 4: King of Prussia Rd & Northern Driveway

01/03/2018

Intersection						
Int Delay, s/veh	0.1					
Movement	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations	↘↗		↑			↑
Traffic Vol, veh/h	4	4	1159	0	0	404
Future Vol, veh/h	4	4	1159	0	0	404
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	None	-	None	-	None
Storage Length	0	-	-	-	-	-
Veh in Median Storage, #	0	-	0	-	-	0
Grade, %	0	-	0	-	-	0
Peak Hour Factor	94	94	94	94	94	94
Heavy Vehicles, %	0	0	2	0	0	8
Mvmt Flow	4	4	1233	0	0	430

Major/Minor	Minor1	Major1	Major2			
Conflicting Flow All	1663	1233	0	-	-	-
Stage 1	1233	-	-	-	-	-
Stage 2	430	-	-	-	-	-
Critical Hdwy	6.4	6.2	-	-	-	-
Critical Hdwy Stg 1	5.4	-	-	-	-	-
Critical Hdwy Stg 2	5.4	-	-	-	-	-
Follow-up Hdwy	3.5	3.3	-	-	-	-
Pot Cap-1 Maneuver	108	218	-	0	0	-
Stage 1	278	-	-	0	0	-
Stage 2	660	-	-	0	0	-
Platoon blocked, %			-			-
Mov Cap-1 Maneuver	108	218	-	-	-	-
Mov Cap-2 Maneuver	217	-	-	-	-	-
Stage 1	278	-	-	-	-	-
Stage 2	660	-	-	-	-	-

Approach	WB	NB	SB
HCM Control Delay, s	22.3	0	0
HCM LOS	C		

Minor Lane/Major Mvmt	NBTWBLn1	SBT
Capacity (veh/h)	- 217	-
HCM Lane V/C Ratio	- 0.039	-
HCM Control Delay (s)	- 22.3	-
HCM Lane LOS	- C	-
HCM 95th %tile Q(veh)	- 0.1	-

Intersection												
Int Delay, s/veh	2.1											
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		↕						↕			↕	
Traffic Vol, veh/h	9	0	133	0	0	0	177	1153	27	27	323	59
Future Vol, veh/h	9	0	133	0	0	0	177	1153	27	27	323	59
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	8	8	0	0
Sign Control	Stop	Stop	Stop	Stop	Stop	Stop	Free	Free	Free	Free	Free	Free
RT Channelized	-	-	None	-	-	None	-	-	None	-	-	None
Storage Length	-	-	-	-	-	-	-	-	-	-	-	-
Veh in Median Storage, #	-	0	-	-	-	-	-	0	-	-	0	-
Grade, %	-	0	-	-	0	-	-	0	-	-	0	-
Peak Hour Factor	78	78	78	78	78	78	78	78	78	78	78	78
Heavy Vehicles, %	11	0	4	0	0	0	0	2	0	0	10	0
Mvmt Flow	12	0	171	0	0	0	227	1478	35	35	414	76

Major/Minor	Minor2			Major1			Major2					
Conflicting Flow All	2470	2496	452				490	0	0	1521	0	0
Stage 1	521	521	-				-	-	-	-	-	-
Stage 2	1949	1975	-				-	-	-	-	-	-
Critical Hdwy	6.51	6.5	6.24				4.1	-	-	4.1	-	-
Critical Hdwy Stg 1	5.51	5.5	-				-	-	-	-	-	-
Critical Hdwy Stg 2	5.51	5.5	-				-	-	-	-	-	-
Follow-up Hdwy	3.599	4	3.336				2.2	-	-	2.2	-	-
Pot Cap-1 Maneuver	31	29	603				1084	-	-	445	-	-
Stage 1	578	535	-				-	-	-	-	-	-
Stage 2	115	109	-				-	-	-	-	-	-
Platoon blocked, %												
Mov Cap-1 Maneuver	0	0	603				1084	-	-	445	-	-
Mov Cap-2 Maneuver	0	0	-				-	-	-	-	-	-
Stage 1	515	0	-				-	-	-	-	-	-
Stage 2	0	0	-				-	-	-	-	-	-

Approach	EB	NB	SB
HCM Control Delay, s	13.5	1.2	0.9
HCM LOS	B		

Minor Lane/Major Mvmt	NBL	NBT	NBR	EBLn1	SBL	SBT	SBR
Capacity (veh/h)	1084	-	-	603	445	-	-
HCM Lane V/C Ratio	0.209	-	-	0.302	0.078	-	-
HCM Control Delay (s)	9.2	0	-	13.5	13.8	0	-
HCM Lane LOS	A	A	-	B	B	A	-
HCM 95th %tile Q(veh)	0.8	-	-	1.3	0.3	-	-

HCM 2010 TWSC
6: King of Prussia Rd & Southern Driveway

01/03/2018

Intersection						
Int Delay, s/veh	6.1					
Movement	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations	↘↙		↑	↗↘	↘	↑
Traffic Vol, veh/h	33	7	1345	242	54	401
Future Vol, veh/h	33	7	1345	242	54	401
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	None	-	None	-	None
Storage Length	0	-	-	0	100	-
Veh in Median Storage, #	0	-	0	-	-	0
Grade, %	0	-	0	-	-	0
Peak Hour Factor	83	83	83	83	83	83
Heavy Vehicles, %	0	0	2	0	0	8
Mvmt Flow	40	8	1620	292	65	483






























Major/Minor	Minor1	Major1	Major2			
Conflicting Flow All	2233	1620	0	0	1620	0
Stage 1	1620	-	-	-	-	-
Stage 2	613	-	-	-	-	-
Critical Hdwy	6.4	6.2	-	-	4.1	-
Critical Hdwy Stg 1	5.4	-	-	-	-	-
Critical Hdwy Stg 2	5.4	-	-	-	-	-
Follow-up Hdwy	3.5	3.3	-	-	2.2	-
Pot Cap-1 Maneuver	48	129	-	-	407	-
Stage 1	180	-	-	-	-	-
Stage 2	544	-	-	-	-	-
Platoon blocked, %			-	-		
Mov Cap-1 Maneuver	40	129	-	-	407	-
Mov Cap-2 Maneuver	40	-	-	-	-	-
Stage 1	180	-	-	-	-	-
Stage 2	457	-	-	-	-	-

Approach	WB	NB	SB
HCM Control Delay, s	298	0	1.8
HCM LOS	F		

Minor Lane/Major Mvmt	NBT	NBRWBLn1	SBL	SBT
Capacity (veh/h)	-	-	45	407
HCM Lane V/C Ratio	-	-	1.071	0.16
HCM Control Delay (s)	-	-	298	15.5
HCM Lane LOS	-	-	F	C
HCM 95th %tile Q(veh)	-	-	4.5	0.6


HCM 2010 Signalized Intersection Summary
 7: I-476 Off Ramp/King of Prussia Rd & Lancaster Ave

01/03/2018

												
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	 	 			 	 	 		 	 		 
Traffic Volume (veh/h)	363	1306	0	0	544	371	774	833	344	289	0	134
Future Volume (veh/h)	363	1306	0	0	544	371	774	833	344	289	0	134
Number	5	2	12	1	6	16	3	8	18	7	4	14
Initial Q (Qb), veh	0	0	0	0	0	0	0	0	0	0	0	0
Ped-Bike Adj(A_pbT)	1.00		1.00	1.00		1.00	1.00		1.00	1.00		1.00
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Adj Sat Flow, veh/h/ln	1791	1756	0	0	1800	1854	1764	1764	1764	1665	0	1748
Adj Flow Rate, veh/h	374	1346	0	0	561	0	798	859	355	298	0	138
Adj No. of Lanes	2	2	0	0	2	1	2	1	1	2	0	1
Peak Hour Factor	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97
Percent Heavy Veh, %	0	2	0	0	1	2	1	1	1	7	0	6
Cap, veh/h	451	1334	0	0	746	344	1660	690	586	362	0	0
Arrive On Green	0.09	0.27	0.00	0.00	0.07	0.00	0.51	0.39	0.39	0.07	0.00	0.01
Sat Flow, veh/h	3309	3424	0	0	3510	1576	3260	1764	1500	3077	298	
Grp Volume(v), veh/h	374	1346	0	0	561	0	798	859	355	298	65.3	
Grp Sat Flow(s),veh/h/ln	1655	1668	0	0	1710	1576	1630	1764	1500	1539	E	
Q Serve(g_s), s	12.2	44.0	0.0	0.0	17.7	0.0	17.5	43.0	20.8	8.0		
Cycle Q Clear(g_c), s	12.2	44.0	0.0	0.0	17.7	0.0	17.5	43.0	20.8	8.0		
Prop In Lane	1.00		0.00	0.00		1.00	1.00		1.00	1.00		
Lane Grp Cap(c), veh/h	451	1334	0	0	746	344	1660	690	586	362		
V/C Ratio(X)	0.83	1.01	0.00	0.00	0.75	0.00	0.48	1.25	0.61	0.82		
Avail Cap(c_a), veh/h	451	1334	0	0	746	344	1660	690	586	362		
HCM Platoon Ratio	0.67	0.67	1.00	1.00	0.33	0.33	1.00	1.00	1.00	1.00		
Upstream Filter(I)	0.88	0.88	0.00	0.00	0.91	0.00	1.00	1.00	1.00	1.00		
Uniform Delay (d), s/veh	48.7	40.3	0.0	0.0	48.1	0.0	17.6	33.5	26.7	51.2		
Incr Delay (d2), s/veh	10.9	25.2	0.0	0.0	6.3	0.0	0.2	122.4	1.8	14.1		
Initial Q Delay(d3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
%ile BackOfQ(95%),veh/ln	10.1	44.9	0.0	0.0	13.7	0.0	12.5	79.8	13.8	3.3		
LnGrp Delay(d),s/veh	59.6	65.4	0.0	0.0	54.4	0.0	17.8	155.9	28.5	65.3		
LnGrp LOS	E	F			D		B	F	C	E		
Approach Vol, veh/h		1720			561			2012				
Approach Delay, s/veh		64.2			54.4			78.6				
Approach LOS		E			D			E				
Timer	1	2	3	4	5	6	7	8				
Assigned Phs		2	3		5	6	7	8				
Phs Duration (G+Y+Rc), s		49.0	61.0		20.0	29.0	13.0	48.0				
Change Period (Y+Rc), s		6.0	6.0		6.0	6.0	6.0	6.0				
Max Green Setting (Gmax), s		43.0	42.0		14.0	23.0	7.0	42.0				
Max Q Clear Time (g_c+I1), s		46.5	20.0		14.7	20.2	10.5	45.5				
Green Ext Time (p_c), s		0.0	3.1		0.0	2.4	0.0	0.0				
Intersection Summary												
HCM 2010 Ctrl Delay			69.4									
HCM 2010 LOS			E									

HCM 2010 Signalized Intersection Summary
 8: I-476 SB Off Ramp & Lancaster Ave

01/03/2018



Movement	EBT	EBR	WBL	WBT	NBL	NBR		
Lane Configurations	↑↑↑		↵↵	↑↑	↵↵	↵		
Traffic Volume (veh/h)	860	0	173	1235	807	845		
Future Volume (veh/h)	860	0	173	1235	807	845		
Number	4	14	3	8	5	12		
Initial Q (Qb), veh	0	0	0	0	0	0		
Ped-Bike Adj(A_pbT)		1.00	1.00		1.00	1.00		
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00		
Adj Sat Flow, veh/h/ln	1730	0	1715	1782	1800	1785		
Adj Flow Rate, veh/h	878	0	177	1260	823	0		
Adj No. of Lanes	3	0	2	2	2	1		
Peak Hour Factor	0.98	0.98	0.98	0.98	0.98	0.98		
Percent Heavy Veh, %	3	0	6	2	2	7		
Cap, veh/h	2286	0	277	2089	972	443		
Arrive On Green	0.48	0.00	0.03	0.20	0.29	0.00		
Sat Flow, veh/h	5035	0	3169	3476	3326	1517		
Grp Volume(v), veh/h	878	0	177	1260	823	0		
Grp Sat Flow(s),veh/h/ln	1574	0	1584	1693	1663	1517		
Q Serve(g_s), s	13.0	0.0	6.1	37.2	25.6	0.0		
Cycle Q Clear(g_c), s	13.0	0.0	6.1	37.2	25.6	0.0		
Prop In Lane		0.00	1.00		1.00	1.00		
Lane Grp Cap(c), veh/h	2286	0	277	2089	972	443		
V/C Ratio(X)	0.38	0.00	0.64	0.60	0.85	0.00		
Avail Cap(c_a), veh/h	2286	0	317	2089	1421	648		
HCM Platoon Ratio	1.00	1.00	0.33	0.33	1.00	1.00		
Upstream Filter(I)	1.00	0.00	0.62	0.62	1.00	0.00		
Uniform Delay (d), s/veh	18.0	0.0	51.7	31.6	36.6	0.0		
Incr Delay (d2), s/veh	0.5	0.0	2.2	0.8	3.3	0.0		
Initial Q Delay(d3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0		
%ile BackOfQ(95%),veh/ln	9.6	0.0	4.9	23.1	18.0	0.0		
LnGrp Delay(d),s/veh	18.5	0.0	53.9	32.4	39.9	0.0		
LnGrp LOS	B		D	C	D			
Approach Vol, veh/h	878			1437	823			
Approach Delay, s/veh	18.5			35.0	39.9			
Approach LOS	B			D	D			
Timer	1	2	3	4	5	6	7	8
Assigned Phs		2	3	4				8
Phs Duration (G+Y+Rc), s		37.1	14.6	58.2				72.9
Change Period (Y+Rc), s		6.0	6.0	6.0				6.0
Max Green Setting (Gmax), s		46.0	10.0	36.0				52.0
Max Q Clear Time (g_c+I1), s		28.1	8.6	15.5				39.7
Green Ext Time (p_c), s		3.0	0.1	14.9				9.9
Intersection Summary								
HCM 2010 Ctrl Delay			31.7					
HCM 2010 LOS			C					

HCM 2010 Signalized Intersection Summary
 9: Hillside Circuit & Lancaster Ave

01/03/2018



Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↔↔	↑↔		↔	↑↑	↔		↔	↔			
Traffic Volume (veh/h)	568	1579	4	2	888	494	6	2	2	0	0	0
Future Volume (veh/h)	568	1579	4	2	888	494	6	2	2	0	0	0
Number	5	2	12	1	6	16	3	8	18			
Initial Q (Qb), veh	0	0	0	0	0	0	0	0	0			
Ped-Bike Adj(A_pbT)	1.00		1.00	1.00		1.00	1.00		0.88			
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00			
Adj Sat Flow, veh/h/ln	1782	1748	1800	1800	1765	1765	1800	1800	1800			
Adj Flow Rate, veh/h	592	1645	4	2	925	0	6	2	2			
Adj No. of Lanes	2	2	0	1	2	1	0	1	1			
Peak Hour Factor	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96			
Percent Heavy Veh, %	1	3	3	0	2	2	0	0	0			
Cap, veh/h	690	2843	7	18	2138	957	21	7	22			
Arrive On Green	0.42	1.00	1.00	0.01	0.64	0.00	0.02	0.02	0.02			
Sat Flow, veh/h	3293	3398	8	1714	3353	1500	1301	434	1345			
Grp Volume(v), veh/h	592	804	845	2	925	0	8	0	2			
Grp Sat Flow(s),veh/h/ln	1646	1660	1746	1714	1676	1500	1735	0	1345			
Q Serve(g_s), s	17.9	0.0	0.0	0.1	15.2	0.0	0.5	0.0	0.2			
Cycle Q Clear(g_c), s	17.9	0.0	0.0	0.1	15.2	0.0	0.5	0.0	0.2			
Prop In Lane	1.00		0.00	1.00		1.00	0.75		1.00			
Lane Grp Cap(c), veh/h	690	1389	1461	18	2138	957	28	0	22			
V/C Ratio(X)	0.86	0.58	0.58	0.11	0.43	0.00	0.28	0.00	0.09			
Avail Cap(c_a), veh/h	928	1389	1461	109	2138	957	110	0	86			
HCM Platoon Ratio	2.00	2.00	2.00	1.00	1.00	1.00	1.00	1.00	1.00			
Upstream Filter(I)	0.12	0.12	0.12	1.00	1.00	0.00	1.00	0.00	1.00			
Uniform Delay (d), s/veh	30.5	0.0	0.0	53.9	10.0	0.0	53.5	0.0	53.3			
Incr Delay (d2), s/veh	0.8	0.2	0.2	2.6	0.6	0.0	5.4	0.0	1.8			
Initial Q Delay(d3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
%ile BackOfQ(95%),veh/ln	9.8	0.2	0.2	0.1	11.5	0.0	0.5	0.0	0.1			
LnGrp Delay(d),s/veh	31.3	0.2	0.2	56.5	10.6	0.0	58.8	0.0	55.1			
LnGrp LOS	C	A	A	E	B		E		E			
Approach Vol, veh/h		2241			927			10				
Approach Delay, s/veh		8.4			10.7			58.1				
Approach LOS		A			B			E				
Timer	1	2	3	4	5	6	7	8				
Assigned Phs	1	2			5	6		8				
Phs Duration (G+Y+Rc), s	6.2	97.0			28.1	75.2		6.8				
Change Period (Y+Rc), s	6.0	6.0			6.0	6.0		6.0				
Max Green Setting (Gmax), s	6.0	80.0			30.0	56.0		6.0				
Max Q Clear Time (g_c+1/2), s	6.0	2.5			20.4	17.7		2.7				
Green Ext Time (p_c), s	0.0	42.9			1.6	27.7		0.0				
Intersection Summary												
HCM 2010 Ctrl Delay				9.2								
HCM 2010 LOS				A								
Notes												

HCM 2010 Signalized Intersection Summary
 10: Radnor Chester Rd






















01/03/2018



Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (veh/h)	142	1001	54	216	1495	446	94	380	85	98	135	109
Future Volume (veh/h)	142	1001	54	216	1495	446	94	380	85	98	135	109
Number	5	2	12	1	6	16	3	8	18	7	4	14
Initial Q (Qb), veh	0	0	0	0	0	0	0	0	0	0	0	0
Ped-Bike Adj(A_pbT)	1.00		1.00	1.00		1.00	1.00		1.00	1.00		1.00
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Adj Sat Flow, veh/h/ln	1739	1739	1809	1713	1747	1764	1764	1746	1764	1690	1724	1791
Adj Flow Rate, veh/h	148	1043	56	225	1557	465	98	396	89	102	141	114
Adj No. of Lanes	1	2	0	1	2	1	0	2	0	1	2	0
Peak Hour Factor	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96
Percent Heavy Veh, %	4	4	4	4	2	1	1	1	1	6	3	3
Cap, veh/h	169	1472	79	267	1532	691	153	499	113	211	607	457
Arrive On Green	0.06	0.46	0.46	0.06	0.46	0.46	0.24	0.24	0.24	0.05	0.34	0.34
Sat Flow, veh/h	1657	3190	171	1632	3319	1497	453	2068	469	1609	1782	1341
Grp Volume(v), veh/h	148	540	559	225	1557	465	297	0	286	102	129	126
Grp Sat Flow(s),veh/h/ln	1657	1652	1709	1632	1660	1497	1485	0	1506	1609	1638	1486
Q Serve(g_s), s	5.4	29.0	29.0	7.0	51.2	26.9	19.3	0.0	19.7	5.1	6.2	6.8
Cycle Q Clear(g_c), s	5.4	29.0	29.0	7.0	51.2	26.9	21.0	0.0	19.7	5.1	6.2	6.8
Prop In Lane	1.00		0.10	1.00		1.00	0.33		0.31	1.00		0.90
Lane Grp Cap(c), veh/h	169	762	788	267	1532	691	401	0	363	211	557	506
V/C Ratio(X)	0.87	0.71	0.71	0.84	1.02	0.67	0.74	0.00	0.79	0.48	0.23	0.25
Avail Cap(c_a), veh/h	169	762	788	267	1532	691	444	0	407	211	590	535
HCM Platoon Ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(I)	1.00	1.00	1.00	1.00	1.00	1.00	1.00	0.00	1.00	1.00	1.00	1.00
Uniform Delay (d), s/veh	26.9	23.9	23.9	25.6	29.9	23.4	39.8	0.0	39.4	30.0	26.2	26.4
Incr Delay (d2), s/veh	36.1	5.5	5.3	21.0	27.2	5.2	5.9	0.0	8.9	1.7	0.2	0.3
Initial Q Delay(d3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
%ile BackOfQ(95%),veh/ln	0.3	20.6	21.1	9.1	52.5	17.8	14.3	0.0	14.0	4.3	5.1	5.1
LnGrp Delay(d),s/veh	63.1	29.4	29.3	46.6	57.1	28.5	45.7	0.0	48.3	31.7	26.4	26.6
LnGrp LOS	E	C	C	D	F	C	D		D	C	C	C
Approach Vol, veh/h		1247			2247			583			357	
Approach Delay, s/veh		33.3			50.1			47.0			28.0	
Approach LOS		C			D			D			C	
Timer	1	2	3	4	5	6	7	8				
Assigned Phs	1	2		4	5	6	7	8				
Phs Duration (G+Y+Rc), s	2.0	56.2		42.8	12.0	56.2	11.0	31.8				
Change Period (Y+Rc), s	6.0	6.0		6.0	6.0	6.0	6.0	6.0				
Max Green Setting (Gmax), s	6.0	47.0		39.0	6.0	47.0	5.0	29.0				
Max Q Clear Time (g_c+19), s	0.0	31.5		8.8	7.9	53.7	7.6	23.0				
Green Ext Time (p_c), s	0.0	14.0		6.2	0.0	0.0	0.0	2.7				
Intersection Summary												
HCM 2010 Ctrl Delay				43.2								
HCM 2010 LOS				D								


HCM 2010 Signalized Intersection Summary
 1: King of Prussia Rd & Parking Drive/Matsonford Rd

01/03/2018

												
Movement	EBL	EBT	EBR	WBL	WBT	WBR	SEL	SET	SER	NWL	NWT	NWR
Lane Configurations												
Traffic Volume (veh/h)	3	4	9	538	1	220	123	758	1	7	509	277
Future Volume (veh/h)	3	4	9	538	1	220	123	758	1	7	509	277
Number	3	8	18	7	4	14	5	2	12	1	6	16
Initial Q (Qb), veh	0	0	0	0	0	0	0	0	0	0	0	0
Ped-Bike Adj(A_pbT)	1.00		1.00	1.00		1.00	1.00		1.00	1.00		1.00
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Adj Sat Flow, veh/h/ln	1800	1800	1800	1800	1891	1891	1773	1844	1844	1782	1782	1817
Adj Flow Rate, veh/h	3	4	10	585	1	239	134	824	1	8	553	0
Adj No. of Lanes	1	1	0	1	1	0	1	1	0	1	1	1
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
Percent Heavy Veh, %	0	0	0	1	0	0	0	0	0	0	0	2
Cap, veh/h	413	178	444	633	3	623	284	921	1	147	641	556
Arrive On Green	0.39	0.39	0.39	0.39	0.39	0.39	0.08	0.50	0.50	0.36	0.36	0.00
Sat Flow, veh/h	1158	457	1142	1422	7	1601	1689	1841	2	668	1782	1544
Grp Volume(v), veh/h	3	0	14	585	0	240	134	0	825	8	553	0
Grp Sat Flow(s),veh/h/ln	1158	0	1599	1422	0	1608	1689	0	1844	668	1782	1544
Q Serve(g_s), s	0.2	0.0	0.5	35.0	0.0	9.6	4.1	0.0	36.4	1.0	25.9	0.0
Cycle Q Clear(g_c), s	9.3	0.0	0.5	35.0	0.0	9.6	4.1	0.0	36.4	24.3	25.9	0.0
Prop In Lane	1.00		0.71	1.00		1.00	1.00		0.00	1.00		1.00
Lane Grp Cap(c), veh/h	413	0	622	633	0	625	284	0	922	147	641	556
V/C Ratio(X)	0.01	0.00	0.02	0.92	0.00	0.38	0.47	0.00	0.90	0.05	0.86	0.00
Avail Cap(c_a), veh/h	413	0	622	633	0	625	292	0	922	147	641	556
HCM Platoon Ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(I)	1.00	0.00	1.00	1.00	0.00	1.00	1.00	0.00	1.00	1.00	1.00	0.00
Uniform Delay (d), s/veh	22.9	0.0	17.0	28.5	0.0	19.8	18.9	0.0	20.4	36.8	26.7	0.0
Incr Delay (d2), s/veh	0.0	0.0	0.0	19.5	0.0	0.4	1.2	0.0	13.0	0.7	14.3	0.0
Initial Q Delay(d3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
%ile BackOfQ(95%),veh/ln	0.1	0.0	0.4	24.8	0.0	7.7	3.6	0.0	29.3	0.4	21.7	0.0
LnGrp Delay(d),s/veh	22.9	0.0	17.0	47.9	0.0	20.1	20.2	0.0	33.4	37.5	41.0	0.0
LnGrp LOS	C		B	D		C	C		C	D	D	
Approach Vol, veh/h		17			825			959			561	
Approach Delay, s/veh		18.0			39.8			31.6			41.0	
Approach LOS		B			D			C			D	
Timer	1	2	3	4	5	6	7	8				
Assigned Phs		2		4	5	6		8				
Phs Duration (G+Y+Rc), s		50.0		40.0	12.6	37.4		40.0				
Change Period (Y+Rc), s		6.0		6.0	6.0	6.0		6.0				
Max Green Setting (Gmax), s		44.0		34.0	7.0	31.0		34.0				
Max Q Clear Time (g_c+I1), s		38.4		37.5	6.6	28.4		11.8				
Green Ext Time (p_c), s		3.8		0.0	0.0	1.9		3.5				
Intersection Summary												
HCM 2010 Ctrl Delay				36.6								
HCM 2010 LOS				D								

HCM 2010 Signalized Intersection Summary
 2: Radnor Chester Rd & King of Prussia Rd

01/03/2018



Movement	EBL	EBT	EBR	WBL	WBT	WBR	NEL	NET	NER	SWL	SWT	SWR
Lane Configurations												
Traffic Volume (veh/h)	8	751	677	60	434	1	409	7	144	32	37	50
Future Volume (veh/h)	8	751	677	60	434	1	409	7	144	32	37	50
Number	5	2	12	1	6	16	7	4	14	3	8	18
Initial Q (Qb), veh	0	0	0	0	0	0	0	0	0	0	0	0
Ped-Bike Adj(A_pbT)	1.00		1.00	1.00		1.00	1.00		0.98	1.00		0.98
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Adj Sat Flow, veh/h/ln	1782	1782	1872	1836	1835	1854	1782	1664	1835	1809	1743	1809
Adj Flow Rate, veh/h	8	782	0	62	452	1	426	7	150	33	39	52
Adj No. of Lanes	1	1	1	1	1	0	0	1	1	0	1	0
Peak Hour Factor	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96
Percent Heavy Veh, %	1	1	0	1	1	1	14	14	1	3	3	3
Cap, veh/h	319	772	690	80	793	2	282	3	678	51	57	41
Arrive On Green	0.43	0.43	0.00	0.43	0.43	0.43	0.44	0.44	0.44	0.44	0.44	0.44
Sat Flow, veh/h	943	1782	1591	716	1830	4	455	7	1526	0	128	93
Grp Volume(v), veh/h	8	782	0	62	0	453	433	0	150	124	0	0
Grp Sat Flow(s),veh/h/ln	943	1782	1591	716	0	1834	463	0	1526	221	0	0
Q Serve(g_s), s	0.6	39.0	0.0	0.0	0.0	16.7	0.0	0.0	5.4	0.0	0.0	0.0
Cycle Q Clear(g_c), s	16.8	39.0	0.0	39.0	0.0	16.7	40.0	0.0	5.4	40.0	0.0	0.0
Prop In Lane	1.00		1.00	1.00		0.00	0.98		1.00	0.27		0.42
Lane Grp Cap(c), veh/h	319	772	690	80	0	795	285	0	678	149	0	0
V/C Ratio(X)	0.03	1.01	0.00	0.77	0.00	0.57	1.52	0.00	0.22	0.83	0.00	0.00
Avail Cap(c_a), veh/h	319	772	690	80	0	795	285	0	678	149	0	0
HCM Platoon Ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(I)	0.11	0.11	0.00	1.00	0.00	1.00	1.00	0.00	1.00	1.00	0.00	0.00
Uniform Delay (d), s/veh	25.3	25.5	0.0	45.0	0.0	19.2	30.6	0.0	15.4	21.7	0.0	0.0
Incr Delay (d2), s/veh	0.0	14.1	0.0	51.4	0.0	3.0	250.7	0.0	0.2	31.4	0.0	0.0
Initial Q Delay(d3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
%ile BackOfQ(95%),veh/ln	0.3	39.7	0.0	4.8	0.0	14.0	48.4	0.0	4.2	5.7	0.0	0.0
LnGrp Delay(d),s/veh	25.3	39.7	0.0	96.4	0.0	22.1	281.3	0.0	15.6	53.0	0.0	0.0
LnGrp LOS	C	F		F		C	F		B	D		
Approach Vol, veh/h		790			515			583			124	
Approach Delay, s/veh		39.5			31.1			212.9			53.0	
Approach LOS		D			C			F			D	
Timer	1	2	3	4	5	6	7	8				
Assigned Phs		2		4		6		8				
Phs Duration (G+Y+Rc), s		44.0		46.0		44.0		46.0				
Change Period (Y+Rc), s		6.0		7.0		6.0		7.0				
Max Green Setting (Gmax), s		38.0		39.0		38.0		39.0				
Max Q Clear Time (g_c+I1), s		41.5		42.0		41.5		42.0				
Green Ext Time (p_c), s		0.0		0.0		0.0		0.0				
Intersection Summary												
HCM 2010 Ctrl Delay				88.4								
HCM 2010 LOS				F								

HCM 2010 TWSC
 3: King of Prussia Rd & Septa Driveway

01/03/2018

Intersection

Int Delay, s/veh 18.7

Movement	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations	Y		T		T	T
Traffic Vol, veh/h	150	89	415	25	40	987
Future Vol, veh/h	150	89	415	25	40	987
Conflicting Peds, #/hr	2	10	0	17	17	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	None	-	None	-	None
Storage Length	0	-	-	-	100	-
Veh in Median Storage, #	0	-	0	-	-	0
Grade, %	0	-	0	-	-	0
Peak Hour Factor	85	85	85	85	85	85
Heavy Vehicles, %	0	17	1	0	17	1
Mvmt Flow	176	105	488	29	47	1161

Major/Minor	Minor1	Major1	Major2
Conflicting Flow All	1777	530	0
Stage 1	520	-	-
Stage 2	1257	-	-
Critical Hdwy	6.4	6.37	-
Critical Hdwy Stg 1	5.4	-	-
Critical Hdwy Stg 2	5.4	-	-
Follow-up Hdwy	3.5	3.453	-
Pot Cap-1 Maneuver	~ 92	521	-
Stage 1	601	-	-
Stage 2	270	-	-
Platoon blocked, %		-	-
Mov Cap-1 Maneuver	~ 86	509	-
Mov Cap-2 Maneuver	195	-	-
Stage 1	592	-	-
Stage 2	256	-	-

Approach	WB	NB	SB
HCM Control Delay, s	132.3	0	0.3
HCM LOS	F		

Minor Lane/Major Mvmt	NBT	NBRWBLn1	SBL	SBT
Capacity (veh/h)	-	-	253	953
HCM Lane V/C Ratio	-	-	1.111	0.049
HCM Control Delay (s)	-	-	132.3	9
HCM Lane LOS	-	-	F	A
HCM 95th %tile Q(veh)	-	-	12.2	0.2

Notes

~: Volume exceeds capacity \$: Delay exceeds 300s +: Computation Not Defined *: All major volume in platoon

HCM 2010 TWSC
 4: King of Prussia Rd & Northern Driveway

01/03/2018

Intersection						
Int Delay, s/veh	0.5					
Movement	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations	↑		↑			↑
Traffic Vol, veh/h	23	23	348	0	0	1208
Future Vol, veh/h	23	23	348	0	0	1208
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	None	-	None	-	None
Storage Length	0	-	-	-	-	-
Veh in Median Storage, #	0	-	0	-	-	0
Grade, %	0	-	0	-	-	0
Peak Hour Factor	93	93	93	93	93	93
Heavy Vehicles, %	0	0	1	0	0	1
Mvmt Flow	25	25	374	0	0	1299

Major/Minor	Minor1	Major1	Major2			
Conflicting Flow All	1673	374	0	-	-	-
Stage 1	374	-	-	-	-	-
Stage 2	1299	-	-	-	-	-
Critical Hdwy	6.4	6.2	-	-	-	-
Critical Hdwy Stg 1	5.4	-	-	-	-	-
Critical Hdwy Stg 2	5.4	-	-	-	-	-
Follow-up Hdwy	3.5	3.3	-	-	-	-
Pot Cap-1 Maneuver	106	677	-	0	0	-
Stage 1	700	-	-	0	0	-
Stage 2	258	-	-	0	0	-
Platoon blocked, %			-			-
Mov Cap-1 Maneuver	106	677	-	-	-	-
Mov Cap-2 Maneuver	207	-	-	-	-	-
Stage 1	700	-	-	-	-	-
Stage 2	258	-	-	-	-	-

Approach	WB	NB	SB
HCM Control Delay, s	18.4	0	0
HCM LOS	C		

Minor Lane/Major Mvmt	NBTWBLn1	SBT
Capacity (veh/h)	- 317	-
HCM Lane V/C Ratio	- 0.156	-
HCM Control Delay (s)	- 18.4	-
HCM Lane LOS	- C	-
HCM 95th %tile Q(veh)	- 0.5	-

Intersection												
Int Delay, s/veh	1.1											
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		↕						↕			↕	
Traffic Vol, veh/h	5	0	42	0	0	0	24	349	5	5	1221	5
Future Vol, veh/h	5	0	42	0	0	0	24	349	5	5	1221	5
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	8	8	0	0
Sign Control	Stop	Stop	Stop	Stop	Stop	Stop	Free	Free	Free	Free	Free	Free
RT Channelized	-	-	None	-	-	None	-	-	None	-	-	None
Storage Length	-	-	-	-	-	-	-	-	-	-	-	-
Veh in Median Storage, #	-	0	-	-	-	-	-	0	-	-	0	-
Grade, %	-	0	-	-	0	-	-	0	-	-	0	-
Peak Hour Factor	94	94	94	94	94	94	94	94	94	94	94	94
Heavy Vehicles, %	0	0	0	0	0	0	0	1	0	0	1	0
Mvmt Flow	5	0	45	0	0	0	26	371	5	5	1299	5

Major/Minor	Minor2			Major1			Major2					
Conflicting Flow All	1737	1748	1302				1304	0	0	385	0	0
Stage 1	1312	1312	-				-	-	-	-	-	-
Stage 2	425	436	-				-	-	-	-	-	-
Critical Hdwy	6.4	6.5	6.2				4.1	-	-	4.1	-	-
Critical Hdwy Stg 1	5.4	5.5	-				-	-	-	-	-	-
Critical Hdwy Stg 2	5.4	5.5	-				-	-	-	-	-	-
Follow-up Hdwy	3.5	4	3.3				2.2	-	-	2.2	-	-
Pot Cap-1 Maneuver	97	87	198				538	-	-	1185	-	-
Stage 1	254	230	-				-	-	-	-	-	-
Stage 2	664	583	-				-	-	-	-	-	-
Platoon blocked, %								-	-		-	-
Mov Cap-1 Maneuver	90	0	198				538	-	-	1185	-	-
Mov Cap-2 Maneuver	90	0	-				-	-	-	-	-	-
Stage 1	250	0	-				-	-	-	-	-	-
Stage 2	623	0	-				-	-	-	-	-	-

Approach	EB	NB	SB
HCM Control Delay, s	33.4	0.8	0
HCM LOS	D		

Minor Lane/Major Mvmt	NBL	NBT	NBR	EBLn1	SBL	SBT	SBR
Capacity (veh/h)	538	-	-	176	1185	-	-
HCM Lane V/C Ratio	0.047	-	-	0.284	0.004	-	-
HCM Control Delay (s)	12	0	-	33.4	8.1	0	-
HCM Lane LOS	B	A	-	D	A	A	-
HCM 95th %tile Q(veh)	0.1	-	-	1.1	0	-	-

HCM 2010 TWSC
6: King of Prussia Rd & Southern Driveway

01/03/2018

Intersection						
Int Delay, s/veh	87.3					
Movement	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations	↘↘		↑	↑	↘	↑
Traffic Vol, veh/h	208	46	331	43	10	1249
Future Vol, veh/h	208	46	331	43	10	1249
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	None	-	None	-	None
Storage Length	0	-	-	0	100	-
Veh in Median Storage, #	0	-	0	-	-	0
Grade, %	0	-	0	-	-	0
Peak Hour Factor	94	94	94	94	94	94
Heavy Vehicles, %	0	0	1	0	0	1
Mvmt Flow	221	49	352	46	11	1329

Major/Minor	Minor1	Major1	Major2		
Conflicting Flow All	1702	352	0	0	352
Stage 1	352	-	-	-	-
Stage 2	1350	-	-	-	-
Critical Hdwy	6.4	6.2	-	-	4.1
Critical Hdwy Stg 1	5.4	-	-	-	-
Critical Hdwy Stg 2	5.4	-	-	-	-
Follow-up Hdwy	3.5	3.3	-	-	2.2
Pot Cap-1 Maneuver	~ 102	696	-	-	1218
Stage 1	716	-	-	-	-
Stage 2	244	-	-	-	-
Platoon blocked, %			-	-	-
Mov Cap-1 Maneuver	~ 101	696	-	-	1218
Mov Cap-2 Maneuver	~ 101	-	-	-	-
Stage 1	716	-	-	-	-
Stage 2	242	-	-	-	-


Approach	WB	NB	SB
HCM Control Delay, s	647.9	0	0.1
HCM LOS	F		

Minor Lane/Major Mvmt	NBT	NBRWBLn1	SBL	SBT
Capacity (veh/h)	-	-	120	1218
HCM Lane V/C Ratio	-	-	2.252	0.009
HCM Control Delay (s)	-	-	647.9	8
HCM Lane LOS	-	-	F	A
HCM 95th %tile Q(veh)	-	-	23.2	0

Notes
 ~: Volume exceeds capacity \$: Delay exceeds 300s +: Computation Not Defined *: All major volume in platoon

HCM 2010 Signalized Intersection Summary
 8: I-476 SB Off Ramp & Lancaster Ave

01/03/2018



Movement	EBT	EBR	WBL	WBT	NBL	NBR		
Lane Configurations	↑↑↑		↵↵	↑↑	↵↵	↵		
Traffic Volume (veh/h)	1062	0	587	787	627	503		
Future Volume (veh/h)	1062	0	587	787	627	503		
Number	4	14	3	8	5	12		
Initial Q (Qb), veh	0	0	0	0	0	0		
Ped-Bike Adj(A_pbT)		1.00	1.00		1.00	1.00		
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00		
Adj Sat Flow, veh/h/ln	1730	0	1800	1782	1818	1891		
Adj Flow Rate, veh/h	1084	0	599	803	640	0		
Adj No. of Lanes	3	0	2	2	2	1		
Peak Hour Factor	0.98	0.98	0.98	0.98	0.98	0.98		
Percent Heavy Veh, %	3	0	1	2	1	1		
Cap, veh/h	1971	0	730	2311	762	364		
Arrive On Green	0.42	0.00	0.07	0.23	0.23	0.00		
Sat Flow, veh/h	5035	0	3326	3476	3359	1607		
Grp Volume(v), veh/h	1084	0	599	803	640	0		
Grp Sat Flow(s),veh/h/ln	1574	0	1663	1693	1679	1607		
Q Serve(g_s), s	19.1	0.0	19.5	21.9	20.0	0.0		
Cycle Q Clear(g_c), s	19.1	0.0	19.5	21.9	20.0	0.0		
Prop In Lane		0.00	1.00		1.00	1.00		
Lane Grp Cap(c), veh/h	1971	0	730	2311	762	364		
V/C Ratio(X)	0.55	0.00	0.82	0.35	0.84	0.00		
Avail Cap(c_a), veh/h	1971	0	847	2311	916	438		
HCM Platoon Ratio	1.00	1.00	0.33	0.33	1.00	1.00		
Upstream Filter(I)	1.00	0.00	0.74	0.74	1.00	0.00		
Uniform Delay (d), s/veh	24.2	0.0	48.9	22.0	40.6	0.0		
Incr Delay (d2), s/veh	1.1	0.0	4.3	0.3	6.0	0.0		
Initial Q Delay(d3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0		
%ile BackOfQ(95%),veh/ln	3.2	0.0	13.8	14.9	15.0	0.0		
LnGrp Delay(d),s/veh	25.3	0.0	53.2	22.3	46.7	0.0		
LnGrp LOS	C		D	C	D			
Approach Vol, veh/h	1084			1402	640			
Approach Delay, s/veh	25.3			35.5	46.7			
Approach LOS	C			D	D			
Timer	1	2	3	4	5	6	7	8
Assigned Phs		2	3	4				8
Phs Duration (G+Y+Rc), s		29.9	29.1	50.9				80.1
Change Period (Y+Rc), s		6.0	6.0	6.0				6.0
Max Green Setting (Gmax), s		29.0	27.0	36.0				69.0
Max Q Clear Time (g_c+11), s		22.5	22.0	21.6				24.4
Green Ext Time (p_c), s		1.4	1.1	10.2				20.2
Intersection Summary								
HCM 2010 Ctrl Delay			34.3					
HCM 2010 LOS			C					

HCM 2010 Signalized Intersection Summary
 9: Hillside Circuit & Lancaster Ave

01/03/2018



Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↖ ↗	↖ ↗		↖ ↗	↖ ↗	↖ ↗		↖ ↗	↖ ↗			
Traffic Volume (veh/h)	1178	1803	15	6	721	595	3	1	2	0	0	0
Future Volume (veh/h)	1178	1803	15	6	721	595	3	1	2	0	0	0
Number	5	2	12	1	6	16	3	8	18			
Initial Q (Qb), veh	0	0	0	0	0	0	0	0	0			
Ped-Bike Adj(A_pbT)	1.00		1.00	1.00		1.00	1.00		0.88			
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00			
Adj Sat Flow, veh/h/ln	1782	1731	1800	1800	1782	1853	1800	1800	1800			
Adj Flow Rate, veh/h	1227	1878	16	6	751	0	3	1	2			
Adj No. of Lanes	2	2	0	1	2	1	0	1	1			
Peak Hour Factor	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96			
Percent Heavy Veh, %	1	4	4	0	1	1	0	0	0			
Cap, veh/h	1227	2795	24	23	1616	752	18	6	18			
Arrive On Green	0.75	1.00	1.00	0.01	0.48	0.00	0.01	0.01	0.01			
Sat Flow, veh/h	3293	3343	28	1714	3386	1575	1301	434	1345			
Grp Volume(v), veh/h	1227	923	971	6	751	0	4	0	2			
Grp Sat Flow(s),veh/h/ln	1646	1645	1726	1714	1693	1575	1735	0	1345			
Q Serve(g_s), s	41.0	0.0	0.0	0.4	16.4	0.0	0.3	0.0	0.2			
Cycle Q Clear(g_c), s	41.0	0.0	0.0	0.4	16.4	0.0	0.3	0.0	0.2			
Prop In Lane	1.00		0.02	1.00		1.00	0.75		1.00			
Lane Grp Cap(c), veh/h	1227	1376	1444	23	1616	752	24	0	18			
V/C Ratio(X)	1.00	0.67	0.67	0.26	0.46	0.00	0.17	0.00	0.11			
Avail Cap(c_a), veh/h	1227	1376	1444	109	1616	752	110	0	86			
HCM Platoon Ratio	2.00	2.00	2.00	1.00	1.00	1.00	1.00	1.00	1.00			
Upstream Filter(I)	0.09	0.09	0.09	1.00	1.00	0.00	1.00	0.00	1.00			
Uniform Delay (d), s/veh	14.0	0.0	0.0	53.7	19.3	0.0	53.6	0.0	53.6			
Incr Delay (d2), s/veh	7.6	0.2	0.2	5.6	1.0	0.0	3.3	0.0	2.6			
Initial Q Delay(d3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
%ile BackOfQ(95%),veh/ln	11.2	0.2	0.2	0.4	12.4	0.0	0.3	0.0	0.1			
LnGrp Delay(d),s/veh	21.6	0.2	0.2	59.3	20.3	0.0	56.9	0.0	56.2			
LnGrp LOS	C	A	A	E	C		E		E			
Approach Vol, veh/h		3121			757			6				
Approach Delay, s/veh		8.7			20.6			56.7				
Approach LOS		A			C			E				
Timer	1	2	3	4	5	6	7	8				
Assigned Phs	1	2			5	6		8				
Phs Duration (G+Y+Rc), s	6.5	97.0			46.0	57.5		6.5				
Change Period (Y+Rc), s	6.0	6.0			6.0	6.0		6.0				
Max Green Setting (Gmax), s	6.0	80.0			40.0	46.0		6.0				
Max Q Clear Time (g_c+12), s	6.0	2.5			43.5	18.9		2.7				
Green Ext Time (p_c), s	0.0	47.3			0.0	22.2		0.0				
Intersection Summary												
HCM 2010 Ctrl Delay				11.1								
HCM 2010 LOS				B								
Notes												

HCM 2010 Signalized Intersection Summary
 10: Radnor Chester Rd.

01/03/2018



Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (veh/h)	122	1188	95	202	1134	128	83	215	144	418	456	219
Future Volume (veh/h)	122	1188	95	202	1134	128	83	215	144	418	456	219
Number	5	2	12	1	6	16	3	8	18	7	4	14
Initial Q (Qb), veh	0	0	0	0	0	0	0	0	0	0	0	0
Ped-Bike Adj(A_pbT)	1.00		1.00	1.00		1.00	1.00		1.00	1.00		1.00
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Adj Sat Flow, veh/h/ln	1791	1792	1809	1747	1764	1764	1764	1752	1764	1773	1779	1791
Adj Flow Rate, veh/h	126	1225	98	208	1169	132	86	222	148	431	470	226
Adj No. of Lanes	1	2	0	1	2	1	0	2	0	1	2	0
Peak Hour Factor	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97
Percent Heavy Veh, %	1	1	1	2	1	1	1	1	1	1	0	0
Cap, veh/h	223	1201	96	205	1271	567	151	349	238	333	875	418
Arrive On Green	0.08	0.38	0.38	0.08	0.38	0.38	0.26	0.26	0.26	0.08	0.39	0.39
Sat Flow, veh/h	1706	3194	255	1664	3352	1496	383	1324	902	1689	2221	1061
Grp Volume(v), veh/h	126	652	671	208	1169	132	221	0	235	431	357	339
Grp Sat Flow(s),veh/h/ln	1706	1703	1747	1664	1676	1496	1174	0	1434	1689	1690	1591
Q Serve(g_s), s	4.4	37.6	37.6	8.0	33.2	6.0	13.0	0.0	14.5	8.0	16.2	16.4
Cycle Q Clear(g_c), s	4.4	37.6	37.6	8.0	33.2	6.0	16.7	0.0	14.5	8.0	16.2	16.4
Prop In Lane	1.00		0.15	1.00		1.00	0.39		0.63	1.00		0.67
Lane Grp Cap(c), veh/h	223	640	657	205	1271	567	360	0	379	333	666	627
V/C Ratio(X)	0.56	1.02	1.02	1.01	0.92	0.23	0.61	0.00	0.62	1.29	0.54	0.54
Avail Cap(c_a), veh/h	246	640	657	205	1271	567	447	0	488	333	795	748
HCM Platoon Ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(I)	1.00	1.00	1.00	1.00	1.00	1.00	1.00	0.00	1.00	1.00	1.00	1.00
Uniform Delay (d), s/veh	22.9	31.2	31.2	25.5	29.6	21.1	32.9	0.0	32.4	34.3	23.3	23.3
Incr Delay (d2), s/veh	2.4	40.3	40.7	66.5	12.1	1.0	1.7	0.0	1.7	152.8	0.7	0.7
Initial Q Delay(d3),s/veh	0.0	0.0	0.0	0.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
%ile BackOfQ(95%),veh/ln	3.9	44.6	45.9	17.0	24.2	4.7	9.6	0.0	9.8	35.4	12.2	11.7
LnGrp Delay(d),s/veh	25.3	71.5	71.9	92.1	41.7	22.1	34.6	0.0	34.1	187.1	24.0	24.1
LnGrp LOS	C	F	F	F	D	C	C		C	F	C	C
Approach Vol, veh/h		1449			1509			456			1127	
Approach Delay, s/veh		67.7			47.0			34.3			86.4	
Approach LOS		E			D			C			F	
Timer	1	2	3	4	5	6	7	8				
Assigned Phs	1	2		4	5	6	7	8				
Phs Duration (G+Y+Rc), s	3.0	42.6		44.4	12.7	42.9	13.0	31.4				
Change Period (Y+Rc), s	6.0	6.0		6.0	6.0	6.0	6.0	6.0				
Max Green Setting (Gmax), s	7.0	29.0		46.0	8.0	28.0	7.0	33.0				
Max Q Clear Time (g_c+110), s	10.5	40.1		18.7	6.9	35.7	10.5	18.7				
Green Ext Time (p_c), s	0.0	0.0		8.9	0.0	0.0	0.0	6.6				
Intersection Summary												
HCM 2010 Ctrl Delay				62.1								
HCM 2010 LOS				E								

APPENDIX G

Trip Generation

TRAFFIC IMPACT STUDY

MIXED MEDICAL FACILITY

145 KING OF PRUSSIA ROAD
RADNOR TOWNSHIP
DELAWARE COUNTY, PA

UPHS1507

The following is a description of the development of a trip generation rate for the proposed Penn Medicine mixed use medical facility at 145 King of Prussia Road. The development of the trip rate is based on the trips generated by the existing facilities.

The Institute of Transportation Engineers' Trip Generation Manual, 9th Edition describes a medical-dental office building as follows:

A medical-dental office building is a facility that provides diagnoses and outpatient care on a routine basis but is unable to provide prolonged in-house medical and surgical care. One or more private physicians or dentists generally operate this type of facility.

For the AM Peak of the adjacent roadway, the Trip Generation Rate was derived based on 23 studies. For 22 of the 23 studies, the gross floor area of the buildings was less than 70,000 SF. For the PM Peak of the adjacent roadway, the Trip Generation Rate was derived based on 43 studies. For 41 of the 43 studies, the gross floor area of the buildings was less than 70,000 SF.

The proposed Penn Medicine facility for 145 King of Prussia Road has a gross floor area of 250,000 SF, more than triple the size of 90% of the facilities used by ITE to derive trip generation data. Therefore, the proposed facility is very different from those used to derive ITE trip generation data.

Furthermore, unlike private physician practices, the proposed Penn Medicine facility will include a number of treatment facilities that are uncommon in a typical medical office and that occupy a larger portion of the gross square floor area of the building, while not accommodating a larger number of patients. These facilities include ambulatory operating rooms, endoscopy rooms, chemotherapy treatment areas, radiological imaging rooms and radiation oncology treatment areas.

It is for these reasons, that the ITE trip generation is not appropriate to use for the proposed Penn Medicine site at 145 King of Prussia Road.

Proposed Trip Generation for 145 King of Prussia.

The following is a proposal for the development of a trip generation rate for the proposed 250,000 SF Penn Medicine mixed medical facility at 145 King of Prussia Road. The development of the trip rate is based on the trips generated by three existing ambulatory care facilities and it is for the peak hour of the adjacent street (King of Prussia Road) which, based on traffic counts, is 7:15-8:15 AM and 5:00–6:00 PM.

EXISTING RADNOR PENN MEDICINE

Penn currently operates an existing 171,000 square foot ambulatory care facility at 250 King of Prussia Road. The facility has 2 parking structures and multiple surface lots that provide 317 parking spaces. The facility also leases 41 parking spaces in the adjacent Radnor Court parking lot and there are 195 spaces available for employee parking at the lot located at 145 King of Prussia Road (near the Septa station). Traffic counts were performed at the parking lot driveways to

record the entry and exit trips generated by the existing Penn Medicine facility and develop a trip generation rate. The east side of the parking lot at 145 King of Prussia Road is also utilized by Septa employees and by commuters accessing the adjacent Septa station. In addition to the driveway counts, we counted the number of vehicles that parked near King of Prussia Road, and those that parked near the SEPTA facility. Based on these observations of the occupancy of the lot and the location of parked vehicles it is estimated that approximately 53% of the vehicles utilizing the lot are employees of the Penn Medicine mixed use facility. The following is a summary of trip data collected through driveway counts:

RADNOR PENN MEDICINE DRIVEWAY COUNTS

<u>Location</u>	<u>AM PEAK</u>		<u>PM PEAK</u>		<u>DAILY</u>	
	<u>IN</u>	<u>OUT</u>	<u>IN</u>	<u>OUT</u>	<u>IN</u>	<u>OUT</u>
On-Site Parking	215	91	83	119	2,134	2,134
Off-Site Parking	55	13	5	70	159	159
Total	270	104	88	189	2,293	2,293

The existing Penn Medicine ambulatory care facility is 171,000 SF with 165 exam or treatment rooms. For the purpose of this exercise, each exam room and each treatment room regardless of type will be considered a “patient position.” The top two floors (approximately 46,700 SF) of the existing Radnor Penn Medicine facility are general office. The trip generation for the office portion of the existing facility was calculated using the ITE Trip Generation Manual.

RADNOR PENN MEDICINE OFFICE TRIPS

<u>Land Use</u>	<u>Size</u>	<u>Daily Trips</u>	<u>Peak Hour Trips</u>		
			<u>Inbound</u>	<u>Outbound</u>	<u>Total</u>
Office (710)	46.7 ksf	515	64(AM) 12(PM)	9(AM) 58(PM)	73 70

The trips associated with the ambulatory care portion of the Radnor Penn Medicine facility were calculated using the driveway data and subtracting the calculated trips generated by the office portion of the development:

Total trips at Radnor (driveway + offsite) - ITE trip generation for office portion = Trips associated with medical practice (TAMP)

RADNOR PENN MEDICINE MEDICAL MIXED USE TRIPS

<u>Location</u>	<u>AM PEAK</u>		<u>PM PEAK</u>		<u>DAILY</u>	
	<u>IN</u>	<u>OUT</u>	<u>IN</u>	<u>OUT</u>	<u>IN</u>	<u>OUT</u>
Total recorded trips	270	104	88	189	2,293	2,293
Office Trips (ITE)	64	9	12	58	258	257
Remaining Trips (TAMP)	206	95	76	131	2,035	2,036

The trips generation rate for the ambulatory care portion of the Radnor Penn Medicine facility was calculated for the independent variable "patient positions" using the trips associated with medical practice (TAMP) and dividing by the number of patient positions:

TAMP/ patient positions = Trip generation rate per patient position

<u>Land Use</u>	<u>Size</u>	<u>Average Daily Trips Rate</u>	<u>Average Peak Hour Trip Rate</u>	
			<u>AM</u>	<u>PM</u>
Medical/Mixed Use	189 Patient Positions	21.54	1.59 (.68 in/.32 out)	1.09 (.37 in/.63 out)

Driveway counts were also conducted at the Valley Forge Penn Medicine ambulatory care facility located at 1001 Chesterbrook Blvd. in Berwyn PA. The Valley Forge Penn Medical Center has 149 exam or treatment rooms (patient positions) and all of the trips generated by the site are related to the medical uses. The recorded driveway trips are summarized below:

VALLEY FORGE PENN MEDICINE DRIVEWAY COUNTS

<u>Location</u>	<u>AM PEAK</u>		<u>PM PEAK</u>		<u>DAILY</u>	
	<u>IN</u>	<u>OUT</u>	<u>IN</u>	<u>OUT</u>	<u>IN</u>	<u>OUT</u>
Valley Forge Penn Medicine	88	8	14	58	638	638

The trip generation rates for the Valley Forge Penn Medicine ambulatory care facility was calculated using the collected driveway data for the independent variable "patient position" using the driveway data:

VALLEY FORGE PENN MEDICINE TRIPS

<u>Land Use</u>	<u>Size</u>	<u>Average Daily Trips Rate</u>	<u>Peak Hour Trip Rate</u>	
			<u>AM</u>	<u>PM</u>
Medical/Mixed Use	149 Patient Positions	8.56	0.64 (.92 in/.08 out)	0.48 (.20 in/.80 out)

Driveway counts were also conducted at the Fern Hill Medical Campus located at 915 Old Fern Hill Road in West Chester, PA. Fern Hill Medical Campus is 154,826 SF with 239 patient positions and all of the trips generated by the site are related to the medical uses. The recorded driveway trips are summarized below:

FERN HILL MEDICAL CAMPUS DRIVEWAY COUNTS

<u>Location</u>	<u>AM PEAK</u>		<u>PM PEAK</u>		<u>DAILY</u>	
	<u>IN</u>	<u>OUT</u>	<u>IN</u>	<u>OUT</u>	<u>IN</u>	<u>OUT</u>
Fern Hill Medical Campus	395	105	85	227	2382	2382

The trip generation rates for the ambulatory care facility mixed use/medical portion of the Fern Hill Medical Campus ambulatory care facility was calculated using the collected driveway data for the independent variable “patient positions” using the driveway data:

FERN HILL MEDICAL CAMPUS MIXED USE TRIPS

Independent Variable – Patient Positions

<u>Land Use</u>	<u>Size</u>	<u>Average Daily Trips Rate</u>	<u>Peak Hour Trip Rate</u>	
			<u>AM</u>	<u>PM</u>
Medical/Mixed Use	223 positions	21.36	2.24 (.79 in/.21 out)	1.40 (.27 in/.73 out)

The following is a comparison of the trip generation rates calculated for the Radnor Penn Medicine ambulatory care facility, the Valley Forge Penn Medicine ambulatory care facility, The Fern Hill ambulatory care facility and the average of the three:

COMPARISON OF CALCULATED TRIP RATES FOR MEDICAL MIXED USE

(Trips/Patient Position)

<u>Location</u>	<u>Avg. Daily Trip Rate</u>	<u>Peak Hour Trips Rates</u>	
		<u>AM</u>	<u>PM</u>
Radnor (124,300 SF/ 189 PP)	21.54	1.59 (.68 in/.32 out)	1.09 (.37 in/.63 out)
Valley Forge (88,300 SF/ 149 PP)	8.56	0.64 (.92 in/.08 out)	0.48 (.20 in/.80 out)
Fern Hill (154,826 SF/ 223 PP)	21.36	2.24 (.79 in/.21 out)	1.40 (.27 in/.73 out)
Average	18.02 (.50 in/.50 out)	1.60 (.77 in/.23 out)	1.06 (.29 in/.71 out)

PROPOSED PENN MEDICINE MEDICAL MIXED USE

The proposed 470,000 SF Penn Medicine development at 145 King of Prussia Road will have a 250,000 SF building dedicated to mixed medical use with 271 patient positions. The following is a comparison of the trips generated by the 250,000 SF medical portion of the site using patient positions as an independent variable:

<u>Method (Land Use)</u>	<u>Size</u>	<u>AM Rate</u>	<u>AM Trips</u>	<u>PM Rate</u>	<u>PM Trips</u>
Calculated - Medical Use (Trips/Patient Position) (Average Rate)	271 Patient Pos.	1.60	434	1.06	287

Trip Generation Calculations Using Developed rates for Mixed Medical Use

Land Use Code	Size	Unit of Measure	Weekday Trips			AM Trips			PM Trips		
			In	Out	Total	In	Out	Total	In	Out	Total
Medical Mixed Use*	250,000 SF (271 PP)	Patient Positions	2,442	2,442	4,883	334	100	434	83	204	287
General Office Building (ITE Land Use 710)	150,000 SF	1,000 SF GFA	827	827	1,655	206	28	234	38	186	224
Hotel (ITE Land Use 310)	75,000 SF (120 rooms)	Rooms	490	490	980	38	26	64	37	35	72
Total			3,759	3,759	7,518	577	154	731	158	425	583

* Trip generation calculated using calculated trip rates for Medical Mixed Use based on observations of similar facilities

APPENDIX H

Turn Lane Evaluation

TRAFFIC IMPACT STUDY

MIXED MEDICAL FACILITY

145 KING OF PRUSSIA ROAD
RADNOR TOWNSHIP
DELAWARE COUNTY, PA

UPHS1507

Turn Lane Warrant and Length Analysis Workbook

STUDY LOCATION AND ANALYSIS INFORMATION

Municipality:	Radnor Township	Analysis Date:	11/30/2016
County:	Delaware County	Conducted By:	SDS
PennDOT Engineering District:	6	Checked By:	ACB
		Agency/Company Name:	Pennon
Intersection & Approach Description: King of Prussia Road NB at Raider Road/Site Driveway			
Analysis Period:	2025 Build	Number of Approach Lanes:	1
Design Hour:	AM Peak Hour	Undivided or Divided Highway:	Undivided
Intersection Control:	Signalized	Type of Analysis	
Posted Speed Limit (MPH):	35	Left or Right-Turn Lane Analysis?:	
Type of Terrain:	Rolling	Left Turn Lane	

VOLUME CALCULATIONS

Left Turn Lane Volume Calculations

Movement	Include?	Volume	% Trucks	PCEV		
Advancing	Left	Yes	177	0.0%	177	Advancing Volume: 1650 Opposing Volume: 416 Left Turn Volume: 177
	Through	-	1071	2.0%	1104	
	Right	Yes	369	0.0%	369	
Opposing	Left	Yes	52	0.0%	52	% Left Turns in Advancing Volume: 10.73%
	Through	-	268	9.0%	305	
	Right	Yes	59	0.0%	59	

Right Turn Lane Volume Calculations

Movement	Include?	Volume	% Trucks	PCEV		
Advancing	Left	Yes	177	0.0%	N/A	Advancing Volume: N/A Right Turn Volume: N/A
	Through	-	1069	2.0%	N/A	
	Right	-	369	0.0%	N/A	

TURN LANE WARRANT FINDINGS

Left Turn Lane Warrant Findings

Applicable Warrant Figure: **Figure 1**

Warrant Met?: **Yes**

Right Turn Lane Warrant Findings

Applicable Warrant Figure: **N/A**

Warrant Met?: **N/A**

TURN LANE LENGTH CALCULATIONS

Intersection Control:	Signalized	Average # of Vehicles/Cycle:	4.0
Design Hour Volume of Turning Lane:	177		
Cycles Per Hour (Assumed):	40		
Cycles Per Hour (If Known):	40		

PennDOT Publication 46, Exhibit 11-6

Type of Traffic Control	Speed (MPH)					
	25-35		40-45		50-60	
	Turn Demand Volume					
	High	Low	High	Low	High	Low
Signalized	A	A	B or C	B or C	B or C	B or C
Unsignalized	A	A	C	B	B or C	B

Left Turn Lane Storage Length, Condition A: **175** Feet

Condition B: **N/A** Feet

Condition C: **N/A** Feet


Required Left Turn Lane Storage Length: **175** Feet

Additional Findings:

N/A

Additional Comments / Justifications:

Figure 1. Warrant for left turn lanes on two-lane roadways
 (speeds to 35 mph, unsignalized and signalized intersections)
 (L = % Left Turns in Advancing Volume)

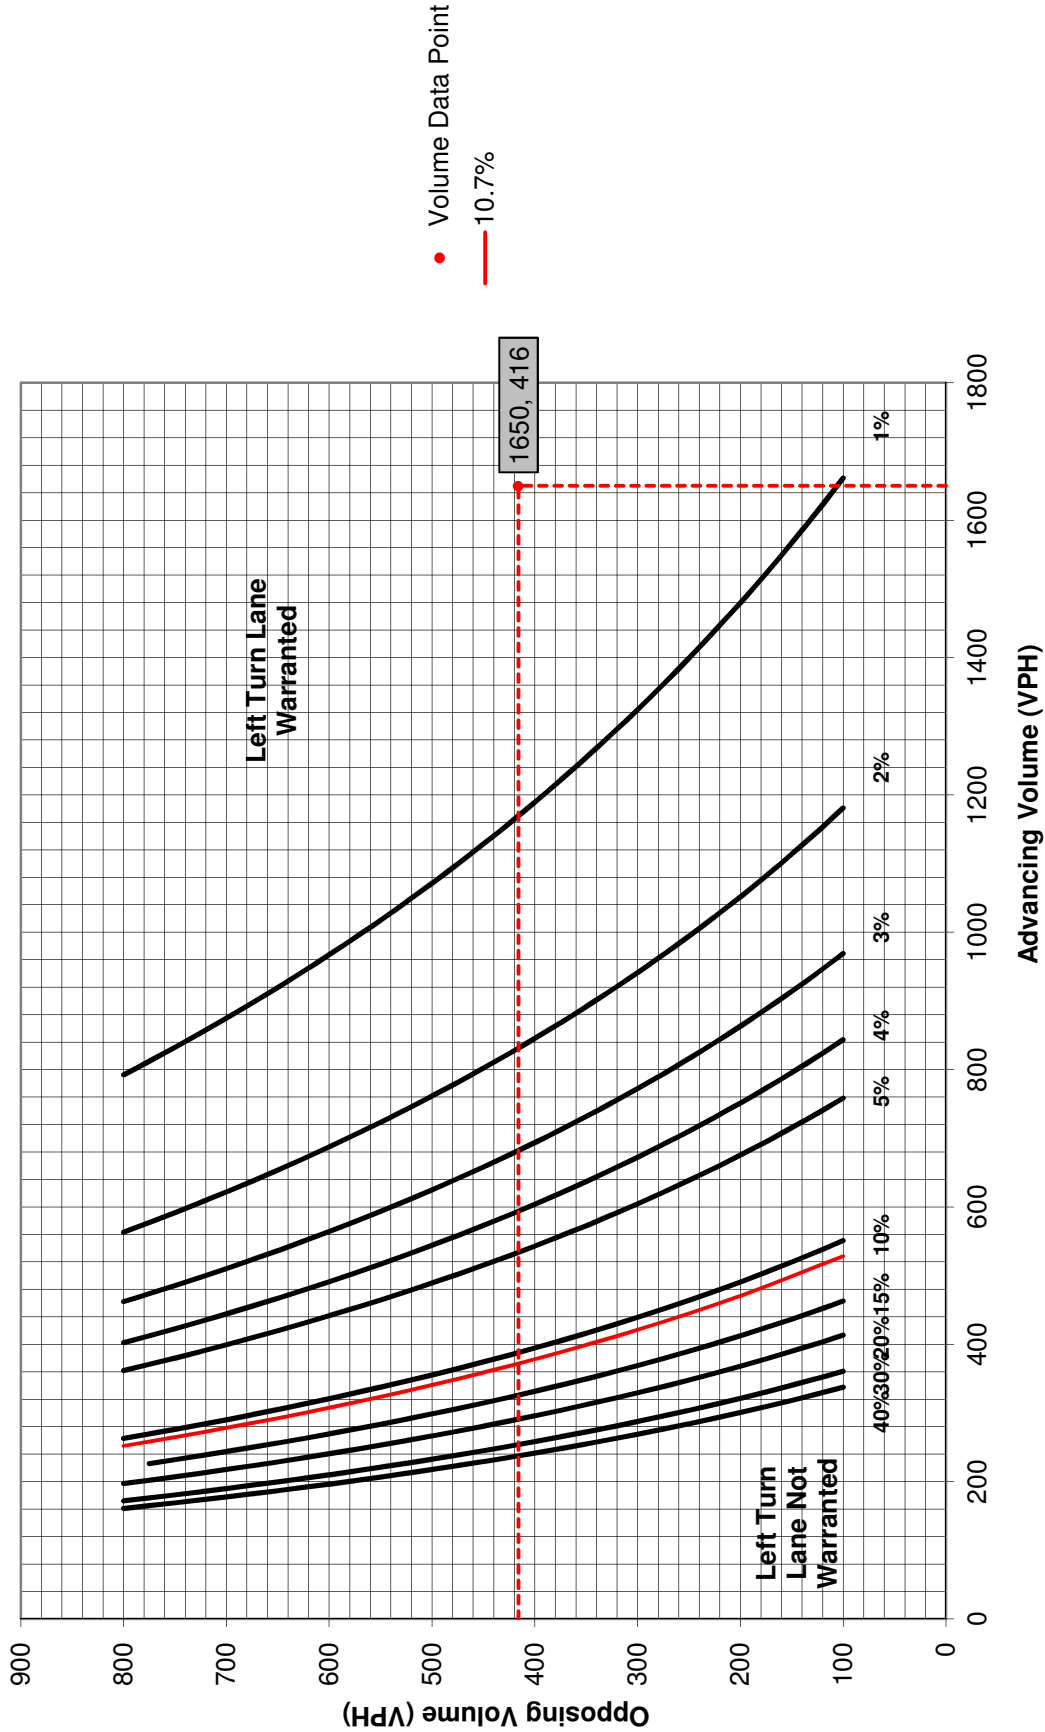

Turn Lane Warrant and Length Analysis Workbook

STUDY LOCATION AND ANALYSIS INFORMATION

Municipality:	Radnor Township	Analysis Date:	11/30/2016
County:	Delaware County	Conducted By:	SDS
PennDOT Engineering District:	6	Checked By:	ACB
Intersection & Approach Description:		Agency/Company Name:	
King of Prussia Road NB at Raider Road/Site Driveway		Pennoni	
Analysis Period:	2025 Build	Number of Approach Lanes:	1
Design Hour:	PM Peak Hour	Undivided or Divided Highway:	Undivided
Intersection Control:	Signalized	Type of Analysis	
Posted Speed Limit (MPH):	35	Left or Right-Turn Lane Analysis?:	
Type of Terrain:	Rolling	Left Turn Lane	

VOLUME CALCULATIONS

Left Turn Lane Volume Calculations

Movement		Include?	Volume	% Trucks	PCEV		
Advancing	Left	Yes	24	0.0%	24	Advancing Volume: 429	
	Through	-	299	1.0%	304		Opposing Volume: 1136
	Right	Yes	101	0.0%	101		Left Turn Volume: 24
Opposing	Left	Yes	14	0.0%	14	% Left Turns in Advancing Volume: 5.59%	
	Through	-	1117	0.0%	1117		
	Right	Yes	5	0.0%	5		

Right Turn Lane Volume Calculations

Movement		Include?	Volume	% Trucks	PCEV		
Advancing	Left	Yes	24	0.0%	N/A	Advancing Volume: N/A	
	Through	-	299	1.0%	N/A		Right Turn Volume: N/A
	Right	-	101	0.0%	N/A		

TURN LANE WARRANT FINDINGS

Left Turn Lane Warrant Findings

Applicable Warrant Figure: **Figure 1**

Warrant Met?: **Yes**

Right Turn Lane Warrant Findings

Applicable Warrant Figure: **N/A**

Warrant Met?: **N/A**

TURN LANE LENGTH CALCULATIONS

Intersection Control:	Signalized	Average # of Vehicles/Cycle:	1.0
Design Hour Volume of Turning Lane:	24		
Cycles Per Hour (Assumed):	40		
Cycles Per Hour (If Known):	40		

PennDOT Publication 46, Exhibit 11-6

Type of Traffic Control	Speed (MPH)					
	25-35		40-45		50-60	
	Turn Demand Volume					
	High	Low	High	Low	High	Low
Signalized	A	A	B or C	B or C	B or C	B or C
Unsignalized	A	A	C	B	B or C	B

Left Turn Lane Storage Length, Condition A: **75** Feet

Condition B: **N/A** Feet

Condition C: **N/A** Feet


Required Left Turn Lane Storage Length: **75** Feet

Additional Findings:

N/A

Additional Comments / Justifications:

Figure 1. Warrant for left turn lanes on two-lane roadways
 (speeds to 35 mph, unsignalized and signalized intersections)
 (L = % Left Turns in Advancing Volume)

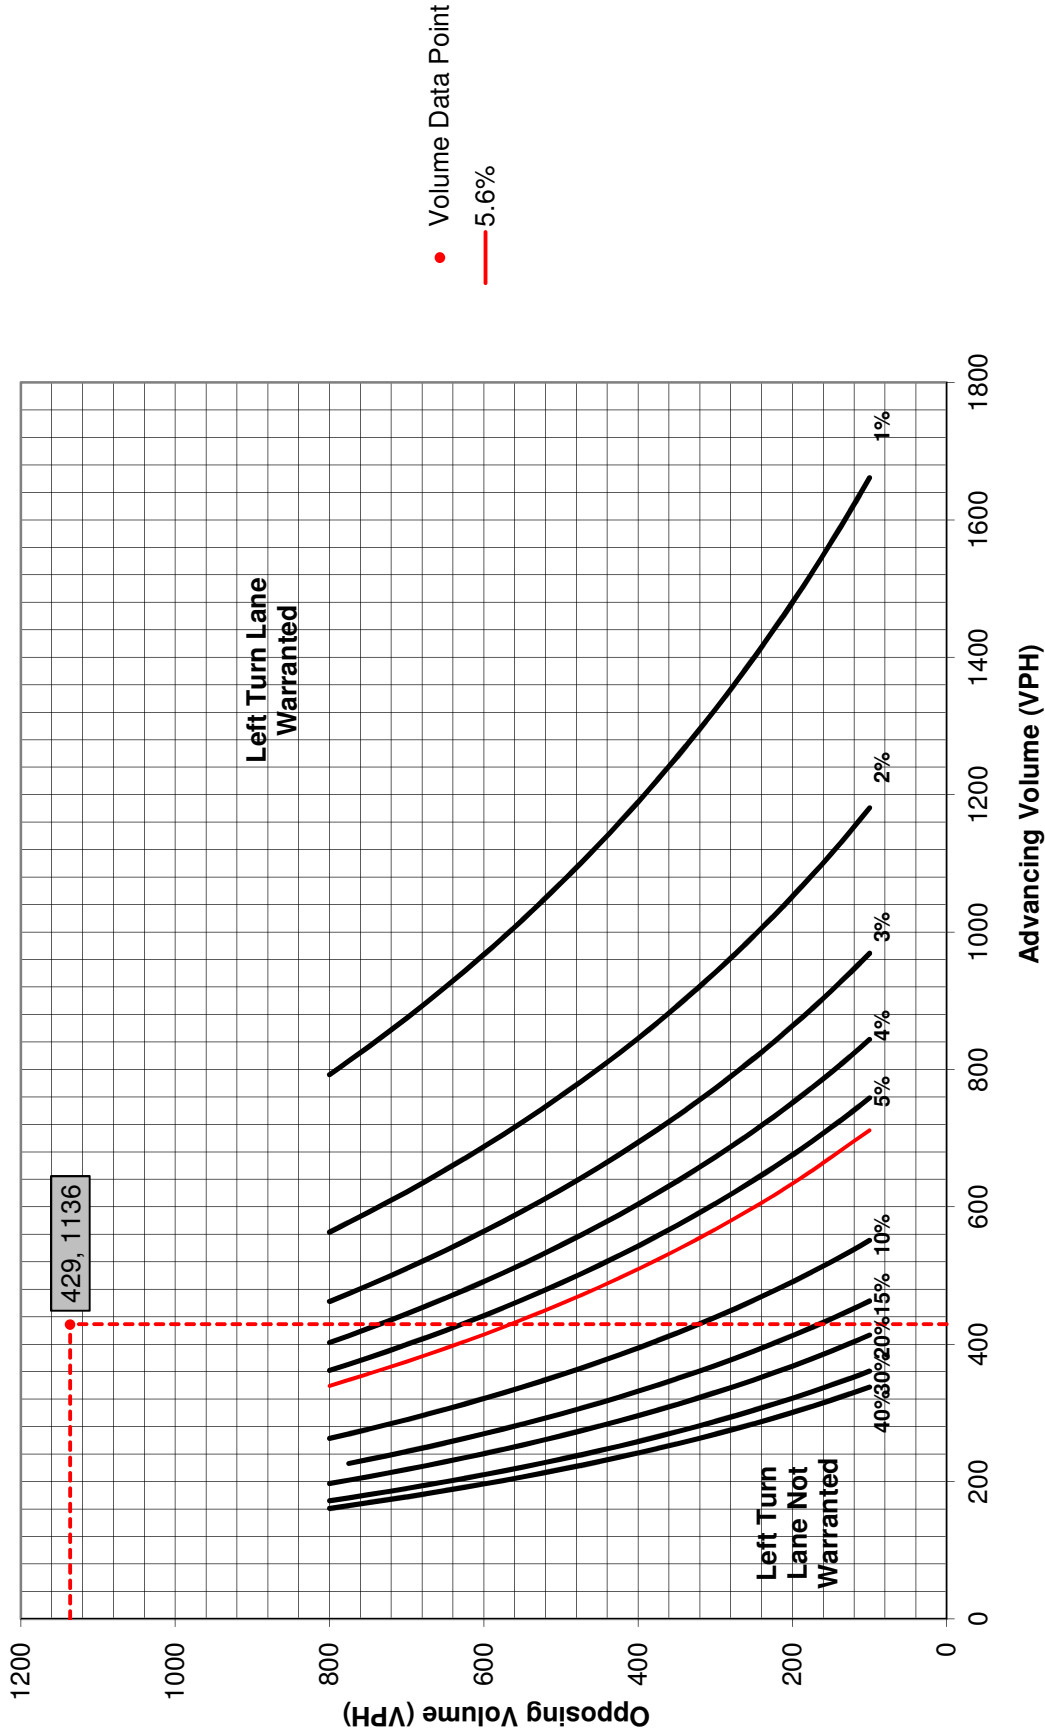

Turn Lane Warrant and Length Analysis Workbook

STUDY LOCATION AND ANALYSIS INFORMATION

Municipality:	Radnor Township	Analysis Date:	11/30/2016
County:	Delaware County	Conducted By:	SDS
PennDOT Engineering District:	6	Checked By:	ACB
		Agency/Company Name:	Pennon
Intersection & Approach Description: King of Prussia Road SB at Raider Road/Site Driveway			
Analysis Period:	2025 Build	Number of Approach Lanes:	1
Design Hour:	AM Peak Hour	Undivided or Divided Highway:	Undivided
Intersection Control:	Signalized		
Posted Speed Limit (MPH):	35		Type of Analysis
Type of Terrain:	Rolling	Left or Right-Turn Lane Analysis?:	Left Turn Lane

VOLUME CALCULATIONS

Left Turn Lane Volume Calculations					
Movement		Include?	Volume	% Trucks	PCEV
Advancing	Left	Yes	52	0.0%	52
	Through	-	268	9.0%	305
	Right	Yes	59	0.0%	59
Opposing	Left	Yes	177	0.0%	177
	Through	-	1071	2.0%	1104
	Right	Yes	369	0.0%	369

Advancing Volume:	416	
Opposing Volume:	1650	
Left Turn Volume:	52	
% Left Turns in Advancing Volume:		12.50%

Right Turn Lane Volume Calculations					
Movement		Include?	Volume	% Trucks	PCEV
Advancing	Left	Yes	52	0.0%	N/A
	Through	-	268	9.0%	N/A
	Right	-	59	0.0%	N/A

Advancing Volume:	N/A
Right Turn Volume:	N/A

TURN LANE WARRANT FINDINGS

Left Turn Lane Warrant Findings	Right Turn Lane Warrant Findings
Applicable Warrant Figure: Figure 1	Applicable Warrant Figure: N/A
Warrant Met?: Yes	Warrant Met?: N/A

TURN LANE LENGTH CALCULATIONS

Intersection Control:	Signalized
Design Hour Volume of Turning Lane:	52
Cycles Per Hour (Assumed):	40
Cycles Per Hour (If Known):	40
Average # of Vehicles/Cycle:	1.0

PennDOT Publication 46, Exhibit 11-6

Type of Traffic Control	Speed (MPH)					
	25-35		40-45		50-60	
	Turn Demand Volume					
	High	Low	High	Low	High	Low
Signalized	A	A	B or C	B or C	B or C	B or C
Unsignalized	A	A	C	B	B or C	B

Left Turn Lane Storage Length, Condition A:	75	Feet
Condition B:	N/A	Feet
Condition C:	N/A	Feet
Required Left Turn Lane Storage Length:	75	Feet


Additional Findings:

N/A

Additional Comments / Justifications:

--

Figure 1. Warrant for left turn lanes on two-lane roadways
 (speeds to 35 mph, unsignalized and signalized intersections)
 (L = % Left Turns in Advancing Volume)

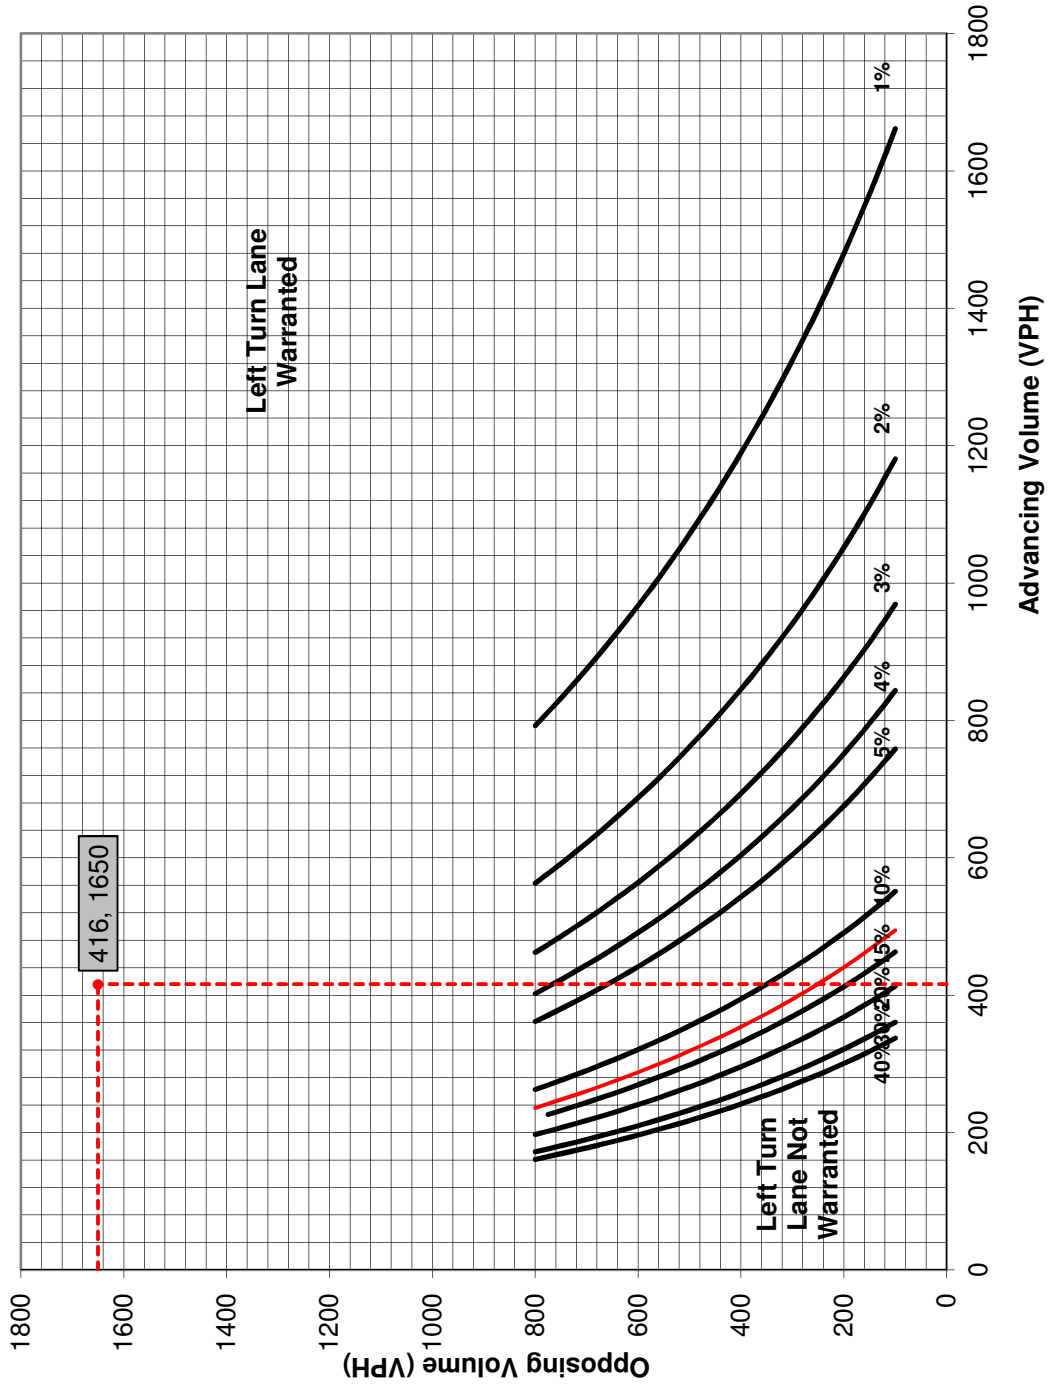

• Volume Data Point
 — 12.5%

Turn Lane Warrant and Length Analysis Workbook

STUDY LOCATION AND ANALYSIS INFORMATION

Municipality: Radnor Township	Analysis Date: 11/30/2016
County: Delaware County	Conducted By: SDS
PennDOT Engineering District: 6	Checked By: ACB
	Agency/Company Name: Pennoni
Intersection & Approach Description: King of Prussia Road SB at Raider Road/Site Driveway	
Analysis Period: 2025 Build	Number of Approach Lanes: 1
Design Hour: PM Peak Hour	Undivided or Divided Highway: Undivided
Intersection Control: Signalized	Type of Analysis
Posted Speed Limit (MPH): 35	
Type of Terrain: Rolling	Left or Right-Turn Lane Analysis?: Left Turn Lane

VOLUME CALCULATIONS

Left Turn Lane Volume Calculations

Movement	Include?	Volume	% Trucks	PCEV			
Advancing	Left	Yes	14	0.0%	14	Advancing Volume: 1152	
	Through	-	1117	0.0%	1133		Opposing Volume: 427
	Right	Yes	5	0.0%	5		Left Turn Volume: 14
Opposing	Left	Yes	24	0.0%	24	% Left Turns in Advancing Volume: 1.22%	
	Through	-	299	1.0%	304		
	Right	Yes	101	0.0%	99		

Right Turn Lane Volume Calculations

Movement	Include?	Volume	% Trucks	PCEV			
Advancing	Left	Yes	14	0.0%	N/A	Advancing Volume: N/A	
	Through	-	1117	0.0%	N/A		Right Turn Volume: N/A
	Right	-	5	0.0%	N/A		

TURN LANE WARRANT FINDINGS

Left Turn Lane Warrant Findings

Applicable Warrant Figure: **Figure 1**

Warrant Met?: **Yes**

Right Turn Lane Warrant Findings

Applicable Warrant Figure: **N/A**

Warrant Met?: **N/A**

TURN LANE LENGTH CALCULATIONS

Intersection Control: Signalized	
Design Hour Volume of Turning Lane: 14	
Cycles Per Hour (Assumed): 40	
Cycles Per Hour (If Known): 40	Average # of Vehicles/Cycle: 1.0

PennDOT Publication 46, Exhibit 11-6

Type of Traffic Control	Speed (MPH)					
	25-35		40-45		50-60	
	Turn Demand Volume					
	High	Low	High	Low	High	Low
Signalized	A	A	B or C	B or C	B or C	B or C
Unsignalized	A	A	C	B	B or C	B

Left Turn Lane Storage Length, Condition A: **75** Feet

Condition B: **N/A** Feet

Condition C: **N/A** Feet


Required Left Turn Lane Storage Length: **75** Feet

Additional Findings:

N/A

Additional Comments / Justifications:

Figure 1. Warrant for left turn lanes on two-lane roadways
 (speeds to 35 mph, unsignalized and signalized intersections)
 (L = % Left Turns in Advancing Volume)

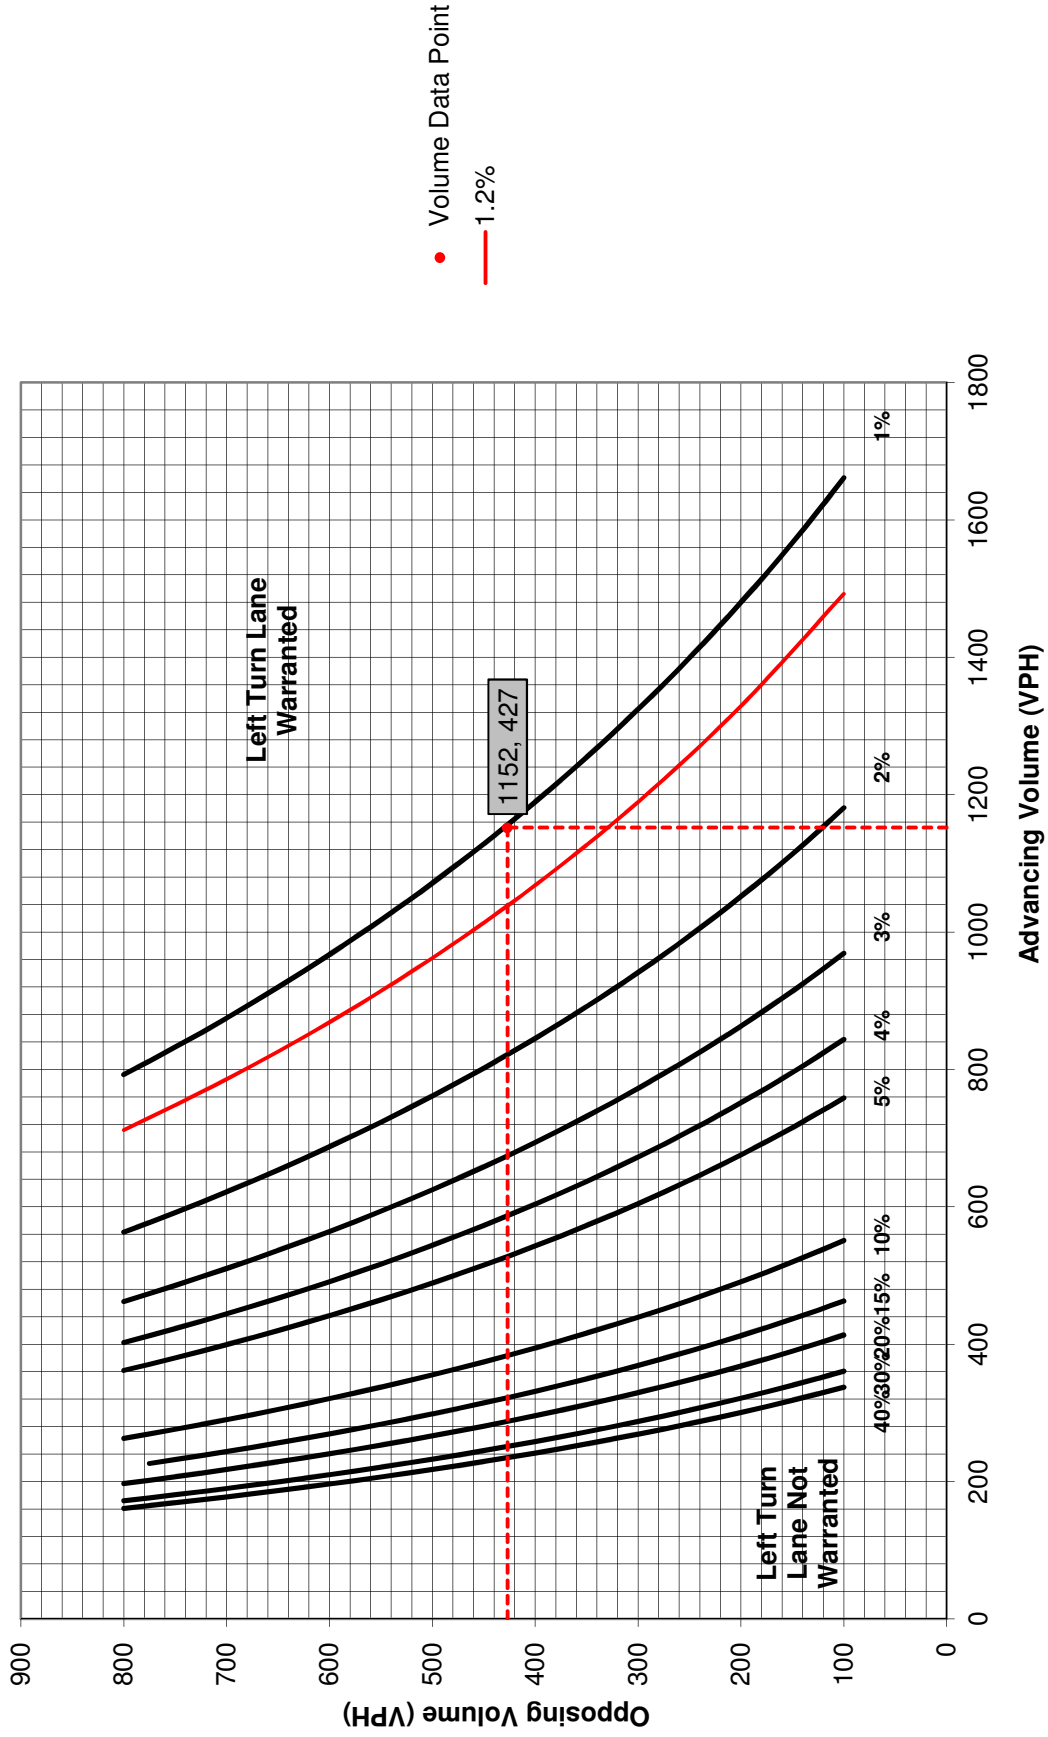

Turn Lane Warrant and Length Analysis Workbook

STUDY LOCATION AND ANALYSIS INFORMATION

Municipality:	Radnor Township	Analysis Date:	11/30/2016
County:	Delaware County	Conducted By:	SDS
PennDOT Engineering District:	6	Checked By:	ACB
Intersection & Approach Description:		Agency/Company Name:	
King of Prussia Road NB at Raider Road/Site Driveway		Pennoni	
Analysis Period:	2025 Build	Number of Approach Lanes:	1
Design Hour:	AM Peak Hour	Undivided or Divided Highway:	Undivided
Intersection Control:	Signalized	Type of Analysis	
Posted Speed Limit (MPH):	35	Left or Right-Turn Lane Analysis?:	
Type of Terrain:	Rolling	Right Turn Lane	

VOLUME CALCULATIONS

Left Turn Lane Volume Calculations

Movement		Include?	Volume	% Trucks	PCEV
Advancing	Left	Yes	177	0.0%	N/A
	Through	-	1071	2.0%	N/A
	Right	Yes	369	0.0%	N/A
Opposing	Left	Yes	52	0.0%	N/A
	Through	-	268	9.0%	N/A
	Right	Yes	59	0.0%	N/A

Advancing Volume:	N/A
Opposing Volume:	N/A
Left Turn Volume:	N/A

% Left Turns in Advancing Volume:	N/A
-----------------------------------	-----

Right Turn Lane Volume Calculations

Movement		Include?	Volume	% Trucks	PCEV
Advancing	Left	Yes	177	0.0%	177
	Through	-	1069	2.0%	1102
	Right	-	369	0.0%	369

Advancing Volume:	1648
Right Turn Volume:	369

TURN LANE WARRANT FINDINGS

Left Turn Lane Warrant Findings

Applicable Warrant Figure:	N/A
Warrant Met?:	N/A

Right Turn Lane Warrant Findings

Applicable Warrant Figure:	Figure 9
Warrant Met?:	Yes

TURN LANE LENGTH CALCULATIONS

Intersection Control:	Signalized	Average # of Vehicles/Cycle:	9.0
Design Hour Volume of Turning Lane:	369		
Cycles Per Hour (Assumed):	40		
Cycles Per Hour (If Known):	40		

PennDOT Publication 46, Exhibit 11-6

Type of Traffic Control	Speed (MPH)					
	25-35		40-45		50-60	
	Turn Demand Volume					
	High	Low	High	Low	High	Low
Signalized	A	A	B or C	B or C	B or C	B or C
Unsignalized	A	A	C	B	B or C	B


Right Turn Lane Storage Length, Condition A:	350	Feet
Condition B:	N/A	Feet
Condition C:	N/A	Feet
Required Right Turn Lane Storage Length:	350	Feet

Additional Findings:

N/A

Additional Comments / Justifications:

Figure 9. Warrant for right turn lanes on two-lane roadways
(40 mph or lower speeds, unsignalized and signalized intersections)

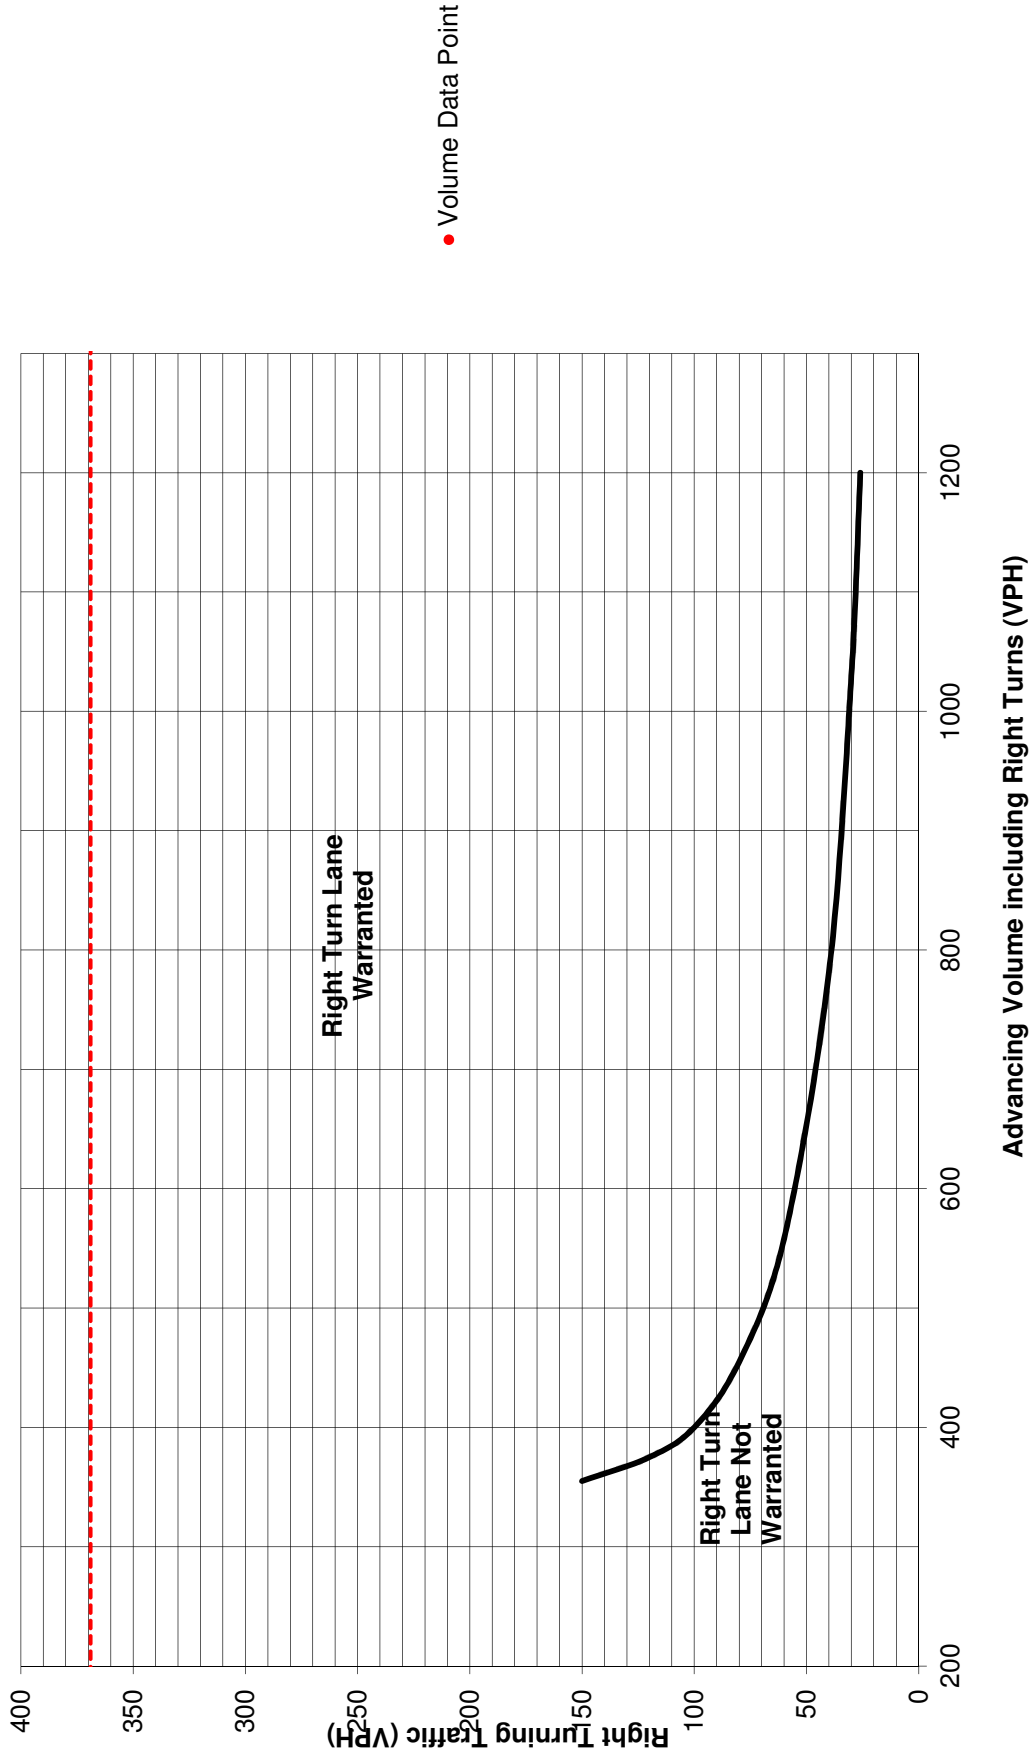

Turn Lane Warrant and Length Analysis Workbook

STUDY LOCATION AND ANALYSIS INFORMATION

Municipality: Radnor Township	Analysis Date: 11/30/2016
County: Delaware County	Conducted By: SDS
PennDOT Engineering District: 6	Checked By: ACB
	Agency/Company Name: Pennoni
Intersection & Approach Description: King of Prussia Road NB at Raider Road/Site Driveway	
Analysis Period: 2025 Build	Number of Approach Lanes: 1
Design Hour: PM Peak Hour	Undivided or Divided Highway: Undivided
Intersection Control: Signalized	
Posted Speed Limit (MPH): 35	Type of Analysis
Type of Terrain: Rolling	Left or Right-Turn Lane Analysis?: Right Turn Lane

VOLUME CALCULATIONS

Left Turn Lane Volume Calculations

Movement	Include?	Volume	% Trucks	PCEV			
Advancing	Left	Yes	24	0.0%	N/A	Advancing Volume: N/A	
	Through	-	299	1.0%	N/A		Opposing Volume: N/A
	Right	Yes	101	0.0%	N/A		Left Turn Volume: N/A
Opposing	Left	Yes	14	0.0%	N/A	% Left Turns in Advancing Volume: N/A	
	Through	-	1117	0.0%	N/A		
	Right	Yes	5	0.0%	N/A		

Right Turn Lane Volume Calculations

Movement	Include?	Volume	% Trucks	PCEV			
Advancing	Left	Yes	24	0.0%	24	Advancing Volume: 429	
	Through	-	299	1.0%	304		Right Turn Volume: 101
	Right	-	101	0.0%	101		

TURN LANE WARRANT FINDINGS

Left Turn Lane Warrant Findings

Applicable Warrant Figure: **N/A**

Warrant Met?: **N/A**

Right Turn Lane Warrant Findings

Applicable Warrant Figure: **Figure 9**

Warrant Met?: **Yes**

TURN LANE LENGTH CALCULATIONS

Intersection Control:	Signalized	
Design Hour Volume of Turning Lane:	101	
Cycles Per Hour (Assumed):	40	
Cycles Per Hour (If Known):	40	Average # of Vehicles/Cycle: 3.0

PennDOT Publication 46, Exhibit 11-6

Type of Traffic Control	Speed (MPH)					
	25-35		40-45		50-60	
	Turn Demand Volume					
	High	Low	High	Low	High	Low
Signalized	A	A	B or C	B or C	B or C	B or C
Unsignalized	A	A	C	B	B or C	B

Right Turn Lane Storage Length, Condition A: **150** Feet

Condition B: **N/A** Feet

Condition C: **N/A** Feet


Required Right Turn Lane Storage Length: **150** Feet

Additional Findings:

N/A

Additional Comments / Justifications:

Figure 9. Warrant for right turn lanes on two-lane roadways
(40 mph or lower speeds, unsignalized and signalized intersections)

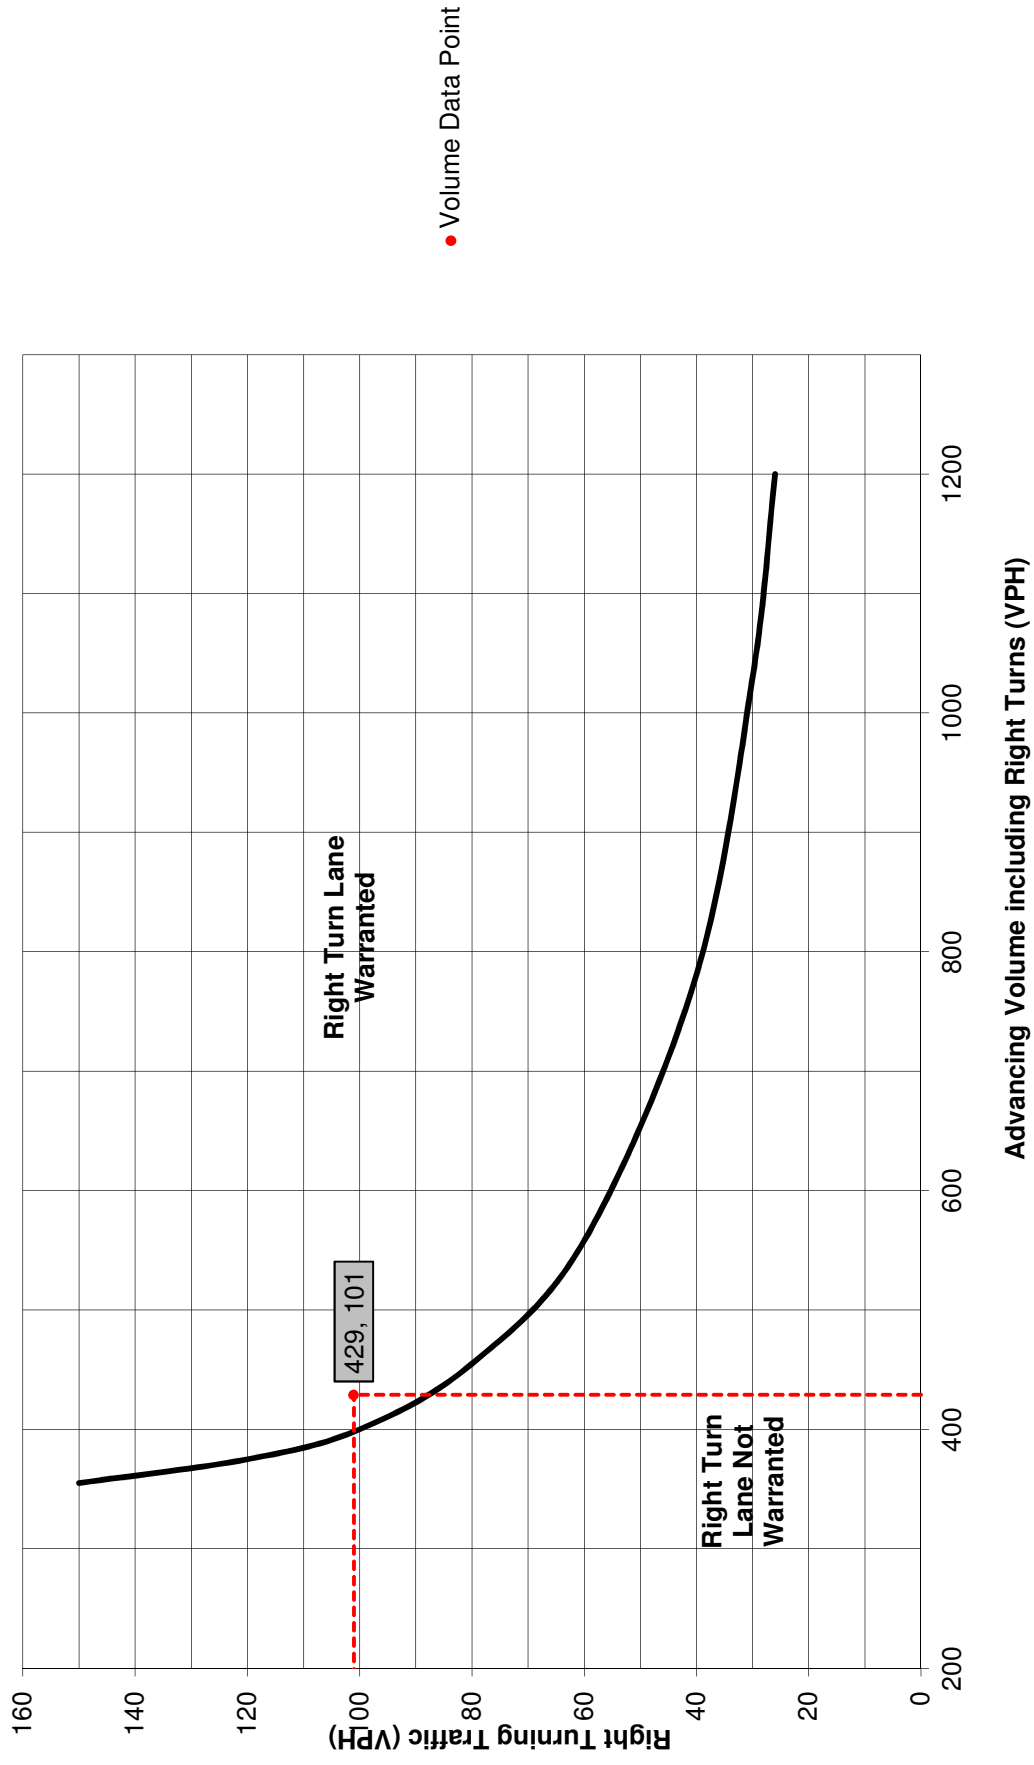

Turn Lane Warrant and Length Analysis Workbook

STUDY LOCATION AND ANALYSIS INFORMATION

Municipality: Radnor Township	Analysis Date: 11/30/2016
County: Delaware County	Conducted By: SDS
PennDOT Engineering District: 6	Checked By: ACB
	Agency/Company Name: Pennoni
Intersection & Approach Description: King of Prussia Road NB at Septa Driveway	
Analysis Period: 2025 Build	Number of Approach Lanes: 1
Design Hour: AM Peak Hour	Undivided or Divided Highway: Undivided
Intersection Control: Unsignalized	
Posted Speed Limit (MPH): 35	Type of Analysis
Type of Terrain: Rolling	Left or Right-Turn Lane Analysis?: Left Turn Lane

VOLUME CALCULATIONS

Left Turn Lane Volume Calculations

Movement	Include?	Volume	% Trucks	PCEV		
Advancing	Left	149	9.0%	170	Advancing Volume: 497	
	Through	-	4.0%	327		Opposing Volume: 1134
	Right	Yes	0	0.0%		0
Opposing	Left	0	0.0%	0	% Left Turns in Advancing Volume: 34.21%	
	Through	-	2.0%	1018		
	Right	Yes	116	0.0%		116

Right Turn Lane Volume Calculations

Movement	Include?	Volume	% Trucks	PCEV		
Advancing	Left	149	9.0%	N/A	Advancing Volume: N/A	
	Through	-	4.0%	N/A		Right Turn Volume: N/A
	Right	-	0	5.0%		N/A

TURN LANE WARRANT FINDINGS

Left Turn Lane Warrant Findings

Applicable Warrant Figure: **Figure 1**

Warrant Met?: **Yes**

Right Turn Lane Warrant Findings

Applicable Warrant Figure: **N/A**

Warrant Met?: **N/A**

TURN LANE LENGTH CALCULATIONS

Intersection Control: Unsignalized	
Design Hour Volume of Turning Lane: 170	
Cycles Per Hour (Assumed): 60	
Cycles Per Hour (If Known):	Average # of Vehicles/Cycle: 3.0

PennDOT Publication 46, Exhibit 11-6

Type of Traffic Control	Speed (MPH)					
	25-35		40-45		50-60	
	Turn Demand Volume					
	High	Low	High	Low	High	Low
Signalized	A	A	B or C	B or C	B or C	B or C
Unsignalized	A	A	C	B	B or C	B

Left Turn Lane Storage Length, Condition A: **150** Feet

Condition B: **N/A** Feet

Condition C: **N/A** Feet


Required Left Turn Lane Storage Length: **150** Feet

Additional Findings:

N/A

Additional Comments / Justifications:

**Figure 9. Warrant for right turn lanes on two-lane roadways
(40 mph or lower speeds, unsignalized and signalized intersections)**

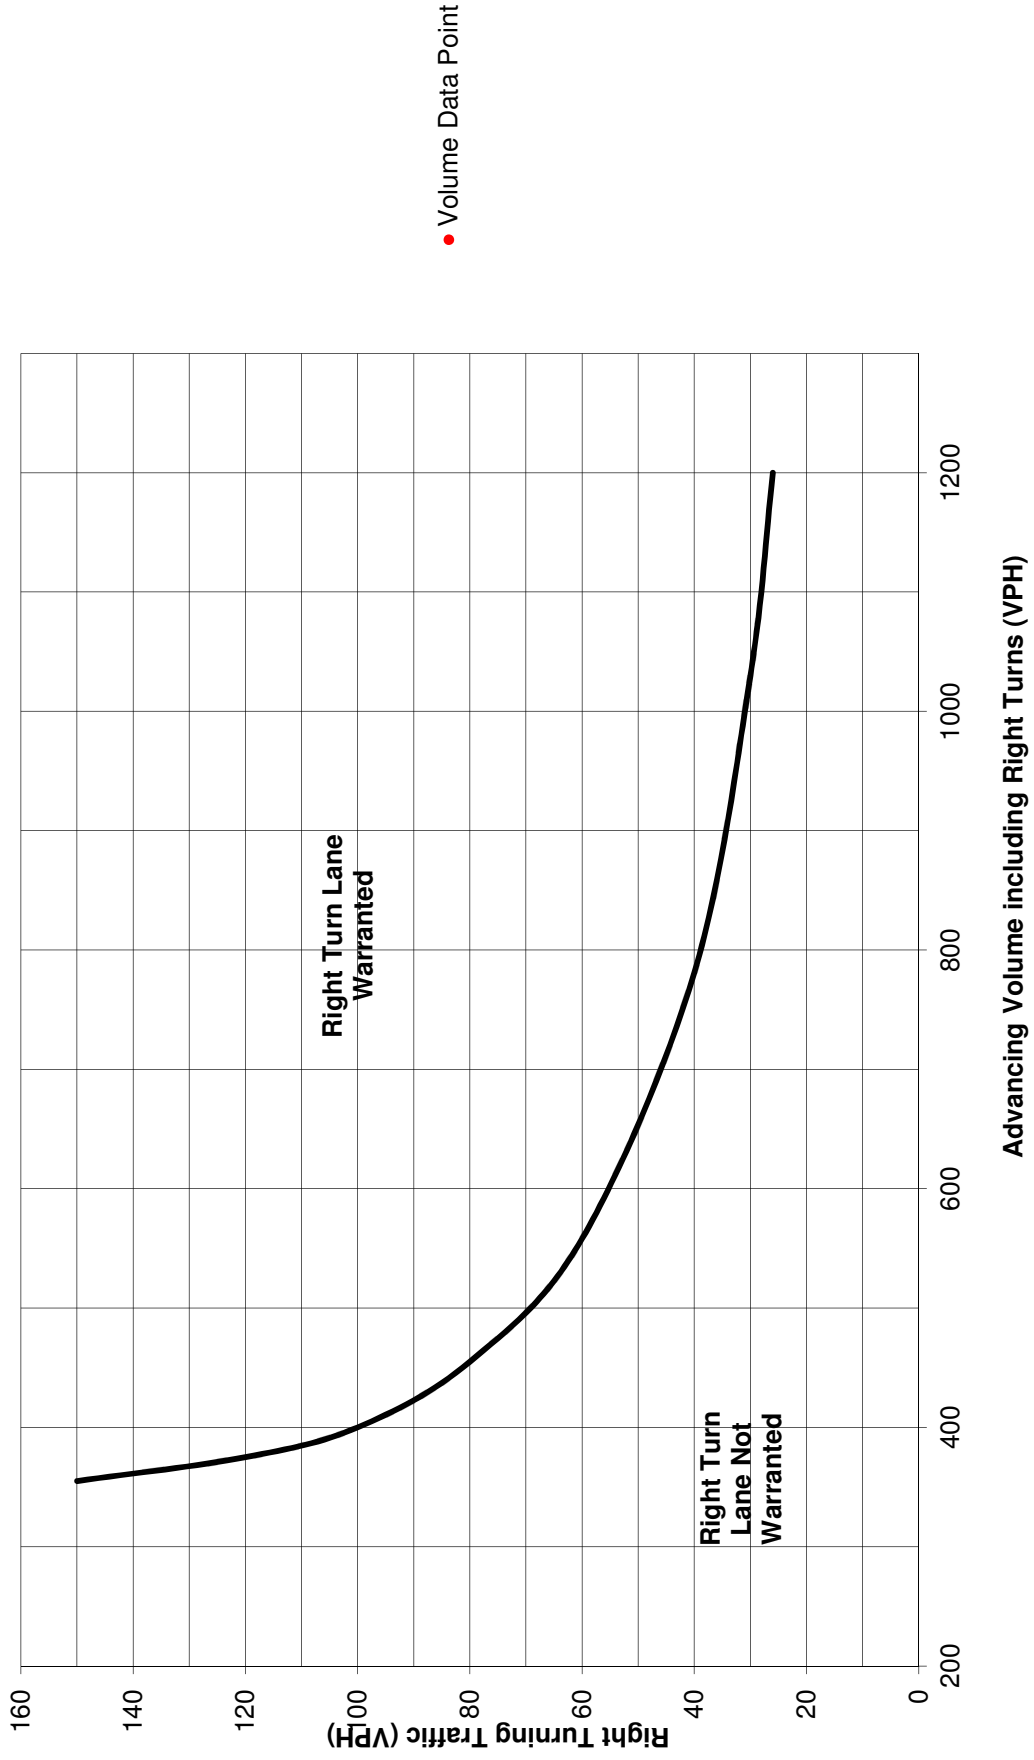

Turn Lane Warrant and Length Analysis Workbook

STUDY LOCATION AND ANALYSIS INFORMATION

Municipality: Radnor Township	Analysis Date: 11/30/2016
County: Delaware County	Conducted By: SDS
PennDOT Engineering District: 6	Checked By: ACB
	Agency/Company Name: Pennoni
Intersection & Approach Description: King of Prussia Road SB at Septa Driveway	
Analysis Period: 2025 Build	Number of Approach Lanes: 1
Design Hour: PM Peak Hour	Undivided or Divided Highway: Undivided
Intersection Control: Unsignalized	Type of Analysis
Posted Speed Limit (MPH): 35	
Type of Terrain: Rolling	Left or Right-Turn Lane Analysis?: Left Turn Lane

VOLUME CALCULATIONS

Left Turn Lane Volume Calculations

Movement	Include?	Volume	% Trucks	PCEV		
Advancing	Left	54	10.0%	63	Advancing Volume: 1200	
	Through	988	10.0%	1137		Opposing Volume: 433
	Right	0	0.0%	0		Left Turn Volume: 63
Opposing	Left	0	0.0%	0	% Left Turns in Advancing Volume: 5.25%	
	Through	409	1.0%	416		
	Right	17	0.0%	17		

Right Turn Lane Volume Calculations

Movement	Include?	Volume	% Trucks	PCEV		
Advancing	Left	54	10.0%	N/A	Advancing Volume: N/A	
	Through	988	0.0%	N/A		Right Turn Volume: N/A
	Right	0	0.0%	N/A		

TURN LANE WARRANT FINDINGS

Left Turn Lane Warrant Findings

Applicable Warrant Figure: **Figure 1**

Warrant Met?: **Yes**

Right Turn Lane Warrant Findings

Applicable Warrant Figure: **N/A**

Warrant Met?: **N/A**

TURN LANE LENGTH CALCULATIONS

Intersection Control: Unsignalized	
Design Hour Volume of Turning Lane: 63	
Cycles Per Hour (Assumed): 60	
Cycles Per Hour (If Known):	Average # of Vehicles/Cycle: 1.0

PennDOT Publication 46, Exhibit 11-6

Type of Traffic Control	Speed (MPH)					
	25-35		40-45		50-60	
	Turn Demand Volume					
	High	Low	High	Low	High	Low
Signalized	A	A	B or C	B or C	B or C	B or C
Unsignalized	A	A	C	B	B or C	B

Left Turn Lane Storage Length, Condition A: **75** Feet

Condition B: **N/A** Feet

Condition C: **N/A** Feet


Required Left Turn Lane Storage Length: **75** Feet

Additional Findings:

N/A

Additional Comments / Justifications:

Figure 1. Warrant for left turn lanes on two-lane roadways
 (speeds to 35 mph, unsignalized and signalized intersections)
 (L = % Left Turns in Advancing Volume)

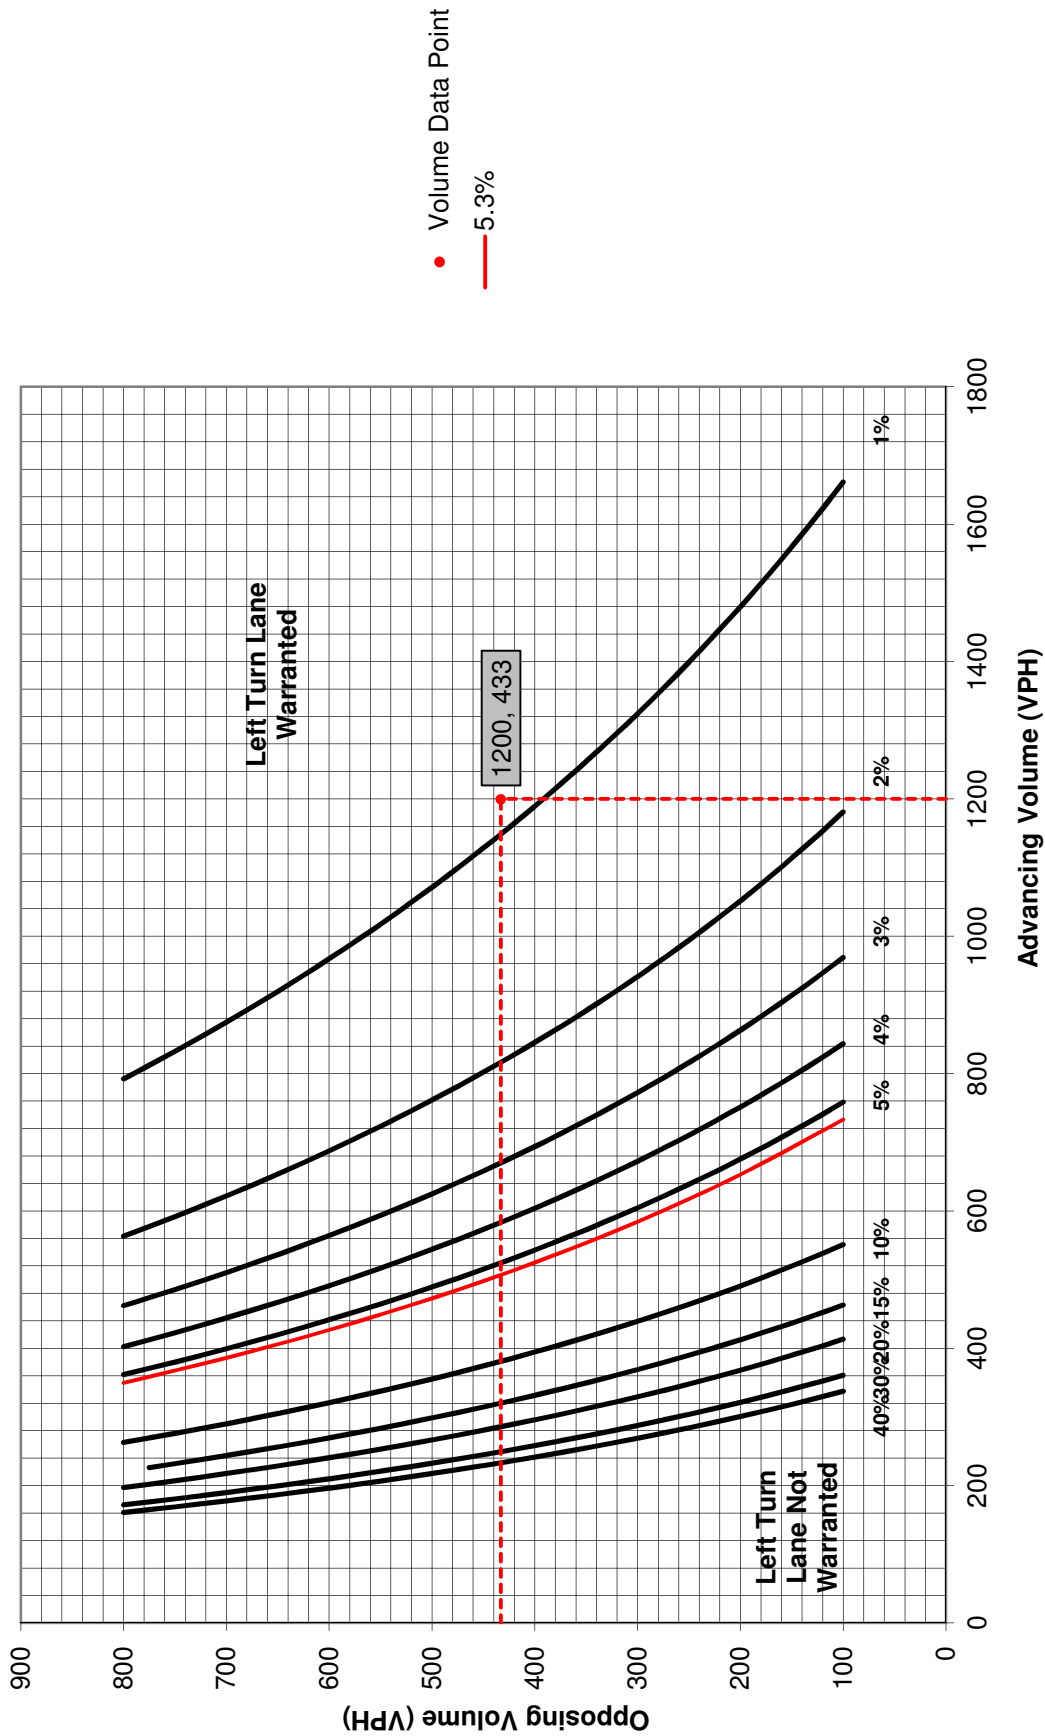

Turn Lane Warrant and Length Analysis Workbook

STUDY LOCATION AND ANALYSIS INFORMATION

Municipality: Radnor Township	Analysis Date: 11/30/2016
County: Delaware County	Conducted By: SDS
PennDOT Engineering District: 6	Checked By: ACB
	Agency/Company Name: Pennoni
Intersection & Approach Description: King of Prussia Road NB at Septa Driveway	
Analysis Period: 2025 Build	Number of Approach Lanes: 1
Design Hour: AM Peak Hour	Undivided or Divided Highway: Undivided
Intersection Control: Unsignalized	
Posted Speed Limit (MPH): 35	Type of Analysis
Type of Terrain: Rolling	Left or Right-Turn Lane Analysis?: Right Turn Lane

VOLUME CALCULATIONS

Left Turn Lane Volume Calculations

Movement	Include?	Volume	% Trucks	PCEV			
Advancing	Left	Yes	0	0.0%	N/A	Advancing Volume: N/A	
	Through	-	988	2.0%	N/A		Opposing Volume: N/A
	Right	Yes	116	0.0%	N/A		Left Turn Volume: N/A
Opposing	Left	Yes	149	9.0%	N/A	% Left Turns in Advancing Volume: N/A	
	Through	-	308	4.0%	N/A		
	Right	Yes	0	0.0%	N/A		

Right Turn Lane Volume Calculations

Movement	Include?	Volume	% Trucks	PCEV			
Advancing	Left	Yes	0	0.0%	0	Advancing Volume: 1134	
	Through	-	988	2.0%	1018		Right Turn Volume: 116
	Right	-	116	0.0%	116		

TURN LANE WARRANT FINDINGS

Left Turn Lane Warrant Findings

Applicable Warrant Figure: **N/A**

Warrant Met?: **N/A**

Right Turn Lane Warrant Findings

Applicable Warrant Figure: **Figure 9**

Warrant Met?: **Yes**

TURN LANE LENGTH CALCULATIONS

Intersection Control: Unsignalized	
Design Hour Volume of Turning Lane: 116	
Cycles Per Hour (Assumed): 60	
Cycles Per Hour (If Known):	Average # of Vehicles/Cycle: 2.0

PennDOT Publication 46, Exhibit 11-6

Type of Traffic Control	Speed (MPH)					
	25-35		40-45		50-60	
	Turn Demand Volume					
	High	Low	High	Low	High	Low
Signalized	A	A	B or C	B or C	B or C	B or C
Unsignalized	A	A	C	B	B or C	B

Right Turn Lane Storage Length, Condition A: **100** Feet

Condition B: **N/A** Feet

Condition C: **N/A** Feet


Required Right Turn Lane Storage Length: **100** Feet

Additional Findings:

N/A

Additional Comments / Justifications:

Figure 9. Warrant for right turn lanes on two-lane roadways
(40 mph or lower speeds, unsignalized and signalized intersections)

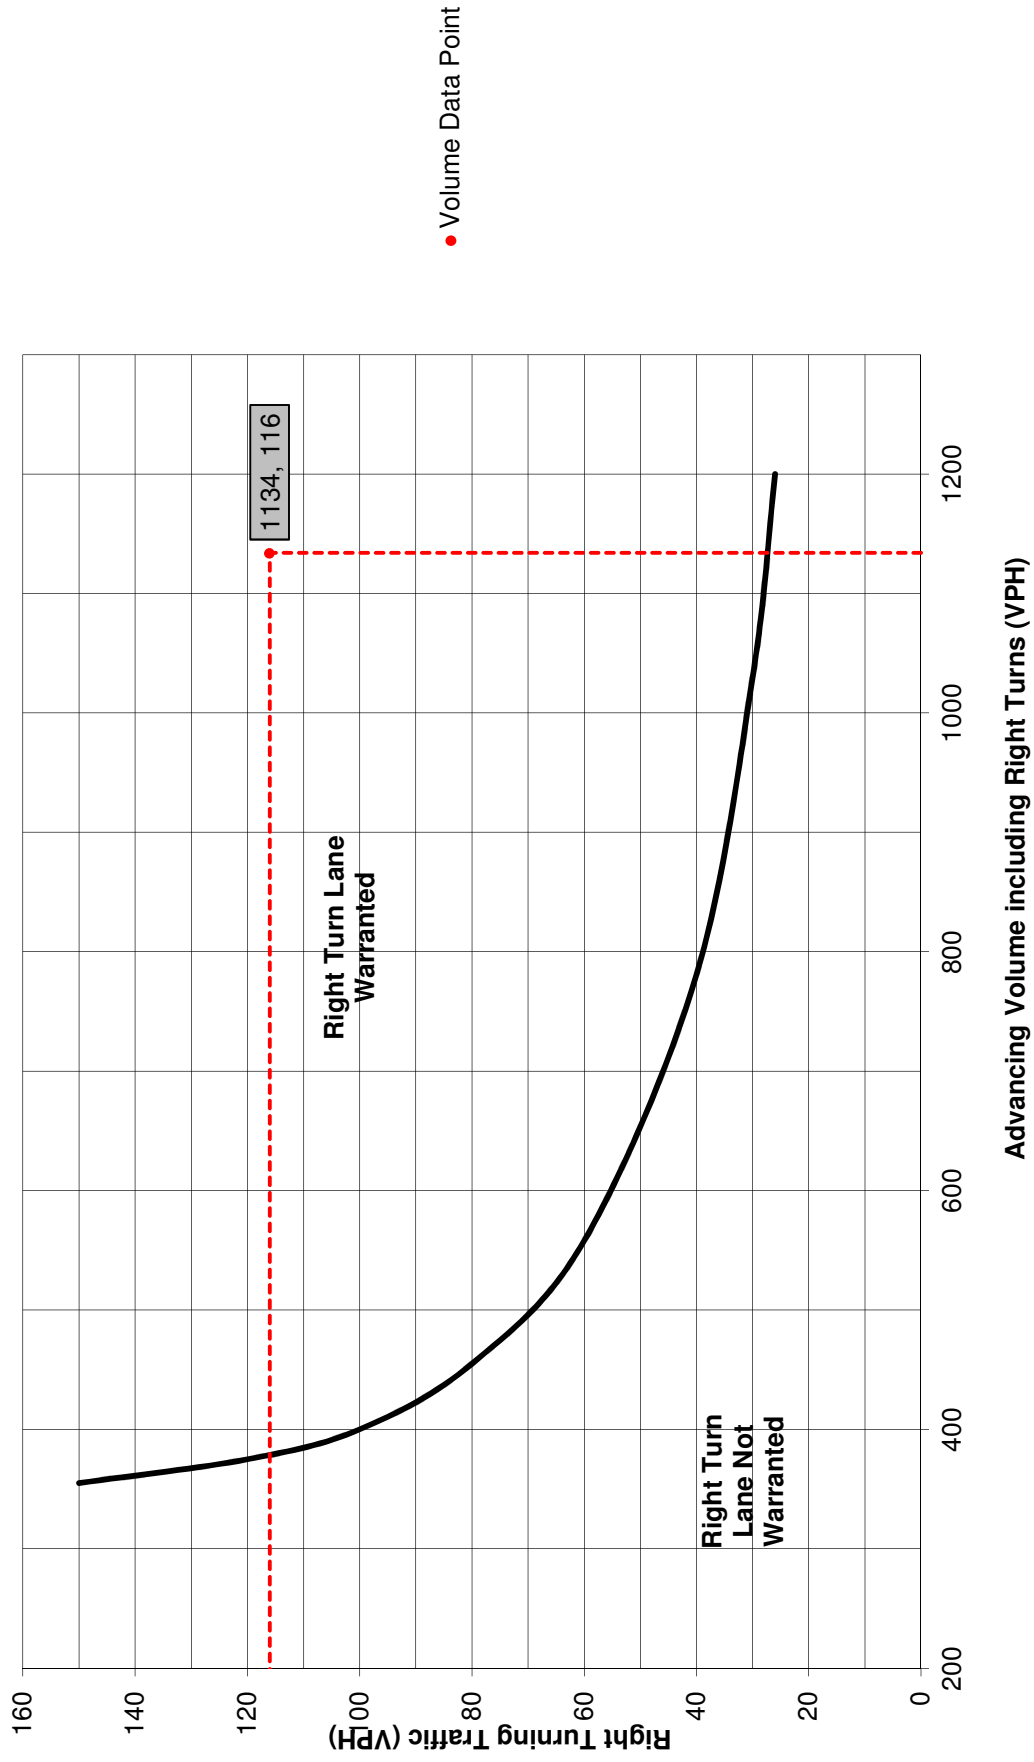

Turn Lane Warrant and Length Analysis Workbook

STUDY LOCATION AND ANALYSIS INFORMATION

Municipality: Radnor Township	Analysis Date: 11/30/2016
County: Delaware County	Conducted By: SDS
PennDOT Engineering District: 6	Checked By: ACB
	Agency/Company Name: Pennoni
Intersection & Approach Description: King of Prussia Road NB at Septa Driveway	
Analysis Period: 2025 Build	Number of Approach Lanes: 1
Design Hour: PM Peak Hour	Undivided or Divided Highway: Undivided
Intersection Control: Unsignalized	
Posted Speed Limit (MPH): 35	Type of Analysis
Type of Terrain: Rolling	Left or Right-Turn Lane Analysis?: Right Turn Lane

VOLUME CALCULATIONS

Left Turn Lane Volume Calculations

Movement		Include?	Volume	% Trucks	PCEV
Advancing	Left	Yes	0	0.0%	N/A
	Through	-	409	1.0%	N/A
	Right	Yes	17	0.0%	N/A
Opposing	Left	Yes	54	9.0%	N/A
	Through	-	988	0.0%	N/A
	Right	Yes	0	0.0%	N/A

Advancing Volume:	N/A
Opposing Volume:	N/A
Left Turn Volume:	N/A

% Left Turns in Advancing Volume:	N/A
-----------------------------------	-----

Right Turn Lane Volume Calculations

Movement		Include?	Volume	% Trucks	PCEV
Advancing	Left	Yes	0	0.0%	0
	Through	-	409	1.0%	416
	Right	-	17	0.0%	17

Advancing Volume:	433
Right Turn Volume:	17

TURN LANE WARRANT FINDINGS

Left Turn Lane Warrant Findings

Applicable Warrant Figure:	N/A
Warrant Met?:	N/A

Right Turn Lane Warrant Findings

Applicable Warrant Figure:	Figure 9
Warrant Met?:	No

TURN LANE LENGTH CALCULATIONS

Intersection Control:	Unsignalized
Design Hour Volume of Turning Lane:	17
Cycles Per Hour (Assumed):	60
Cycles Per Hour (If Known):	
Average # of Vehicles/Cycle:	N/A

PennDOT Publication 46, Exhibit 11-6

Type of Traffic Control	Speed (MPH)					
	25-35		40-45		50-60	
	Turn Demand Volume					
	High	Low	High	Low	High	Low
Signalized	A	A	B or C	B or C	B or C	B or C
Unsignalized	A	A	C	B	B or C	B


Right Turn Lane Storage Length, Condition A:	N/A	Feet
Condition B:	N/A	Feet
Condition C:	N/A	Feet
Required Right Turn Lane Storage Length:	N/A	Feet

Additional Findings:

N/A

Additional Comments / Justifications:

Figure 9. Warrant for right turn lanes on two-lane roadways (40 mph or lower speeds, unsignalized and signalized intersections)

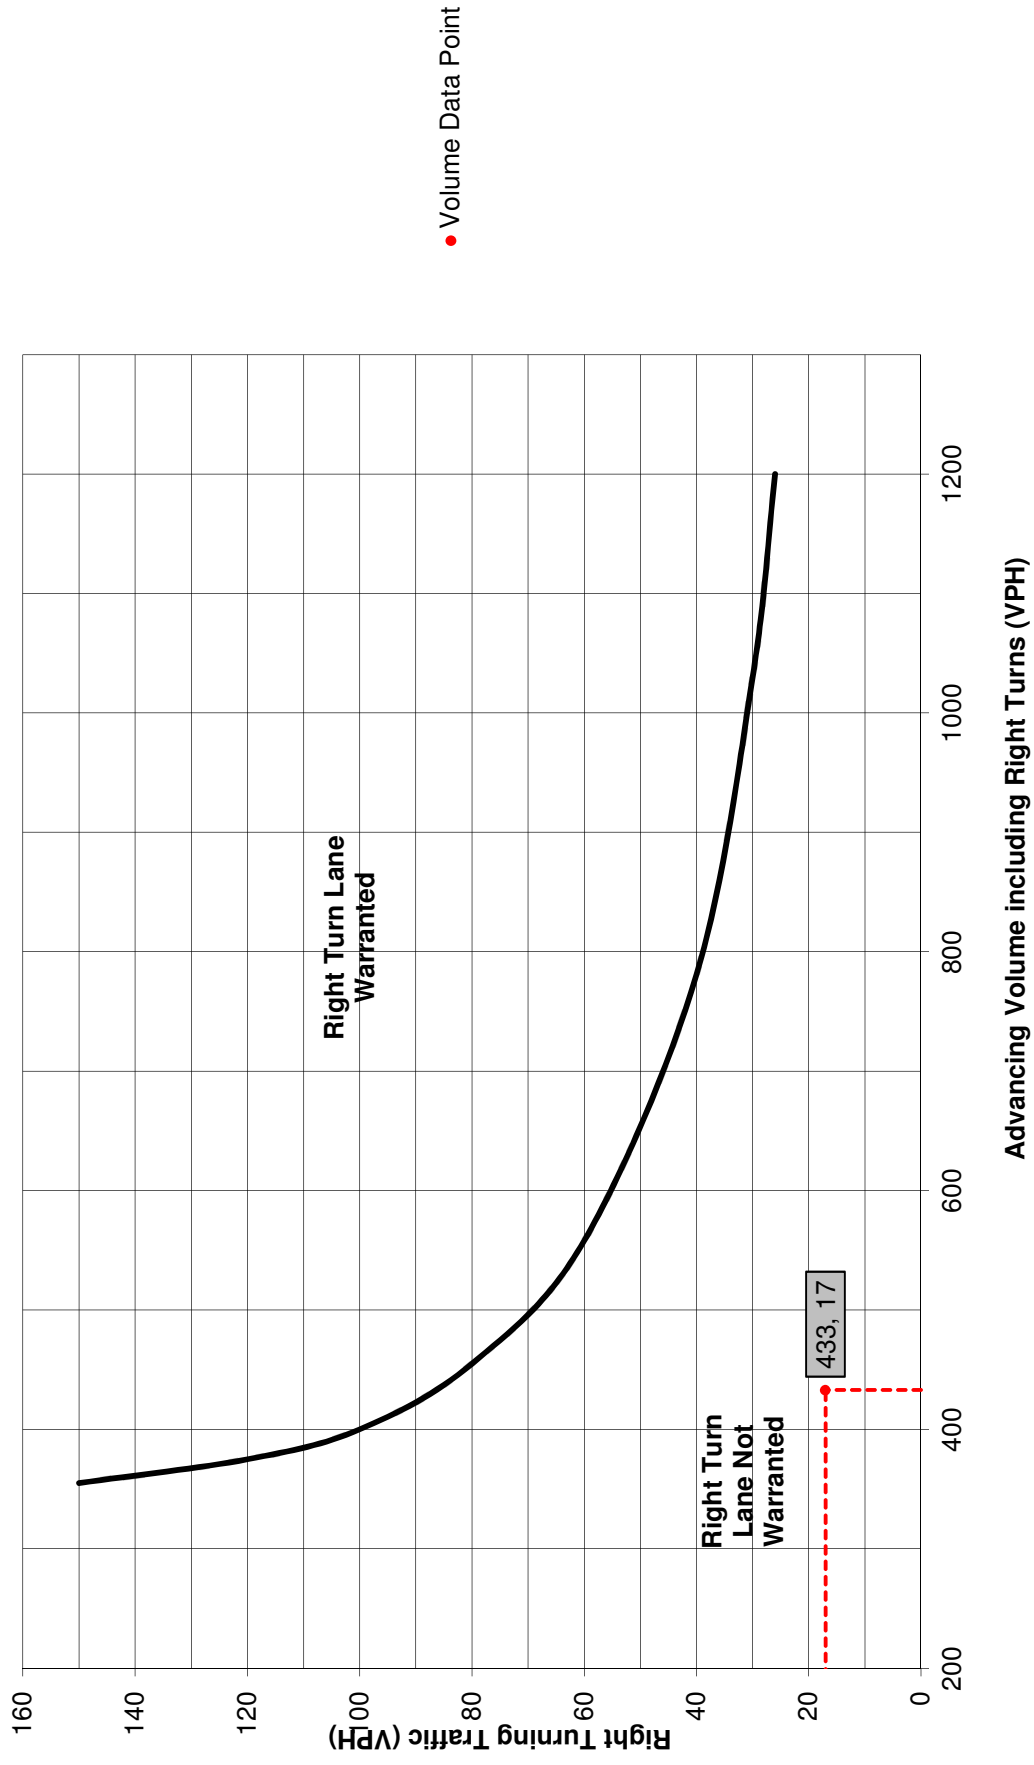

Turn Lane Warrant and Length Analysis Workbook

STUDY LOCATION AND ANALYSIS INFORMATION

Municipality: Radnor Township	Analysis Date: 11/30/2016
County: Delaware County	Conducted By: SDS
PennDOT Engineering District: 6	Checked By: ACB
	Agency/Company Name: Pennoni
Intersection & Approach Description: King of Prussia Road SB at South Site Driveway	
Analysis Period: 2025 Build	Number of Approach Lanes: 1
Design Hour: AM Peak Hour	Undivided or Divided Highway: Undivided
Intersection Control: Unsignalized	Type of Analysis
Posted Speed Limit (MPH): 35	Left or Right-Turn Lane Analysis?: Left Turn Lane
Type of Terrain: Rolling	

VOLUME CALCULATIONS

Left Turn Lane Volume Calculations

Movement	Include?	Volume	% Trucks	PCEV			
Advancing	Left	Yes	6	0.0%	6	Advancing Volume: 544	
	Through	-	493	6.0%	538		Opposing Volume: 1642
	Right	Yes	0	0.0%	0		Left Turn Volume: 6
Opposing	Left	Yes	0	0.0%	0	% Left Turns in Advancing Volume: 1.10%	
	Through	-	1611	1.0%	1636		
	Right	Yes	6	0.0%	6		

Right Turn Lane Volume Calculations

Movement	Include?	Volume	% Trucks	PCEV			
Advancing	Left	Yes	6	0.0%	N/A	Advancing Volume: N/A	
	Through	-	493	6.0%	N/A		Right Turn Volume: N/A
	Right	-	0	0.0%	N/A		

TURN LANE WARRANT FINDINGS

Left Turn Lane Warrant Findings

Applicable Warrant Figure: **Figure 1**

Warrant Met?: **Yes**

Right Turn Lane Warrant Findings

Applicable Warrant Figure: **N/A**

Warrant Met?: **N/A**

TURN LANE LENGTH CALCULATIONS

Intersection Control: Unsignalized	
Design Hour Volume of Turning Lane: 6	
Cycles Per Hour (Assumed): 60	
Cycles Per Hour (If Known):	Average # of Vehicles/Cycle: 1.0

PennDOT Publication 46, Exhibit 11-6

Type of Traffic Control	Speed (MPH)					
	25-35		40-45		50-60	
	Turn Demand Volume					
	High	Low	High	Low	High	Low
Signalized	A	A	B or C	B or C	B or C	B or C
Unsignalized	A	A	C	B	B or C	B

Left Turn Lane Storage Length, Condition A: **75** Feet

Condition B: **N/A** Feet

Condition C: **N/A** Feet


Required Left Turn Lane Storage Length: **75** Feet

Additional Findings:

N/A

Additional Comments / Justifications:

Figure 7. Warrant for left turn lanes on four-lane, undivided highways
 (unsignalized and signalized intersections)
 (L = % Left Turns in Advancing Volume) • Volume Data Point

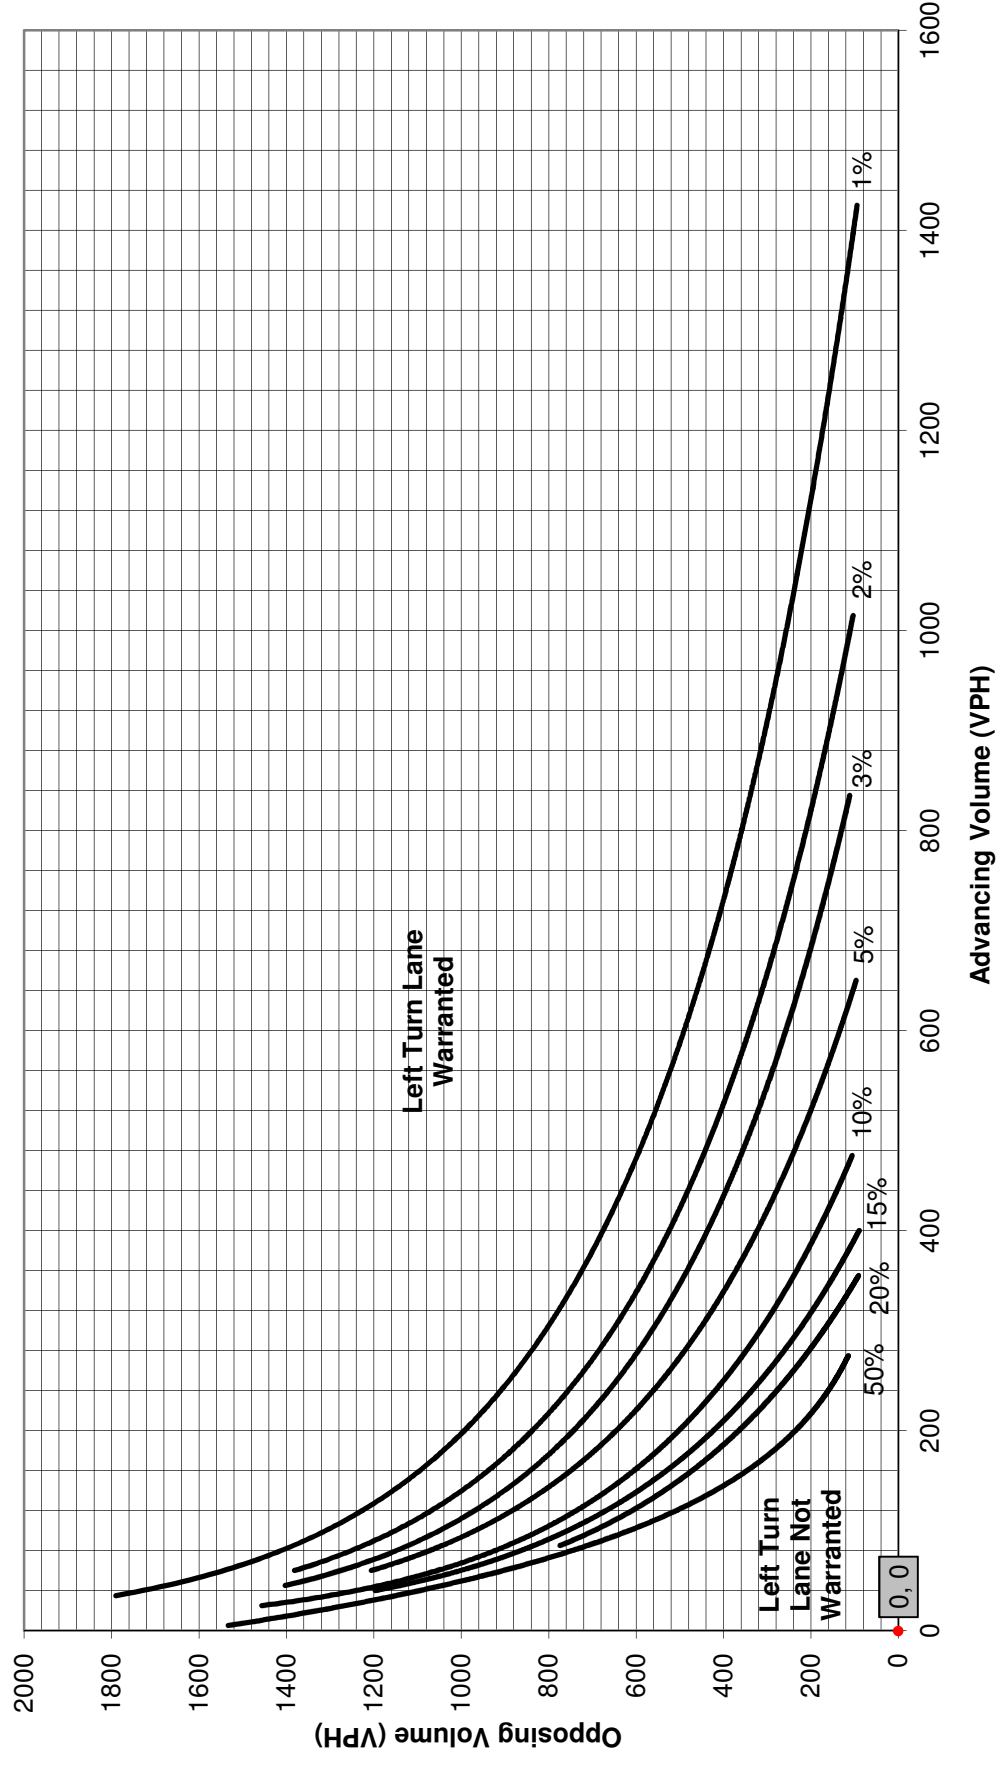

Turn Lane Warrant and Length Analysis Workbook

STUDY LOCATION AND ANALYSIS INFORMATION

Municipality: Radnor Township	Analysis Date: 11/30/2016
County: Delaware County	Conducted By: SDS
PennDOT Engineering District: 6	Checked By: ACB
	Agency/Company Name: Pennoni
Intersection & Approach Description: King of Prussia Road SB at South Site Driveway	
Analysis Period: 2025 Build	Number of Approach Lanes: 1
Design Hour: PM Peak Hour	Undivided or Divided Highway: Undivided
Intersection Control: Unsignalized	Type of Analysis
Posted Speed Limit (MPH): 35	
Type of Terrain: Rolling	Left or Right-Turn Lane Analysis?: Left Turn Lane

VOLUME CALCULATIONS

Left Turn Lane Volume Calculations

Movement	Include?	Volume	% Trucks	PCEV	
Advancing	Left	Yes	2	0.0%	2
	Through	-	1425	0.0%	1425
	Right	Yes	0	0.0%	0
Opposing	Left	Yes	0	0.0%	0
	Through	-	419	1.0%	426
	Right	Yes	2	0.0%	2

Advancing Volume:	1427
Opposing Volume:	428
Left Turn Volume:	2

% Left Turns in Advancing Volume: 0.14%

Right Turn Lane Volume Calculations

Movement	Include?	Volume	% Trucks	PCEV	
Advancing	Left	Yes	2	0.0%	N/A
	Through	-	1425	0.0%	N/A
	Right	-	0	0.0%	N/A

Advancing Volume:	N/A
Right Turn Volume:	N/A

TURN LANE WARRANT FINDINGS

Left Turn Lane Warrant Findings

Applicable Warrant Figure: **Figure 1**

Warrant Met?: **No**

Right Turn Lane Warrant Findings

Applicable Warrant Figure: **N/A**

Warrant Met?: **N/A**

TURN LANE LENGTH CALCULATIONS

Intersection Control:	Unsignalized	Average # of Vehicles/Cycle:	N/A
Design Hour Volume of Turning Lane:	2		
Cycles Per Hour (Assumed):	60		
Cycles Per Hour (If Known):			

PennDOT Publication 46, Exhibit 11-6

Type of Traffic Control	Speed (MPH)					
	25-35		40-45		50-60	
	Turn Demand Volume					
	High	Low	High	Low	High	Low
Signalized	A	A	B or C	B or C	B or C	B or C
Unsignalized	A	A	C	B	B or C	B

Left Turn Lane Storage Length, Condition A: **N/A** Feet

Condition B: **N/A** Feet


Condition C: **N/A** Feet

Required Left Turn Lane Storage Length: **N/A** Feet

Additional Findings:
N/A

Additional Comments / Justifications:

Figure 1. Warrant for left turn lanes on two-lane roadways
 (speeds to 35 mph, unsignalized and signalized intersections)
 (L = % Left Turns in Advancing Volume)

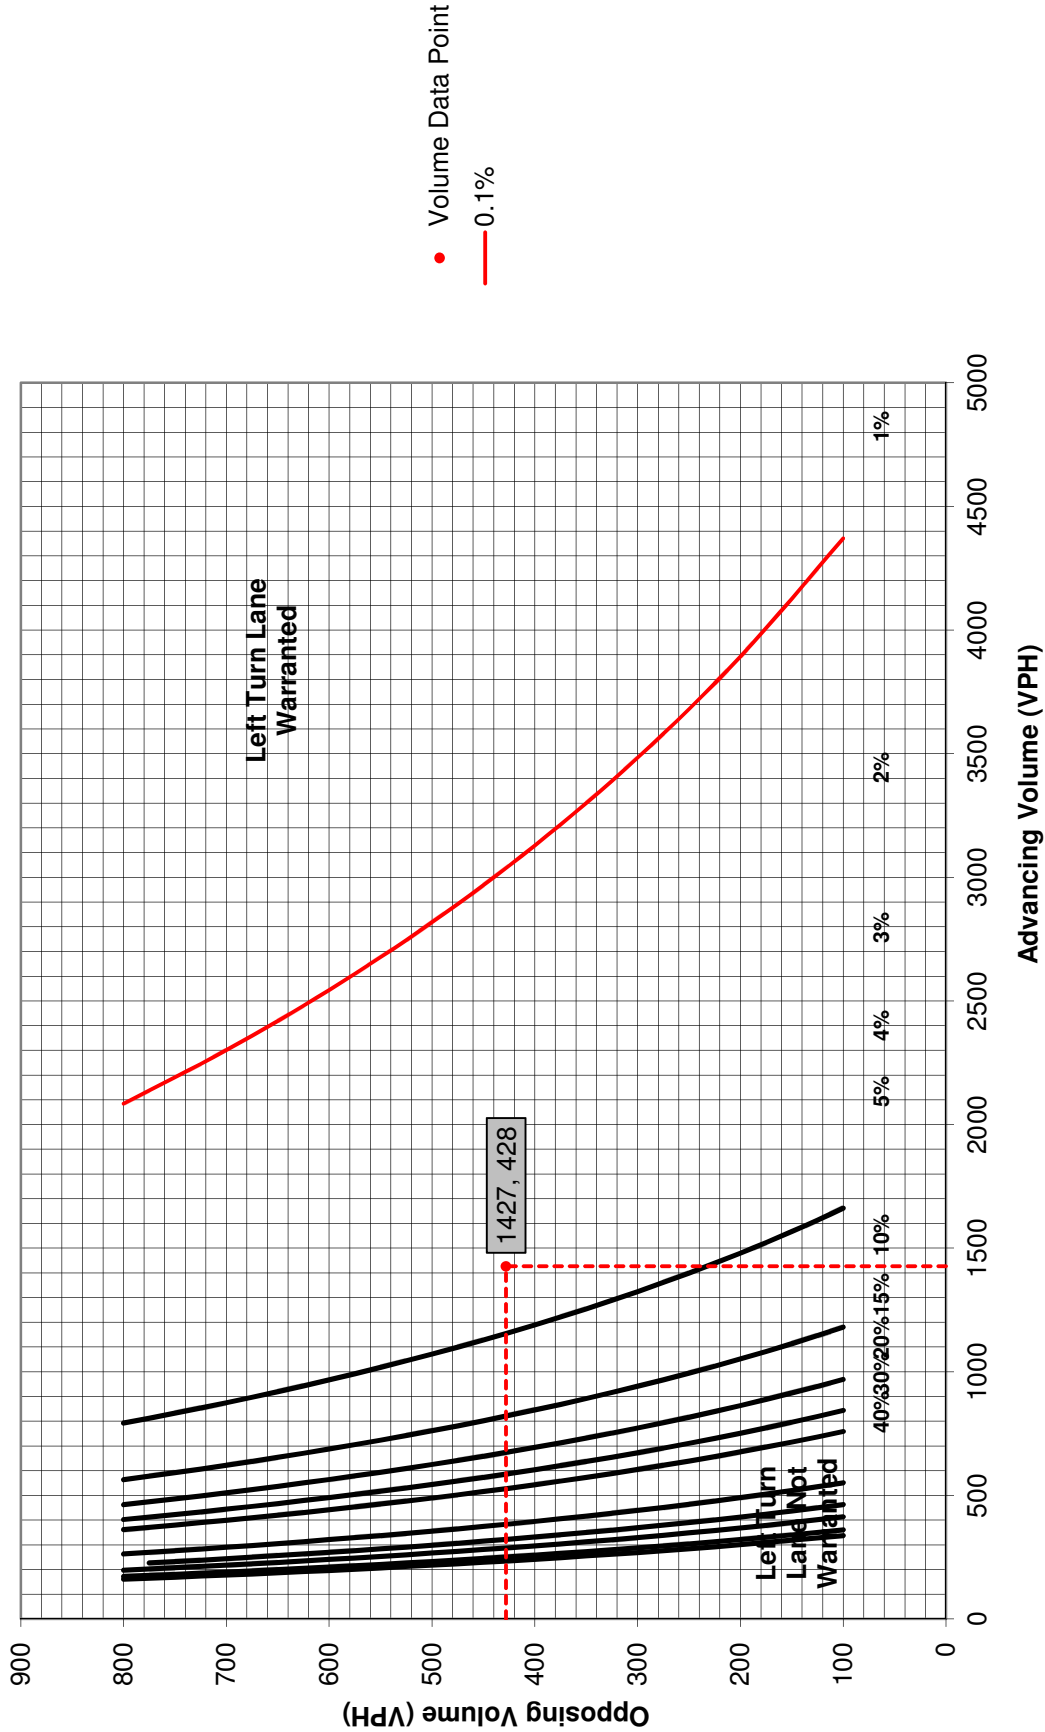

Turn Lane Warrant and Length Analysis Workbook

STUDY LOCATION AND ANALYSIS INFORMATION

Municipality:	Radnor Township	Analysis Date:	11/30/2016
County:	Delaware County	Conducted By:	SDS
PennDOT Engineering District:	6	Checked By:	ACB
Intersection & Approach Description:		Agency/Company Name:	
King of Prussia Road NB at South Site Driveway		Pennoni	
Analysis Period:	2025 Build	Number of Approach Lanes:	2
Design Hour:	AM Peak Hour	Undivided or Divided Highway:	Undivided
Intersection Control:	Unsignalized	Type of Analysis:	Right Turn Lane
Posted Speed Limit (MPH):	35	Left or Right-Turn Lane Analysis?:	Right Turn Lane
Type of Terrain:	Rolling		

VOLUME CALCULATIONS

Left Turn Lane Volume Calculations

Movement	Include?	Volume	% Trucks	PCEV	
Advancing	Left	Yes	0	0.0%	N/A
	Through	-	1611	1.0%	N/A
	Right	Yes	6	0.0%	N/A
Opposing	Left	Yes	6	0.0%	N/A
	Through	-	493	6.0%	N/A
	Right	Yes	0	0.0%	N/A

Advancing Volume:	N/A
Opposing Volume:	N/A
Left Turn Volume:	N/A
% Left Turns in Advancing Volume:	N/A

Right Turn Lane Volume Calculations

Movement	Include?	Volume	% Trucks	PCEV	
Advancing	Left	Yes	0	0.0%	0
	Through	-	1611	1.0%	1648
	Right	-	6	0.0%	6

Advancing Volume:	1654
Right Turn Volume:	6

TURN LANE WARRANT FINDINGS

Left Turn Lane Warrant Findings

Applicable Warrant Figure: N/A

Warrant Met?: N/A

Right Turn Lane Warrant Findings

Applicable Warrant Figure: Figure 11

Warrant Met?: No

TURN LANE LENGTH CALCULATIONS

Intersection Control:	Unsignalized		
Design Hour Volume of Turning Lane:	6	Average # of Vehicles/Cycle:	N/A
Cycles Per Hour (Assumed):	60		
Cycles Per Hour (If Known):			

PennDOT Publication 46, Exhibit 11-6

Type of Traffic Control	Speed (MPH)					
	25-35		40-45		50-60	
	Turn Demand Volume					
	High	Low	High	Low	High	Low
Signalized	A	A	B or C	B or C	B or C	B or C
Unsignalized	A	A	C	B	B or C	B


Right Turn Lane Storage Length, Condition A:	N/A	Feet
Condition B:	N/A	Feet
Condition C:	N/A	Feet
Required Right Turn Lane Storage Length:	N/A	Feet

Additional Findings:

N/A

Additional Comments / Justifications:

Figure 11. Warrant for right turn lanes on four-lane roadways (40 mph or lower speeds, unsignalized and signalized intersections)

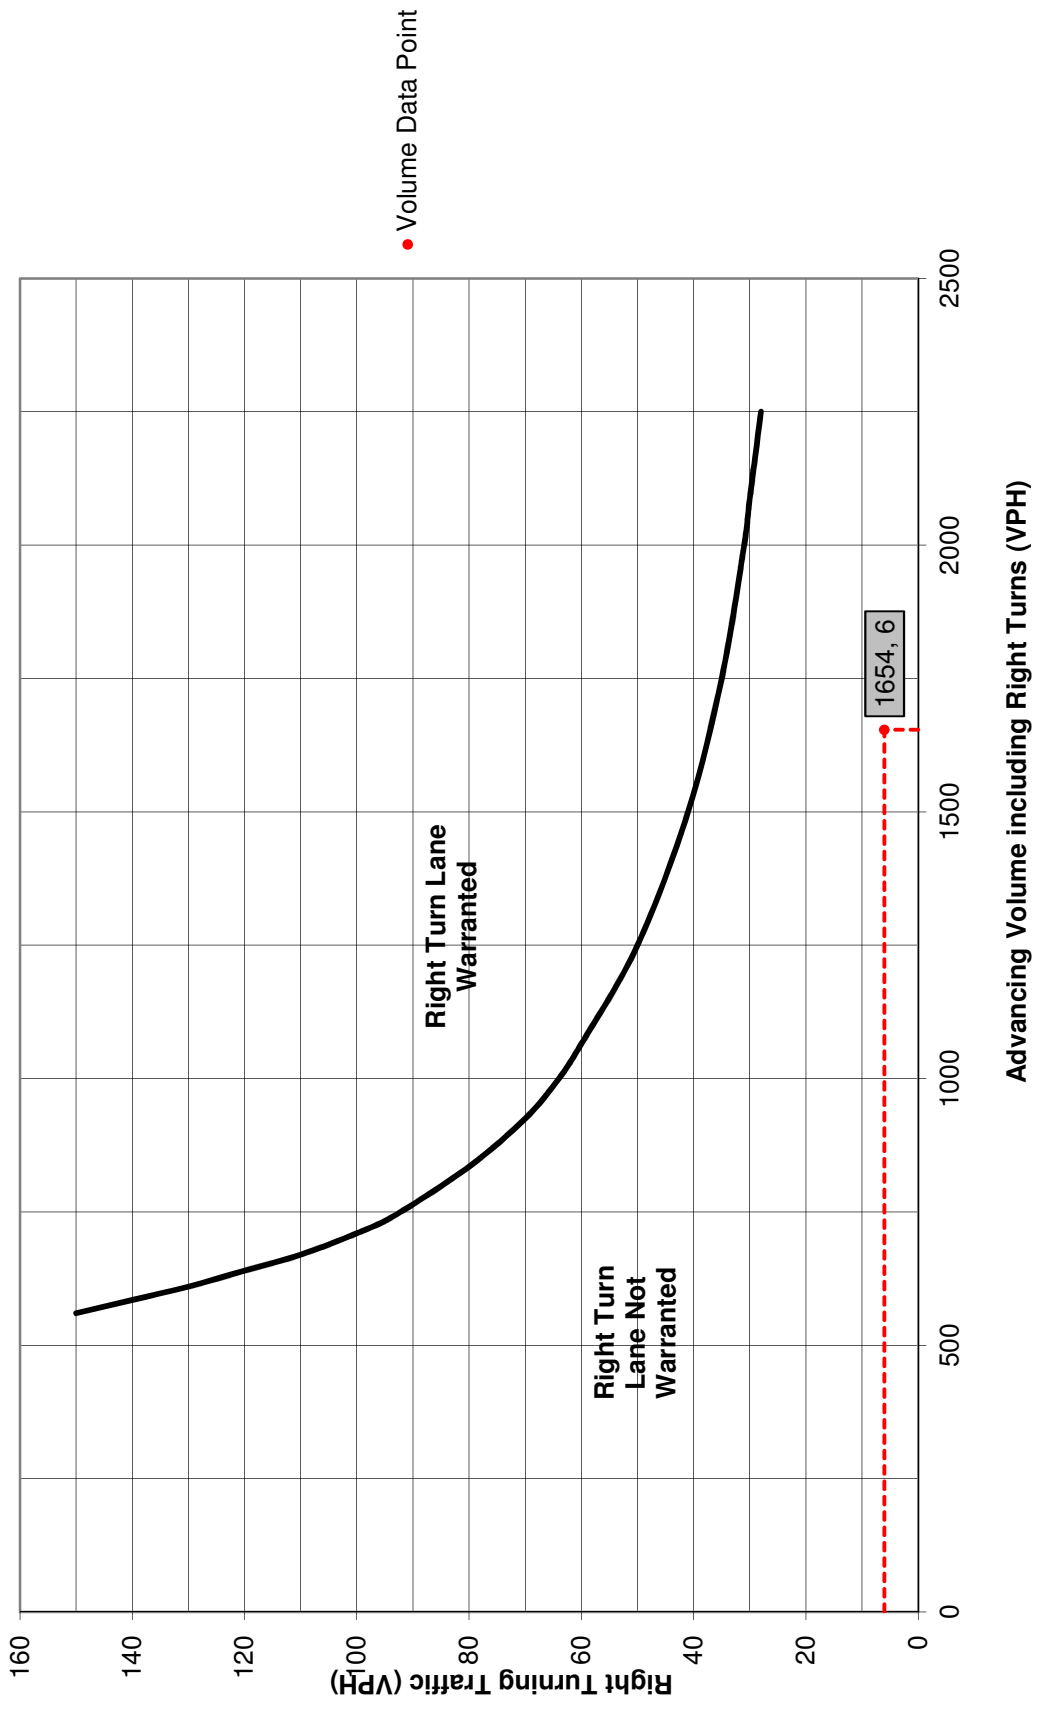

Turn Lane Warrant and Length Analysis Workbook

STUDY LOCATION AND ANALYSIS INFORMATION

Municipality: Radnor Township	Analysis Date: 11/30/2016
County: Delaware County	Conducted By: SDS
PennDOT Engineering District: 6	Checked By: ACB
	Agency/Company Name: Pennoni
Intersection & Approach Description: King of Prussia Road NB at South Site Driveway	
Analysis Period: 2020 Build	Number of Approach Lanes: 2
Design Hour: PM Peak Hour	Undivided or Divided Highway: Undivided
Intersection Control: Unsignalized	
Posted Speed Limit (MPH): 35	Type of Analysis
Type of Terrain: Rolling	Left or Right-Turn Lane Analysis?: Right Turn Lane

VOLUME CALCULATIONS

Left Turn Lane Volume Calculations

Movement		Include?	Volume	% Trucks	PCEV
Advancing	Left	Yes	0	0.0%	N/A
	Through	-	419	1.0%	N/A
	Right	Yes	2	0.0%	N/A
Opposing	Left	Yes	2	0.0%	N/A
	Through	-	1425	0.0%	N/A
	Right	Yes	0	0.0%	N/A

Advancing Volume:	N/A
Opposing Volume:	N/A
Left Turn Volume:	N/A

% Left Turns in Advancing Volume:	N/A
-----------------------------------	-----

Right Turn Lane Volume Calculations

Movement		Include?	Volume	% Trucks	PCEV
Advancing	Left	Yes	0	0.0%	0
	Through	-	419	1.0%	426
	Right	-	2	0.0%	2

Advancing Volume:	428
Right Turn Volume:	2

TURN LANE WARRANT FINDINGS

Left Turn Lane Warrant Findings

Applicable Warrant Figure:	N/A
Warrant Met?:	N/A

Right Turn Lane Warrant Findings

Applicable Warrant Figure:	Figure 11
Warrant Met?:	No

TURN LANE LENGTH CALCULATIONS

Intersection Control:	Unsignalized	Average # of Vehicles/Cycle:	N/A
Design Hour Volume of Turning Lane:	2		
Cycles Per Hour (Assumed):	60		
Cycles Per Hour (If Known):			

PennDOT Publication 46, Exhibit 11-6

Type of Traffic Control	Speed (MPH)					
	25-35		40-45		50-60	
	Turn Demand Volume					
	High	Low	High	Low	High	Low
Signalized	A	A	B or C	B or C	B or C	B or C
Unsignalized	A	A	C	B	B or C	B


Right Turn Lane Storage Length, Condition A:	N/A	Feet
Condition B:	N/A	Feet
Condition C:	N/A	Feet
Required Right Turn Lane Storage Length:	N/A	Feet

Additional Findings:

N/A

Additional Comments / Justifications:

Figure 11. Warrant for right turn lanes on four-lane roadways (40 mph or lower speeds, unsignalized and signalized intersections)

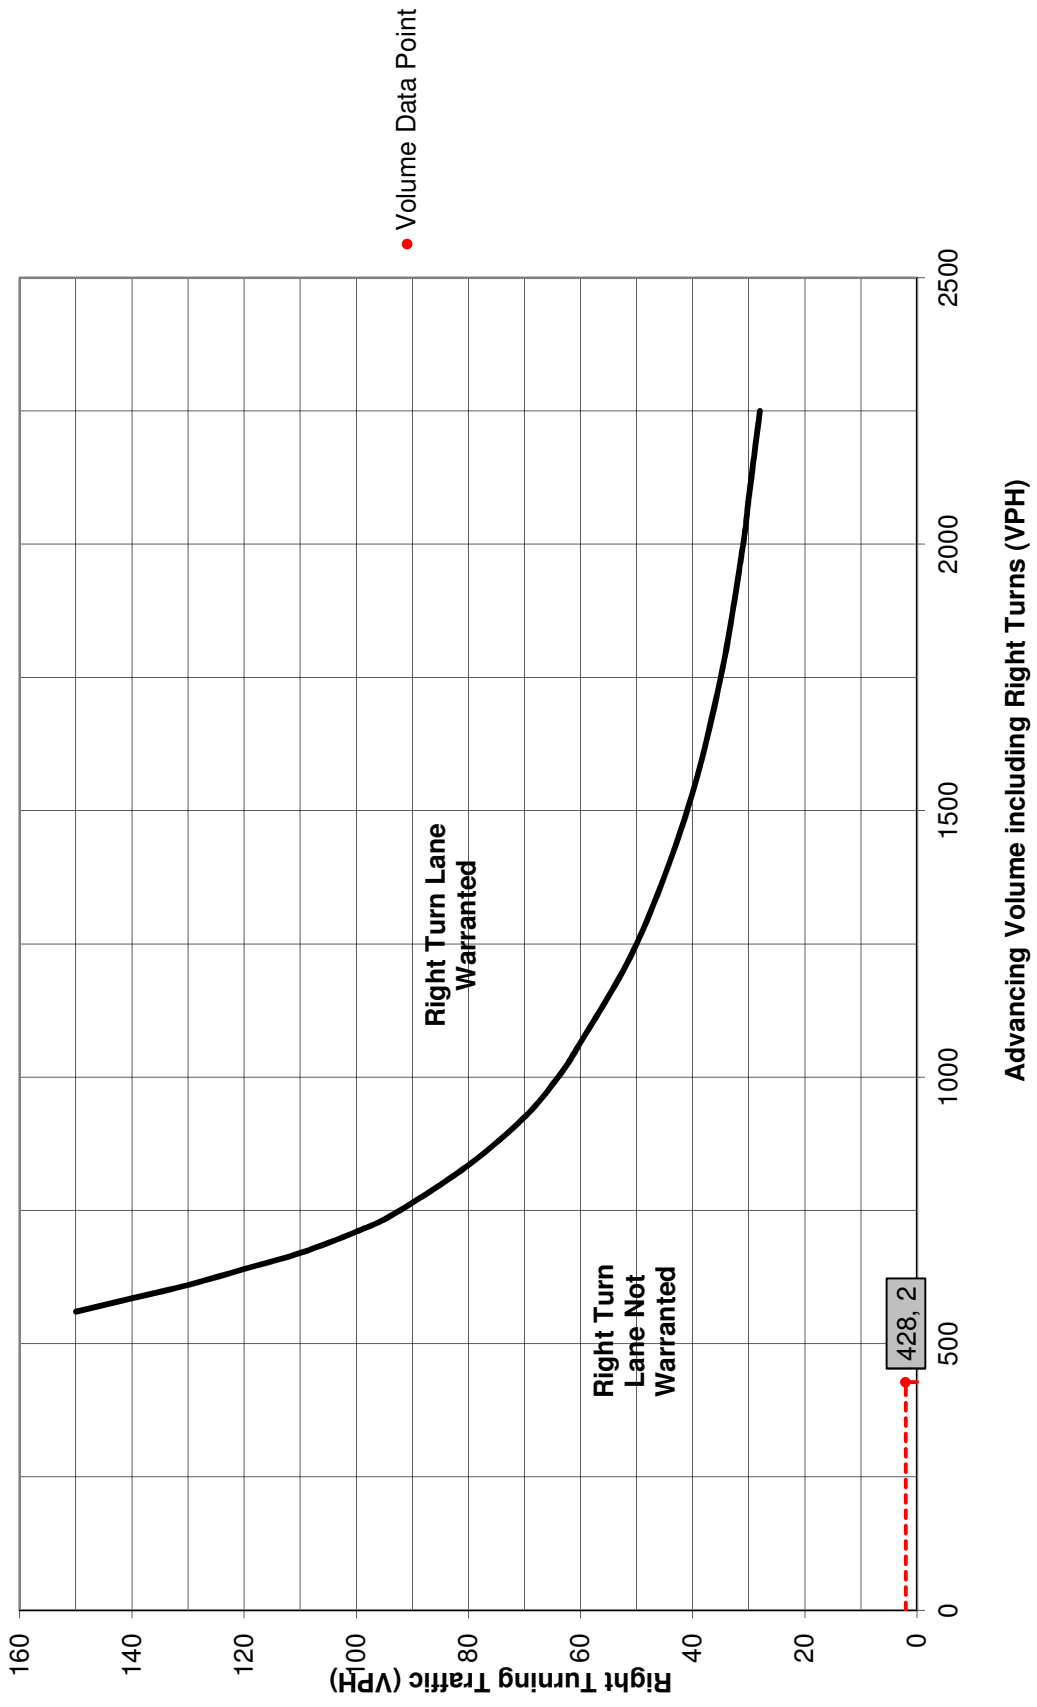

APPENDIX I

2020 and 2025 Build Condition without Improvements

Capacity Analysis Worksheets

TRAFFIC IMPACT STUDY

MIXED MEDICAL FACILITY

145 KING OF PRUSSIA ROAD






















RADNOR TOWNSHIP

DELAWARE COUNTY, PA

UPHS1507


HCM 2010 Signalized Intersection Summary
1: King of Prussia Rd & Parking Drive/Matsonford Rd

01/16/2018

												
Movement	EBL	EBT	EBR	WBL	WBT	WBR	SEL	SET	SER	NWL	NWT	NWR
Lane Configurations												
Traffic Volume (veh/h)	1	0	2	314	7	102	368	629	2	12	626	599
Future Volume (veh/h)	1	0	2	314	7	102	368	629	2	12	626	599
Number	3	8	18	7	4	14	5	2	12	1	6	16
Initial Q (Qb), veh	0	0	0	0	0	0	0	0	0	0	0	0
Ped-Bike Adj(A_pbT)	1.00		1.00	1.00		1.00	1.00		1.00	1.00		1.00
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Adj Sat Flow, veh/h/ln	1800	1800	1800	1748	1744	1891	1721	1826	1844	1782	1764	1817
Adj Flow Rate, veh/h	1	0	2	349	8	113	409	699	2	13	696	0
Adj No. of Lanes	1	1	0	1	1	0	1	1	0	1	1	1
Peak Hour Factor	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90
Percent Heavy Veh, %	0	0	0	4	0	0	3	1	1	0	1	2
Cap, veh/h	333	0	391	437	25	357	390	1152	3	371	686	601
Arrive On Green	0.26	0.00	0.26	0.26	0.26	0.26	0.19	0.63	0.63	0.39	0.39	0.00
Sat Flow, veh/h	1291	0	1530	1396	99	1398	1639	1820	5	749	1764	1544
Grp Volume(v), veh/h	1	0	2	349	0	121	409	0	701	13	696	0
Grp Sat Flow(s),veh/h/ln	1291	0	1530	1396	0	1497	1639	0	1825	749	1764	1544
Q Serve(g_s), s	0.1	0.0	0.1	22.3	0.0	5.9	17.0	0.0	20.6	1.0	35.0	0.0
Cycle Q Clear(g_c), s	5.4	0.0	0.1	22.3	0.0	5.9	17.0	0.0	20.6	1.0	35.0	0.0
Prop In Lane	1.00		1.00	1.00		0.93	1.00		0.00	1.00		1.00
Lane Grp Cap(c), veh/h	333	0	391	437	0	383	390	0	1156	371	686	601
V/C Ratio(X)	0.00	0.00	0.01	0.80	0.00	0.32	1.05	0.00	0.61	0.04	1.01	0.00
Avail Cap(c_a), veh/h	333	0	391	437	0	383	390	0	1156	371	686	601
HCM Platoon Ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(I)	1.00	0.00	1.00	1.00	0.00	1.00	1.00	0.00	1.00	1.00	1.00	0.00
Uniform Delay (d), s/veh	29.1	0.0	25.0	33.3	0.0	27.1	27.5	0.0	9.8	17.1	27.5	0.0
Incr Delay (d2), s/veh	0.0	0.0	0.0	10.1	0.0	0.5	59.2	0.0	2.4	0.2	38.0	0.0
Initial Q Delay(d3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
%ile BackOfQ(95%),veh/ln	0.0	0.0	0.1	15.0	0.0	4.4	28.9	0.0	16.3	0.4	43.6	0.0
LnGrp Delay(d),s/veh	29.1	0.0	25.0	43.4	0.0	27.6	86.7	0.0	12.2	17.3	65.5	0.0
LnGrp LOS	C		C	D		C	F		B	B	F	
Approach Vol, veh/h		3			470			1110			709	
Approach Delay, s/veh		26.4			39.3			39.6			64.6	
Approach LOS		C			D			D			E	
Timer	1	2	3	4	5	6	7	8				
Assigned Phs		2		4	5	6		8				
Phs Duration (G+Y+Rc), s		62.0		28.0	22.0	40.0		28.0				
Change Period (Y+Rc), s		6.0		6.0	6.0	6.0		6.0				
Max Green Setting (Gmax), s		56.0		22.0	16.0	34.0		22.0				
Max Q Clear Time (g_c+I1), s		22.6		24.8	19.5	37.5		7.9				
Green Ext Time (p_c), s		12.3		0.0	0.0	0.0		1.5				
Intersection Summary												
HCM 2010 Ctrl Delay			47.3									
HCM 2010 LOS			D									

HCM 2010 Signalized Intersection Summary
2: Radnor Chester Rd & King of Prussia Rd

01/16/2018



Movement	EBL	EBT	EBR	WBL	WBT	WBR	NEL	NET	NER	SWL	SWT	SWR
Lane Configurations												
Traffic Volume (veh/h)	38	396	467	28	837	7	502	32	58	2	1	6
Future Volume (veh/h)	38	396	467	28	837	7	502	32	58	2	1	6
Number	5	2	12	1	6	16	7	4	14	3	8	18
Initial Q (Qb), veh	0	0	0	0	0	0	0	0	0	0	0	0
Ped-Bike Adj(A_pbT)	1.00		1.00	1.00		1.00	1.00		0.97	1.00		0.97
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Adj Sat Flow, veh/h/ln	1800	1714	1817	1717	1816	1854	1782	1629	1835	1809	1628	1809
Adj Flow Rate, veh/h	40	421	0	30	890	7	534	34	62	2	1	6
Adj No. of Lanes	1	1	1	1	1	0	0	1	1	0	1	0
Peak Hour Factor	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94
Percent Heavy Veh, %	0	5	3	8	2	2	0	0	1	0	0	0
Cap, veh/h	90	857	772	395	900	7	226	9	574	49	37	73
Arrive On Green	0.50	0.50	0.00	0.50	0.50	0.50	0.38	0.38	0.38	0.38	0.38	0.38
Sat Flow, veh/h	630	1714	1545	935	1799	14	393	25	1520	0	97	194
Grp Volume(v), veh/h	40	421	0	30	0	897	568	0	62	9	0	0
Grp Sat Flow(s),veh/h/ln	630	1714	1545	935	0	1813	418	0	1520	290	0	0
Q Serve(g_s), s	1.5	14.6	0.0	2.0	0.0	44.0	0.0	0.0	2.4	0.0	0.0	0.0
Cycle Q Clear(g_c), s	45.0	14.6	0.0	16.6	0.0	44.0	34.0	0.0	2.4	34.0	0.0	0.0
Prop In Lane	1.00		1.00	1.00		0.01	0.94		1.00	0.22		0.67
Lane Grp Cap(c), veh/h	90	857	772	395	0	907	236	0	574	159	0	0
V/C Ratio(X)	0.44	0.49	0.00	0.08	0.00	0.99	2.41	0.00	0.11	0.06	0.00	0.00
Avail Cap(c_a), veh/h	90	857	772	395	0	907	236	0	574	159	0	0
HCM Platoon Ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(I)	0.58	0.58	0.00	1.00	0.00	1.00	1.00	0.00	1.00	1.00	0.00	0.00
Uniform Delay (d), s/veh	44.8	14.9	0.0	20.4	0.0	22.3	33.6	0.0	18.2	21.6	0.0	0.0
Incr Delay (d2), s/veh	8.9	1.2	0.0	0.4	0.0	27.4	648.0	0.0	0.1	0.1	0.0	0.0
Initial Q Delay(d3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
%ile BackOfQ(95%),veh/ln	2.2	10.5	0.0	1.0	0.0	37.6	86.8	0.0	1.8	0.3	0.0	0.0
LnGrp Delay(d),s/veh	53.7	16.1	0.0	20.8	0.0	49.7	681.6	0.0	18.2	21.8	0.0	0.0
LnGrp LOS	D	B		C		D	F		B	C		
Approach Vol, veh/h		461			927			630			9	
Approach Delay, s/veh		19.3			48.7			616.3			21.8	
Approach LOS		B			D			F			C	
Timer	1	2	3	4	5	6	7	8				
Assigned Phs		2		4		6		8				
Phs Duration (G+Y+Rc), s		50.0		40.0		50.0		40.0				
Change Period (Y+Rc), s		6.0		7.0		6.0		7.0				
Max Green Setting (Gmax), s		44.0		33.0		44.0		33.0				
Max Q Clear Time (g_c+I1), s		47.5		36.0		46.0		36.0				
Green Ext Time (p_c), s		0.0		0.0		0.0		0.0				
Intersection Summary												
HCM 2010 Ctrl Delay			218.3									
HCM 2010 LOS			F									

HCM 2010 TWSC
 3: King of Prussia Rd & Septa Driveway

01/16/2018

Intersection

Int Delay, s/veh 3

Movement	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations						
Traffic Vol, veh/h	20	42	970	115	147	303
Future Vol, veh/h	20	42	970	115	147	303
Conflicting Peds, #/hr	2	10	0	17	17	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	None	-	None	-	None
Storage Length	0	-	-	-	100	-
Veh in Median Storage, #	0	-	0	-	-	0
Grade, %	0	-	0	-	-	0
Peak Hour Factor	87	87	87	87	87	87
Heavy Vehicles, %	0	42	2	0	22	5
Mvmt Flow	23	48	1115	132	169	348

Major/Minor

	Minor1	Major1	Major2		
Conflicting Flow All	1886	1208	0	0	1264
Stage 1	1198	-	-	-	-
Stage 2	688	-	-	-	-
Critical Hdwy	6.4	6.62	-	-	4.32
Critical Hdwy Stg 1	5.4	-	-	-	-
Critical Hdwy Stg 2	5.4	-	-	-	-
Follow-up Hdwy	3.5	3.678	-	-	2.398
Pot Cap-1 Maneuver	79	185	-	-	487
Stage 1	289	-	-	-	-
Stage 2	503	-	-	-	-
Platoon blocked, %			-	-	-
Mov Cap-1 Maneuver	51	181	-	-	483
Mov Cap-2 Maneuver	162	-	-	-	-
Stage 1	285	-	-	-	-
Stage 2	326	-	-	-	-

Approach

	WB	NB	SB
HCM Control Delay, s	39.3	0	5.4
HCM LOS	E		

Minor Lane/Major Mvmt

	NBT	NBRWBLn1	SBL	SBT
Capacity (veh/h)	-	-	174	483
HCM Lane V/C Ratio	-	-	0.41	0.35
HCM Control Delay (s)	-	-	39.3	16.4
HCM Lane LOS	-	-	E	C
HCM 95th %tile Q(veh)	-	-	1.8	1.6

HCM 2010 TWSC
5: King of Prussia Rd & Raider Rd

01/16/2018

Intersection												
Int Delay, s/veh	282.8											
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		↕		↕	↕			↕			↕	
Traffic Vol, veh/h	9	0	130	99	0	22	173	1052	369	52	264	58
Future Vol, veh/h	9	0	130	99	0	22	173	1052	369	52	264	58
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	8	8	0	0
Sign Control	Stop	Stop	Stop	Stop	Stop	Stop	Free	Free	Free	Free	Free	Free
RT Channelized	-	-	None	-	-	None	-	-	None	-	-	None
Storage Length	-	-	-	0	-	-	-	-	-	-	-	-
Veh in Median Storage, #	-	0	-	-	0	-	-	0	-	-	0	-
Grade, %	-	0	-	-	0	-	-	0	-	-	0	-
Peak Hour Factor	78	78	78	78	78	78	78	78	78	78	78	78
Heavy Vehicles, %	11	0	4	0	0	0	0	2	0	0	10	0
Mvmt Flow	12	0	167	127	0	28	222	1349	473	67	338	74

Major/Minor	Minor2		Minor1		Major1			Major2				
Conflicting Flow All	2552	2782	376	2629	2583	1593	413	0	0	1830	0	0
Stage 1	509	509	-	2037	2037	-	-	-	-	-	-	-
Stage 2	2043	2273	-	592	546	-	-	-	-	-	-	-
Critical Hdwy	7.21	6.5	6.24	7.1	6.5	6.2	4.1	-	-	4.1	-	-
Critical Hdwy Stg 1	6.21	5.5	-	6.1	5.5	-	-	-	-	-	-	-
Critical Hdwy Stg 2	6.21	5.5	-	6.1	5.5	-	-	-	-	-	-	-
Follow-up Hdwy	3.599	4	3.336	3.5	4	3.3	2.2	-	-	2.2	-	-
Pot Cap-1 Maneuver	17	19	666	~ 16	26	133	1157	-	-	338	-	-
Stage 1	530	541	-	~ 75	101	-	-	-	-	-	-	-
Stage 2	69	77	-	496	521	-	-	-	-	-	-	-
Platoon blocked, %								-	-	-	-	-
Mov Cap-1 Maneuver	~ 11	14	666	~ 10	19	132	1157	-	-	338	-	-
Mov Cap-2 Maneuver	~ 11	14	-	~ 10	19	-	-	-	-	-	-	-
Stage 1	530	400	-	~ 75	100	-	-	-	-	-	-	-
Stage 2	54	76	-	275	386	-	-	-	-	-	-	-

Approach	EB	WB	NB	SB
HCM Control Delay, s	240.2	\$ 4909.7	1	2.5
HCM LOS	F	F		

Minor Lane/Major Mvmt	NBL	NBT	NBR	EBLn1	WBLn1	WBLn2	SBL	SBT	SBR
Capacity (veh/h)	1157	-	-	137	10	132	338	-	-
HCM Lane V/C Ratio	0.192	-	-	1.301	12.692	0.214	0.197	-	-
HCM Control Delay (s)	8.8	0	-	240.2	\$ 5992	39.5	18.2	0	-
HCM Lane LOS	A	A	-	F	F	E	C	A	-
HCM 95th %tile Q(veh)	0.7	-	-	11.1	17.4	0.8	0.7	-	-

Notes
 ~: Volume exceeds capacity \$: Delay exceeds 300s +: Computation Not Defined *: All major volume in platoon

Intersection						
Int Delay, s/veh	0.2					
Movement	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations	↘↙		↑	↗↘	↘	↑
Traffic Vol, veh/h	2	2	1588	6	6	486
Future Vol, veh/h	2	2	1588	6	6	486
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	None	-	None	-	None
Storage Length	0	-	-	0	100	-
Veh in Median Storage, #	0	-	0	-	-	0
Grade, %	0	-	0	-	-	0
Peak Hour Factor	83	83	83	83	83	83
Heavy Vehicles, %	0	0	2	0	0	8
Mvmt Flow	2	2	1913	7	7	586

Major/Minor	Minor1	Major1	Major2		
Conflicting Flow All	2513	1913	0	0	1913
Stage 1	1913	-	-	-	-
Stage 2	600	-	-	-	-
Critical Hdwy	6.4	6.2	-	-	4.1
Critical Hdwy Stg 1	5.4	-	-	-	-
Critical Hdwy Stg 2	5.4	-	-	-	-
Follow-up Hdwy	3.5	3.3	-	-	2.2
Pot Cap-1 Maneuver	32	86	-	-	314
Stage 1	129	-	-	-	-
Stage 2	552	-	-	-	-
Platoon blocked, %			-	-	-
Mov Cap-1 Maneuver	31	86	-	-	314
Mov Cap-2 Maneuver	31	-	-	-	-
Stage 1	129	-	-	-	-
Stage 2	540	-	-	-	-

Approach	WB	NB	SB
HCM Control Delay, s	92.2	0	0.2
HCM LOS	F		

Minor Lane/Major Mvmt	NBT	NBRWBLn1	SBL	SBT
Capacity (veh/h)	-	-	46	314
HCM Lane V/C Ratio	-	-	0.105	0.023
HCM Control Delay (s)	-	-	92.2	16.7
HCM Lane LOS	-	-	F	C
HCM 95th %tile Q(veh)	-	-	0.3	0.1


HCM 2010 Signalized Intersection Summary
 7: I-476 Off Ramp/King of Prussia Rd & Lancaster Ave

01/16/2018

Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (veh/h)	373	1281	0	0	534	374	759	827	337	316	0	160
Future Volume (veh/h)	373	1281	0	0	534	374	759	827	337	316	0	160
Number	5	2	12	1	6	16	3	8	18	7	4	14
Initial Q (Qb), veh	0	0	0	0	0	0	0	0	0	0	0	0
Ped-Bike Adj(A_pbT)	1.00		1.00	1.00		1.00	1.00		1.00	1.00		1.00
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Adj Sat Flow, veh/h/ln	1791	1756	0	0	1800	1854	1764	1764	1764	1665	0	1748
Adj Flow Rate, veh/h	385	1321	0	0	551	0	782	853	347	326	0	165
Adj No. of Lanes	2	2	0	0	2	1	2	1	1	2	0	1
Peak Hour Factor	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97
Percent Heavy Veh, %	0	2	0	0	1	2	1	1	1	7	0	6
Cap, veh/h	451	1334	0	0	746	344	1660	690	586	362	0	0
Arrive On Green	0.09	0.27	0.00	0.00	0.07	0.00	0.51	0.39	0.39	0.07	0.00	0.01
Sat Flow, veh/h	3309	3424	0	0	3510	1576	3260	1764	1500	3077	326	
Grp Volume(v), veh/h	385	1321	0	0	551	0	782	853	347	326	75.9	
Grp Sat Flow(s),veh/h/ln	1655	1668	0	0	1710	1576	1630	1764	1500	1539	E	
Q Serve(g_s), s	12.6	43.4	0.0	0.0	17.4	0.0	17.0	43.0	20.2	8.0		
Cycle Q Clear(g_c), s	12.6	43.4	0.0	0.0	17.4	0.0	17.0	43.0	20.2	8.0		
Prop In Lane	1.00		0.00	0.00		1.00	1.00		1.00	1.00		
Lane Grp Cap(c), veh/h	451	1334	0	0	746	344	1660	690	586	362		
V/C Ratio(X)	0.85	0.99	0.00	0.00	0.74	0.00	0.47	1.24	0.59	0.90		
Avail Cap(c_a), veh/h	451	1334	0	0	746	344	1660	690	586	362		
HCM Platoon Ratio	0.67	0.67	1.00	1.00	0.33	0.33	1.00	1.00	1.00	1.00		
Upstream Filter(I)	0.88	0.88	0.00	0.00	0.91	0.00	1.00	1.00	1.00	1.00		
Uniform Delay (d), s/veh	48.9	40.0	0.0	0.0	48.0	0.0	17.4	33.5	26.5	51.6		
Incr Delay (d2), s/veh	13.1	20.8	0.0	0.0	5.9	0.0	0.2	118.8	1.6	24.3		
Initial Q Delay(d3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
%ile BackOfQ(95%),veh/ln	10.5	31.4	0.0	0.0	13.5	0.0	12.2	78.5	13.3	5.0		
LnGrp Delay(d),s/veh	62.0	60.9	0.0	0.0	53.9	0.0	17.6	152.3	28.1	75.9		
LnGrp LOS	E	E			D		B	F	C	E		
Approach Vol, veh/h		1706			551			1982				
Approach Delay, s/veh		61.1			53.9			77.4				
Approach LOS		E			D			E				
Timer	1	2	3	4	5	6	7	8				
Assigned Phs		2	3		5	6	7	8				
Phs Duration (G+Y+Rc), s		49.0	61.0		20.0	29.0	13.0	48.0				
Change Period (Y+Rc), s		6.0	6.0		6.0	6.0	6.0	6.0				
Max Green Setting (Gmax), s		43.0	42.0		14.0	23.0	7.0	42.0				
Max Q Clear Time (g_c+I1), s		45.9	19.5		15.1	19.9	10.5	45.5				
Green Ext Time (p_c), s		0.0	3.0		0.0	2.7	0.0	0.0				
Intersection Summary												
HCM 2010 Ctrl Delay			68.4									
HCM 2010 LOS			E									

HCM 2010 Signalized Intersection Summary
 8: I-476 SB Off Ramp & Lancaster Ave

01/16/2018



Movement	EBT	EBR	WBL	WBT	NBL	NBR		
Lane Configurations	↑↑↑		↵↵	↑↑	↵↵	↵		
Traffic Volume (veh/h)	851	0	186	1224	792	839		
Future Volume (veh/h)	851	0	186	1224	792	839		
Number	4	14	3	8	5	12		
Initial Q (Qb), veh	0	0	0	0	0	0		
Ped-Bike Adj(A_pbT)		1.00	1.00		1.00	1.00		
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00		
Adj Sat Flow, veh/h/ln	1730	0	1715	1782	1800	1785		
Adj Flow Rate, veh/h	868	0	190	1249	808	0		
Adj No. of Lanes	3	0	2	2	2	1		
Peak Hour Factor	0.98	0.98	0.98	0.98	0.98	0.98		
Percent Heavy Veh, %	3	0	6	2	2	7		
Cap, veh/h	2288	0	290	2104	957	436		
Arrive On Green	0.48	0.00	0.03	0.21	0.29	0.00		
Sat Flow, veh/h	5035	0	3169	3476	3326	1517		
Grp Volume(v), veh/h	868	0	190	1249	808	0		
Grp Sat Flow(s),veh/h/ln	1574	0	1584	1693	1663	1517		
Q Serve(g_s), s	12.8	0.0	6.5	36.7	25.1	0.0		
Cycle Q Clear(g_c), s	12.8	0.0	6.5	36.7	25.1	0.0		
Prop In Lane		0.00	1.00		1.00	1.00		
Lane Grp Cap(c), veh/h	2288	0	290	2104	957	436		
V/C Ratio(X)	0.38	0.00	0.66	0.59	0.84	0.00		
Avail Cap(c_a), veh/h	2288	0	317	2104	1421	648		
HCM Platoon Ratio	1.00	1.00	0.33	0.33	1.00	1.00		
Upstream Filter(I)	1.00	0.00	0.63	0.63	1.00	0.00		
Uniform Delay (d), s/veh	17.9	0.0	51.6	31.1	36.9	0.0		
Incr Delay (d2), s/veh	0.5	0.0	2.7	0.8	3.2	0.0		
Initial Q Delay(d3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0		
%ile BackOfQ(95%),veh/ln	9.5	0.0	5.2	22.9	17.7	0.0		
LnGrp Delay(d),s/veh	18.4	0.0	54.4	31.9	40.0	0.0		
LnGrp LOS	B		D	C	D			
Approach Vol, veh/h	868			1439	808			
Approach Delay, s/veh	18.4			34.9	40.0			
Approach LOS	B			C	D			
Timer	1	2	3	4	5	6	7	8
Assigned Phs		2	3	4				8
Phs Duration (G+Y+Rc), s		36.6	15.1	58.3				73.4
Change Period (Y+Rc), s		6.0	6.0	6.0				6.0
Max Green Setting (Gmax), s		46.0	10.0	36.0				52.0
Max Q Clear Time (g_c+I1), s		27.6	9.0	15.3				39.2
Green Ext Time (p_c), s		3.0	0.1	14.8				10.1
Intersection Summary								
HCM 2010 Ctrl Delay			31.6					
HCM 2010 LOS			C					

HCM 2010 Signalized Intersection Summary

9: Hillside Circuit & Lancaster Ave

01/16/2018



Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (veh/h)	574	1566	4	2	881	485	6	2	2	0	0	0
Future Volume (veh/h)	574	1566	4	2	881	485	6	2	2	0	0	0
Number	5	2	12	1	6	16	3	8	18			
Initial Q (Qb), veh	0	0	0	0	0	0	0	0	0			
Ped-Bike Adj(A_pbT)	1.00		1.00	1.00		1.00	1.00		0.88			
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00			
Adj Sat Flow, veh/h/ln	1782	1748	1800	1800	1765	1835	1800	1800	1800			
Adj Flow Rate, veh/h	598	1631	4	2	918	0	6	2	2			
Adj No. of Lanes	2	2	0	1	2	1	0	1	1			
Peak Hour Factor	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96			
Percent Heavy Veh, %	1	3	3	0	2	2	0	0	0			
Cap, veh/h	696	2843	7	18	2133	992	21	7	22			
Arrive On Green	0.42	1.00	1.00	0.01	0.64	0.00	0.02	0.02	0.02			
Sat Flow, veh/h	3293	3398	8	1714	3353	1560	1301	434	1345			
Grp Volume(v), veh/h	598	797	838	2	918	0	8	0	2			
Grp Sat Flow(s),veh/h/ln	1646	1660	1746	1714	1676	1560	1735	0	1345			
Q Serve(g_s), s	18.1	0.0	0.0	0.1	15.1	0.0	0.5	0.0	0.2			
Cycle Q Clear(g_c), s	18.1	0.0	0.0	0.1	15.1	0.0	0.5	0.0	0.2			
Prop In Lane	1.00		0.00	1.00		1.00	0.75		1.00			
Lane Grp Cap(c), veh/h	696	1389	1461	18	2133	992	28	0	22			
V/C Ratio(X)	0.86	0.57	0.57	0.11	0.43	0.00	0.28	0.00	0.09			
Avail Cap(c_a), veh/h	928	1389	1461	109	2133	992	110	0	86			
HCM Platoon Ratio	2.00	2.00	2.00	1.00	1.00	1.00	1.00	1.00	1.00			
Upstream Filter(I)	0.09	0.09	0.09	1.00	1.00	0.00	1.00	0.00	1.00			
Uniform Delay (d), s/veh	30.3	0.0	0.0	53.9	10.0	0.0	53.5	0.0	53.3			
Incr Delay (d2), s/veh	0.7	0.2	0.2	2.6	0.6	0.0	5.4	0.0	1.8			
Initial Q Delay(d3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
%ile BackOfQ(95%),veh/ln	9.6	0.1	0.1	0.1	11.4	0.0	0.5	0.0	0.1			
LnGrp Delay(d),s/veh	30.9	0.2	0.2	56.5	10.7	0.0	58.8	0.0	55.1			
LnGrp LOS	C	A	A	E	B		E		E			
Approach Vol, veh/h		2233			920			10				
Approach Delay, s/veh		8.4			10.8			58.1				
Approach LOS		A			B			E				
Timer	1	2	3	4	5	6	7	8				
Assigned Phs	1	2			5	6		8				
Phs Duration (G+Y+Rc), s	6.2	97.0			28.2	75.0		6.8				
Change Period (Y+Rc), s	6.0	6.0			6.0	6.0		6.0				
Max Green Setting (Gmax), s	6.0	80.0			30.0	56.0		6.0				
Max Q Clear Time (g_c+1), s	6.0	2.5			20.6	17.6		2.7				
Green Ext Time (p_c), s	0.0	42.2			1.6	27.5		0.0				
Intersection Summary												
HCM 2010 Ctrl Delay			9.2									
HCM 2010 LOS			A									
Notes												

HCM 2010 Signalized Intersection Summary

10: Radnor Chester Rd






















01/16/2018



Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (veh/h)	139	989	53	212	1479	438	92	373	83	96	132	107
Future Volume (veh/h)	139	989	53	212	1479	438	92	373	83	96	132	107
Number	5	2	12	1	6	16	3	8	18	7	4	14
Initial Q (Qb), veh	0	0	0	0	0	0	0	0	0	0	0	0
Ped-Bike Adj(A_pbT)	1.00		1.00	1.00		1.00	1.00		1.00	1.00		1.00
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Adj Sat Flow, veh/h/ln	1739	1739	1809	1713	1747	1764	1764	1746	1764	1690	1724	1791
Adj Flow Rate, veh/h	145	1030	55	221	1541	456	96	389	86	100	138	111
Adj No. of Lanes	1	2	0	1	2	1	0	2	0	1	2	0
Peak Hour Factor	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96
Percent Heavy Veh, %	4	4	4	4	2	1	1	1	1	6	3	3
Cap, veh/h	186	1381	74	266	1436	648	151	497	111	246	640	479
Arrive On Green	0.07	0.43	0.43	0.07	0.43	0.43	0.24	0.24	0.24	0.07	0.36	0.36
Sat Flow, veh/h	1657	3191	170	1632	3319	1497	452	2080	464	1609	1787	1337
Grp Volume(v), veh/h	145	533	552	221	1541	456	292	0	279	100	126	123
Grp Sat Flow(s),veh/h/ln	1657	1652	1709	1632	1660	1497	1489	0	1507	1609	1638	1487
Q Serve(g_s), s	5.2	29.7	29.7	8.0	47.6	27.3	18.6	0.0	19.1	4.8	5.9	6.4
Cycle Q Clear(g_c), s	5.2	29.7	29.7	8.0	47.6	27.3	20.3	0.0	19.1	4.8	5.9	6.4
Prop In Lane	1.00		0.10	1.00		1.00	0.33		0.31	1.00		0.90
Lane Grp Cap(c), veh/h	186	715	740	266	1436	648	399	0	360	246	587	532
V/C Ratio(X)	0.78	0.75	0.75	0.83	1.07	0.70	0.73	0.00	0.78	0.41	0.21	0.23
Avail Cap(c_a), veh/h	186	715	740	266	1436	648	449	0	411	390	789	716
HCM Platoon Ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(I)	1.00	1.00	1.00	1.00	1.00	1.00	1.00	0.00	1.00	1.00	1.00	1.00
Uniform Delay (d), s/veh	25.0	26.1	26.1	24.0	31.2	25.5	39.5	0.0	39.1	28.2	24.5	24.7
Incr Delay (d2), s/veh	18.9	7.0	6.8	19.6	45.9	6.3	5.3	0.0	8.0	1.1	0.2	0.2
Initial Q Delay(d3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
%ile BackOfQ(95%),veh/ln	6.0	21.2	21.8	8.0	55.6	18.1	13.8	0.0	13.6	4.0	4.8	4.8
LnGrp Delay(d),s/veh	43.9	33.1	32.9	43.5	77.1	31.8	44.7	0.0	47.1	29.3	24.7	24.9
LnGrp LOS	D	C	C	D	F	C	D		D	C	C	C
Approach Vol, veh/h		1230			2218			571			349	
Approach Delay, s/veh		34.3			64.5			45.9			26.1	
Approach LOS		C			E			D			C	
Timer	1	2	3	4	5	6	7	8				
Assigned Phs	1	2		4	5	6	7	8				
Phs Duration (G+Y+Rc), s	3.0	52.6		44.4	13.0	52.6	13.1	31.3				
Change Period (Y+Rc), s	6.0	6.0		6.0	6.0	6.0	6.0	6.0				
Max Green Setting (Gmax), s	33.0			52.0	7.0	33.0	17.0	29.0				
Max Q Clear Time (g_c+110), s	32.2			8.4	7.7	50.1	7.3	22.3				
Green Ext Time (p_c), s	0.0	0.7		6.3	0.0	0.0	0.1	2.9				
Intersection Summary												
HCM 2010 Ctrl Delay				50.5								
HCM 2010 LOS				D								


HCM 2010 Signalized Intersection Summary
 1: King of Prussia Rd & Parking Drive/Matsonford Rd

01/11/2018

												
Movement	EBL	EBT	EBR	WBL	WBT	WBR	SEL	SET	SER	NWL	NWT	NWR
Lane Configurations												
Traffic Volume (veh/h)	3	4	9	533	1	216	120	753	1	7	495	269
Future Volume (veh/h)	3	4	9	533	1	216	120	753	1	7	495	269
Number	3	8	18	7	4	14	5	2	12	1	6	16
Initial Q (Qb), veh	0	0	0	0	0	0	0	0	0	0	0	0
Ped-Bike Adj(A_pbT)	1.00		1.00	1.00		1.00	1.00		1.00	1.00		1.00
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Adj Sat Flow, veh/h/ln	1800	1800	1800	1800	1891	1891	1773	1844	1844	1782	1782	1817
Adj Flow Rate, veh/h	3	4	10	579	1	235	130	818	1	8	538	0
Adj No. of Lanes	1	1	0	1	1	0	1	1	0	1	1	1
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
Percent Heavy Veh, %	0	0	0	1	0	0	0	0	0	0	0	2
Cap, veh/h	386	167	419	601	2	587	321	962	1	178	687	595
Arrive On Green	0.37	0.37	0.37	0.37	0.37	0.37	0.08	0.52	0.52	0.39	0.39	0.00
Sat Flow, veh/h	1162	457	1142	1422	7	1601	1689	1841	2	671	1782	1544
Grp Volume(v), veh/h	3	0	14	579	0	236	130	0	819	8	538	0
Grp Sat Flow(s),veh/h/ln	1162	0	1599	1422	0	1608	1689	0	1844	671	1782	1544
Q Serve(g_s), s	0.2	0.0	0.5	33.0	0.0	9.8	3.8	0.0	34.4	0.9	23.9	0.0
Cycle Q Clear(g_c), s	9.5	0.0	0.5	33.0	0.0	9.8	3.8	0.0	34.4	22.5	23.9	0.0
Prop In Lane	1.00		0.71	1.00		1.00	1.00		0.00	1.00		1.00
Lane Grp Cap(c), veh/h	386	0	586	601	0	590	321	0	963	178	687	595
V/C Ratio(X)	0.01	0.00	0.02	0.96	0.00	0.40	0.41	0.00	0.85	0.04	0.78	0.00
Avail Cap(c_a), veh/h	386	0	586	601	0	590	334	0	963	178	687	595
HCM Platoon Ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(I)	1.00	0.00	1.00	1.00	0.00	1.00	1.00	0.00	1.00	0.82	0.82	0.00
Uniform Delay (d), s/veh	24.5	0.0	18.2	30.1	0.0	21.2	17.0	0.0	18.5	33.2	24.4	0.0
Incr Delay (d2), s/veh	0.0	0.0	0.0	27.6	0.0	0.4	0.8	0.0	9.4	0.4	7.3	0.0
Initial Q Delay(d3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
%ile BackOfQ(95%),veh/ln	0.1	0.0	0.4	26.1	0.0	7.8	3.3	0.0	27.1	0.3	18.4	0.0
LnGrp Delay(d),s/veh	24.5	0.0	18.2	57.7	0.0	21.6	17.8	0.0	27.8	33.6	31.6	0.0
LnGrp LOS	C		B	E		C	B		C	C	C	
Approach Vol, veh/h		17			815			949			546	
Approach Delay, s/veh		19.3			47.3			26.5			31.6	
Approach LOS		B			D			C			C	
Timer	1	2	3	4	5	6	7	8				
Assigned Phs		2		4	5	6		8				
Phs Duration (G+Y+Rc), s		52.0		38.0	12.3	39.7		38.0				
Change Period (Y+Rc), s		6.0		6.0	6.0	6.0		6.0				
Max Green Setting (Gmax), s		46.0		32.0	7.0	33.0		32.0				
Max Q Clear Time (g_c+I1), s		36.4		35.5	6.3	26.4		12.0				
Green Ext Time (p_c), s		5.9		0.0	0.0	4.4		3.3				
Intersection Summary												
HCM 2010 Ctrl Delay			34.9									
HCM 2010 LOS			C									

HCM 2010 Signalized Intersection Summary
 2: Radnor Chester Rd & King of Prussia Rd

01/11/2018



Movement	EBL	EBT	EBR	WBL	WBT	WBR	NEL	NET	NER	SWL	SWT	SWR
Lane Configurations	↔	↑	↗	↖	↔			↖	↗		↖	↗
Traffic Volume (veh/h)	8	752	664	58	420	1	401	7	142	31	37	49
Future Volume (veh/h)	8	752	664	58	420	1	401	7	142	31	37	49
Number	5	2	12	1	6	16	7	4	14	3	8	18
Initial Q (Qb), veh	0	0	0	0	0	0	0	0	0	0	0	0
Ped-Bike Adj(A_pbT)	1.00		1.00	1.00		1.00	1.00		0.98	1.00		0.98
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Adj Sat Flow, veh/h/ln	1782	1782	1872	1836	1835	1854	1782	1664	1835	1809	1743	1809
Adj Flow Rate, veh/h	8	783	0	60	438	1	418	7	148	32	39	51
Adj No. of Lanes	1	1	1	1	1	0	0	1	1	0	1	0
Peak Hour Factor	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96
Percent Heavy Veh, %	1	1	0	1	1	1	14	14	1	3	3	3
Cap, veh/h	357	812	725	101	834	2	270	3	644	50	58	42
Arrive On Green	0.46	0.46	0.00	0.46	0.46	0.46	0.42	0.42	0.42	0.42	0.42	0.42
Sat Flow, veh/h	955	1782	1591	715	1830	4	453	8	1525	0	138	99
Grp Volume(v), veh/h	8	783	0	60	0	439	425	0	148	122	0	0
Grp Sat Flow(s),veh/h/ln	955	1782	1591	715	0	1834	460	0	1525	237	0	0
Q Serve(g_s), s	0.5	38.4	0.0	2.6	0.0	15.4	0.0	0.0	5.6	0.0	0.0	0.0
Cycle Q Clear(g_c), s	15.5	38.4	0.0	41.0	0.0	15.4	38.0	0.0	5.6	38.0	0.0	0.0
Prop In Lane	1.00		1.00	1.00		0.00	0.98		1.00	0.26		0.42
Lane Grp Cap(c), veh/h	357	812	725	101	0	836	274	0	644	151	0	0
V/C Ratio(X)	0.02	0.96	0.00	0.60	0.00	0.53	1.55	0.00	0.23	0.81	0.00	0.00
Avail Cap(c_a), veh/h	357	812	725	101	0	836	274	0	644	151	0	0
HCM Platoon Ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(I)	0.12	0.12	0.00	1.00	0.00	1.00	1.00	0.00	1.00	1.00	0.00	0.00
Uniform Delay (d), s/veh	22.9	23.8	0.0	44.6	0.0	17.5	31.5	0.0	16.6	22.1	0.0	0.0
Incr Delay (d2), s/veh	0.0	5.3	0.0	23.4	0.0	2.4	266.2	0.0	0.2	27.2	0.0	0.0
Initial Q Delay(d3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
%ile BackOfQ(95%),veh/lr	0.3	22.4	0.0	3.8	0.0	13.1	48.6	0.0	4.3	5.5	0.0	0.0
LnGrp Delay(d),s/veh	22.9	29.1	0.0	67.9	0.0	19.9	297.7	0.0	16.8	49.3	0.0	0.0
LnGrp LOS	C	C		E		B	F		B	D		
Approach Vol, veh/h		791			499			573			122	
Approach Delay, s/veh		29.0			25.7			225.1			49.3	
Approach LOS		C			C			F			D	
Timer	1	2	3	4	5	6	7	8				
Assigned Phs		2		4		6		8				
Phs Duration (G+Y+Rc), s		46.0		44.0		46.0		44.0				
Change Period (Y+Rc), s		6.0		7.0		6.0		7.0				
Max Green Setting (Gmax), s		40.0		37.0		40.0		37.0				
Max Q Clear Time (g_c+I1), s		40.9		40.0		43.5		40.0				
Green Ext Time (p_c), s		0.0		0.0		0.0		0.0				
Intersection Summary												
HCM 2010 Ctrl Delay			86.0									
HCM 2010 LOS			F									

HCM 2010 TWSC
3: King of Prussia Rd & Septa Driveway

01/11/2018

Intersection						
Int Delay, s/veh	4.2					
Movement	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations	↔		↔		↔	↔
Traffic Vol, veh/h	76	84	403	17	53	970
Future Vol, veh/h	76	84	403	17	53	970
Conflicting Peds, #/hr	2	10	0	17	17	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	None	-	None	-	None
Storage Length	0	-	-	-	100	-
Veh in Median Storage, #	0	-	0	-	-	0
Grade, %	0	-	0	-	-	0
Peak Hour Factor	85	85	85	85	85	85
Heavy Vehicles, %	0	17	1	0	17	1
Mvmt Flow	89	99	474	20	62	1141

Major/Minor	Minor1	Major1	Major2		
Conflicting Flow All	1769	511	0	0	511
Stage 1	501	-	-	-	-
Stage 2	1268	-	-	-	-
Critical Hdwy	6.4	6.37	-	-	4.27
Critical Hdwy Stg 1	5.4	-	-	-	-
Critical Hdwy Stg 2	5.4	-	-	-	-
Follow-up Hdwy	3.5	3.453	-	-	2.353
Pot Cap-1 Maneuver	93	534	-	-	982
Stage 1	613	-	-	-	-
Stage 2	267	-	-	-	-
Platoon blocked, %					
Mov Cap-1 Maneuver	~ 86	522	-	-	974
Mov Cap-2 Maneuver	192	-	-	-	-
Stage 1	604	-	-	-	-
Stage 2	250	-	-	-	-

Approach	WB	NB	SB
HCM Control Delay, s	38.6	0	0.5
HCM LOS	E		

Minor Lane/Major Mvmt	NBT	NBRWBLn1	SBL	SBT
Capacity (veh/h)	-	-	287	974
HCM Lane V/C Ratio	-	-	0.656	0.064
HCM Control Delay (s)	-	-	38.6	8.9
HCM Lane LOS	-	-	E	A
HCM 95th %tile Q(veh)	-	-	4.3	0.2

Notes
 ~: Volume exceeds capacity \$: Delay exceeds 300s +: Computation Not Defined *: All major volume in platoon

Intersection

Int Delay, s/veh 260.3

Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		↕		↕	↕			↕			↕	
Traffic Vol, veh/h	5	0	41	272	0	60	23	294	101	14	1097	5
Future Vol, veh/h	5	0	41	272	0	60	23	294	101	14	1097	5
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	8	8	0	0
Sign Control	Stop	Stop	Stop	Stop	Stop	Stop	Free	Free	Free	Free	Free	Free
RT Channelized	-	-	None	-	-	None	-	-	None	-	-	None
Storage Length	-	-	-	0	-	-	-	-	-	-	-	-
Veh in Median Storage, #	-	0	-	-	0	-	-	0	-	-	0	-
Grade, %	-	0	-	-	0	-	-	0	-	-	0	-
Peak Hour Factor	94	94	94	94	94	94	94	94	94	94	94	94
Heavy Vehicles, %	0	0	0	0	0	0	0	1	0	0	1	0
Mvmt Flow	5	0	44	289	0	64	24	313	107	15	1167	5

Major/Minor	Minor2		Minor1		Major1		Major2					
Conflicting Flow All	1646	1676	1170	1644	1625	374	1172	0	0	428	0	0
Stage 1	1199	1199	-	423	423	-	-	-	-	-	-	-
Stage 2	447	477	-	1221	1202	-	-	-	-	-	-	-
Critical Hdwy	7.1	6.5	6.2	7.1	6.5	6.2	4.1	-	-	4.1	-	-
Critical Hdwy Stg 1	6.1	5.5	-	6.1	5.5	-	-	-	-	-	-	-
Critical Hdwy Stg 2	6.1	5.5	-	6.1	5.5	-	-	-	-	-	-	-
Follow-up Hdwy	3.5	4	3.3	3.5	4	3.3	2.2	-	-	2.2	-	-
Pot Cap-1 Maneuver	80	96	237	~ 81	103	677	603	-	-	1142	-	-
Stage 1	228	261	-	613	591	-	-	-	-	-	-	-
Stage 2	595	559	-	~ 222	260	-	-	-	-	-	-	-
Platoon blocked, %								-	-	-	-	-
Mov Cap-1 Maneuver	67	87	237	~ 61	93	672	603	-	-	1142	-	-
Mov Cap-2 Maneuver	67	87	-	~ 61	93	-	-	-	-	-	-	-
Stage 1	216	251	-	577	556	-	-	-	-	-	-	-
Stage 2	510	526	-	~ 174	250	-	-	-	-	-	-	-

Approach	EB	WB	NB	SB
HCM Control Delay, s	31.1	\$ 1493.4	0.6	0.1
HCM LOS	D	F		

Minor Lane/Major Mvmt	NBL	NBT	NBR	EBLn1	WBLn1	WBLn2	SBL	SBT	SBR
Capacity (veh/h)	603	-	-	186	61	672	1142	-	-
HCM Lane V/C Ratio	0.041	-	-	0.263	4.744	0.095	0.013	-	-
HCM Control Delay (s)	11.2	0	-	31.1	\$ 1820.4	10.9	8.2	0	-
HCM Lane LOS	B	A	-	D	F	B	A	A	-
HCM 95th %tile Q(veh)	0.1	-	-	1	31.9	0.3	0	-	-

Notes
 ~: Volume exceeds capacity \$: Delay exceeds 300s +: Computation Not Defined *: All major volume in platoon

HCM 2010 TWSC
6: King of Prussia Rd & Southern Driveway

01/11/2018

Intersection						
Int Delay, s/veh	0.2					
Movement	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations	↘↙		↑	↗↘	↘	↑
Traffic Vol, veh/h	4	4	413	2	2	1404
Future Vol, veh/h	4	4	413	2	2	1404
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	None	-	None	-	None
Storage Length	0	-	-	0	100	-
Veh in Median Storage, #	0	-	0	-	-	0
Grade, %	0	-	0	-	-	0
Peak Hour Factor	94	94	94	94	94	94
Heavy Vehicles, %	0	0	1	0	0	1
Mvmt Flow	4	4	439	2	2	1494

Major/Minor	Minor1	Major1	Major2		
Conflicting Flow All	1937	439	0	0	439
Stage 1	439	-	-	-	-
Stage 2	1498	-	-	-	-
Critical Hdwy	6.4	6.2	-	-	4.1
Critical Hdwy Stg 1	5.4	-	-	-	-
Critical Hdwy Stg 2	5.4	-	-	-	-
Follow-up Hdwy	3.5	3.3	-	-	2.2
Pot Cap-1 Maneuver	73	622	-	-	1132
Stage 1	654	-	-	-	-
Stage 2	206	-	-	-	-
Platoon blocked, %			-	-	-
Mov Cap-1 Maneuver	73	622	-	-	1132
Mov Cap-2 Maneuver	73	-	-	-	-
Stage 1	654	-	-	-	-
Stage 2	206	-	-	-	-

Approach	WB	NB	SB
HCM Control Delay, s	34.4	0	0
HCM LOS	D		

Minor Lane/Major Mvmt	NBT	NBRWBLn1	SBL	SBT
Capacity (veh/h)	-	-	131	1132
HCM Lane V/C Ratio	-	-	0.065	0.002
HCM Control Delay (s)	-	-	34.4	8.2
HCM Lane LOS	-	-	D	A
HCM 95th %tile Q(veh)	-	-	0.2	0

HCM 2010 Signalized Intersection Summary
 7: I-476 Off Ramp/King of Prussia Rd & Lancaster Ave

01/11/2018

Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (veh/h)	102	1538	0	0	578	179	272	231	214	832	0	453
Future Volume (veh/h)	102	1538	0	0	578	179	272	231	214	832	0	453
Number	5	2	12	1	6	16	3	8	18	7	4	14
Initial Q (Qb), veh	0	0	0	0	0	0	0	0	0	0	0	0
Ped-Bike Adj(A_pbT)	1.00		1.00	1.00		1.00	1.00		1.00	1.00		1.00
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Adj Sat Flow, veh/h/ln	1791	1773	0	0	1800	1872	1764	1782	1782	1764	0	1853
Adj Flow Rate, veh/h	109	1636	0	0	615	0	289	246	228	885	0	482
Adj No. of Lanes	2	2	0	0	2	1	2	1	1	2	0	1
Peak Hour Factor	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94
Percent Heavy Veh, %	0	1	0	0	1	1	1	0	0	1	0	0
Cap, veh/h	216	1623	0	0	1269	591	1393	292	248	858	0	0
Arrive On Green	0.04	0.32	0.00	0.00	0.74	0.00	0.43	0.16	0.16	0.22	0.00	0.01
Sat Flow, veh/h	3309	3458	0	0	3510	1591	3260	1782	1515	3260	885	
Grp Volume(v), veh/h	109	1636	0	0	615	0	289	246	228	885	83.2	
Grp Sat Flow(s),veh/h/ln	1655	1685	0	0	1710	1591	1630	1782	1515	1630	F	
Q Serve(g_s), s	3.5	53.0	0.0	0.0	8.0	0.0	6.1	14.7	16.3	24.0		
Cycle Q Clear(g_c), s	3.5	53.0	0.0	0.0	8.0	0.0	6.1	14.7	16.3	24.0		
Prop In Lane	1.00		0.00	0.00		1.00	1.00		1.00	1.00		
Lane Grp Cap(c), veh/h	216	1623	0	0	1269	591	1393	292	248	858		
V/C Ratio(X)	0.51	1.01	0.00	0.00	0.48	0.00	0.21	0.84	0.92	1.03		
Avail Cap(c_a), veh/h	391	1623	0	0	1269	591	1393	292	248	858		
HCM Platoon Ratio	0.67	0.67	1.00	1.00	2.00	2.00	1.00	1.00	1.00	1.00		
Upstream Filter(I)	0.87	0.87	0.00	0.00	0.88	0.00	1.00	1.00	1.00	1.00		
Uniform Delay (d), s/veh	50.9	37.2	0.0	0.0	9.9	0.0	19.8	44.6	45.3	44.2		
Incr Delay (d2), s/veh	1.6	22.8	0.0	0.0	1.2	0.0	0.1	19.6	36.3	39.0		
Initial Q Delay(d3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
%ile BackOfQ(95%),veh/ln	3.0	53.6	0.0	0.0	6.8	0.0	5.0	13.7	14.4	12.4		
LnGrp Delay(d),s/veh	52.5	60.0	0.0	0.0	11.1	0.0	19.9	64.3	81.6	83.2		
LnGrp LOS	D	F			B		B	E	F	F		
Approach Vol, veh/h		1745			615			763				
Approach Delay, s/veh		59.6			11.1			52.6				
Approach LOS		E			B			D				
Timer	1	2	3	4	5	6	7	8				
Assigned Phs		2	3		5	6	7	8				
Phs Duration (G+Y+Rc), s		58.0	52.0		12.2	45.8	29.0	23.0				
Change Period (Y+Rc), s		6.0	6.0		6.0	6.0	6.0	6.0				
Max Green Setting (Gmax), s		52.0	23.0		12.0	34.0	23.0	17.0				
Max Q Clear Time (g_c+I1), s		55.5	8.6		6.0	10.5	26.5	18.8				
Green Ext Time (p_c), s		0.0	0.8		0.1	17.6	0.0	0.0				
Intersection Summary												
HCM 2010 Ctrl Delay			56.0									
HCM 2010 LOS			E									

HCM 2010 Signalized Intersection Summary
 8: I-476 SB Off Ramp & Lancaster Ave

01/11/2018



Movement	EBT	EBR	WBL	WBT	NBL	NBR		
Lane Configurations	↑↑↑		↵↵	↑↑	↵↵	↵		
Traffic Volume (veh/h)	1052	0	570	768	615	507		
Future Volume (veh/h)	1052	0	570	768	615	507		
Number	4	14	3	8	5	12		
Initial Q (Qb), veh	0	0	0	0	0	0		
Ped-Bike Adj(A_pbT)		1.00	1.00		1.00	1.00		
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00		
Adj Sat Flow, veh/h/ln	1730	0	1800	1782	1818	1891		
Adj Flow Rate, veh/h	1073	0	582	784	628	0		
Adj No. of Lanes	3	0	2	2	2	1		
Peak Hour Factor	0.98	0.98	0.98	0.98	0.98	0.98		
Percent Heavy Veh, %	3	0	1	2	1	1		
Cap, veh/h	2009	0	714	2322	751	359		
Arrive On Green	0.43	0.00	0.07	0.23	0.22	0.00		
Sat Flow, veh/h	5035	0	3326	3476	3359	1607		
Grp Volume(v), veh/h	1073	0	582	784	628	0		
Grp Sat Flow(s),veh/h/ln	1574	0	1663	1693	1679	1607		
Q Serve(g_s), s	18.6	0.0	19.0	21.3	19.6	0.0		
Cycle Q Clear(g_c), s	18.6	0.0	19.0	21.3	19.6	0.0		
Prop In Lane		0.00	1.00		1.00	1.00		
Lane Grp Cap(c), veh/h	2009	0	714	2322	751	359		
V/C Ratio(X)	0.53	0.00	0.81	0.34	0.84	0.00		
Avail Cap(c_a), veh/h	2009	0	847	2322	916	438		
HCM Platoon Ratio	1.00	1.00	0.33	0.33	1.00	1.00		
Upstream Filter(I)	1.00	0.00	0.76	0.76	1.00	0.00		
Uniform Delay (d), s/veh	23.5	0.0	48.9	21.6	40.8	0.0		
Incr Delay (d2), s/veh	1.0	0.0	4.1	0.3	5.8	0.0		
Initial Q Delay(d3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0		
%ile BackOfQ(95%),veh/ln	2.9	0.0	13.5	14.7	14.8	0.0		
LnGrp Delay(d),s/veh	24.5	0.0	53.1	21.9	46.6	0.0		
LnGrp LOS	C		D	C	D			
Approach Vol, veh/h	1073			1366	628			
Approach Delay, s/veh	24.5			35.2	46.6			
Approach LOS	C			D	D			
Timer	1	2	3	4	5	6	7	8
Assigned Phs		2	3	4				8
Phs Duration (G+Y+Rc), s		29.6	28.6	51.8				80.4
Change Period (Y+Rc), s		6.0	6.0	6.0				6.0
Max Green Setting (Gmax), s		29.0	27.0	36.0				69.0
Max Q Clear Time (g_c+11), s		22.1	21.5	21.1				23.8
Green Ext Time (p_c), s		1.4	1.1	10.3				19.8
Intersection Summary								
HCM 2010 Ctrl Delay			33.8					
HCM 2010 LOS			C					

HCM 2010 Signalized Intersection Summary

9: Hillside Circuit & Lancaster Ave

01/11/2018



Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↔	↑		↔	↑↑	↔		↑	↔			
Traffic Volume (veh/h)	1150	1764	14	6	721	584	3	1	2	0	0	0
Future Volume (veh/h)	1150	1764	14	6	721	584	3	1	2	0	0	0
Number	5	2	12	1	6	16	3	8	18			
Initial Q (Qb), veh	0	0	0	0	0	0	0	0	0			
Ped-Bike Adj(A_pbT)	1.00		1.00	1.00		1.00	1.00		0.88			
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00			
Adj Sat Flow, veh/h/ln	1782	1731	1800	1800	1782	1782	1800	1800	1800			
Adj Flow Rate, veh/h	1198	1838	15	6	751	0	3	1	2			
Adj No. of Lanes	2	2	0	1	2	1	0	1	1			
Peak Hour Factor	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96			
Percent Heavy Veh, %	1	4	4	0	1	1	0	0	0			
Cap, veh/h	1197	2797	23	23	1647	737	18	6	18			
Arrive On Green	0.73	1.00	1.00	0.01	0.49	0.00	0.01	0.01	0.01			
Sat Flow, veh/h	3293	3344	27	1714	3386	1515	1301	434	1345			
Grp Volume(v), veh/h	1198	903	950	6	751	0	4	0	2			
Grp Sat Flow(s),veh/h/ln	1646	1645	1726	1714	1693	1515	1735	0	1345			
Q Serve(g_s), s	40.0	0.0	0.0	0.4	16.1	0.0	0.3	0.0	0.2			
Cycle Q Clear(g_c), s	40.0	0.0	0.0	0.4	16.1	0.0	0.3	0.0	0.2			
Prop In Lane	1.00		0.02	1.00		1.00	0.75		1.00			
Lane Grp Cap(c), veh/h	1197	1376	1444	23	1647	737	24	0	18			
V/C Ratio(X)	1.00	0.66	0.66	0.26	0.46	0.00	0.17	0.00	0.11			
Avail Cap(c_a), veh/h	1197	1376	1444	109	1647	737	110	0	86			
HCM Platoon Ratio	2.00	2.00	2.00	1.00	1.00	1.00	1.00	1.00	1.00			
Upstream Filter(I)	0.09	0.09	0.09	1.00	1.00	0.00	1.00	0.00	1.00			
Uniform Delay (d), s/veh	15.0	0.0	0.0	53.7	18.6	0.0	53.6	0.0	53.6			
Incr Delay (d2), s/veh	7.9	0.2	0.2	5.6	0.9	0.0	3.3	0.0	2.6			
Initial Q Delay(d3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
%ile BackOfQ(95%),veh/ln	88.3	0.2	0.2	0.4	12.3	0.0	0.3	0.0	0.1			
LnGrp Delay(d),s/veh	22.9	0.2	0.2	59.3	19.6	0.0	56.9	0.0	56.2			
LnGrp LOS	F	A	A	E	B		E		E			
Approach Vol, veh/h		3051			757			6				
Approach Delay, s/veh		9.1			19.9			56.7				
Approach LOS		A			B			E				
Timer	1	2	3	4	5	6	7	8				
Assigned Phs	1	2			5	6		8				
Phs Duration (G+Y+Rc), s	6.5	97.0			45.0	58.5		6.5				
Change Period (Y+Rc), s	6.0	6.0			6.0	6.0		6.0				
Max Green Setting (Gmax), s	6.0	80.0			39.0	47.0		6.0				
Max Q Clear Time (g_c+12), s	6.0	2.5			42.5	18.6		2.7				
Green Ext Time (p_c), s	0.0	45.8			0.0	22.7		0.0				
Intersection Summary												
HCM 2010 Ctrl Delay				11.3								
HCM 2010 LOS				B								
Notes												

HCM 2010 Signalized Intersection Summary

10: Radnor Chester Rd






















01/11/2018



Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (veh/h)	120	1175	93	198	1108	126	81	211	141	410	448	215
Future Volume (veh/h)	120	1175	93	198	1108	126	81	211	141	410	448	215
Number	5	2	12	1	6	16	3	8	18	7	4	14
Initial Q (Qb), veh	0	0	0	0	0	0	0	0	0	0	0	0
Ped-Bike Adj(A_pbT)	1.00		1.00	1.00		1.00	1.00		1.00	1.00		1.00
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Adj Sat Flow, veh/h/ln	1791	1792	1809	1747	1764	1764	1764	1752	1764	1773	1779	1791
Adj Flow Rate, veh/h	124	1211	96	204	1142	130	84	218	145	423	462	222
Adj No. of Lanes	1	2	0	1	2	1	0	2	0	1	2	0
Peak Hour Factor	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97
Percent Heavy Veh, %	1	1	1	2	1	1	1	1	1	1	0	0
Cap, veh/h	231	1220	97	207	1294	578	149	345	234	331	863	412
Arrive On Green	0.08	0.38	0.38	0.08	0.39	0.39	0.26	0.26	0.26	0.08	0.39	0.39
Sat Flow, veh/h	1706	3197	253	1664	3352	1496	385	1338	906	1689	2222	1060
Grp Volume(v), veh/h	124	644	663	204	1142	130	218	0	229	423	351	333
Grp Sat Flow(s),veh/h/ln	1706	1703	1747	1664	1676	1496	1195	0	1433	1689	1690	1591
Q Serve(g_s), s	4.3	37.6	37.8	7.8	31.7	5.8	12.6	0.0	14.1	8.0	16.0	16.2
Cycle Q Clear(g_c), s	4.3	37.6	37.8	7.8	31.7	5.8	16.1	0.0	14.1	8.0	16.0	16.2
Prop In Lane	1.00		0.14	1.00		1.00	0.39		0.63	1.00		0.67
Lane Grp Cap(c), veh/h	231	650	667	207	1294	578	359	0	370	331	656	618
V/C Ratio(X)	0.54	0.99	0.99	0.98	0.88	0.23	0.61	0.00	0.62	1.28	0.53	0.54
Avail Cap(c_a), veh/h	256	650	667	207	1294	578	453	0	487	331	795	748
HCM Platoon Ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(I)	1.00	1.00	1.00	1.00	1.00	1.00	1.00	0.00	1.00	1.00	1.00	1.00
Uniform Delay (d), s/veh	22.3	30.7	30.8	24.9	28.6	20.6	33.1	0.0	32.7	34.5	23.6	23.7
Incr Delay (d2), s/veh	1.9	33.2	33.4	57.6	8.9	0.9	1.7	0.0	1.7	145.8	0.7	0.7
Initial Q Delay(d3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
%ile BackOfQ(95%),veh/ln	3.8	31.5	32.5	13.8	22.8	4.6	9.5	0.0	9.7	33.9	12.0	11.7
LnGrp Delay(d),s/veh	24.2	63.9	64.2	82.5	37.5	21.5	34.8	0.0	34.4	180.3	24.3	24.4
LnGrp LOS	C	E	E	F	D	C	C		C	F	C	C
Approach Vol, veh/h		1431			1476			447			1107	
Approach Delay, s/veh		60.6			42.3			34.6			83.9	
Approach LOS		E			D			C			F	
Timer	1	2	3	4	5	6	7	8				
Assigned Phs	1	2		4	5	6	7	8				
Phs Duration (G+Y+Rc), s	3.0	43.2		43.8	12.6	43.6	13.0	30.8				
Change Period (Y+Rc), s	6.0	6.0		6.0	6.0	6.0	6.0	6.0				
Max Green Setting (Gmax), s	7.0	29.0		46.0	8.0	28.0	7.0	33.0				
Max Q Clear Time (g_c+110), s	11.0	40.1		18.5	6.8	34.2	10.5	18.1				
Green Ext Time (p_c), s	0.0	0.0		8.7	0.0	0.0	0.0	6.6				
Intersection Summary												
HCM 2010 Ctrl Delay				57.7								
HCM 2010 LOS				E								

HCM 2010 Signalized Intersection Summary
 1: King of Prussia Rd & Parking Drive/Matsonford Rd


01/11/2018

												
Movement	EBL	EBT	EBR	WBL	WBT	WBR	SEL	SET	SER	NWL	NWT	NWR
Lane Configurations												
Traffic Volume (veh/h)	1	0	2	319	7	104	375	639	2	12	638	611
Future Volume (veh/h)	1	0	2	319	7	104	375	639	2	12	638	611
Number	3	8	18	7	4	14	5	2	12	1	6	16
Initial Q (Qb), veh	0	0	0	0	0	0	0	0	0	0	0	0
Ped-Bike Adj(A_pbT)	1.00		1.00	1.00		1.00	1.00		1.00	1.00		1.00
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Adj Sat Flow, veh/h/ln	1800	1800	1800	1748	1744	1891	1721	1826	1844	1782	1764	1817
Adj Flow Rate, veh/h	1	0	2	354	8	116	417	710	2	13	709	0
Adj No. of Lanes	1	1	0	1	1	0	1	1	0	1	1	1
Peak Hour Factor	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90
Percent Heavy Veh, %	0	0	0	4	0	0	3	1	1	0	1	2
Cap, veh/h	330	0	391	437	25	358	390	1152	3	368	686	601
Arrive On Green	0.26	0.00	0.26	0.26	0.26	0.26	0.19	0.63	0.63	0.39	0.39	0.00
Sat Flow, veh/h	1287	0	1530	1396	97	1400	1639	1820	5	742	1764	1544
Grp Volume(v), veh/h	1	0	2	354	0	124	417	0	712	13	709	0
Grp Sat Flow(s),veh/h/ln	1287	0	1530	1396	0	1497	1639	0	1825	742	1764	1544
Q Serve(g_s), s	0.1	0.0	0.1	22.8	0.0	6.1	17.0	0.0	21.1	1.0	35.0	0.0
Cycle Q Clear(g_c), s	5.6	0.0	0.1	22.8	0.0	6.1	17.0	0.0	21.1	1.0	35.0	0.0
Prop In Lane	1.00		1.00	1.00		0.94	1.00		0.00	1.00		1.00
Lane Grp Cap(c), veh/h	330	0	391	437	0	383	390	0	1156	368	686	601
V/C Ratio(X)	0.00	0.00	0.01	0.81	0.00	0.32	1.07	0.00	0.62	0.04	1.03	0.00
Avail Cap(c_a), veh/h	330	0	391	437	0	383	390	0	1156	368	686	601
HCM Platoon Ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(I)	1.00	0.00	1.00	1.00	0.00	1.00	1.00	0.00	1.00	1.00	1.00	0.00
Uniform Delay (d), s/veh	29.3	0.0	25.0	33.4	0.0	27.2	27.5	0.0	9.9	17.1	27.5	0.0
Incr Delay (d2), s/veh	0.0	0.0	0.0	11.0	0.0	0.5	65.5	0.0	2.5	0.2	43.2	0.0
Initial Q Delay(d3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
%ile BackOfQ(95%),veh/ln	0.0	0.0	0.1	15.3	0.0	4.6	30.1	0.0	16.8	0.4	45.4	0.0
LnGrp Delay(d),s/veh	29.3	0.0	25.0	44.4	0.0	27.7	93.0	0.0	12.4	17.3	70.7	0.0
LnGrp LOS	C		C	D		C	F		B	B	F	
Approach Vol, veh/h		3			478			1129			722	
Approach Delay, s/veh		26.4			40.1			42.2			69.8	
Approach LOS		C			D			D			E	
Timer	1	2	3	4	5	6	7	8				
Assigned Phs		2		4	5	6		8				
Phs Duration (G+Y+Rc), s		62.0		28.0	22.0	40.0		28.0				
Change Period (Y+Rc), s		6.0		6.0	6.0	6.0		6.0				
Max Green Setting (Gmax), s		56.0		22.0	16.0	34.0		22.0				
Max Q Clear Time (g_c+I1), s		23.1		25.3	19.5	37.5		8.1				
Green Ext Time (p_c), s		12.6		0.0	0.0	0.0		1.5				
Intersection Summary												
HCM 2010 Ctrl Delay			50.3									
HCM 2010 LOS			D									

HCM 2010 Signalized Intersection Summary

2: Radnor Chester Rd & King of Prussia Rd

01/11/2018



Movement	EBL	EBT	EBR	WBL	WBT	WBR	NEL	NET	NER	SWL	SWT	SWR
Lane Configurations												
Traffic Volume (veh/h)	38	401	476	29	853	7	511	33	59	2	1	6
Future Volume (veh/h)	38	401	476	29	853	7	511	33	59	2	1	6
Number	5	2	12	1	6	16	7	4	14	3	8	18
Initial Q (Qb), veh	0	0	0	0	0	0	0	0	0	0	0	0
Ped-Bike Adj(A_pbT)	1.00		1.00	1.00		1.00	1.00		0.97	1.00		0.97
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Adj Sat Flow, veh/h/ln	1800	1714	1817	1717	1816	1854	1782	1629	1835	1809	1628	1809
Adj Flow Rate, veh/h	40	427	0	31	907	7	544	35	63	2	1	6
Adj No. of Lanes	1	1	1	1	1	0	0	1	1	0	1	0
Peak Hour Factor	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94
Percent Heavy Veh, %	0	5	3	8	2	2	0	0	1	0	0	0
Cap, veh/h	83	857	772	391	900	7	226	10	574	49	37	73
Arrive On Green	0.50	0.50	0.00	0.50	0.50	0.50	0.38	0.38	0.38	0.38	0.38	0.38
Sat Flow, veh/h	621	1714	1545	930	1800	14	393	25	1520	0	97	194
Grp Volume(v), veh/h	40	427	0	31	0	914	579	0	63	9	0	0
Grp Sat Flow(s),veh/h/ln	621	1714	1545	930	0	1814	418	0	1520	290	0	0
Q Serve(g_s), s	0.5	14.9	0.0	2.1	0.0	45.0	0.0	0.0	2.4	0.0	0.0	0.0
Cycle Q Clear(g_c), s	45.0	14.9	0.0	17.0	0.0	45.0	34.0	0.0	2.4	34.0	0.0	0.0
Prop In Lane	1.00		1.00	1.00		0.01	0.94		1.00	0.22		0.67
Lane Grp Cap(c), veh/h	83	857	772	391	0	907	236	0	574	159	0	0
V/C Ratio(X)	0.48	0.50	0.00	0.08	0.00	1.01	2.46	0.00	0.11	0.06	0.00	0.00
Avail Cap(c_a), veh/h	83	857	772	391	0	907	236	0	574	159	0	0
HCM Platoon Ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(I)	0.56	0.56	0.00	1.00	0.00	1.00	1.00	0.00	1.00	1.00	0.00	0.00
Uniform Delay (d), s/veh	45.0	15.0	0.0	20.6	0.0	22.5	33.6	0.0	18.2	21.6	0.0	0.0
Incr Delay (d2), s/veh	10.7	1.2	0.0	0.4	0.0	31.9	668.6	0.0	0.1	0.1	0.0	0.0
Initial Q Delay(d3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
%ile BackOfQ(95%),veh/ln	2.2	10.6	0.0	1.0	0.0	54.8	89.2	0.0	1.9	0.3	0.0	0.0
LnGrp Delay(d),s/veh	55.6	16.1	0.0	21.0	0.0	54.4	702.2	0.0	18.3	21.8	0.0	0.0
LnGrp LOS	E	B		C		F	F		B	C		
Approach Vol, veh/h		467			945			642			9	
Approach Delay, s/veh		19.5			53.3			635.1			21.8	
Approach LOS		B			D			F			C	
Timer	1	2	3	4	5	6	7	8				
Assigned Phs		2		4		6		8				
Phs Duration (G+Y+Rc), s		50.0		40.0		50.0		40.0				
Change Period (Y+Rc), s		6.0		7.0		6.0		7.0				
Max Green Setting (Gmax), s		44.0		33.0		44.0		33.0				
Max Q Clear Time (g_c+I1), s		47.5		36.0		47.0		36.0				
Green Ext Time (p_c), s		0.0		0.0		0.0		0.0				
Intersection Summary												
HCM 2010 Ctrl Delay				226.5								
HCM 2010 LOS				F								

HCM 2010 TWSC
3: King of Prussia Rd & Septa Driveway

01/11/2018

Intersection						
Int Delay, s/veh	3.2					
Movement	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations	Y		T		T	T
Traffic Vol, veh/h	21	42	988	116	149	308
Future Vol, veh/h	21	42	988	116	149	308
Conflicting Peds, #/hr	2	10	0	17	17	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	None	-	None	-	None
Storage Length	0	-	-	-	100	-
Veh in Median Storage, #	0	-	0	-	-	0
Grade, %	0	-	0	-	-	0
Peak Hour Factor	87	87	87	87	87	87
Heavy Vehicles, %	0	42	2	0	22	5
Mvmt Flow	24	48	1136	133	171	354

Major/Minor	Minor1	Major1	Major2		
Conflicting Flow All	1918	1229	0	0	1286
Stage 1	1219	-	-	-	-
Stage 2	699	-	-	-	-
Critical Hdwy	6.4	6.62	-	-	4.32
Critical Hdwy Stg 1	5.4	-	-	-	-
Critical Hdwy Stg 2	5.4	-	-	-	-
Follow-up Hdwy	3.5	3.678	-	-	2.398
Pot Cap-1 Maneuver	75	179	-	-	478
Stage 1	282	-	-	-	-
Stage 2	497	-	-	-	-
Platoon blocked, %			-	-	-
Mov Cap-1 Maneuver	47	175	-	-	474
Mov Cap-2 Maneuver	157	-	-	-	-
Stage 1	278	-	-	-	-
Stage 2	317	-	-	-	-

Approach	WB	NB	SB
HCM Control Delay, s	41.4	0	5.5
HCM LOS	E		

Minor Lane/Major Mvmt	NBT	NBRWBLn1	SBL	SBT
Capacity (veh/h)	-	-	169	474
HCM Lane V/C Ratio	-	-	0.428	0.361
HCM Control Delay (s)	-	-	41.4	16.8
HCM Lane LOS	-	-	E	C
HCM 95th %tile Q(veh)	-	-	1.9	1.6

Intersection

Int Delay, s/veh 313.4

Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		↕		↕	↕			↕			↕	
Traffic Vol, veh/h	9	0	133	99	0	22	177	1071	369	52	268	59
Future Vol, veh/h	9	0	133	99	0	22	177	1071	369	52	268	59
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	8	8	0	0
Sign Control	Stop	Stop	Stop	Stop	Stop	Stop	Free	Free	Free	Free	Free	Free
RT Channelized	-	-	None	-	-	None	-	-	None	-	-	None
Storage Length	-	-	-	0	-	-	-	-	-	-	-	-
Veh in Median Storage, #	-	0	-	-	0	-	-	0	-	-	0	-
Grade, %	-	0	-	-	0	-	-	0	-	-	0	-
Peak Hour Factor	78	78	78	78	78	78	78	78	78	78	78	78
Heavy Vehicles, %	11	0	4	0	0	0	0	2	0	0	10	0
Mvmt Flow	12	0	171	127	0	28	227	1373	473	67	344	76

Major/Minor	Minor2		Minor1		Major1			Major2				
Conflicting Flow All	2593	2823	381	2671	2624	1618	419	0	0	1854	0	0
Stage 1	515	515	-	2071	2071	-	-	-	-	-	-	-
Stage 2	2078	2308	-	600	553	-	-	-	-	-	-	-
Critical Hdwy	7.21	6.5	6.24	7.1	6.5	6.2	4.1	-	-	4.1	-	-
Critical Hdwy Stg 1	6.21	5.5	-	6.1	5.5	-	-	-	-	-	-	-
Critical Hdwy Stg 2	6.21	5.5	-	6.1	5.5	-	-	-	-	-	-	-
Follow-up Hdwy	3.599	4	3.336	3.5	4	3.3	2.2	-	-	2.2	-	-
Pot Cap-1 Maneuver	16	18	662	~ 15	24	129	1151	-	-	331	-	-
Stage 1	526	538	-	~ 72	97	-	-	-	-	-	-	-
Stage 2	66	74	-	491	518	-	-	-	-	-	-	-
Platoon blocked, %								-	-	-	-	-
Mov Cap-1 Maneuver	~ 10	13	662	~ 9	17	128	1151	-	-	331	-	-
Mov Cap-2 Maneuver	~ 10	13	-	~ 9	17	-	-	-	-	-	-	-
Stage 1	526	394	-	~ 72	96	-	-	-	-	-	-	-
Stage 2	51	74	-	267	380	-	-	-	-	-	-	-

Approach	EB	WB	NB	SB
HCM Control Delay, s	287.6	\$ 5492.6	1	2.6
HCM LOS	F	F		

Minor Lane/Major Mvmt	NBL	NBT	NBR	EBLn1	WBLn1	WBLn2	SBL	SBT	SBR
Capacity (veh/h)	1151	-	-	129	9	128	331	-	-
HCM Lane V/C Ratio	0.197	-	-	1.411	14.103	0.22	0.201	-	-
HCM Control Delay (s)	8.9	0	-	287.6	\$ 6704.1	40.9	18.6	0	-
HCM Lane LOS	A	A	-	F	F	E	C	A	-
HCM 95th %tile Q(veh)	0.7	-	-	12.2	17.5	0.8	0.7	-	-

Notes
 ~: Volume exceeds capacity \$: Delay exceeds 300s +: Computation Not Defined *: All major volume in platoon

HCM 2010 TWSC
6: King of Prussia Rd & Southern Driveway

01/11/2018

Intersection						
Int Delay, s/veh	0.2					
Movement	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations	↘↗		↑	↗↘	↘↗	↑
Traffic Vol, veh/h	2	2	1611	6	6	493
Future Vol, veh/h	2	2	1611	6	6	493
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	None	-	None	-	None
Storage Length	0	-	-	0	100	-
Veh in Median Storage, #	0	-	0	-	-	0
Grade, %	0	-	0	-	-	0
Peak Hour Factor	83	83	83	83	83	83
Heavy Vehicles, %	0	0	2	0	0	8
Mvmt Flow	2	2	1941	7	7	594

Major/Minor	Minor1	Major1	Major2		
Conflicting Flow All	2549	1941	0	0	1941
Stage 1	1941	-	-	-	-
Stage 2	608	-	-	-	-
Critical Hdwy	6.4	6.2	-	-	4.1
Critical Hdwy Stg 1	5.4	-	-	-	-
Critical Hdwy Stg 2	5.4	-	-	-	-
Follow-up Hdwy	3.5	3.3	-	-	2.2
Pot Cap-1 Maneuver	30	83	-	-	306
Stage 1	124	-	-	-	-
Stage 2	547	-	-	-	-
Platoon blocked, %			-	-	-
Mov Cap-1 Maneuver	29	83	-	-	306
Mov Cap-2 Maneuver	29	-	-	-	-
Stage 1	124	-	-	-	-
Stage 2	534	-	-	-	-

Approach	WB	NB	SB
HCM Control Delay, s	99	0	0.2
HCM LOS	F		

Minor Lane/Major Mvmt	NBT	NBRWBLn1	SBL	SBT
Capacity (veh/h)	-	-	43	306
HCM Lane V/C Ratio	-	-	0.112	0.024
HCM Control Delay (s)	-	-	99	17
HCM Lane LOS	-	-	F	C
HCM 95th %tile Q(veh)	-	-	0.4	0.1

HCM 2010 Signalized Intersection Summary
 7: I-476 Off Ramp/King of Prussia Rd & Lancaster Ave

01/11/2018

Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (veh/h)	376	1306	0	0	544	379	774	840	344	321	0	162
Future Volume (veh/h)	376	1306	0	0	544	379	774	840	344	321	0	162
Number	5	2	12	1	6	16	3	8	18	7	4	14
Initial Q (Qb), veh	0	0	0	0	0	0	0	0	0	0	0	0
Ped-Bike Adj(A_pbT)	1.00		1.00	1.00		1.00	1.00		1.00	1.00		1.00
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Adj Sat Flow, veh/h/ln	1791	1756	0	0	1800	1854	1764	1764	1764	1665	0	1748
Adj Flow Rate, veh/h	388	1346	0	0	561	0	798	866	355	331	0	167
Adj No. of Lanes	2	2	0	0	2	1	2	1	1	2	0	1
Peak Hour Factor	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97
Percent Heavy Veh, %	0	2	0	0	1	2	1	1	1	7	0	6
Cap, veh/h	451	1334	0	0	746	344	1660	690	586	362	0	0
Arrive On Green	0.09	0.27	0.00	0.00	0.07	0.00	0.51	0.39	0.39	0.07	0.00	0.01
Sat Flow, veh/h	3309	3424	0	0	3510	1576	3260	1764	1500	3077	331	
Grp Volume(v), veh/h	388	1346	0	0	561	0	798	866	355	331	78.5	
Grp Sat Flow(s),veh/h/ln	1655	1668	0	0	1710	1576	1630	1764	1500	1539	E	
Q Serve(g_s), s	12.7	44.0	0.0	0.0	17.7	0.0	17.5	43.0	20.8	8.0		
Cycle Q Clear(g_c), s	12.7	44.0	0.0	0.0	17.7	0.0	17.5	43.0	20.8	8.0		
Prop In Lane	1.00		0.00	0.00		1.00	1.00		1.00	1.00		
Lane Grp Cap(c), veh/h	451	1334	0	0	746	344	1660	690	586	362		
V/C Ratio(X)	0.86	1.01	0.00	0.00	0.75	0.00	0.48	1.26	0.61	0.91		
Avail Cap(c_a), veh/h	451	1334	0	0	746	344	1660	690	586	362		
HCM Platoon Ratio	0.67	0.67	1.00	1.00	0.33	0.33	1.00	1.00	1.00	1.00		
Upstream Filter(I)	0.87	0.87	0.00	0.00	0.90	0.00	1.00	1.00	1.00	1.00		
Uniform Delay (d), s/veh	48.9	40.3	0.0	0.0	48.1	0.0	17.6	33.5	26.7	51.6		
Incr Delay (d2), s/veh	13.7	25.1	0.0	0.0	6.2	0.0	0.2	126.7	1.8	26.9		
Initial Q Delay(d3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
%ile BackOfQ(95%),veh/ln	10.6	44.9	0.0	0.0	13.7	0.0	12.5	81.3	13.8	5.4		
LnGrp Delay(d),s/veh	62.6	65.4	0.0	0.0	54.3	0.0	17.8	160.2	28.5	78.5		
LnGrp LOS	E	F			D		B	F	C	E		
Approach Vol, veh/h		1734			561			2019				
Approach Delay, s/veh		64.8			54.3			80.7				
Approach LOS		E			D			F				
Timer	1	2	3	4	5	6	7	8				
Assigned Phs		2	3		5	6	7	8				
Phs Duration (G+Y+Rc), s		49.0	61.0		20.0	29.0	13.0	48.0				
Change Period (Y+Rc), s		6.0	6.0		6.0	6.0	6.0	6.0				
Max Green Setting (Gmax), s		43.0	42.0		14.0	23.0	7.0	42.0				
Max Q Clear Time (g_c+I1), s		46.5	20.0		15.2	20.2	10.5	45.5				
Green Ext Time (p_c), s		0.0	3.1		0.0	2.4	0.0	0.0				
Intersection Summary												
HCM 2010 Ctrl Delay			71.4									
HCM 2010 LOS			E									

HCM 2010 Signalized Intersection Summary

8: I-476 SB Off Ramp & Lancaster Ave

01/11/2018



Movement	EBT	EBR	WBL	WBT	NBL	NBR		
Lane Configurations	↑↑↑		↔	↑↑	↔	↔		
Traffic Volume (veh/h)	866	0	189	1247	807	853		
Future Volume (veh/h)	866	0	189	1247	807	853		
Number	4	14	3	8	5	12		
Initial Q (Qb), veh	0	0	0	0	0	0		
Ped-Bike Adj(A_pbT)		1.00	1.00		1.00	1.00		
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00		
Adj Sat Flow, veh/h/ln	1730	0	1715	1782	1800	1785		
Adj Flow Rate, veh/h	884	0	193	1272	823	0		
Adj No. of Lanes	3	0	2	2	2	1		
Peak Hour Factor	0.98	0.98	0.98	0.98	0.98	0.98		
Percent Heavy Veh, %	3	0	6	2	2	7		
Cap, veh/h	2263	0	293	2089	972	443		
Arrive On Green	0.48	0.00	0.03	0.20	0.29	0.00		
Sat Flow, veh/h	5035	0	3169	3476	3326	1517		
Grp Volume(v), veh/h	884	0	193	1272	823	0		
Grp Sat Flow(s),veh/h/ln	1574	0	1584	1693	1663	1517		
Q Serve(g_s), s	13.2	0.0	6.6	37.6	25.6	0.0		
Cycle Q Clear(g_c), s	13.2	0.0	6.6	37.6	25.6	0.0		
Prop In Lane		0.00	1.00		1.00	1.00		
Lane Grp Cap(c), veh/h	2263	0	293	2089	972	443		
V/C Ratio(X)	0.39	0.00	0.66	0.61	0.85	0.00		
Avail Cap(c_a), veh/h	2263	0	317	2089	1421	648		
HCM Platoon Ratio	1.00	1.00	0.33	0.33	1.00	1.00		
Upstream Filter(I)	1.00	0.00	0.62	0.62	1.00	0.00		
Uniform Delay (d), s/veh	18.4	0.0	51.6	31.7	36.6	0.0		
Incr Delay (d2), s/veh	0.5	0.0	2.8	0.8	3.3	0.0		
Initial Q Delay(d3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0		
%ile BackOfQ(95%),veh/ln	9.8	0.0	5.3	23.3	18.0	0.0		
LnGrp Delay(d),s/veh	18.9	0.0	54.4	32.6	39.9	0.0		
LnGrp LOS	B		D	C	D			
Approach Vol, veh/h	884			1465	823			
Approach Delay, s/veh	18.9			35.5	39.9			
Approach LOS	B			D	D			
Timer	1	2	3	4	5	6	7	8
Assigned Phs		2	3	4				8
Phs Duration (G+Y+Rc), s		37.1	15.2	57.7				72.9
Change Period (Y+Rc), s		6.0	6.0	6.0				6.0
Max Green Setting (Gmax), s		46.0	10.0	36.0				52.0
Max Q Clear Time (g_c+I1), s		28.1	9.1	15.7				40.1
Green Ext Time (p_c), s		3.0	0.1	14.8				9.6
Intersection Summary								
HCM 2010 Ctrl Delay			32.0					
HCM 2010 LOS			C					

HCM 2010 Signalized Intersection Summary

9: Hillside Circuit & Lancaster Ave

01/11/2018



Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↔↔	↑↔		↔	↑↑	↔		↔	↔			
Traffic Volume (veh/h)	583	1595	4	2	895	494	6	2	2	0	0	0
Future Volume (veh/h)	583	1595	4	2	895	494	6	2	2	0	0	0
Number	5	2	12	1	6	16	3	8	18			
Initial Q (Qb), veh	0	0	0	0	0	0	0	0	0			
Ped-Bike Adj(A_pbT)	1.00		1.00	1.00		1.00	1.00		0.99			
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00			
Adj Sat Flow, veh/h/ln	1782	1748	1800	1800	1765	1835	1800	1800	1800			
Adj Flow Rate, veh/h	607	1661	4	2	932	0	6	2	2			
Adj No. of Lanes	2	2	0	1	2	1	0	1	1			
Peak Hour Factor	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96			
Percent Heavy Veh, %	1	3	3	0	2	2	0	0	0			
Cap, veh/h	704	2843	7	18	2124	988	21	7	25			
Arrive On Green	0.43	1.00	1.00	0.01	0.63	0.00	0.02	0.02	0.02			
Sat Flow, veh/h	3293	3398	8	1714	3353	1560	1301	434	1513			
Grp Volume(v), veh/h	607	811	854	2	932	0	8	0	2			
Grp Sat Flow(s),veh/h/ln	1646	1660	1746	1714	1676	1560	1735	0	1513			
Q Serve(g_s), s	18.4	0.0	0.0	0.1	15.5	0.0	0.5	0.0	0.1			
Cycle Q Clear(g_c), s	18.4	0.0	0.0	0.1	15.5	0.0	0.5	0.0	0.1			
Prop In Lane	1.00		0.00	1.00		1.00	0.75		1.00			
Lane Grp Cap(c), veh/h	704	1389	1461	18	2124	988	28	0	25			
V/C Ratio(X)	0.86	0.58	0.58	0.11	0.44	0.00	0.28	0.00	0.08			
Avail Cap(c_a), veh/h	928	1389	1461	109	2124	988	110	0	96			
HCM Platoon Ratio	2.00	2.00	2.00	1.00	1.00	1.00	1.00	1.00	1.00			
Upstream Filter(I)	0.09	0.09	0.09	1.00	1.00	0.00	1.00	0.00	1.00			
Uniform Delay (d), s/veh	30.0	0.0	0.0	53.9	10.2	0.0	53.5	0.0	53.3			
Incr Delay (d2), s/veh	0.7	0.2	0.2	2.6	0.7	0.0	5.4	0.0	1.4			
Initial Q Delay(d3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
%ile BackOfQ(95%),veh/ln	9.7	0.1	0.1	0.1	11.7	0.0	0.5	0.0	0.1			
LnGrp Delay(d),s/veh	30.7	0.2	0.2	56.5	10.9	0.0	58.8	0.0	54.7			
LnGrp LOS	C	A	A	E	B		E		D			
Approach Vol, veh/h		2272			934			10				
Approach Delay, s/veh		8.3			11.0			58.0				
Approach LOS		A			B			E				
Timer	1	2	3	4	5	6	7	8				
Assigned Phs	1	2			5	6		8				
Phs Duration (G+Y+Rc), s	6.2	97.0			28.5	74.7		6.8				
Change Period (Y+Rc), s	6.0	6.0			6.0	6.0		6.0				
Max Green Setting (Gmax), s	6.0	80.0			30.0	56.0		6.0				
Max Q Clear Time (g_c+1/2), s	12.6	2.5			20.9	18.0		2.6				
Green Ext Time (p_c), s	0.0	43.6			1.6	27.8		0.0				
Intersection Summary												
HCM 2010 Ctrl Delay				9.2								
HCM 2010 LOS				A								
Notes												

HCM 2010 Signalized Intersection Summary
 10: Radnor Chester Rd

01/11/2018



Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (veh/h)	142	1006	54	216	1507	446	94	380	85	98	135	109
Future Volume (veh/h)	142	1006	54	216	1507	446	94	380	85	98	135	109
Number	5	2	12	1	6	16	3	8	18	7	4	14
Initial Q (Qb), veh	0	0	0	0	0	0	0	0	0	0	0	0
Ped-Bike Adj(A_pbT)	1.00		1.00	1.00		1.00	1.00		1.00	1.00		1.00
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Adj Sat Flow, veh/h/ln	1739	1739	1809	1713	1747	1764	1764	1746	1764	1690	1724	1791
Adj Flow Rate, veh/h	148	1048	56	225	1570	465	98	396	89	102	141	114
Adj No. of Lanes	1	2	0	1	2	1	0	2	0	1	2	0
Peak Hour Factor	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96
Percent Heavy Veh, %	4	4	4	4	2	1	1	1	1	6	3	3
Cap, veh/h	171	1461	78	264	1520	685	153	501	114	213	610	459
Arrive On Green	0.06	0.46	0.46	0.06	0.46	0.46	0.24	0.24	0.24	0.05	0.34	0.34
Sat Flow, veh/h	1657	3191	170	1632	3319	1497	453	2069	469	1609	1782	1341
Grp Volume(v), veh/h	148	543	561	225	1570	465	297	0	286	102	129	126
Grp Sat Flow(s),veh/h/ln	1657	1652	1709	1632	1660	1497	1485	0	1506	1609	1638	1486
Q Serve(g_s), s	5.3	29.2	29.2	7.0	50.4	26.9	19.1	0.0	19.5	5.1	6.2	6.7
Cycle Q Clear(g_c), s	5.3	29.2	29.2	7.0	50.4	26.9	20.8	0.0	19.5	5.1	6.2	6.7
Prop In Lane	1.00		0.10	1.00		1.00	0.33		0.31	1.00		0.90
Lane Grp Cap(c), veh/h	171	756	782	264	1520	685	403	0	365	213	560	508
V/C Ratio(X)	0.87	0.72	0.72	0.85	1.03	0.68	0.74	0.00	0.78	0.48	0.23	0.25
Avail Cap(c_a), veh/h	171	756	782	264	1520	685	448	0	411	213	610	554
HCM Platoon Ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(I)	1.00	1.00	1.00	1.00	1.00	1.00	1.00	0.00	1.00	1.00	1.00	1.00
Uniform Delay (d), s/veh	26.3	24.1	24.1	25.7	29.8	23.5	39.3	0.0	39.0	29.6	25.8	26.0
Incr Delay (d2), s/veh	34.3	5.8	5.6	22.3	32.1	5.3	5.7	0.0	8.6	1.7	0.2	0.3
Initial Q Delay(d3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
%ile BackOfQ(95%),veh/ln	0.1	20.7	21.3	9.1	53.6	17.8	14.1	0.0	13.9	4.2	5.1	5.1
LnGrp Delay(d),s/veh	60.6	29.8	29.7	48.0	61.9	28.8	45.0	0.0	47.6	31.2	26.0	26.3
LnGrp LOS	E	C	C	D	F	C	D		D	C	C	C
Approach Vol, veh/h		1252			2260			583			357	
Approach Delay, s/veh		33.4			53.7			46.2			27.6	
Approach LOS		C			D			D			C	
Timer	1	2	3	4	5	6	7	8				
Assigned Phs	1	2		4	5	6	7	8				
Phs Duration (G+Y+Rc), s	2.0	55.4		42.6	12.0	55.4	11.0	31.6				
Change Period (Y+Rc), s	6.0	6.0		6.0	6.0	6.0	6.0	6.0				
Max Green Setting (Gmax), s	6.0	46.0		40.0	6.0	46.0	5.0	29.0				
Max Q Clear Time (g_c+19), s	19.5	31.7		8.7	7.8	52.9	7.6	22.8				
Green Ext Time (p_c), s	0.0	13.1		6.2	0.0	0.0	0.0	2.8				
Intersection Summary												
HCM 2010 Ctrl Delay				44.9								
HCM 2010 LOS				D								

HCM 2010 Signalized Intersection Summary


1: King of Prussia Rd & Parking Drive/Matsonford Rd

01/11/2018

Movement	EBL	EBT	EBR	WBL	WBT	WBR	SEL	SET	SER	NWL	NWT	NWR
Lane Configurations												
Traffic Volume (veh/h)	3	4	9	543	1	220	123	767	1	7	503	274
Future Volume (veh/h)	3	4	9	543	1	220	123	767	1	7	503	274
Number	3	8	18	7	4	14	5	2	12	1	6	16
Initial Q (Qb), veh	0	0	0	0	0	0	0	0	0	0	0	0
Ped-Bike Adj(A_pbT)	1.00		1.00	1.00		1.00	1.00		1.00	1.00		1.00
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Adj Sat Flow, veh/h/ln	1800	1800	1800	1800	1891	1891	1773	1844	1844	1782	1782	1817
Adj Flow Rate, veh/h	3	4	10	590	1	239	134	834	1	8	547	0
Adj No. of Lanes	1	1	0	1	1	0	1	1	0	1	1	1
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
Percent Heavy Veh, %	0	0	0	1	0	0	0	0	0	0	0	2
Cap, veh/h	413	178	444	633	3	623	288	921	1	141	641	556
Arrive On Green	0.39	0.39	0.39	0.39	0.39	0.39	0.08	0.50	0.50	0.36	0.36	0.00
Sat Flow, veh/h	1158	457	1142	1422	7	1601	1689	1841	2	661	1782	1544
Grp Volume(v), veh/h	3	0	14	590	0	240	134	0	835	8	547	0
Grp Sat Flow(s),veh/h/ln	1158	0	1599	1422	0	1608	1689	0	1844	661	1782	1544
Q Serve(g_s), s	0.2	0.0	0.5	35.0	0.0	9.6	4.1	0.0	37.3	1.0	25.5	0.0
Cycle Q Clear(g_c), s	9.3	0.0	0.5	35.0	0.0	9.6	4.1	0.0	37.3	25.2	25.5	0.0
Prop In Lane	1.00		0.71	1.00		1.00	1.00		0.00	1.00		1.00
Lane Grp Cap(c), veh/h	413	0	622	633	0	625	288	0	922	141	641	556
V/C Ratio(X)	0.01	0.00	0.02	0.93	0.00	0.38	0.46	0.00	0.91	0.06	0.85	0.00
Avail Cap(c_a), veh/h	413	0	622	633	0	625	296	0	922	141	641	556
HCM Platoon Ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(l)	1.00	0.00	1.00	1.00	0.00	1.00	1.00	0.00	1.00	0.79	0.79	0.00
Uniform Delay (d), s/veh	22.9	0.0	17.0	28.6	0.0	19.8	18.8	0.0	20.6	37.6	26.6	0.0
Incr Delay (d2), s/veh	0.0	0.0	0.0	20.8	0.0	0.4	1.2	0.0	14.1	0.6	11.1	0.0
Initial Q Delay(d3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
%ile BackOfQ(95%),veh/ln	0.1	0.0	0.4	25.2	0.0	7.7	3.6	0.0	30.2	0.4	20.0	0.0
LnGrp Delay(d),s/veh	22.9	0.0	17.0	49.4	0.0	20.1	19.9	0.0	34.7	38.2	37.7	0.0
LnGrp LOS	C		B	D		C	B		C	D	D	
Approach Vol, veh/h		17			830			969			555	
Approach Delay, s/veh		18.0			40.9			32.6			37.7	
Approach LOS		B			D			C			D	
Timer	1	2	3	4	5	6	7	8				
Assigned Phs		2		4	5	6		8				
Phs Duration (G+Y+Rc), s		50.0		40.0	12.6	37.4		40.0				
Change Period (Y+Rc), s		6.0		6.0	6.0	6.0		6.0				
Max Green Setting (Gmax), s		44.0		34.0	7.0	31.0		34.0				
Max Q Clear Time (g_c+I1), s		39.3		37.5	6.6	28.0		11.8				
Green Ext Time (p_c), s		3.4		0.0	0.0	2.2		3.5				
Intersection Summary												
HCM 2010 Ctrl Delay			36.6									
HCM 2010 LOS			D									

HCM 2010 Signalized Intersection Summary
 2: Radnor Chester Rd & King of Prussia Rd

01/11/2018



Movement	EBL	EBT	EBR	WBL	WBT	WBR	NEL	NET	NER	SWL	SWT	SWR
Lane Configurations												
Traffic Volume (veh/h)	8	766	677	59	426	1	409	7	145	32	37	50
Future Volume (veh/h)	8	766	677	59	426	1	409	7	145	32	37	50
Number	5	2	12	1	6	16	7	4	14	3	8	18
Initial Q (Qb), veh	0	0	0	0	0	0	0	0	0	0	0	0
Ped-Bike Adj(A_pbT)	1.00		1.00	1.00		1.00	1.00		0.98	1.00		0.98
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Adj Sat Flow, veh/h/ln	1782	1782	1872	1836	1835	1854	1782	1664	1835	1809	1743	1809
Adj Flow Rate, veh/h	8	798	0	61	444	1	426	7	151	33	39	52
Adj No. of Lanes	1	1	1	1	1	0	0	1	1	0	1	0
Peak Hour Factor	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96
Percent Heavy Veh, %	1	1	0	1	1	1	14	14	1	3	3	3
Cap, veh/h	325	772	690	80	793	2	282	3	678	51	57	41
Arrive On Green	0.43	0.43	0.00	0.43	0.43	0.43	0.44	0.44	0.44	0.44	0.44	0.44
Sat Flow, veh/h	950	1782	1591	705	1830	4	455	7	1526	0	128	93
Grp Volume(v), veh/h	8	798	0	61	0	445	433	0	151	124	0	0
Grp Sat Flow(s),veh/h/ln	950	1782	1591	705	0	1834	463	0	1526	221	0	0
Q Serve(g_s), s	0.6	39.0	0.0	0.0	0.0	16.3	0.0	0.0	5.5	0.0	0.0	0.0
Cycle Q Clear(g_c), s	16.4	39.0	0.0	39.0	0.0	16.3	40.0	0.0	5.5	40.0	0.0	0.0
Prop In Lane	1.00		1.00	1.00		0.00	0.98		1.00	0.27		0.42
Lane Grp Cap(c), veh/h	325	772	690	80	0	795	285	0	678	149	0	0
V/C Ratio(X)	0.02	1.03	0.00	0.76	0.00	0.56	1.52	0.00	0.22	0.83	0.00	0.00
Avail Cap(c_a), veh/h	325	772	690	80	0	795	285	0	678	149	0	0
HCM Platoon Ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(I)	0.09	0.09	0.00	1.00	0.00	1.00	1.00	0.00	1.00	1.00	0.00	0.00
Uniform Delay (d), s/veh	25.0	25.5	0.0	45.0	0.0	19.1	30.6	0.0	15.4	21.7	0.0	0.0
Incr Delay (d2), s/veh	0.0	19.9	0.0	49.4	0.0	2.8	250.7	0.0	0.2	31.4	0.0	0.0
Initial Q Delay(d3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
%ile BackOfQ(95%),veh/ln	0.3	41.5	0.0	4.7	0.0	13.8	48.4	0.0	4.2	5.7	0.0	0.0
LnGrp Delay(d),s/veh	25.0	45.4	0.0	94.4	0.0	21.9	281.3	0.0	15.6	53.0	0.0	0.0
LnGrp LOS	C	F		F		C	F		B	D		
Approach Vol, veh/h		806			506			584			124	
Approach Delay, s/veh		45.2			30.7			212.6			53.0	
Approach LOS		D			C			F			D	
Timer	1	2	3	4	5	6	7	8				
Assigned Phs		2		4		6		8				
Phs Duration (G+Y+Rc), s		44.0		46.0		44.0		46.0				
Change Period (Y+Rc), s		6.0		7.0		6.0		7.0				
Max Green Setting (Gmax), s		38.0		39.0		38.0		39.0				
Max Q Clear Time (g_c+I1), s		41.5		42.0		41.5		42.0				
Green Ext Time (p_c), s		0.0		0.0		0.0		0.0				
Intersection Summary												
HCM 2010 Ctrl Delay			90.4									
HCM 2010 LOS			F									

HCM 2010 TWSC
3: King of Prussia Rd & Septa Driveway

01/11/2018

Intersection

Int Delay, s/veh 4.4

Movement WBL WBR NBT NBR SBL SBT

Lane Configurations	W	W	N	N	S	S
Traffic Vol, veh/h	77	85	409	17	54	988
Future Vol, veh/h	77	85	409	17	54	988
Conflicting Peds, #/hr	2	10	0	17	17	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	None	-	None	-	None
Storage Length	0	-	-	-	100	-
Veh in Median Storage, #	0	-	0	-	-	0
Grade, %	0	-	0	-	-	0
Peak Hour Factor	85	85	85	85	85	85
Heavy Vehicles, %	0	17	1	0	17	1
Mvmt Flow	91	100	481	20	64	1162

Major/Minor Minor1 Major1 Major2

Conflicting Flow All	1799	518	0	0	518	0
Stage 1	508	-	-	-	-	-
Stage 2	1291	-	-	-	-	-
Critical Hdwy	6.4	6.37	-	-	4.27	-
Critical Hdwy Stg 1	5.4	-	-	-	-	-
Critical Hdwy Stg 2	5.4	-	-	-	-	-
Follow-up Hdwy	3.5	3.453	-	-	2.353	-
Pot Cap-1 Maneuver	~ 89	529	-	-	976	-
Stage 1	608	-	-	-	-	-
Stage 2	260	-	-	-	-	-
Platoon blocked, %			-	-		-
Mov Cap-1 Maneuver	~ 82	517	-	-	968	-
Mov Cap-2 Maneuver	186	-	-	-	-	-
Stage 1	599	-	-	-	-	-
Stage 2	242	-	-	-	-	-

Approach WB NB SB

HCM Control Delay, s	41.4	0	0.5
HCM LOS	E		

Minor Lane/Major Mvmt NBT NBRWBLn1 SBL SBT

Capacity (veh/h)	-	-	280	968	-
HCM Lane V/C Ratio	-	-	0.681	0.066	-
HCM Control Delay (s)	-	-	41.4	9	-
HCM Lane LOS	-	-	E	A	-
HCM 95th %tile Q(veh)	-	-	4.5	0.2	-

Notes

~: Volume exceeds capacity \$: Delay exceeds 300s +: Computation Not Defined *: All major volume in platoon

Intersection												
Int Delay, s/veh	278.8											
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		↕		↕	↕			↕			↕	
Traffic Vol, veh/h	5	0	42	272	0	60	24	299	101	14	1117	5
Future Vol, veh/h	5	0	42	272	0	60	24	299	101	14	1117	5
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	8	8	0	0
Sign Control	Stop	Stop	Stop	Stop	Stop	Stop	Free	Free	Free	Free	Free	Free
RT Channelized	-	-	None	-	-	None	-	-	None	-	-	None
Storage Length	-	-	-	0	-	-	-	-	-	-	-	-
Veh in Median Storage, #	-	0	-	-	0	-	-	0	-	-	0	-
Grade, %	-	0	-	-	0	-	-	0	-	-	0	-
Peak Hour Factor	94	94	94	94	94	94	94	94	94	94	94	94
Heavy Vehicles, %	0	0	0	0	0	0	0	1	0	0	1	0
Mvmt Flow	5	0	45	289	0	64	26	318	107	15	1188	5

Major/Minor	Minor2		Minor1		Major1		Major2					
Conflicting Flow All	1676	1706	1191	1674	1654	380	1194	0	0	434	0	0
Stage 1	1221	1221	-	431	431	-	-	-	-	-	-	-
Stage 2	455	485	-	1243	1223	-	-	-	-	-	-	-
Critical Hdwy	7.1	6.5	6.2	7.1	6.5	6.2	4.1	-	-	4.1	-	-
Critical Hdwy Stg 1	6.1	5.5	-	6.1	5.5	-	-	-	-	-	-	-
Critical Hdwy Stg 2	6.1	5.5	-	6.1	5.5	-	-	-	-	-	-	-
Follow-up Hdwy	3.5	4	3.3	3.5	4	3.3	2.2	-	-	2.2	-	-
Pot Cap-1 Maneuver	76	92	231	~ 77	99	671	592	-	-	1136	-	-
Stage 1	222	255	-	607	586	-	-	-	-	-	-	-
Stage 2	589	555	-	~ 216	254	-	-	-	-	-	-	-
Platoon blocked, %								-	-	-	-	-
Mov Cap-1 Maneuver	64	83	231	~ 57	89	667	592	-	-	1136	-	-
Mov Cap-2 Maneuver	64	83	-	~ 57	89	-	-	-	-	-	-	-
Stage 1	209	245	-	568	548	-	-	-	-	-	-	-
Stage 2	502	519	-	~ 167	244	-	-	-	-	-	-	-

Approach	EB	WB	NB	SB
HCM Control Delay, s	32.3	\$ 1622.6	0.6	0.1
HCM LOS	D	F		

Minor Lane/Major Mvmt	NBL	NBT	NBR	EBLn1	WBLn1	WBLn2	SBL	SBT	SBR
Capacity (veh/h)	592	-	-	181	57	667	1136	-	-
HCM Lane V/C Ratio	0.043	-	-	0.276	5.077	0.096	0.013	-	-
HCM Control Delay (s)	11.4	0	-	32.3	1978.1	11	8.2	0	-
HCM Lane LOS	B	A	-	D	F	B	A	A	-
HCM 95th %tile Q(veh)	0.1	-	-	1.1	32.4	0.3	0	-	-

Notes
 ~: Volume exceeds capacity \$: Delay exceeds 300s +: Computation Not Defined *: All major volume in platoon

HCM 2010 TWSC
6: King of Prussia Rd & Southern Driveway

01/11/2018

Intersection						
Int Delay, s/veh	0.2					
Movement	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations	↘↗		↑	↗↘	↘↗	↑
Traffic Vol, veh/h	4	4	419	2	2	1425
Future Vol, veh/h	4	4	419	2	2	1425
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	None	-	None	-	None
Storage Length	0	-	-	0	100	-
Veh in Median Storage, #	0	-	0	-	-	0
Grade, %	0	-	0	-	-	0
Peak Hour Factor	94	94	94	94	94	94
Heavy Vehicles, %	0	0	1	0	0	1
Mvmt Flow	4	4	446	2	2	1516






















Major/Minor	Minor1	Major1	Major2		
Conflicting Flow All	1966	446	0	0	446
Stage 1	446	-	-	-	-
Stage 2	1520	-	-	-	-
Critical Hdwy	6.4	6.2	-	-	4.1
Critical Hdwy Stg 1	5.4	-	-	-	-
Critical Hdwy Stg 2	5.4	-	-	-	-
Follow-up Hdwy	3.5	3.3	-	-	2.2
Pot Cap-1 Maneuver	70	617	-	-	1125
Stage 1	649	-	-	-	-
Stage 2	201	-	-	-	-
Platoon blocked, %			-	-	-
Mov Cap-1 Maneuver	70	617	-	-	1125
Mov Cap-2 Maneuver	70	-	-	-	-
Stage 1	649	-	-	-	-
Stage 2	201	-	-	-	-

Approach	WB	NB	SB
HCM Control Delay, s	35.6	0	0
HCM LOS	E		

Minor Lane/Major Mvmt	NBT	NBRWBLn1	SBL	SBT
Capacity (veh/h)	-	-	126	1125
HCM Lane V/C Ratio	-	-	0.068	0.002
HCM Control Delay (s)	-	-	35.6	8.2
HCM Lane LOS	-	-	E	A
HCM 95th %tile Q(veh)	-	-	0.2	0

HCM 2010 Signalized Intersection Summary
 7: I-476 Off Ramp/King of Prussia Rd & Lancaster Ave

01/11/2018

												
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (veh/h)	103	1567	0	0	589	182	277	235	218	845	0	459
Future Volume (veh/h)	103	1567	0	0	589	182	277	235	218	845	0	459
Number	5	2	12	1	6	16	3	8	18	7	4	14
Initial Q (Qb), veh	0	0	0	0	0	0	0	0	0	0	0	0
Ped-Bike Adj(A_pbT)	1.00		1.00	1.00		1.00	1.00		1.00	1.00		1.00
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Adj Sat Flow, veh/h/ln	1791	1773	0	0	1800	1872	1764	1782	1782	1764	0	1853
Adj Flow Rate, veh/h	110	1667	0	0	627	0	295	250	232	899	0	488
Adj No. of Lanes	2	2	0	0	2	1	2	1	1	2	0	1
Peak Hour Factor	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94
Percent Heavy Veh, %	0	1	0	0	1	1	1	0	0	1	0	0
Cap, veh/h	217	1623	0	0	1268	590	1393	292	248	858	0	0
Arrive On Green	0.04	0.32	0.00	0.00	0.74	0.00	0.43	0.16	0.16	0.22	0.00	0.01
Sat Flow, veh/h	3309	3458	0	0	3510	1591	3260	1782	1515	3260	899	
Grp Volume(v), veh/h	110	1667	0	0	627	0	295	250	232	899	88.1	
Grp Sat Flow(s),veh/h/ln	1655	1685	0	0	1710	1591	1630	1782	1515	1630	F	
Q Serve(g_s), s	3.6	53.0	0.0	0.0	8.2	0.0	6.3	15.0	16.6	24.0		
Cycle Q Clear(g_c), s	3.6	53.0	0.0	0.0	8.2	0.0	6.3	15.0	16.6	24.0		
Prop In Lane	1.00		0.00	0.00		1.00	1.00		1.00	1.00		
Lane Grp Cap(c), veh/h	217	1623	0	0	1268	590	1393	292	248	858		
V/C Ratio(X)	0.51	1.03	0.00	0.00	0.49	0.00	0.21	0.86	0.94	1.05		
Avail Cap(c_a), veh/h	391	1623	0	0	1268	590	1393	292	248	858		
HCM Platoon Ratio	0.67	0.67	1.00	1.00	2.00	2.00	1.00	1.00	1.00	1.00		
Upstream Filter(I)	0.86	0.86	0.00	0.00	0.86	0.00	1.00	1.00	1.00	1.00		
Uniform Delay (d), s/veh	50.9	37.2	0.0	0.0	10.0	0.0	19.8	44.8	45.4	44.2		
Incr Delay (d2), s/veh	1.6	27.9	0.0	0.0	1.2	0.0	0.1	21.6	40.0	43.9		
Initial Q Delay(d3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
%ile BackOfQ(95%),veh/ln	3.0	55.7	0.0	0.0	6.8	0.0	5.1	14.1	14.8	9.4		
LnGrp Delay(d),s/veh	52.4	65.2	0.0	0.0	11.2	0.0	19.9	66.3	85.4	88.1		
LnGrp LOS	D	F			B		B	E	F	F		
Approach Vol, veh/h		1777			627			777				
Approach Delay, s/veh		64.4			11.2			54.4				
Approach LOS		E			B			D				
Timer	1	2	3	4	5	6	7	8				
Assigned Phs		2	3		5	6	7	8				
Phs Duration (G+Y+Rc), s		58.0	52.0		12.2	45.8	29.0	23.0				
Change Period (Y+Rc), s		6.0	6.0		6.0	6.0	6.0	6.0				
Max Green Setting (Gmax), s		52.0	23.0		12.0	34.0	23.0	17.0				
Max Q Clear Time (g_c+I1), s		55.5	8.8		6.1	10.7	26.5	19.1				
Green Ext Time (p_c), s		0.0	0.8		0.1	17.8	0.0	0.0				
Intersection Summary												
HCM 2010 Ctrl Delay			59.5									
HCM 2010 LOS			E									

HCM 2010 Signalized Intersection Summary
 8: I-476 SB Off Ramp & Lancaster Ave

01/11/2018



Movement	EBT	EBR	WBL	WBT	NBL	NBR		
Lane Configurations	↑↑↑		↵↵	↑↑	↵↵	↵		
Traffic Volume (veh/h)	1072	0	580	782	627	516		
Future Volume (veh/h)	1072	0	580	782	627	516		
Number	4	14	3	8	5	12		
Initial Q (Qb), veh	0	0	0	0	0	0		
Ped-Bike Adj(A_pbT)		1.00	1.00		1.00	1.00		
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00		
Adj Sat Flow, veh/h/ln	1730	0	1800	1782	1818	1891		
Adj Flow Rate, veh/h	1094	0	592	798	640	0		
Adj No. of Lanes	3	0	2	2	2	1		
Peak Hour Factor	0.98	0.98	0.98	0.98	0.98	0.98		
Percent Heavy Veh, %	3	0	1	2	1	1		
Cap, veh/h	1980	0	724	2311	762	364		
Arrive On Green	0.42	0.00	0.07	0.23	0.23	0.00		
Sat Flow, veh/h	5035	0	3326	3476	3359	1607		
Grp Volume(v), veh/h	1094	0	592	798	640	0		
Grp Sat Flow(s),veh/h/ln	1574	0	1663	1693	1679	1607		
Q Serve(g_s), s	19.3	0.0	19.3	21.8	20.0	0.0		
Cycle Q Clear(g_c), s	19.3	0.0	19.3	21.8	20.0	0.0		
Prop In Lane		0.00	1.00		1.00	1.00		
Lane Grp Cap(c), veh/h	1980	0	724	2311	762	364		
V/C Ratio(X)	0.55	0.00	0.82	0.35	0.84	0.00		
Avail Cap(c_a), veh/h	1980	0	847	2311	916	438		
HCM Platoon Ratio	1.00	1.00	0.33	0.33	1.00	1.00		
Upstream Filter(I)	1.00	0.00	0.75	0.75	1.00	0.00		
Uniform Delay (d), s/veh	24.1	0.0	48.9	22.0	40.6	0.0		
Incr Delay (d2), s/veh	1.1	0.0	4.2	0.3	6.0	0.0		
Initial Q Delay(d3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0		
%ile BackOfQ(95%),veh/ln	8.3	0.0	13.7	14.9	15.0	0.0		
LnGrp Delay(d),s/veh	25.3	0.0	53.1	22.3	46.7	0.0		
LnGrp LOS	C		D	C	D			
Approach Vol, veh/h	1094			1390	640			
Approach Delay, s/veh	25.3			35.4	46.7			
Approach LOS	C			D	D			
Timer	1	2	3	4	5	6	7	8
Assigned Phs		2	3	4				8
Phs Duration (G+Y+Rc), s		29.9	28.9	51.1				80.1
Change Period (Y+Rc), s		6.0	6.0	6.0				6.0
Max Green Setting (Gmax), s		29.0	27.0	36.0				69.0
Max Q Clear Time (g_c+11), s		22.5	21.8	21.8				24.3
Green Ext Time (p_c), s		1.4	1.1	10.1				20.3
Intersection Summary								
HCM 2010 Ctrl Delay			34.2					
HCM 2010 LOS			C					

HCM 2010 Signalized Intersection Summary
 9: Hillside Circuit & Lancaster Ave

01/11/2018



Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↖ ↗	↕		↖ ↗	↕	↖ ↗		↕	↖ ↗			
Traffic Volume (veh/h)	1170	1796	15	6	734	595	3	1	2	0	0	0
Future Volume (veh/h)	1170	1796	15	6	734	595	3	1	2	0	0	0
Number	5	2	12	1	6	16	3	8	18			
Initial Q (Qb), veh	0	0	0	0	0	0	0	0	0			
Ped-Bike Adj(A_pbT)	1.00		1.00	1.00		1.00	1.00		0.88			
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00			
Adj Sat Flow, veh/h/ln	1782	1731	1800	1800	1782	1853	1800	1800	1800			
Adj Flow Rate, veh/h	1219	1871	16	6	765	0	3	1	2			
Adj No. of Lanes	2	2	0	1	2	1	0	1	1			
Peak Hour Factor	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96			
Percent Heavy Veh, %	1	4	4	0	1	1	0	0	0			
Cap, veh/h	1227	2795	24	23	1616	752	18	6	18			
Arrive On Green	0.75	1.00	1.00	0.01	0.48	0.00	0.01	0.01	0.01			
Sat Flow, veh/h	3293	3342	29	1714	3386	1575	1301	434	1345			
Grp Volume(v), veh/h	1219	919	968	6	765	0	4	0	2			
Grp Sat Flow(s),veh/h/ln	1646	1645	1726	1714	1693	1575	1735	0	1345			
Q Serve(g_s), s	39.9	0.0	0.0	0.4	16.8	0.0	0.3	0.0	0.2			
Cycle Q Clear(g_c), s	39.9	0.0	0.0	0.4	16.8	0.0	0.3	0.0	0.2			
Prop In Lane	1.00		0.02	1.00		1.00	0.75		1.00			
Lane Grp Cap(c), veh/h	1227	1376	1444	23	1616	752	24	0	18			
V/C Ratio(X)	0.99	0.67	0.67	0.26	0.47	0.00	0.17	0.00	0.11			
Avail Cap(c_a), veh/h	1227	1376	1444	109	1616	752	110	0	86			
HCM Platoon Ratio	2.00	2.00	2.00	1.00	1.00	1.00	1.00	1.00	1.00			
Upstream Filter(I)	0.09	0.09	0.09	1.00	1.00	0.00	1.00	0.00	1.00			
Uniform Delay (d), s/veh	13.9	0.0	0.0	53.7	19.4	0.0	53.6	0.0	53.6			
Incr Delay (d2), s/veh	6.3	0.2	0.2	5.6	1.0	0.0	3.3	0.0	2.6			
Initial Q Delay(d3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
%ile BackOfQ(95%),veh/ln	20.4	0.2	0.2	0.4	12.7	0.0	0.3	0.0	0.1			
LnGrp Delay(d),s/veh	20.1	0.2	0.2	59.3	20.4	0.0	56.9	0.0	56.2			
LnGrp LOS	C	A	A	E	C		E		E			
Approach Vol, veh/h		3106			771			6				
Approach Delay, s/veh		8.0			20.7			56.7				
Approach LOS		A			C			E				
Timer	1	2	3	4	5	6	7	8				
Assigned Phs	1	2			5	6		8				
Phs Duration (G+Y+Rc), s	6.5	97.0			46.0	57.5		6.5				
Change Period (Y+Rc), s	6.0	6.0			6.0	6.0		6.0				
Max Green Setting (Gmax), s	6.0	80.0			40.0	46.0		6.0				
Max Q Clear Time (g_c+12.5), s	6.0	2.5			42.4	19.3		2.7				
Green Ext Time (p_c), s	0.0	47.4			0.0	22.0		0.0				
Intersection Summary												
HCM 2010 Ctrl Delay				10.6								
HCM 2010 LOS				B								
Notes												

HCM 2010 Signalized Intersection Summary
 10: Radnor Chester Rd

01/11/2018



Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (veh/h)	122	1197	95	202	1128	128	83	215	144	418	456	219
Future Volume (veh/h)	122	1197	95	202	1128	128	83	215	144	418	456	219
Number	5	2	12	1	6	16	3	8	18	7	4	14
Initial Q (Qb), veh	0	0	0	0	0	0	0	0	0	0	0	0
Ped-Bike Adj(A_pbT)	1.00		1.00	1.00		1.00	1.00		1.00	1.00		1.00
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Adj Sat Flow, veh/h/ln	1791	1792	1809	1747	1764	1764	1764	1752	1764	1773	1779	1791
Adj Flow Rate, veh/h	126	1234	98	208	1163	132	86	222	148	431	470	226
Adj No. of Lanes	1	2	0	1	2	1	0	2	0	1	2	0
Peak Hour Factor	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97
Percent Heavy Veh, %	1	1	1	2	1	1	1	1	1	1	0	0
Cap, veh/h	224	1202	95	205	1271	567	151	349	238	333	875	418
Arrive On Green	0.08	0.38	0.38	0.08	0.38	0.38	0.26	0.26	0.26	0.08	0.39	0.39
Sat Flow, veh/h	1706	3196	253	1664	3352	1496	383	1324	902	1689	2221	1061
Grp Volume(v), veh/h	126	656	676	208	1163	132	221	0	235	431	357	339
Grp Sat Flow(s),veh/h/ln	1706	1703	1747	1664	1676	1496	1174	0	1434	1689	1690	1591
Q Serve(g_s), s	4.4	37.6	37.6	8.0	33.0	6.0	13.0	0.0	14.5	8.0	16.2	16.4
Cycle Q Clear(g_c), s	4.4	37.6	37.6	8.0	33.0	6.0	16.7	0.0	14.5	8.0	16.2	16.4
Prop In Lane	1.00		0.15	1.00		1.00	0.39		0.63	1.00		0.67
Lane Grp Cap(c), veh/h	224	640	657	205	1271	567	360	0	379	333	666	627
V/C Ratio(X)	0.56	1.03	1.03	1.01	0.92	0.23	0.61	0.00	0.62	1.29	0.54	0.54
Avail Cap(c_a), veh/h	247	640	657	205	1271	567	447	0	488	333	795	748
HCM Platoon Ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(I)	1.00	1.00	1.00	1.00	1.00	1.00	1.00	0.00	1.00	1.00	1.00	1.00
Uniform Delay (d), s/veh	22.8	31.2	31.2	25.5	29.5	21.1	32.9	0.0	32.4	34.3	23.3	23.3
Incr Delay (d2), s/veh	2.4	42.1	42.6	66.5	11.7	1.0	1.7	0.0	1.7	152.8	0.7	0.7
Initial Q Delay(d3),s/veh	0.0	0.0	0.0	0.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
%ile BackOfQ(95%),veh/ln	3.9	45.2	46.5	17.0	24.1	4.7	9.6	0.0	9.8	35.4	12.2	11.7
LnGrp Delay(d),s/veh	25.2	73.3	73.8	92.1	41.2	22.1	34.6	0.0	34.1	187.1	24.0	24.1
LnGrp LOS	C	F	F	F	D	C	C		C	F	C	C
Approach Vol, veh/h		1458			1503			456			1127	
Approach Delay, s/veh		69.4			46.6			34.3			86.4	
Approach LOS		E			D			C			F	
Timer	1	2	3	4	5	6	7	8				
Assigned Phs	1	2		4	5	6	7	8				
Phs Duration (G+Y+Rc), s	3.0	42.6		44.4	12.7	42.9	13.0	31.4				
Change Period (Y+Rc), s	6.0	6.0		6.0	6.0	6.0	6.0	6.0				
Max Green Setting (Gmax), s	7.0	29.0		46.0	8.0	28.0	7.0	33.0				
Max Q Clear Time (g_c+110), s	10.5	40.1		18.7	6.9	35.5	10.5	18.7				
Green Ext Time (p_c), s	0.0	0.0		8.9	0.0	0.0	0.0	6.6				
Intersection Summary												
HCM 2010 Ctrl Delay				62.5								
HCM 2010 LOS				E								

APPENDIX J

Signal Warrant Evaluation

TRAFFIC IMPACT STUDY

MIXED MEDICAL FACILITY

145 KING OF PRUSSIA ROAD
RADNOR TOWNSHIP
DELAWARE COUNTY, PA

UPHS1507

TRAFFIC SIGNAL WARRANT ANALYSIS

TRAFFIC VOLUMES SUMMARIES

King of Prussia & Raider Manual Count

Manual Traffic Counts

Start Time	KOP Rd NB	KOP Rd SB	Raider Rd
	Left/Thru	Thru/Right	EB Left/Right
7:00 AM	1,123	268	166
8:00 AM	1,171	235	25
4:00 PM	342	819	69
5:00 PM	292	1,038	48

Mixed Use Weekday Trips

Land Use :	Variable:	AM			PM			WEEKDAY		
		Entering	Exiting	Total	Entering	Exiting	Total	Entering	Exiting	Total
Mixed Use Weekday Trips	475,000 SF	571	148	719	158	425	583	3,759	3,759	7,518

Start Time	Mixed Use Entering Trips		Mixed Use Exiting Trips	
	Est. % Daily	Trips	Est. % Daily	Trips
7:00 AM	11.4%	428	2.4%	89
8:00 AM	15.2%	571	3.9%	148
4:00 PM	4.2%	158	11.3%	425
5:00 PM	3.2%	119	8.5%	319

For the purposes of this evaluation, the 8 AM and 4 PM hours were the peak hours for the AM and PM peak periods respectively. For 7-8 AM and 5-6 PM, a 50% reduction was taken from the trips from the peak periods to obtain these trips for entering and exiting vehicles.


Start Time	King of Prussia Rd						Site Driveway/Raider Rd	
	King of Prussia Rd NB Left/Thru (Existing)	King of Prussia Rd NB Right ¹ (Proposed)	King of Prussia Rd Site NB Thru ² (Proposed)	King of Prussia Rd SB Thru/Right (Existing)	King of Prussia SB left ³ (Proposed)	King of Prussia Site SB Thru ⁴ (Proposed)	Raider Road	Site Driveway ⁵
7:00 AM	1,123	274	44	268	39	13	166	69
8:00 AM	1,171	365	59	235	51	21	25	115
4:00 PM	342	101	20	819	14	44	69	332
5:00 PM	292	76	15	1,038	11	33	48	249

- ¹ Aprox. 64% of entering site trips
- ² Aprox. 10 % of entering trips + 1% of exiting trips
- ³ Aprox. 9% of entering site trips
- ⁴ Aprox. 1 % of entering trips + 10% of exiting trips
- ⁵ Aprox. 78 % of exiting trips

King of Prussia Rd & Site Driveway/Raider Road Warrant Volumes


Start Time	Major Street		Minor Streets		Minor Street	Major Street	4 Hr Warrant Met	Peak Hr Warrant Met
	King of Prussia Rd NB Left/Thru/Right	King of Prussia Rd SB Left/Thru/Right	Raider Road	Site Driveway				
7:00 AM	1,441	320	166	69	166	1,760	Y	Y
8:00 AM	1,595	307	25	115	115	1,902	Y	Y
4:00 PM	463	877	69	332	332	1,340	Y	Y
5:00 PM	383	1,082	48	249	249	1,465	Y	Y

Figure 4C-1. Warrant 2, Four-Hour Vehicular Volume

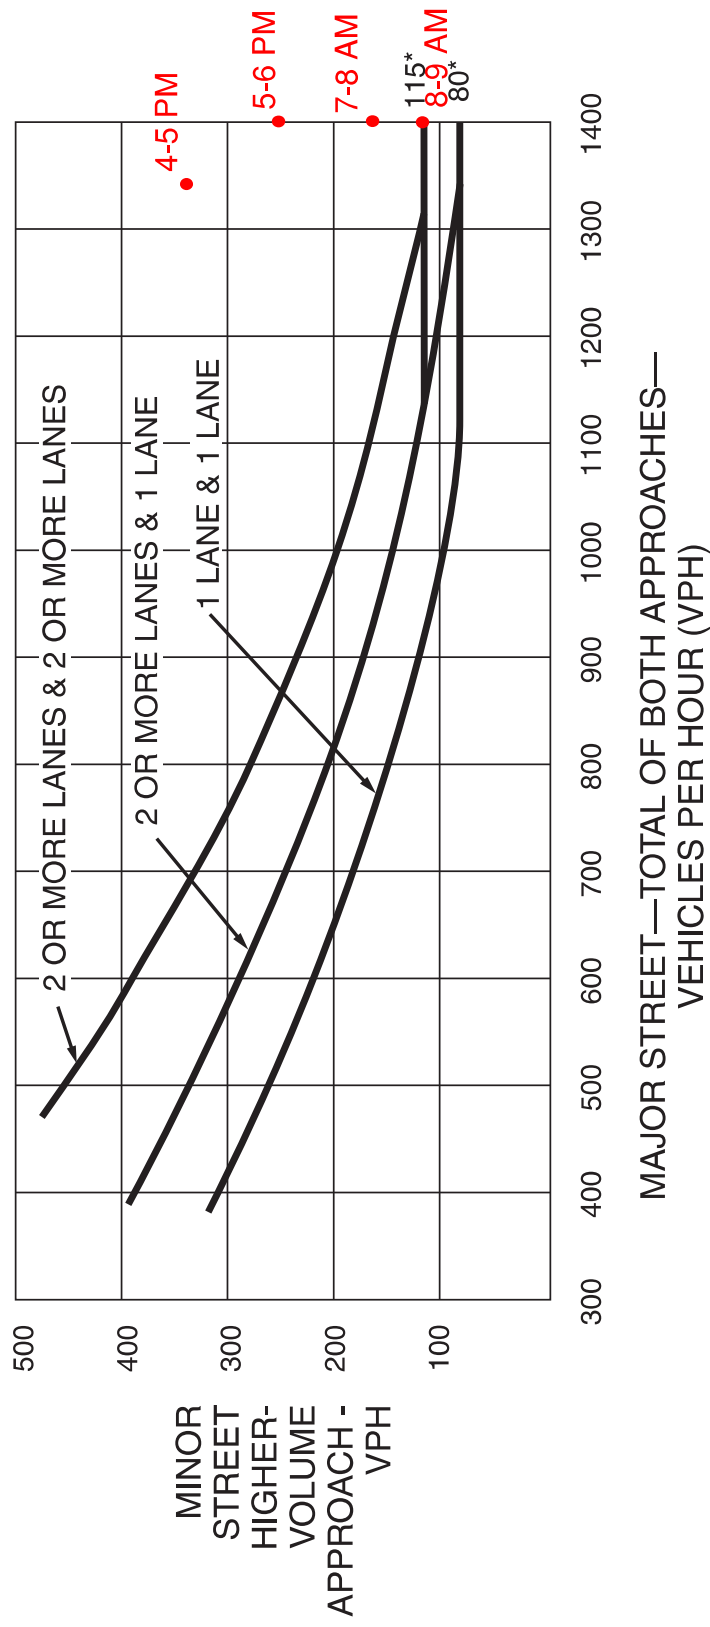

*Note: 115 vph applies as the lower threshold volume for a minor-street approach with two or more lanes and 80 vph applies as the lower threshold volume for a minor-street approach with one lane.

Figure 4C-3. Warrant 3, Peak Hour

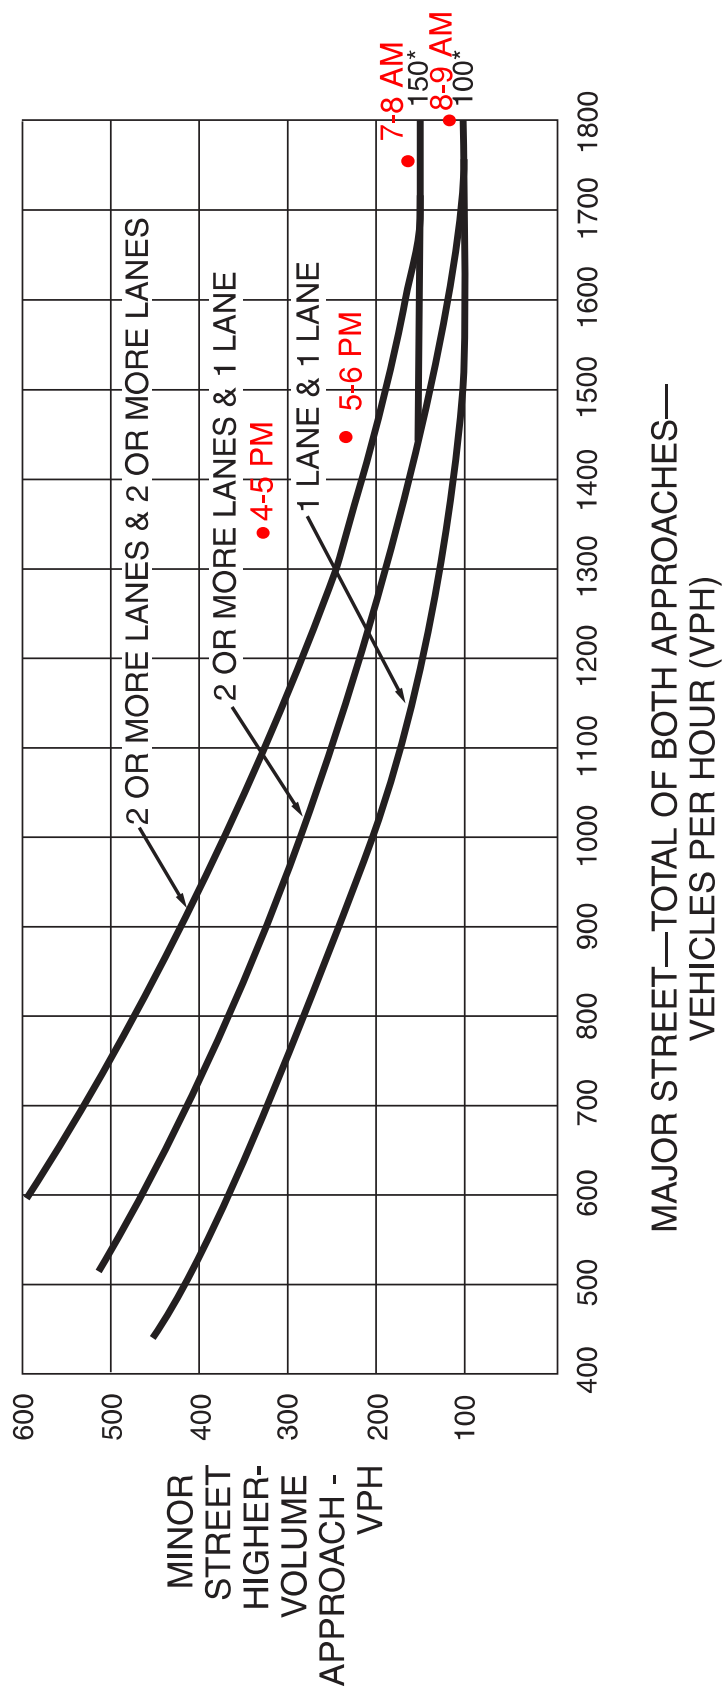

*Note: 150 vph applies as the lower threshold volume for a minor-street approach with two or more lanes and 100 vph applies as the lower threshold volume for a minor-street approach with one lane.

TRAFFIC SIGNAL WARRANT ANALYSIS

TRAFFIC VOLUMES SUMMARIES

King of Prussia & Septa Driveway Count

Manual Traffic Counts

Start Time	KOP Rd NB	KOP Rd SB	Septa Driveway
	Thru/Right	Left/Thru	WB Left/Right
7:00 AM	936	303	23
8:00 AM	1,012	231	25
4:00 PM	358	773	73
5:00 PM	335	970	74

Mixed Use Weekday Trips

Land Use :	Variable:	AM			PM			WEEKDAY		
		Entering	Exiting	Total	Entering	Exiting	Total	Entering	Exiting	Total
Mixed Use Weekday Trips	475,000 SF	571	148	719	158	425	583	3,759	3,759	7,518

Start Time	Mixed Use Entering Trips		Mixed Use Exiting Trips	
	Est. % Daily Entering	Trips	Est. % Daily Exiting	Trips
7:00 AM	11.4%	428	2.4%	89
8:00 AM	15.2%	571	3.9%	148
4:00 PM	4.2%	158	11.3%	425
5:00 PM	3.2%	119	8.5%	319

For the purposes of this evaluation, the 8 AM and 4 PM hours were the peak hours for the AM and PM peak periods respectively. For 7-8 AM and 5-6 PM, a reduction was taken from the trips from the peak periods to obtain these trips for entering and exiting vehicles.

Start Time	King of Prussia Rd						Site Driveway
	King of Prussia Rd NB Thru/Right (Existing)	King of Prussia Rd NB Right ¹ (Proposed)	King of Prussia Rd Site NB Thru ² (Proposed)	King of Prussia Rd SB Left/Thru (Existing)	King of Prussia SB Left ³ (Proposed)	King of Prussia Site SB Thru ⁴ (Proposed)	Site Driveway ⁵
7:00 AM	936	43	13	303	64	43	41
8:00 AM	1,012	57	22	231	86	57	55
4:00 PM	358	16	64	773	24	16	158
5:00 PM	335	12	48	970	18	12	138

¹ Aprox. 10% of entering site trips

² Aprox. 15% of exiting trips

³ Aprox. 15% of entering site trips


⁴ Aprox. 10% of entering trips

⁵ Aprox. 20% of exiting trips

King of Prussia Rd & Septa Driveway Warrant Volumes


Start Time	Major Street		Minor Street	Minor Street	Major Street	4 Hr Warrant Met	Peak Hr Warrant Met
	King of Prussia Rd NB Left/Thru/Right	King of Prussia Rd SB Left/Thru/Right	Septa Driveway				
7:00 AM	992	410	41	41	1,402	N	N
8:00 AM	1,091	374	55	55	1,465	N	N
4:00 PM	438	813	158	158	1,250	Y	Y
5:00 PM	395	1,000	138	138	1,394	Y	Y

Figure 4C-1. Warrant 2, Four-Hour Vehicular Volume

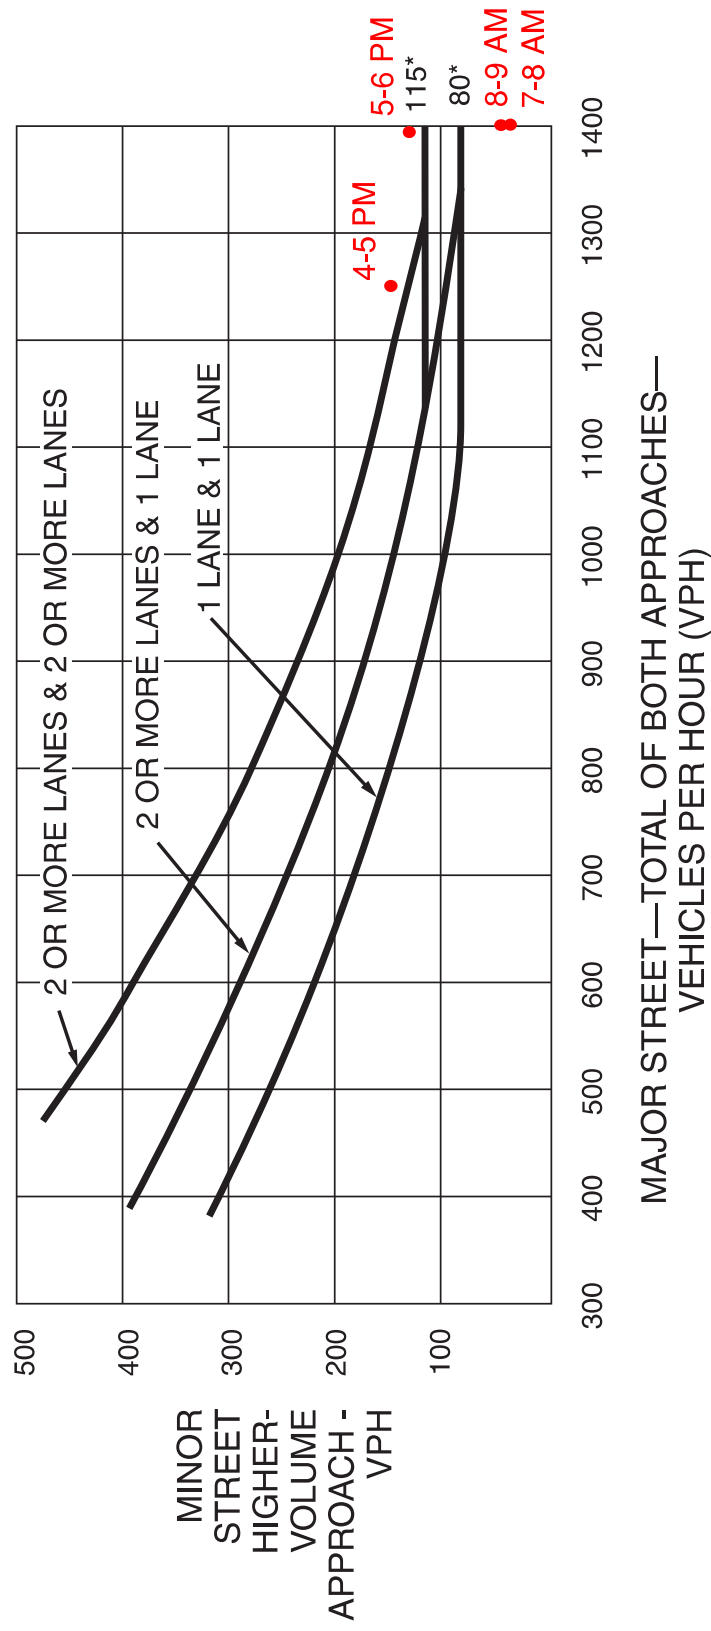

*Note: 115 vph applies as the lower threshold volume for a minor-street approach with two or more lanes and 80 vph applies as the lower threshold volume for a minor-street approach with one lane.

Figure 4C-3. Warrant 3, Peak Hour

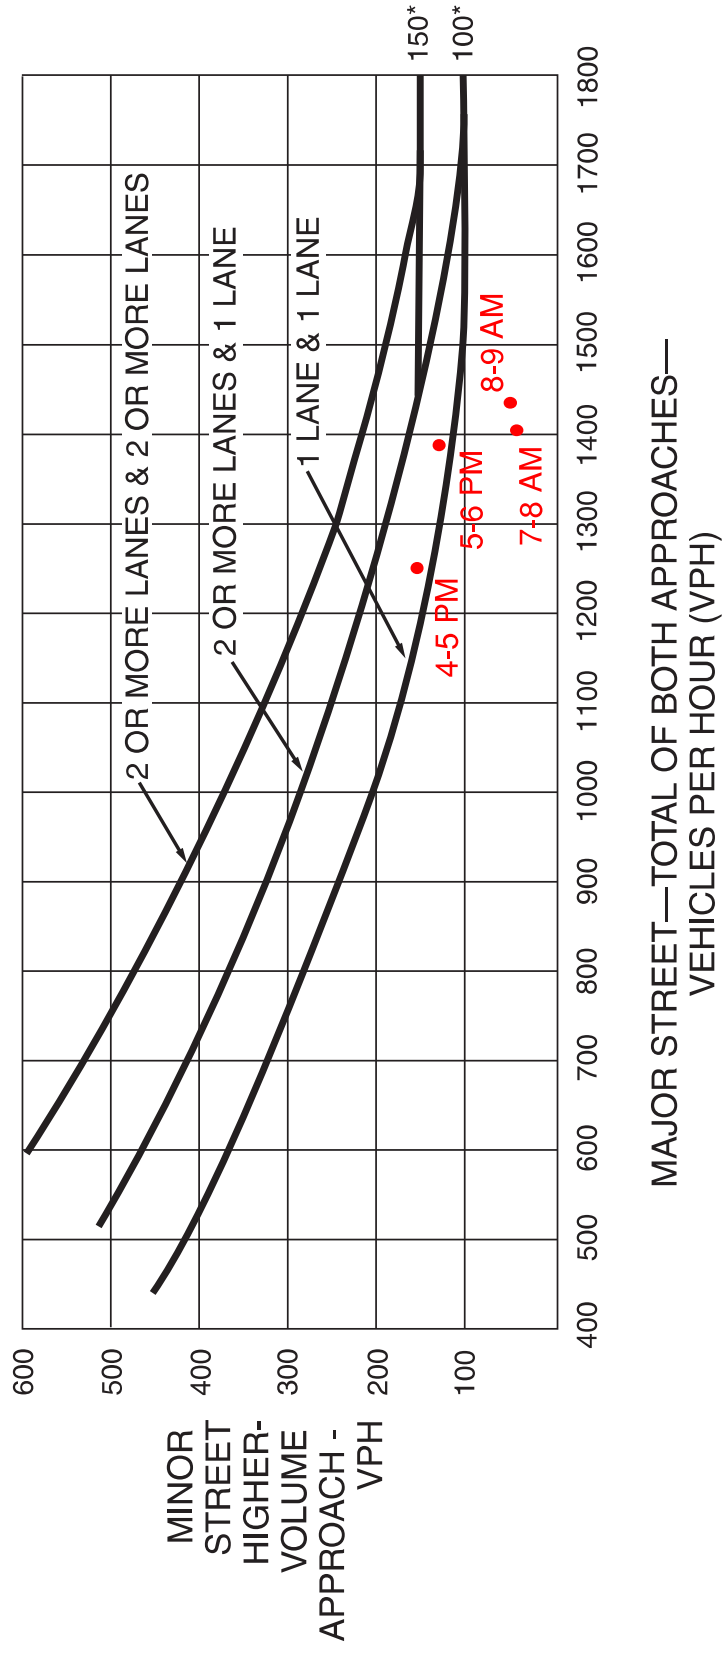

*Note: 150 vph applies as the lower threshold volume for a minor-street approach with two or more lanes and 100 vph applies as the lower threshold volume for a minor-street approach with one lane.

APPENDIX K

Left Turn Phase Evaluation

TRAFFIC IMPACT STUDY

MIXED MEDICAL FACILITY

145 KING OF PRUSSIA ROAD
RADNOR TOWNSHIP
DELAWARE COUNTY, PA

UPHS1507

LEFT TURN SIGNALIZATION

COUNTY: Delaware County
 MUNICIPALITY: Radnor Twp

INTERSECTION: King of Prussia Road and Raider Road/Site Driveway
 YEAR: 2020 Build Conditions

Time	Left Turn				Opposing		Calculated Conflict Factor	Meet Warrants?
	Direction	Exclusive Lane	Volume	Per Cycle	Through Volume	Number of Lanes		
AM PEAK	EB	N	9	0.23	0	1	0	No
	WB	N	99	2.48	0	1	0	No
	NB	Y	173	4.33	264	1	45,672	No
	SB	Y	52	1.30	1052	1	54,704	Yes
PM PEAK	EB	N	5	0.13	0	1	0	No
	WB	N	272	6.8	0	1	0	No
	NB	Y	23	0.575	1097	1	25,231	No
	SB	Y	14	0.35	294	1	4,116	No

Comments: A conflict factor of 50,000 is required for advanced left turn phasing for 2 - one hour periods

AM Peak Cycle Length (seconds): 90
 Midday Peak Cycle Length (seconds): 90
 PM Peak Cycle Length (seconds): 90

Conflict Factors:

1.1 Protected/Permitted Left Turn Phase

- A. Without separate turning lanes
 - 1 opposing lane; CF = 35,000
 - 2 opposing lanes; CF = 45,000
- B. With separate turning lane
 - 1 opposing lane; CF = 50,000
 - 2 opposing lanes; CF = 65,000

1.2 Protected/Prohibited Left Turn Phase

- (must have a separate turning lane)
- 1 opposing lane; CF = 67,500
 - 2 opposing lanes; CF = 90,000

Calculations completed in accordance with PennDOT Publication 149, Chapter 3

LEFT TURN SIGNALIZATION

COUNTY: Delaware County
MUNICIPALITY: Radnor Twp

INTERSECTION: King of Prussia Road and Raider Road/Site Driveway
YEAR: 2025 Build Conditions

Time	Left Turn				Opposing		Calculated Conflict Factor	Meet Warrants?
	Direction	Exclusive Lane	Volume	Per Cycle	Through Volume	Number of Lanes		
AM PEAK	EB	N	9	0.23	0	1	0	No
	WB	N	99	2.48	0	1	0	No
	NB	Y	177	4.43	268	1	47,436	No
	SB	Y	52	1.30	1071	1	55,692	Yes
PM PEAK	EB	N	5	0.13	0	1	0	No
	WB	N	272	6.8	0	1	0	No
	NB	Y	24	0.6	1117	1	26,808	No
	SB	Y	14	0.35	299	1	4,186	No

Comments: A conflict factor of 50,000 is required for advanced left turn phasing for 2 - one hour periods

AM Peak Cycle Length (seconds): 90
Midday Peak Cycle Length (seconds): 90
PM Peak Cycle Length (seconds): 90

Conflict Factors:

1.1 Protected/Permitted Left Turn Phase

- A. Without separate turning lanes
 - 1 opposing lane; CF = 35,000
 - 2 opposing lanes; CF = 45,000
- B. With separate turning lane
 - 1 opposing lane; CF = 50,000
 - 2 opposing lanes; CF = 65,000

1.2 Protected/Prohibited Left Turn Phase

- (must have a separate turning lane)
- 1 opposing lane; CF = 67,500
 - 2 opposing lanes; CF = 90,000

Calculations completed in accordance with PennDOT Publication 149, Chapter 3

APPENDIX L

Pedestrian and Vehicle Clearance Calculations

TRAFFIC IMPACT STUDY

MIXED MEDICAL FACILITY

145 KING OF PRUSSIA ROAD

RADNOR TOWNSHIP

DELAWARE COUNTY, PA

UPHS1507

VEHICLE CHANGE AND CLEARANCE INTERVALS

Assumptions and Calibration Inputs

Change and Clearance Intervals (CCI, seconds)

$$CCI = Y + AR$$

Yellow Change Interval (Y, seconds)

$$Y = t + \frac{1.47V}{2a \pm 64.4(g/100)} \quad (\text{typ. 3-6 seconds})$$

- t = Perception-reaction time, s (1 second) ←
- V = Approach speed, MPH ←
- a = Deceleration rate (10 ft/s²)
- g = Grade of approach, %

All-Red Clearance Interval (AR, seconds)

$$AR = \frac{(W + L)}{1.47V}$$

- W = Width of the intersection, ft
- (from the stop bar to the end of the farthest traveled lane)
- L = Length of Vehicle (20 ft) ←
- V = Approach speed, MPH

Calculations

Through Movement Phases									
Approach Description	Direction	V	g (%)	W	Y	AR	CCI	Comments	
King of Prussia Road SB	SB	35	-2	75	3.8	1.9	5.7		
King of Prussia Road NB	NB	35	2	75	3.5	1.9	5.4		
Raider Road	EB	25	-2	60	3.0	2.2	5.2		
Site Driveway	WB	25	2	60	2.8	2.2	5.0		
Left-Turn Movement Phases									
Approach Description	Direction	V	g (%)	W	Y	AR	CCI	Comments	
King of Prussia Road SB	SB	35	-2	60	3.8	1.6	5.4		
King of Prussia Road NB	NB	35	2	60	3.5	1.6	5.1		

PEDESTRIAN INTERVALS

Assumptions and Calibration Inputs

Walk Interval¹ $T_w = \left(\frac{1}{2} \frac{L}{S_w} \right) + 3$ <p style="text-align: center; font-size: small;">(T_w, seconds)</p>
Pedestrian Change Interval $T_{PC} = \frac{L}{S_w}$ <p style="text-align: center; font-size: small;">(T_{PC}, seconds)</p>
Minimum Duration $(T_w + T_{pc})_{\min} = \frac{(L+6)}{3}$ <p style="text-align: center; font-size: small;">($(T_w + T_{pc})_{\min}$, seconds)</p>

1) The walk interval should be at least 7 seconds, but where justified, a minimum 4 second interval may be used.

Pedestrian Interval Variables

L = Pedestrian walking distance from the curb or edge of shoulder to the far edge of the traveled way, ft

S_w = Walking Speed, ft/s (3.5 ft/s) ← 3.5

Minimum Green Interval²

$$T_p = \frac{L}{S_w} + 3$$

(T_p , seconds)

2) Minimum green interval when no pedestrian signals are present or proposed

Calculations

Description of Pedestrian Crossing	Ped Signal	L	T_w	T_{pc}	$(T_w + T_{pc})_{\min}$	T_p	Comments
Crossing of N King of Prussia	Yes	45	9.5	12.9	17.0	N/A	Using 6 sec. M and 13 sec FH
Crossing of S. King of Prussia	Yes	45	9.5	12.9	17.0	N/A	Using 6 sec. M and 13 sec FH
Crossing Raider Road	Yes	30	7.3	8.6	12.0	N/A	
Crossing Site Driveway	Yes	30	7.3	8.6	12.0	N/A	

APPENDIX M

2020 and 2025 Build Condition with Improvements

Capacity Analysis Worksheets

TRAFFIC IMPACT STUDY

MIXED MEDICAL FACILITY

145 KING OF PRUSSIA ROAD






















RADNOR TOWNSHIP

DELAWARE COUNTY, PA

UPHS1507

HCM 2010 Signalized Intersection Summary
 1: King of Prussia Rd & Parking Drive/Matsonford Rd


01/11/2018

												
Movement	EBL	EBT	EBR	WBL	WBT	WBR	SEL	SET	SER	NWL	NWT	NWR
Lane Configurations												
Traffic Volume (veh/h)	1	0	2	314	7	102	368	629	2	12	626	599
Future Volume (veh/h)	1	0	2	314	7	102	368	629	2	12	626	599
Number	3	8	18	7	4	14	5	2	12	1	6	16
Initial Q (Qb), veh	0	0	0	0	0	0	0	0	0	0	0	0
Ped-Bike Adj(A_pbT)	1.00		1.00	1.00		1.00	1.00		1.00	1.00		1.00
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Adj Sat Flow, veh/h/ln	1800	1800	1800	1748	1744	1891	1721	1826	1844	1782	1764	1817
Adj Flow Rate, veh/h	1	0	2	349	8	113	409	699	2	13	696	0
Adj No. of Lanes	1	1	0	1	1	0	1	1	0	1	1	1
Peak Hour Factor	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90
Percent Heavy Veh, %	0	0	0	4	0	0	3	1	1	0	1	2
Cap, veh/h	333	0	391	437	25	357	390	1152	3	371	686	601
Arrive On Green	0.26	0.00	0.26	0.26	0.26	0.26	0.19	0.63	0.63	0.39	0.39	0.00
Sat Flow, veh/h	1291	0	1530	1396	99	1398	1639	1820	5	749	1764	1544
Grp Volume(v), veh/h	1	0	2	349	0	121	409	0	701	13	696	0
Grp Sat Flow(s),veh/h/ln	1291	0	1530	1396	0	1497	1639	0	1825	749	1764	1544
Q Serve(g_s), s	0.1	0.0	0.1	22.3	0.0	5.9	17.0	0.0	20.6	1.0	35.0	0.0
Cycle Q Clear(g_c), s	5.4	0.0	0.1	22.3	0.0	5.9	17.0	0.0	20.6	1.0	35.0	0.0
Prop In Lane	1.00		1.00	1.00		0.93	1.00		0.00	1.00		1.00
Lane Grp Cap(c), veh/h	333	0	391	437	0	383	390	0	1156	371	686	601
V/C Ratio(X)	0.00	0.00	0.01	0.80	0.00	0.32	1.05	0.00	0.61	0.04	1.01	0.00
Avail Cap(c_a), veh/h	333	0	391	437	0	383	390	0	1156	371	686	601
HCM Platoon Ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(I)	1.00	0.00	1.00	1.00	0.00	1.00	1.00	0.00	1.00	1.00	1.00	0.00
Uniform Delay (d), s/veh	29.1	0.0	25.0	33.3	0.0	27.1	27.5	0.0	9.8	17.1	27.5	0.0
Incr Delay (d2), s/veh	0.0	0.0	0.0	10.1	0.0	0.5	59.2	0.0	2.4	0.2	38.0	0.0
Initial Q Delay(d3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
%ile BackOfQ(95%),veh/ln	0.0	0.0	0.1	15.0	0.0	4.4	28.9	0.0	16.3	0.4	43.6	0.0
LnGrp Delay(d),s/veh	29.1	0.0	25.0	43.4	0.0	27.6	86.7	0.0	12.2	17.3	65.5	0.0
LnGrp LOS	C		C	D		C	F		B	B	F	
Approach Vol, veh/h		3			470			1110			709	
Approach Delay, s/veh		26.4			39.3			39.6			64.6	
Approach LOS		C			D			D			E	
Timer	1	2	3	4	5	6	7	8				
Assigned Phs		2		4	5	6		8				
Phs Duration (G+Y+Rc), s		62.0		28.0	22.0	40.0		28.0				
Change Period (Y+Rc), s		6.0		6.0	6.0	6.0		6.0				
Max Green Setting (Gmax), s		56.0		22.0	16.0	34.0		22.0				
Max Q Clear Time (g_c+I1), s		22.6		24.8	19.5	37.5		7.9				
Green Ext Time (p_c), s		12.3		0.0	0.0	0.0		1.5				
Intersection Summary												
HCM 2010 Ctrl Delay				47.3								
HCM 2010 LOS				D								

HCM 2010 Signalized Intersection Summary

2: Radnor Chester Rd & King of Prussia Rd

01/11/2018



Movement	EBL	EBT	EBR	WBL	WBT	WBR	NEL	NET	NER	SWL	SWT	SWR
Lane Configurations												
Traffic Volume (veh/h)	38	396	467	28	837	7	502	32	58	2	1	6
Future Volume (veh/h)	38	396	467	28	837	7	502	32	58	2	1	6
Number	5	2	12	1	6	16	7	4	14	3	8	18
Initial Q (Qb), veh	0	0	0	0	0	0	0	0	0	0	0	0
Ped-Bike Adj(A_pbT)	1.00		1.00	1.00		1.00	1.00		0.97	1.00		0.97
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Adj Sat Flow, veh/h/ln	1800	1714	1817	1717	1816	1854	1782	1629	1716	1809	1628	1809
Adj Flow Rate, veh/h	40	421	0	30	890	7	534	34	62	2	1	6
Adj No. of Lanes	1	1	1	1	1	0	0	1	1	0	1	0
Peak Hour Factor	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94
Percent Heavy Veh, %	0	5	3	8	2	2	0	0	8	0	0	0
Cap, veh/h	90	857	772	395	900	7	226	9	537	49	37	73
Arrive On Green	0.50	0.50	0.00	0.50	0.50	0.50	0.38	0.38	0.38	0.38	0.38	0.38
Sat Flow, veh/h	630	1714	1545	935	1799	14	393	25	1422	0	97	194
Grp Volume(v), veh/h	40	421	0	30	0	897	568	0	62	9	0	0
Grp Sat Flow(s),veh/h/ln	630	1714	1545	935	0	1813	418	0	1422	290	0	0
Q Serve(g_s), s	1.5	14.6	0.0	2.0	0.0	44.0	0.0	0.0	2.6	0.0	0.0	0.0
Cycle Q Clear(g_c), s	45.0	14.6	0.0	16.6	0.0	44.0	34.0	0.0	2.6	34.0	0.0	0.0
Prop In Lane	1.00		1.00	1.00		0.01	0.94		1.00	0.22		0.67
Lane Grp Cap(c), veh/h	90	857	772	395	0	907	236	0	537	159	0	0
V/C Ratio(X)	0.44	0.49	0.00	0.08	0.00	0.99	2.41	0.00	0.12	0.06	0.00	0.00
Avail Cap(c_a), veh/h	90	857	772	395	0	907	236	0	537	159	0	0
HCM Platoon Ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(I)	0.58	0.58	0.00	1.00	0.00	1.00	1.00	0.00	1.00	1.00	0.00	0.00
Uniform Delay (d), s/veh	44.8	14.9	0.0	20.4	0.0	22.3	33.6	0.0	18.2	21.6	0.0	0.0
Incr Delay (d2), s/veh	8.9	1.2	0.0	0.4	0.0	27.4	648.0	0.0	0.1	0.1	0.0	0.0
Initial Q Delay(d3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
%ile BackOfQ(95%),veh/ln	2.2	10.5	0.0	1.0	0.0	37.6	86.8	0.0	1.8	0.3	0.0	0.0
LnGrp Delay(d),s/veh	53.7	16.1	0.0	20.8	0.0	49.7	681.6	0.0	18.3	21.8	0.0	0.0
LnGrp LOS	D	B		C		D	F		B	C		
Approach Vol, veh/h		461			927			630			9	
Approach Delay, s/veh		19.3			48.7			616.3			21.8	
Approach LOS		B			D			F			C	
Timer	1	2	3	4	5	6	7	8				
Assigned Phs		2		4		6		8				
Phs Duration (G+Y+Rc), s		50.0		40.0		50.0		40.0				
Change Period (Y+Rc), s		6.0		7.0		6.0		7.0				
Max Green Setting (Gmax), s		44.0		33.0		44.0		33.0				
Max Q Clear Time (g_c+I1), s		47.5		36.0		46.0		36.0				
Green Ext Time (p_c), s		0.0		0.0		0.0		0.0				
Intersection Summary												
HCM 2010 Ctrl Delay				218.3								
HCM 2010 LOS				F								

HCM 2010 TWSC
 3: King of Prussia Rd & Septa Driveway

01/11/2018

Intersection

Int Delay, s/veh 3

Movement	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations						
Traffic Vol, veh/h	20	42	970	115	147	303
Future Vol, veh/h	20	42	970	115	147	303
Conflicting Peds, #/hr	2	10	0	17	17	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	None	-	None	-	None
Storage Length	0	-	-	-	100	-
Veh in Median Storage, #	0	-	0	-	-	0
Grade, %	0	-	0	-	-	0
Peak Hour Factor	87	87	87	87	87	87
Heavy Vehicles, %	0	42	2	0	22	5
Mvmt Flow	23	48	1115	132	169	348

Major/Minor

	Minor1	Major1	Major2		
Conflicting Flow All	1886	1208	0	0	1264
Stage 1	1198	-	-	-	-
Stage 2	688	-	-	-	-
Critical Hdwy	6.4	6.62	-	-	4.32
Critical Hdwy Stg 1	5.4	-	-	-	-
Critical Hdwy Stg 2	5.4	-	-	-	-
Follow-up Hdwy	3.5	3.678	-	-	2.398
Pot Cap-1 Maneuver	79	185	-	-	487
Stage 1	289	-	-	-	-
Stage 2	503	-	-	-	-
Platoon blocked, %					
Mov Cap-1 Maneuver	51	181	-	-	483
Mov Cap-2 Maneuver	162	-	-	-	-
Stage 1	285	-	-	-	-
Stage 2	326	-	-	-	-

Approach





















	WB	NB	SB
HCM Control Delay, s	39.3	0	5.4
HCM LOS	E		

Minor Lane/Major Mvmt

	NBT	NBRWBLn1	SBL	SBT
Capacity (veh/h)	-	-	174	483
HCM Lane V/C Ratio	-	-	0.41	0.35
HCM Control Delay (s)	-	-	39.3	16.4
HCM Lane LOS	-	-	E	C
HCM 95th %tile Q(veh)	-	-	1.8	1.6

HCM 2010 Signalized Intersection Summary
5: King of Prussia Rd & Raider Rd

01/11/2018

												
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (veh/h)	9	0	130	99	0	22	173	1052	369	52	264	58
Future Volume (veh/h)	9	0	130	99	0	22	173	1052	369	52	264	58
Number	7	4	14	3	8	18	5	2	12	1	6	16
Initial Q (Qb), veh	0	0	0	0	0	0	0	0	0	0	0	0
Ped-Bike Adj(A_pbT)	1.00		1.00	1.00		1.00	1.00		0.99	1.00		0.99
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Adj Sat Flow, veh/h/ln	1872	1792	1872	1800	1800	1800	1800	1765	1800	1800	1664	1800
Adj Flow Rate, veh/h	12	0	167	127	0	28	222	1349	473	67	338	74
Adj No. of Lanes	0	1	0	1	1	0	1	1	1	1	1	0
Peak Hour Factor	0.78	0.78	0.78	0.78	0.78	0.78	0.78	0.78	0.78	0.78	0.78	0.78
Percent Heavy Veh, %	0	0	0	0	0	0	0	2	0	0	10	10
Cap, veh/h	54	10	264	259	0	283	677	1233	1063	84	923	202
Arrive On Green	0.19	0.00	0.19	0.19	0.00	0.19	0.70	0.70	0.70	0.70	0.70	0.70
Sat Flow, veh/h	50	52	1424	1238	0	1530	988	1765	1521	260	1321	289
Grp Volume(v), veh/h	179	0	0	127	0	28	222	1349	473	67	0	412
Grp Sat Flow(s),veh/h/ln	1526	0	0	1238	0	1530	988	1765	1521	260	0	1611
Q Serve(g_s), s	1.2	0.0	0.0	2.9	0.0	1.3	9.9	60.0	11.7	0.0	0.0	8.9
Cycle Q Clear(g_c), s	9.2	0.0	0.0	12.1	0.0	1.3	18.3	60.0	11.7	60.0	0.0	8.9
Prop In Lane	0.07		0.93	1.00		1.00	1.00		1.00	1.00		0.18
Lane Grp Cap(c), veh/h	327	0	0	259	0	283	677	1233	1063	84	0	1125
V/C Ratio(X)	0.55	0.00	0.00	0.49	0.00	0.10	0.33	1.09	0.45	0.80	0.00	0.37
Avail Cap(c_a), veh/h	400	0	0	318	0	356	677	1233	1063	84	0	1125
HCM Platoon Ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(I)	1.00	0.00	0.00	1.00	0.00	1.00	1.00	1.00	1.00	1.00	0.00	1.00
Uniform Delay (d), s/veh	32.3	0.0	0.0	34.1	0.0	29.1	8.8	12.9	5.7	42.9	0.0	5.2
Incr Delay (d2), s/veh	1.4	0.0	0.0	1.4	0.0	0.2	1.3	55.4	1.4	53.7	0.0	0.9
Initial Q Delay(d3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
%ile BackOfQ(95%),veh/ln	7.3	0.0	0.0	5.4	0.0	1.0	5.3	85.3	9.0	5.1	0.0	7.5
LnGrp Delay(d),s/veh	33.7	0.0	0.0	35.5	0.0	29.2	10.1	68.4	7.0	96.6	0.0	6.2
LnGrp LOS	C			D		C	B	F	A	F		A
Approach Vol, veh/h		179			155			2044			479	
Approach Delay, s/veh		33.7			34.4			47.9			18.8	
Approach LOS		C			C			D			B	
Timer	1	2	3	4	5	6	7	8				
Assigned Phs		2		4		6		8				
Phs Duration (G+Y+Rc), s		65.0		20.9		65.0		20.9				
Change Period (Y+Rc), s		6.0		6.0		6.0		6.0				
Max Green Setting (Gmax), s		59.0		19.0		59.0		19.0				
Max Q Clear Time (g_c+I1), s		62.5		11.2		62.5		14.1				
Green Ext Time (p_c), s		0.0		1.1		0.0		0.8				
Intersection Summary												
HCM 2010 Ctrl Delay				41.4								
HCM 2010 LOS				D								

Intersection						
Int Delay, s/veh	0.2					
Movement	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations						
Traffic Vol, veh/h	2	2	1588	6	6	486
Future Vol, veh/h	2	2	1588	6	6	486
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	None	-	None	-	None
Storage Length	0	-	-	-	100	-
Veh in Median Storage, #	0	-	0	-	-	0
Grade, %	0	-	0	-	-	0
Peak Hour Factor	83	83	83	83	83	83
Heavy Vehicles, %	0	0	2	0	0	8
Mvmt Flow	2	2	1913	7	7	586





















Major/Minor	Minor1	Major1	Major2		
Conflicting Flow All	2517	960	0	0	1920
Stage 1	1917	-	-	-	-
Stage 2	600	-	-	-	-
Critical Hdwy	6.6	6.9	-	-	4.1
Critical Hdwy Stg 1	5.8	-	-	-	-
Critical Hdwy Stg 2	5.4	-	-	-	-
Follow-up Hdwy	3.5	3.3	-	-	2.2
Pot Cap-1 Maneuver	27	261	-	-	312
Stage 1	103	-	-	-	-
Stage 2	552	-	-	-	-
Platoon blocked, %			-	-	-
Mov Cap-1 Maneuver	26	261	-	-	312
Mov Cap-2 Maneuver	26	-	-	-	-
Stage 1	103	-	-	-	-
Stage 2	540	-	-	-	-

Approach	WB	NB	SB
HCM Control Delay, s	90.2	0	0.2
HCM LOS	F		

Minor Lane/Major Mvmt	NBT	NBRWBLn1	SBL	SBT
Capacity (veh/h)	-	-	47	312
HCM Lane V/C Ratio	-	-	0.103	0.023
HCM Control Delay (s)	-	-	90.2	16.8
HCM Lane LOS	-	-	F	C
HCM 95th %tile Q(veh)	-	-	0.3	0.1

HCM 2010 Signalized Intersection Summary
 7: I-476 Off Ramp/King of Prussia Rd & Lancaster Ave

01/11/2018

												
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (veh/h)	373	1281	0	0	534	374	759	827	337	316	0	160
Future Volume (veh/h)	373	1281	0	0	534	374	759	827	337	316	0	160
Number	5	2	12	1	6	16	3	8	18	7	4	14
Initial Q (Qb), veh	0	0	0	0	0	0	0	0	0	0	0	0
Ped-Bike Adj(A_pbT)	1.00		1.00	1.00		1.00	1.00		1.00	1.00		1.00
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Adj Sat Flow, veh/h/ln	1791	1756	0	0	1800	1854	1764	1764	1782	1665	0	1748
Adj Flow Rate, veh/h	385	1321	0	0	551	0	782	853	347	326	0	165
Adj No. of Lanes	2	2	0	0	2	1	2	2	0	2	0	1
Peak Hour Factor	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97
Percent Heavy Veh, %	0	2	0	0	1	2	1	1	1	7	0	6
Cap, veh/h	481	1365	0	0	746	344	1630	890	361	362	0	0
Arrive On Green	0.10	0.27	0.00	0.00	0.07	0.00	0.50	0.38	0.38	0.07	0.00	0.01
Sat Flow, veh/h	3309	3424	0	0	3510	1576	3260	2330	944	3077	326	
Grp Volume(v), veh/h	385	1321	0	0	551	0	782	613	587	326	75.9	
Grp Sat Flow(s),veh/h/ln	1655	1668	0	0	1710	1576	1630	1676	1598	1539	E	
Q Serve(g_s), s	12.5	43.0	0.0	0.0	17.4	0.0	17.4	39.2	39.5	8.0		
Cycle Q Clear(g_c), s	12.5	43.0	0.0	0.0	17.4	0.0	17.4	39.2	39.5	8.0		
Prop In Lane	1.00		0.00	0.00		1.00	1.00		0.59	1.00		
Lane Grp Cap(c), veh/h	481	1365	0	0	746	344	1630	640	610	362		
V/C Ratio(X)	0.80	0.97	0.00	0.00	0.74	0.00	0.48	0.96	0.96	0.90		
Avail Cap(c_a), veh/h	481	1365	0	0	746	344	1630	640	610	362		
HCM Platoon Ratio	0.67	0.67	1.00	1.00	0.33	0.33	1.00	1.00	1.00	1.00		
Upstream Filter(I)	0.88	0.88	0.00	0.00	0.91	0.00	1.00	1.00	1.00	1.00		
Uniform Delay (d), s/veh	48.1	39.2	0.0	0.0	48.0	0.0	18.1	33.1	33.2	51.6		
Incr Delay (d2), s/veh	8.3	16.4	0.0	0.0	5.9	0.0	0.2	25.4	27.3	24.3		
Initial Q Delay(d3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
%ile BackOfQ(95%),veh/ln	10.1	30.3	0.0	0.0	13.5	0.0	12.5	30.4	29.6	5.0		
LnGrp Delay(d),s/veh	56.3	55.6	0.0	0.0	53.9	0.0	18.3	58.5	60.5	75.9		
LnGrp LOS	E	E			D		B	E	E	E		
Approach Vol, veh/h		1706			551			1982				
Approach Delay, s/veh		55.8			53.9			43.2				
Approach LOS		E			D			D				
Timer	1	2	3	4	5	6	7	8				
Assigned Phs		2	3		5	6	7	8				
Phs Duration (G+Y+Rc), s		50.0	60.0		21.0	29.0	13.0	47.0				
Change Period (Y+Rc), s		6.0	6.0		6.0	6.0	6.0	6.0				
Max Green Setting (Gmax), s		44.0	41.0		15.0	23.0	7.0	41.0				
Max Q Clear Time (g_c+I1), s		45.5	19.9		15.0	19.9	10.5	41.7				
Green Ext Time (p_c), s		0.0	3.0		0.0	2.7	0.0	0.0				
Intersection Summary												
HCM 2010 Ctrl Delay			51.5									
HCM 2010 LOS			D									

HCM 2010 Signalized Intersection Summary
 8: I-476 SB Off Ramp & Lancaster Ave

01/11/2018



Movement	EBT	EBR	WBL	WBT	NBL	NBR		
Lane Configurations	↑↑↑		↵↵	↑↑	↵↵	↵		
Traffic Volume (veh/h)	851	0	186	1224	792	839		
Future Volume (veh/h)	851	0	186	1224	792	839		
Number	4	14	3	8	5	12		
Initial Q (Qb), veh	0	0	0	0	0	0		
Ped-Bike Adj(A_pbT)		1.00	1.00		1.00	1.00		
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00		
Adj Sat Flow, veh/h/ln	1730	0	1715	1782	1800	1785		
Adj Flow Rate, veh/h	868	0	190	1249	808	0		
Adj No. of Lanes	3	0	2	2	2	1		
Peak Hour Factor	0.98	0.98	0.98	0.98	0.98	0.98		
Percent Heavy Veh, %	3	0	6	2	2	7		
Cap, veh/h	2288	0	290	2104	957	436		
Arrive On Green	0.48	0.00	0.03	0.21	0.29	0.00		
Sat Flow, veh/h	5035	0	3169	3476	3326	1517		
Grp Volume(v), veh/h	868	0	190	1249	808	0		
Grp Sat Flow(s),veh/h/ln	1574	0	1584	1693	1663	1517		
Q Serve(g_s), s	12.8	0.0	6.5	36.7	25.1	0.0		
Cycle Q Clear(g_c), s	12.8	0.0	6.5	36.7	25.1	0.0		
Prop In Lane		0.00	1.00		1.00	1.00		
Lane Grp Cap(c), veh/h	2288	0	290	2104	957	436		
V/C Ratio(X)	0.38	0.00	0.66	0.59	0.84	0.00		
Avail Cap(c_a), veh/h	2288	0	317	2104	1421	648		
HCM Platoon Ratio	1.00	1.00	0.33	0.33	1.00	1.00		
Upstream Filter(I)	1.00	0.00	0.63	0.63	1.00	0.00		
Uniform Delay (d), s/veh	17.9	0.0	51.6	31.1	36.9	0.0		
Incr Delay (d2), s/veh	0.5	0.0	2.7	0.8	3.2	0.0		
Initial Q Delay(d3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0		
%ile BackOfQ(95%),veh/ln	9.5	0.0	5.2	23.0	17.7	0.0		
LnGrp Delay(d),s/veh	18.4	0.0	54.4	31.9	40.0	0.0		
LnGrp LOS	B		D	C	D			
Approach Vol, veh/h	868			1439	808			
Approach Delay, s/veh	18.4			34.9	40.0			
Approach LOS	B			C	D			
Timer	1	2	3	4	5	6	7	8
Assigned Phs		2	3	4				8
Phs Duration (G+Y+Rc), s		36.6	15.1	58.3				73.4
Change Period (Y+Rc), s		6.0	6.0	6.0				6.0
Max Green Setting (Gmax), s		46.0	10.0	36.0				52.0
Max Q Clear Time (g_c+I1), s		27.6	9.0	15.3				39.2
Green Ext Time (p_c), s		3.0	0.1	14.8				10.1
Intersection Summary								
HCM 2010 Ctrl Delay			31.6					
HCM 2010 LOS			C					

HCM 2010 Signalized Intersection Summary

9: Hillside Circuit & Lancaster Ave

01/11/2018



Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↔	↑		↔	↑↑	↔		↑	↔			
Traffic Volume (veh/h)	574	1566	4	2	881	485	6	2	2	0	0	0
Future Volume (veh/h)	574	1566	4	2	881	485	6	2	2	0	0	0
Number	5	2	12	1	6	16	3	8	18			
Initial Q (Qb), veh	0	0	0	0	0	0	0	0	0			
Ped-Bike Adj(A_pbT)	1.00		1.00	1.00		1.00	1.00		0.90			
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00			
Adj Sat Flow, veh/h/ln	1782	1748	1800	1800	1765	1835	1800	1800	1800			
Adj Flow Rate, veh/h	598	1631	4	2	918	0	6	2	2			
Adj No. of Lanes	2	2	0	1	2	1	0	1	1			
Peak Hour Factor	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96			
Percent Heavy Veh, %	1	3	3	0	2	2	0	0	0			
Cap, veh/h	696	2843	7	18	2133	992	21	7	22			
Arrive On Green	0.42	1.00	1.00	0.01	0.64	0.00	0.02	0.02	0.02			
Sat Flow, veh/h	3293	3398	8	1714	3353	1560	1301	434	1375			
Grp Volume(v), veh/h	598	797	838	2	918	0	8	0	2			
Grp Sat Flow(s),veh/h/ln	1646	1660	1746	1714	1676	1560	1735	0	1375			
Q Serve(g_s), s	18.1	0.0	0.0	0.1	15.1	0.0	0.5	0.0	0.2			
Cycle Q Clear(g_c), s	18.1	0.0	0.0	0.1	15.1	0.0	0.5	0.0	0.2			
Prop In Lane	1.00		0.00	1.00		1.00	0.75		1.00			
Lane Grp Cap(c), veh/h	696	1389	1461	18	2133	992	28	0	22			
V/C Ratio(X)	0.86	0.57	0.57	0.11	0.43	0.00	0.28	0.00	0.09			
Avail Cap(c_a), veh/h	928	1389	1461	109	2133	992	110	0	87			
HCM Platoon Ratio	2.00	2.00	2.00	1.00	1.00	1.00	1.00	1.00	1.00			
Upstream Filter(I)	0.09	0.09	0.09	1.00	1.00	0.00	1.00	0.00	1.00			
Uniform Delay (d), s/veh	30.3	0.0	0.0	53.9	10.0	0.0	53.5	0.0	53.3			
Incr Delay (d2), s/veh	0.6	0.2	0.1	2.6	0.6	0.0	5.4	0.0	1.7			
Initial Q Delay(d3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
%ile BackOfQ(95%),veh/ln	9.6	0.1	0.1	0.1	11.4	0.0	0.5	0.0	0.1			
LnGrp Delay(d),s/veh	30.9	0.2	0.1	56.5	10.7	0.0	58.8	0.0	55.0			
LnGrp LOS	C	A	A	E	B		E		E			
Approach Vol, veh/h		2233			920			10				
Approach Delay, s/veh		8.4			10.8			58.1				
Approach LOS		A			B			E				
Timer	1	2	3	4	5	6	7	8				
Assigned Phs	1	2			5	6		8				
Phs Duration (G+Y+Rc), s	6.2	97.0			28.2	75.0		6.8				
Change Period (Y+Rc), s	6.0	6.0			6.0	6.0		6.0				
Max Green Setting (Gmax), s	6.0	80.0			30.0	56.0		6.0				
Max Q Clear Time (g_c+1/2), s	12.6	2.5			20.6	17.6		2.7				
Green Ext Time (p_c), s	0.0	42.2			1.6	27.5		0.0				
Intersection Summary												
HCM 2010 Ctrl Delay				9.2								
HCM 2010 LOS				A								
Notes												

HCM 2010 Signalized Intersection Summary
 10: Radnor Chester Rd

01/11/2018



Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (veh/h)	139	989	53	212	1479	438	92	373	83	96	132	107
Future Volume (veh/h)	139	989	53	212	1479	438	92	373	83	96	132	107
Number	5	2	12	1	6	16	3	8	18	7	4	14
Initial Q (Qb), veh	0	0	0	0	0	0	0	0	0	0	0	0
Ped-Bike Adj(A_pbT)	1.00		1.00	1.00		1.00	1.00		1.00	1.00		1.00
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Adj Sat Flow, veh/h/ln	1739	1739	1809	1713	1747	1764	1764	1746	1764	1690	1724	1791
Adj Flow Rate, veh/h	145	1030	55	221	1541	456	96	389	86	100	138	111
Adj No. of Lanes	1	2	0	1	2	1	0	2	0	1	2	0
Peak Hour Factor	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96
Percent Heavy Veh, %	4	4	4	4	2	1	1	1	1	6	3	3
Cap, veh/h	186	1381	74	266	1436	648	151	497	111	246	640	479
Arrive On Green	0.07	0.43	0.43	0.07	0.43	0.43	0.24	0.24	0.24	0.07	0.36	0.36
Sat Flow, veh/h	1657	3191	170	1632	3319	1497	452	2080	464	1609	1787	1337
Grp Volume(v), veh/h	145	533	552	221	1541	456	292	0	279	100	126	123
Grp Sat Flow(s),veh/h/ln	1657	1652	1709	1632	1660	1497	1489	0	1507	1609	1638	1487
Q Serve(g_s), s	5.2	29.7	29.7	8.0	47.6	27.3	18.6	0.0	19.1	4.8	5.9	6.4
Cycle Q Clear(g_c), s	5.2	29.7	29.7	8.0	47.6	27.3	20.3	0.0	19.1	4.8	5.9	6.4
Prop In Lane	1.00		0.10	1.00		1.00	0.33		0.31	1.00		0.90
Lane Grp Cap(c), veh/h	186	715	740	266	1436	648	399	0	360	246	587	532
V/C Ratio(X)	0.78	0.75	0.75	0.83	1.07	0.70	0.73	0.00	0.78	0.41	0.21	0.23
Avail Cap(c_a), veh/h	186	715	740	266	1436	648	449	0	411	390	789	716
HCM Platoon Ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(I)	1.00	1.00	1.00	1.00	1.00	1.00	1.00	0.00	1.00	1.00	1.00	1.00
Uniform Delay (d), s/veh	25.0	26.1	26.1	24.0	31.2	25.5	39.5	0.0	39.1	28.2	24.5	24.7
Incr Delay (d2), s/veh	18.9	7.0	6.8	19.6	45.9	6.3	5.3	0.0	8.0	1.1	0.2	0.2
Initial Q Delay(d3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
%ile BackOfQ(95%),veh/ln	6.0	21.2	21.8	8.0	55.6	18.1	13.8	0.0	13.6	4.0	4.8	4.8
LnGrp Delay(d),s/veh	43.9	33.1	32.9	43.5	77.1	31.8	44.7	0.0	47.1	29.3	24.7	24.9
LnGrp LOS	D	C	C	D	F	C	D		D	C	C	C
Approach Vol, veh/h		1230			2218			571			349	
Approach Delay, s/veh		34.3			64.5			45.9			26.1	
Approach LOS		C			E			D			C	
Timer	1	2	3	4	5	6	7	8				
Assigned Phs	1	2		4	5	6	7	8				
Phs Duration (G+Y+Rc), s	3.0	52.6		44.4	13.0	52.6	13.1	31.3				
Change Period (Y+Rc), s	6.0	6.0		6.0	6.0	6.0	6.0	6.0				
Max Green Setting (Gmax), s	7.0	33.0		52.0	7.0	33.0	17.0	29.0				
Max Q Clear Time (g_c+110), s	11.0	32.2		8.4	7.7	50.1	7.3	22.3				
Green Ext Time (p_c), s	0.0	0.7		6.3	0.0	0.0	0.1	2.9				
Intersection Summary												
HCM 2010 Ctrl Delay				50.5								
HCM 2010 LOS				D								

HCM 2010 Signalized Intersection Summary
 1: King of Prussia Rd & Parking Drive/Matsonford Rd


01/11/2018

Movement	EBL	EBT	EBR	WBL	WBT	WBR	SEL	SET	SER	NWL	NWT	NWR
Lane Configurations												
Traffic Volume (veh/h)	3	4	9	533	1	216	120	753	1	7	495	269
Future Volume (veh/h)	3	4	9	533	1	216	120	753	1	7	495	269
Number	3	8	18	7	4	14	5	2	12	1	6	16
Initial Q (Qb), veh	0	0	0	0	0	0	0	0	0	0	0	0
Ped-Bike Adj(A_pbT)	1.00		1.00	1.00		1.00	1.00		1.00	1.00		1.00
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Adj Sat Flow, veh/h/ln	1800	1800	1800	1800	1891	1891	1773	1844	1844	1782	1782	1817
Adj Flow Rate, veh/h	3	4	10	579	1	235	130	818	1	8	538	0
Adj No. of Lanes	1	1	0	1	1	0	1	1	0	1	1	1
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
Percent Heavy Veh, %	0	0	0	1	0	0	0	0	0	0	0	2
Cap, veh/h	386	167	419	601	2	587	321	962	1	178	687	595
Arrive On Green	0.37	0.37	0.37	0.37	0.37	0.37	0.08	0.52	0.52	0.39	0.39	0.00
Sat Flow, veh/h	1162	457	1142	1422	7	1601	1689	1841	2	671	1782	1544
Grp Volume(v), veh/h	3	0	14	579	0	236	130	0	819	8	538	0
Grp Sat Flow(s),veh/h/ln	1162	0	1599	1422	0	1608	1689	0	1844	671	1782	1544
Q Serve(g_s), s	0.2	0.0	0.5	33.0	0.0	9.8	3.8	0.0	34.4	0.9	23.9	0.0
Cycle Q Clear(g_c), s	9.5	0.0	0.5	33.0	0.0	9.8	3.8	0.0	34.4	22.5	23.9	0.0
Prop In Lane	1.00		0.71	1.00		1.00	1.00		0.00	1.00		1.00
Lane Grp Cap(c), veh/h	386	0	586	601	0	590	321	0	963	178	687	595
V/C Ratio(X)	0.01	0.00	0.02	0.96	0.00	0.40	0.41	0.00	0.85	0.04	0.78	0.00
Avail Cap(c_a), veh/h	386	0	586	601	0	590	334	0	963	178	687	595
HCM Platoon Ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(I)	1.00	0.00	1.00	1.00	0.00	1.00	1.00	0.00	1.00	0.82	0.82	0.00
Uniform Delay (d), s/veh	24.5	0.0	18.2	30.1	0.0	21.2	17.0	0.0	18.5	33.2	24.4	0.0
Incr Delay (d2), s/veh	0.0	0.0	0.0	27.6	0.0	0.4	0.8	0.0	9.4	0.4	7.3	0.0
Initial Q Delay(d3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
%ile BackOfQ(95%),veh/ln	0.1	0.0	0.4	26.1	0.0	7.8	3.3	0.0	27.1	0.3	18.4	0.0
LnGrp Delay(d),s/veh	24.5	0.0	18.2	57.7	0.0	21.6	17.8	0.0	27.8	33.6	31.6	0.0
LnGrp LOS	C		B	E		C	B		C	C	C	
Approach Vol, veh/h		17			815			949			546	
Approach Delay, s/veh		19.3			47.3			26.5			31.6	
Approach LOS		B			D			C			C	
Timer	1	2	3	4	5	6	7	8				
Assigned Phs		2		4	5	6		8				
Phs Duration (G+Y+Rc), s		52.0		38.0	12.3	39.7		38.0				
Change Period (Y+Rc), s		6.0		6.0	6.0	6.0		6.0				
Max Green Setting (Gmax), s		46.0		32.0	7.0	33.0		32.0				
Max Q Clear Time (g_c+I1), s		36.4		35.5	6.3	26.4		12.0				
Green Ext Time (p_c), s		5.9		0.0	0.0	4.4		3.3				
Intersection Summary												
HCM 2010 Ctrl Delay			34.9									
HCM 2010 LOS			C									

HCM 2010 Signalized Intersection Summary

2: Radnor Chester Rd & King of Prussia Rd

01/11/2018



Movement	EBL	EBT	EBR	WBL	WBT	WBR	NEL	NET	NER	SWL	SWT	SWR
Lane Configurations												
Traffic Volume (veh/h)	8	752	664	58	420	1	401	7	142	31	37	49
Future Volume (veh/h)	8	752	664	58	420	1	401	7	142	31	37	49
Number	5	2	12	1	6	16	7	4	14	3	8	18
Initial Q (Qb), veh	0	0	0	0	0	0	0	0	0	0	0	0
Ped-Bike Adj(A_pbT)	1.00		1.00	1.00		1.00	1.00		0.98	1.00		0.98
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Adj Sat Flow, veh/h/ln	1782	1782	1872	1836	1835	1854	1782	1664	1835	1809	1743	1809
Adj Flow Rate, veh/h	8	783	0	60	438	1	418	7	148	32	39	51
Adj No. of Lanes	1	1	1	1	1	0	0	1	1	0	1	0
Peak Hour Factor	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96
Percent Heavy Veh, %	1	1	0	1	1	1	14	14	1	3	3	3
Cap, veh/h	357	812	725	101	834	2	270	3	644	50	58	42
Arrive On Green	0.46	0.46	0.00	0.46	0.46	0.46	0.42	0.42	0.42	0.42	0.42	0.42
Sat Flow, veh/h	955	1782	1591	715	1830	4	453	8	1525	0	138	99
Grp Volume(v), veh/h	8	783	0	60	0	439	425	0	148	122	0	0
Grp Sat Flow(s),veh/h/ln	955	1782	1591	715	0	1834	460	0	1525	237	0	0
Q Serve(g_s), s	0.5	38.4	0.0	2.6	0.0	15.4	0.0	0.0	5.6	0.0	0.0	0.0
Cycle Q Clear(g_c), s	15.5	38.4	0.0	41.0	0.0	15.4	38.0	0.0	5.6	38.0	0.0	0.0
Prop In Lane	1.00		1.00	1.00		0.00	0.98		1.00	0.26		0.42
Lane Grp Cap(c), veh/h	357	812	725	101	0	836	274	0	644	151	0	0
V/C Ratio(X)	0.02	0.96	0.00	0.60	0.00	0.53	1.55	0.00	0.23	0.81	0.00	0.00
Avail Cap(c_a), veh/h	357	812	725	101	0	836	274	0	644	151	0	0
HCM Platoon Ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(I)	0.12	0.12	0.00	1.00	0.00	1.00	1.00	0.00	1.00	1.00	0.00	0.00
Uniform Delay (d), s/veh	22.9	23.8	0.0	44.6	0.0	17.5	31.5	0.0	16.6	22.1	0.0	0.0
Incr Delay (d2), s/veh	0.0	5.3	0.0	23.4	0.0	2.4	266.2	0.0	0.2	27.2	0.0	0.0
Initial Q Delay(d3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
%ile BackOfQ(95%),veh/ln	0.3	22.4	0.0	3.8	0.0	13.1	48.6	0.0	4.3	5.5	0.0	0.0
LnGrp Delay(d),s/veh	22.9	29.1	0.0	67.9	0.0	19.9	297.7	0.0	16.8	49.3	0.0	0.0
LnGrp LOS	C	C		E		B	F		B	D		
Approach Vol, veh/h		791			499			573			122	
Approach Delay, s/veh		29.0			25.7			225.1			49.3	
Approach LOS		C			C			F			D	
Timer	1	2	3	4	5	6	7	8				
Assigned Phs		2		4		6		8				
Phs Duration (G+Y+Rc), s		46.0		44.0		46.0		44.0				
Change Period (Y+Rc), s		6.0		7.0		6.0		7.0				
Max Green Setting (Gmax), s		40.0		37.0		40.0		37.0				
Max Q Clear Time (g_c+I1), s		40.9		40.0		43.5		40.0				
Green Ext Time (p_c), s		0.0		0.0		0.0		0.0				
Intersection Summary												
HCM 2010 Ctrl Delay				86.0								
HCM 2010 LOS				F								

HCM 2010 TWSC
 3: King of Prussia Rd & Septa Driveway

01/11/2018

Intersection						
Int Delay, s/veh	4.2					
Movement	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations	↔		↔		↔	↔
Traffic Vol, veh/h	76	84	403	17	53	970
Future Vol, veh/h	76	84	403	17	53	970
Conflicting Peds, #/hr	2	10	0	17	17	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	None	-	None	-	None
Storage Length	0	-	-	-	100	-
Veh in Median Storage, #	0	-	0	-	-	0
Grade, %	0	-	0	-	-	0
Peak Hour Factor	85	85	85	85	85	85
Heavy Vehicles, %	0	17	1	0	17	1
Mvmt Flow	89	99	474	20	62	1141

Major/Minor	Minor1	Major1	Major2		
Conflicting Flow All	1769	511	0	0	511
Stage 1	501	-	-	-	-
Stage 2	1268	-	-	-	-
Critical Hdwy	6.4	6.37	-	-	4.27
Critical Hdwy Stg 1	5.4	-	-	-	-
Critical Hdwy Stg 2	5.4	-	-	-	-
Follow-up Hdwy	3.5	3.453	-	-	2.353
Pot Cap-1 Maneuver	93	534	-	-	982
Stage 1	613	-	-	-	-
Stage 2	267	-	-	-	-
Platoon blocked, %					
Mov Cap-1 Maneuver	~ 86	522	-	-	974
Mov Cap-2 Maneuver	192	-	-	-	-
Stage 1	604	-	-	-	-
Stage 2	250	-	-	-	-

Approach	WB	NB	SB
HCM Control Delay, s	38.6	0	0.5
HCM LOS	E		

Minor Lane/Major Mvmt	NBT	NBRWBLn1	SBL	SBT
Capacity (veh/h)	-	-	287	974
HCM Lane V/C Ratio	-	-	0.656	0.064
HCM Control Delay (s)	-	-	38.6	8.9
HCM Lane LOS	-	-	E	A
HCM 95th %tile Q(veh)	-	-	4.3	0.2

Notes
 ~: Volume exceeds capacity \$: Delay exceeds 300s +: Computation Not Defined *: All major volume in platoon

HCM 2010 Signalized Intersection Summary

5: King of Prussia Rd & Raider Rd

01/11/2018

Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (veh/h)	5	0	41	272	0	60	23	294	101	14	1097	5
Future Volume (veh/h)	5	0	41	272	0	60	23	294	101	14	1097	5
Number	7	4	14	3	8	18	5	2	12	1	6	16
Initial Q (Qb), veh	0	0	0	0	0	0	0	0	0	0	0	0
Ped-Bike Adj(A_pbT)	1.00		1.00	1.00		1.00	1.00		0.99	1.00		0.99
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Adj Sat Flow, veh/h/ln	1872	1872	1872	1800	1800	1800	1800	1782	1800	1800	1782	1800
Adj Flow Rate, veh/h	5	0	44	289	0	64	24	313	107	15	1167	5
Adj No. of Lanes	0	1	0	1	1	0	1	1	1	1	1	0
Peak Hour Factor	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94
Percent Heavy Veh, %	0	0	0	0	0	0	0	1	0	0	1	1
Cap, veh/h	59	21	319	396	0	340	95	1188	1014	664	1182	5
Arrive On Green	0.22	0.00	0.22	0.22	0.00	0.22	0.67	0.67	0.67	0.67	0.67	0.67
Sat Flow, veh/h	67	96	1434	1384	0	1530	486	1782	1521	980	1773	8
Grp Volume(v), veh/h	49	0	0	289	0	64	24	313	107	15	0	1172
Grp Sat Flow(s),veh/h/ln	1597	0	0	1384	0	1530	486	1782	1521	980	0	1781
Q Serve(g_s), s	0.0	0.0	0.0	15.6	0.0	3.1	2.8	6.4	2.3	0.6	0.0	57.7
Cycle Q Clear(g_c), s	2.2	0.0	0.0	17.8	0.0	3.1	60.0	6.4	2.3	7.0	0.0	57.7
Prop In Lane	0.10		0.90	1.00		1.00	1.00		1.00	1.00		0.00
Lane Grp Cap(c), veh/h	399	0	0	396	0	340	95	1188	1014	664	0	1187
V/C Ratio(X)	0.12	0.00	0.00	0.73	0.00	0.19	0.25	0.26	0.11	0.02	0.00	0.99
Avail Cap(c_a), veh/h	399	0	0	396	0	340	95	1188	1014	664	0	1187
HCM Platoon Ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(I)	1.00	0.00	0.00	1.00	0.00	1.00	1.00	1.00	1.00	1.00	0.00	1.00
Uniform Delay (d), s/veh	28.1	0.0	0.0	33.9	0.0	28.4	44.1	6.1	5.4	7.5	0.0	14.6
Incr Delay (d2), s/veh	0.1	0.0	0.0	6.8	0.0	0.3	6.3	0.5	0.2	0.1	0.0	23.2
Initial Q Delay(d3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
%ile BackOfQ(95%),veh/ln	1.8	0.0	0.0	12.3	0.0	2.4	1.4	6.0	1.8	0.3	0.0	45.1
LnGrp Delay(d),s/veh	28.2	0.0	0.0	40.7	0.0	28.7	50.5	6.6	5.6	7.5	0.0	37.8
LnGrp LOS	C			D		C	D	A	A	A		D
Approach Vol, veh/h		49			353			444				1187
Approach Delay, s/veh		28.2			38.5			8.7				37.5
Approach LOS		C			D			A				D
Timer	1	2	3	4	5	6	7	8				
Assigned Phs		2		4		6		8				
Phs Duration (G+Y+Rc), s		65.0		25.0		65.0		25.0				
Change Period (Y+Rc), s		6.0		6.0		6.0		6.0				
Max Green Setting (Gmax), s		59.0		19.0		59.0		19.0				
Max Q Clear Time (g_c+I1), s		62.5		4.2		59.7		19.8				
Green Ext Time (p_c), s		0.0		1.4		0.0		0.0				
Intersection Summary												
HCM 2010 Ctrl Delay				31.1								
HCM 2010 LOS				C								

Intersection						
Int Delay, s/veh	0.2					
Movement	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations	↔		↕		↔	↕
Traffic Vol, veh/h	4	4	413	2	2	1404
Future Vol, veh/h	4	4	413	2	2	1404
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	None	-	None	-	None
Storage Length	0	-	-	-	100	-
Veh in Median Storage, #	0	-	0	-	-	0
Grade, %	0	-	0	-	-	0
Peak Hour Factor	94	94	94	94	94	94
Heavy Vehicles, %	0	0	1	0	0	1
Mvmt Flow	4	4	439	2	2	1494





















Major/Minor	Minor1	Major1	Major2		
Conflicting Flow All	1938	221	0	0	441
Stage 1	440	-	-	-	-
Stage 2	1498	-	-	-	-
Critical Hdwy	6.6	6.9	-	-	4.1
Critical Hdwy Stg 1	5.8	-	-	-	-
Critical Hdwy Stg 2	5.4	-	-	-	-
Follow-up Hdwy	3.5	3.3	-	-	2.2
Pot Cap-1 Maneuver	65	789	-	-	1130
Stage 1	622	-	-	-	-
Stage 2	206	-	-	-	-
Platoon blocked, %					
Mov Cap-1 Maneuver	65	789	-	-	1130
Mov Cap-2 Maneuver	65	-	-	-	-
Stage 1	622	-	-	-	-
Stage 2	206	-	-	-	-

Approach	WB	NB	SB
HCM Control Delay, s	37.3	0	0
HCM LOS	E		

Minor Lane/Major Mvmt	NBT	NBRWBLn1	SBL	SBT
Capacity (veh/h)	-	-	120	1130
HCM Lane V/C Ratio	-	-	0.071	0.002
HCM Control Delay (s)	-	-	37.3	8.2
HCM Lane LOS	-	-	E	A
HCM 95th %tile Q(veh)	-	-	0.2	0


HCM 2010 Signalized Intersection Summary
 7: I-476 Off Ramp/King of Prussia Rd & Lancaster Ave

01/11/2018

												
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (veh/h)	102	1538	0	0	578	179	272	231	214	832	0	453
Future Volume (veh/h)	102	1538	0	0	578	179	272	231	214	832	0	453
Number	5	2	12	1	6	16	3	8	18	7	4	14
Initial Q (Qb), veh	0	0	0	0	0	0	0	0	0	0	0	0
Ped-Bike Adj(A_pbT)	1.00		1.00	1.00		1.00	1.00		1.00	1.00		1.00
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Adj Sat Flow, veh/h/ln	1791	1773	0	0	1800	1872	1764	1782	1782	1764	0	1853
Adj Flow Rate, veh/h	109	1636	0	0	615	0	289	246	228	885	0	477
Adj No. of Lanes	2	2	0	0	2	1	2	2	0	2	0	1
Peak Hour Factor	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.95
Percent Heavy Veh, %	0	1	0	0	1	1	1	0	0	1	0	0
Cap, veh/h	216	1623	0	0	1269	591	1393	278	247	858	0	0
Arrive On Green	0.04	0.32	0.00	0.00	0.74	0.00	0.43	0.16	0.16	0.22	0.00	0.01
Sat Flow, veh/h	3309	3458	0	0	3510	1591	3260	1697	1511	3260	885	
Grp Volume(v), veh/h	109	1636	0	0	615	0	289	245	229	885	83.2	
Grp Sat Flow(s),veh/h/ln	1655	1685	0	0	1710	1591	1630	1693	1515	1630	F	
Q Serve(g_s), s	3.5	53.0	0.0	0.0	8.0	0.0	6.1	15.6	16.3	24.0		
Cycle Q Clear(g_c), s	3.5	53.0	0.0	0.0	8.0	0.0	6.1	15.6	16.3	24.0		
Prop In Lane	1.00		0.00	0.00		1.00	1.00		1.00	1.00		
Lane Grp Cap(c), veh/h	216	1623	0	0	1269	591	1393	277	248	858		
V/C Ratio(X)	0.51	1.01	0.00	0.00	0.48	0.00	0.21	0.89	0.92	1.03		
Avail Cap(c_a), veh/h	391	1623	0	0	1269	591	1393	277	248	858		
HCM Platoon Ratio	0.67	0.67	1.00	1.00	2.00	2.00	1.00	1.00	1.00	1.00		
Upstream Filter(I)	0.87	0.87	0.00	0.00	0.88	0.00	1.00	1.00	1.00	1.00		
Uniform Delay (d), s/veh	50.9	37.2	0.0	0.0	9.9	0.0	19.8	45.0	45.3	44.2		
Incr Delay (d2), s/veh	1.6	22.8	0.0	0.0	1.2	0.0	0.1	27.1	36.8	39.0		
Initial Q Delay(d3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
%ile BackOfQ(95%),veh/ln	3.0	53.6	0.0	0.0	6.8	0.0	5.0	14.4	14.4	12.4		
LnGrp Delay(d),s/veh	52.5	60.0	0.0	0.0	11.1	0.0	19.9	72.1	82.1	83.2		
LnGrp LOS	D	F			B		B	E	F	F		
Approach Vol, veh/h		1745			615			763				
Approach Delay, s/veh		59.6			11.1			55.3				
Approach LOS		E			B			E				
Timer	1	2	3	4	5	6	7	8				
Assigned Phs		2	3		5	6	7	8				
Phs Duration (G+Y+Rc), s		58.0	52.0		12.2	45.8	29.0	23.0				
Change Period (Y+Rc), s		6.0	6.0		6.0	6.0	6.0	6.0				
Max Green Setting (Gmax), s		52.0	23.0		12.0	34.0	23.0	17.0				
Max Q Clear Time (g_c+I1), s		55.5	8.6		6.0	10.5	26.5	18.3				
Green Ext Time (p_c), s		0.0	0.8		0.1	17.6	0.0	0.0				
Intersection Summary												
HCM 2010 Ctrl Delay			56.5									
HCM 2010 LOS			E									

HCM 2010 Signalized Intersection Summary
 8: I-476 SB Off Ramp & Lancaster Ave

01/11/2018



Movement	EBT	EBR	WBL	WBT	NBL	NBR		
Lane Configurations	↑↑↑		↵↵	↑↑	↵↵	↵		
Traffic Volume (veh/h)	1052	0	570	768	615	507		
Future Volume (veh/h)	1052	0	570	768	615	507		
Number	4	14	3	8	5	12		
Initial Q (Qb), veh	0	0	0	0	0	0		
Ped-Bike Adj(A_pbT)		1.00	1.00		1.00	1.00		
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00		
Adj Sat Flow, veh/h/ln	1730	0	1800	1782	1818	1891		
Adj Flow Rate, veh/h	1073	0	582	784	628	0		
Adj No. of Lanes	3	0	2	2	2	1		
Peak Hour Factor	0.98	0.97	0.98	0.98	0.98	0.98		
Percent Heavy Veh, %	3	0	1	2	1	1		
Cap, veh/h	2009	0	714	2322	751	359		
Arrive On Green	0.43	0.00	0.07	0.23	0.22	0.00		
Sat Flow, veh/h	5035	0	3326	3476	3359	1607		
Grp Volume(v), veh/h	1073	0	582	784	628	0		
Grp Sat Flow(s),veh/h/ln	1574	0	1663	1693	1679	1607		
Q Serve(g_s), s	18.6	0.0	19.0	21.3	19.6	0.0		
Cycle Q Clear(g_c), s	18.6	0.0	19.0	21.3	19.6	0.0		
Prop In Lane		0.00	1.00		1.00	1.00		
Lane Grp Cap(c), veh/h	2009	0	714	2322	751	359		
V/C Ratio(X)	0.53	0.00	0.81	0.34	0.84	0.00		
Avail Cap(c_a), veh/h	2009	0	847	2322	916	438		
HCM Platoon Ratio	1.00	1.00	0.33	0.33	1.00	1.00		
Upstream Filter(I)	1.00	0.00	0.77	0.77	1.00	0.00		
Uniform Delay (d), s/veh	23.5	0.0	48.9	21.6	40.8	0.0		
Incr Delay (d2), s/veh	1.0	0.0	4.1	0.3	5.8	0.0		
Initial Q Delay(d3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0		
%ile BackOfQ(95%),veh/ln	2.9	0.0	13.5	14.7	14.8	0.0		
LnGrp Delay(d),s/veh	24.5	0.0	53.1	21.9	46.6	0.0		
LnGrp LOS	C		D	C	D			
Approach Vol, veh/h	1073			1366	628			
Approach Delay, s/veh	24.5			35.2	46.6			
Approach LOS	C			D	D			
Timer	1	2	3	4	5	6	7	8
Assigned Phs		2	3	4				8
Phs Duration (G+Y+Rc), s		29.6	28.6	51.8				80.4
Change Period (Y+Rc), s		6.0	6.0	6.0				6.0
Max Green Setting (Gmax), s		29.0	27.0	36.0				69.0
Max Q Clear Time (g_c+I1), s		22.1	21.5	21.1				23.8
Green Ext Time (p_c), s		1.4	1.1	10.3				19.8
Intersection Summary								
HCM 2010 Ctrl Delay			33.8					
HCM 2010 LOS			C					

HCM 2010 Signalized Intersection Summary

9: Hillside Circuit & Lancaster Ave

01/11/2018



Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (veh/h)	1150	1764	14	6	721	584	3	1	2	0	0	0
Future Volume (veh/h)	1150	1764	14	6	721	584	3	1	2	0	0	0
Number	5	2	12	1	6	16	3	8	18			
Initial Q (Qb), veh	0	0	0	0	0	0	0	0	0			
Ped-Bike Adj(A_pbT)	1.00		1.00	1.00		1.00	1.00		0.88			
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00			
Adj Sat Flow, veh/h/ln	1782	1731	1800	1800	1782	1853	1800	1800	1800			
Adj Flow Rate, veh/h	1198	1838	15	6	751	0	3	1	2			
Adj No. of Lanes	2	2	0	1	2	1	0	1	1			
Peak Hour Factor	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96			
Percent Heavy Veh, %	1	4	4	0	1	1	0	0	0			
Cap, veh/h	1197	2797	23	23	1647	766	18	6	18			
Arrive On Green	0.73	1.00	1.00	0.01	0.49	0.00	0.01	0.01	0.01			
Sat Flow, veh/h	3293	3344	27	1714	3386	1575	1301	434	1345			
Grp Volume(v), veh/h	1198	903	950	6	751	0	4	0	2			
Grp Sat Flow(s),veh/h/ln	1646	1645	1726	1714	1693	1575	1735	0	1345			
Q Serve(g_s), s	40.0	0.0	0.0	0.4	16.1	0.0	0.3	0.0	0.2			
Cycle Q Clear(g_c), s	40.0	0.0	0.0	0.4	16.1	0.0	0.3	0.0	0.2			
Prop In Lane	1.00		0.02	1.00		1.00	0.75		1.00			
Lane Grp Cap(c), veh/h	1197	1376	1444	23	1647	766	24	0	18			
V/C Ratio(X)	1.00	0.66	0.66	0.26	0.46	0.00	0.17	0.00	0.11			
Avail Cap(c_a), veh/h	1197	1376	1444	109	1647	766	110	0	86			
HCM Platoon Ratio	2.00	2.00	2.00	1.00	1.00	1.00	1.00	1.00	1.00			
Upstream Filter(I)	0.09	0.09	0.09	1.00	1.00	0.00	1.00	0.00	1.00			
Uniform Delay (d), s/veh	15.0	0.0	0.0	53.7	18.6	0.0	53.6	0.0	53.6			
Incr Delay (d2), s/veh	7.9	0.2	0.2	5.6	0.9	0.0	3.3	0.0	2.6			
Initial Q Delay(d3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
%ile BackOfQ(95%),veh/ln	33.3	0.2	0.2	0.4	12.3	0.0	0.3	0.0	0.1			
LnGrp Delay(d),s/veh	22.9	0.2	0.2	59.3	19.6	0.0	56.9	0.0	56.2			
LnGrp LOS	F	A	A	E	B		E		E			
Approach Vol, veh/h		3051			757			6				
Approach Delay, s/veh		9.1			19.9			56.7				
Approach LOS		A			B			E				
Timer	1	2	3	4	5	6	7	8				
Assigned Phs	1	2			5	6		8				
Phs Duration (G+Y+Rc), s	6.5	97.0			45.0	58.5		6.5				
Change Period (Y+Rc), s	6.0	6.0			6.0	6.0		6.0				
Max Green Setting (Gmax), s	6.0	80.0			39.0	47.0		6.0				
Max Q Clear Time (g_c+12.5), s	6.0	2.5			42.5	18.6		2.7				
Green Ext Time (p_c), s	0.0	45.8			0.0	22.7		0.0				
Intersection Summary												
HCM 2010 Ctrl Delay				11.3								
HCM 2010 LOS				B								
Notes												

HCM 2010 Signalized Intersection Summary

10: Radnor Chester Rd

01/11/2018



Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (veh/h)	120	1175	93	198	1108	126	81	211	141	410	448	215
Future Volume (veh/h)	120	1175	93	198	1108	126	81	211	141	410	448	215
Number	5	2	12	1	6	16	3	8	18	7	4	14
Initial Q (Qb), veh	0	0	0	0	0	0	0	0	0	0	0	0
Ped-Bike Adj(A_pbT)	1.00		1.00	1.00		1.00	1.00		1.00	1.00		1.00
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Adj Sat Flow, veh/h/ln	1791	1792	1809	1747	1764	1764	1764	1752	1764	1773	1779	1791
Adj Flow Rate, veh/h	124	1211	96	204	1142	130	84	218	145	423	462	222
Adj No. of Lanes	1	2	0	1	2	1	0	2	0	1	2	0
Peak Hour Factor	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97
Percent Heavy Veh, %	1	1	1	2	1	1	1	1	1	1	0	0
Cap, veh/h	215	1284	102	187	1347	601	149	345	234	331	863	412
Arrive On Green	0.06	0.40	0.40	0.06	0.40	0.40	0.26	0.26	0.26	0.08	0.39	0.39
Sat Flow, veh/h	1706	3197	253	1664	3352	1496	385	1338	906	1689	2222	1060
Grp Volume(v), veh/h	124	644	663	204	1142	130	218	0	229	423	351	333
Grp Sat Flow(s),veh/h/ln	1706	1703	1747	1664	1676	1496	1195	0	1433	1689	1690	1591
Q Serve(g_s), s	4.2	36.4	36.6	6.0	30.9	5.7	12.6	0.0	14.1	8.0	16.0	16.2
Cycle Q Clear(g_c), s	4.2	36.4	36.6	6.0	30.9	5.7	16.1	0.0	14.1	8.0	16.0	16.2
Prop In Lane	1.00		0.14	1.00		1.00	0.39		0.63	1.00		0.67
Lane Grp Cap(c), veh/h	215	684	702	187	1347	601	359	0	370	331	656	618
V/C Ratio(X)	0.58	0.94	0.94	1.09	0.85	0.22	0.61	0.00	0.62	1.28	0.53	0.54
Avail Cap(c_a), veh/h	215	684	702	187	1347	601	453	0	487	331	795	748
HCM Platoon Ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(I)	1.00	1.00	1.00	1.00	1.00	1.00	1.00	0.00	1.00	1.00	1.00	1.00
Uniform Delay (d), s/veh	22.2	28.8	28.8	26.9	27.1	19.6	33.1	0.0	32.7	34.5	23.6	23.7
Incr Delay (d2), s/veh	3.8	22.8	22.8	91.2	6.8	0.8	1.7	0.0	1.7	145.8	0.7	0.7
Initial Q Delay(d3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
%ile BackOfQ(95%),veh/ln	3.9	28.9	29.6	12.9	22.0	4.5	9.5	0.0	9.7	33.9	12.0	11.7
LnGrp Delay(d),s/veh	25.9	51.5	51.6	118.0	33.9	20.4	34.8	0.0	34.4	180.3	24.3	24.4
LnGrp LOS	C	D	D	F	C	C	C		C	F	C	C
Approach Vol, veh/h		1431			1476			447			1107	
Approach Delay, s/veh		49.4			44.4			34.6			83.9	
Approach LOS		D			D			C			F	
Timer	1	2	3	4	5	6	7	8				
Assigned Phs	1	2		4	5	6	7	8				
Phs Duration (G+Y+Rc), s	1.0	45.2		43.8	11.0	45.2	13.0	30.8				
Change Period (Y+Rc), s	6.0	6.0		6.0	6.0	6.0	6.0	6.0				
Max Green Setting (Gmax), s	5.0	31.0		46.0	5.0	31.0	7.0	33.0				
Max Q Clear Time (g_c+1/3), s	5.0	38.9		18.5	6.7	33.4	10.5	18.1				
Green Ext Time (p_c), s	0.0	0.0		8.7	0.0	0.0	0.0	6.6				
Intersection Summary												
HCM 2010 Ctrl Delay				54.8								
HCM 2010 LOS				D								


HCM 2010 Signalized Intersection Summary
 1: King of Prussia Rd & Parking Drive/Matsonford Rd

01/16/2018

Movement	EBL	EBT	EBR	WBL	WBT	WBR	SEL	SET	SER	NWL	NWT	NWR
Lane Configurations												
Traffic Volume (veh/h)	1	0	2	318	7	104	375	639	2	12	638	611
Future Volume (veh/h)	1	0	2	318	7	104	375	639	2	12	638	611
Number	3	8	18	7	4	14	5	2	12	1	6	16
Initial Q (Qb), veh	0	0	0	0	0	0	0	0	0	0	0	0
Ped-Bike Adj(A_pbT)	1.00		1.00	1.00		1.00	1.00		1.00	1.00		1.00
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Adj Sat Flow, veh/h/ln	1800	1800	1800	1748	1744	1891	1721	1826	1844	1782	1764	1817
Adj Flow Rate, veh/h	1	0	2	353	8	116	417	710	2	13	709	0
Adj No. of Lanes	1	1	0	1	1	0	1	1	0	1	1	1
Peak Hour Factor	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90
Percent Heavy Veh, %	0	0	0	4	0	0	3	1	1	0	1	2
Cap, veh/h	330	0	391	437	25	358	390	1152	3	368	686	601
Arrive On Green	0.26	0.00	0.26	0.26	0.26	0.26	0.19	0.63	0.63	0.39	0.39	0.00
Sat Flow, veh/h	1287	0	1530	1396	97	1400	1639	1820	5	742	1764	1544
Grp Volume(v), veh/h	1	0	2	353	0	124	417	0	712	13	709	0
Grp Sat Flow(s),veh/h/ln	1287	0	1530	1396	0	1497	1639	0	1825	742	1764	1544
Q Serve(g_s), s	0.1	0.0	0.1	22.7	0.0	6.1	17.0	0.0	21.1	1.0	35.0	0.0
Cycle Q Clear(g_c), s	5.6	0.0	0.1	22.7	0.0	6.1	17.0	0.0	21.1	1.0	35.0	0.0
Prop In Lane	1.00		1.00	1.00		0.94	1.00		0.00	1.00		1.00
Lane Grp Cap(c), veh/h	330	0	391	437	0	383	390	0	1156	368	686	601
V/C Ratio(X)	0.00	0.00	0.01	0.81	0.00	0.32	1.07	0.00	0.62	0.04	1.03	0.00
Avail Cap(c_a), veh/h	330	0	391	437	0	383	390	0	1156	368	686	601
HCM Platoon Ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(I)	1.00	0.00	1.00	1.00	0.00	1.00	1.00	0.00	1.00	1.00	1.00	0.00
Uniform Delay (d), s/veh	29.3	0.0	25.0	33.4	0.0	27.2	27.5	0.0	9.9	17.1	27.5	0.0
Incr Delay (d2), s/veh	0.0	0.0	0.0	10.8	0.0	0.5	65.5	0.0	2.5	0.2	43.2	0.0
Initial Q Delay(d3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
%ile BackOfQ(95%),veh/ln	0.0	0.0	0.1	15.2	0.0	4.6	30.1	0.0	16.8	0.4	45.4	0.0
LnGrp Delay(d),s/veh	29.3	0.0	25.0	44.2	0.0	27.7	93.0	0.0	12.4	17.3	70.7	0.0
LnGrp LOS	C		C	D		C	F		B	B	F	
Approach Vol, veh/h		3			477			1129			722	
Approach Delay, s/veh		26.4			39.9			42.2			69.8	
Approach LOS		C			D			D			E	
Timer	1	2	3	4	5	6	7	8				
Assigned Phs		2		4	5	6		8				
Phs Duration (G+Y+Rc), s		62.0		28.0	22.0	40.0		28.0				
Change Period (Y+Rc), s		6.0		6.0	6.0	6.0		6.0				
Max Green Setting (Gmax), s		56.0		22.0	16.0	34.0		22.0				
Max Q Clear Time (g_c+I1), s		23.1		25.2	19.5	37.5		8.1				
Green Ext Time (p_c), s		12.6		0.0	0.0	0.0		1.5				
Intersection Summary												
HCM 2010 Ctrl Delay				50.2								
HCM 2010 LOS				D								

HCM 2010 Signalized Intersection Summary
 2: Radnor Chester Rd & King of Prussia Rd

01/16/2018



Movement	EBL	EBT	EBR	WBL	WBT	WBR	NEL	NET	NER	SWL	SWT	SWR
Lane Configurations												
Traffic Volume (veh/h)	38	401	476	29	853	7	511	33	59	2	1	6
Future Volume (veh/h)	38	401	476	29	853	7	511	33	59	2	1	6
Number	5	2	12	1	6	16	7	4	14	3	8	18
Initial Q (Qb), veh	0	0	0	0	0	0	0	0	0	0	0	0
Ped-Bike Adj(A_pbT)	1.00		1.00	1.00		1.00	1.00		0.97	1.00		0.97
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Adj Sat Flow, veh/h/ln	1800	1714	1817	1717	1816	1854	1782	1629	1835	1809	1628	1809
Adj Flow Rate, veh/h	40	427	0	31	907	7	544	35	63	2	1	6
Adj No. of Lanes	1	1	1	1	1	0	0	1	1	0	1	0
Peak Hour Factor	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94
Percent Heavy Veh, %	0	5	3	8	2	2	0	0	1	0	0	0
Cap, veh/h	83	857	772	391	900	7	226	10	574	49	37	73
Arrive On Green	0.50	0.50	0.00	0.50	0.50	0.50	0.38	0.38	0.38	0.38	0.38	0.38
Sat Flow, veh/h	621	1714	1545	930	1800	14	393	25	1520	0	97	194
Grp Volume(v), veh/h	40	427	0	31	0	914	579	0	63	9	0	0
Grp Sat Flow(s),veh/h/ln	621	1714	1545	930	0	1814	418	0	1520	290	0	0
Q Serve(g_s), s	0.5	14.9	0.0	2.1	0.0	45.0	0.0	0.0	2.4	0.0	0.0	0.0
Cycle Q Clear(g_c), s	45.0	14.9	0.0	17.0	0.0	45.0	34.0	0.0	2.4	34.0	0.0	0.0
Prop In Lane	1.00		1.00	1.00		0.01	0.94		1.00	0.22		0.67
Lane Grp Cap(c), veh/h	83	857	772	391	0	907	236	0	574	159	0	0
V/C Ratio(X)	0.48	0.50	0.00	0.08	0.00	1.01	2.46	0.00	0.11	0.06	0.00	0.00
Avail Cap(c_a), veh/h	83	857	772	391	0	907	236	0	574	159	0	0
HCM Platoon Ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(I)	0.56	0.56	0.00	1.00	0.00	1.00	1.00	0.00	1.00	1.00	0.00	0.00
Uniform Delay (d), s/veh	45.0	15.0	0.0	20.6	0.0	22.5	33.6	0.0	18.2	21.6	0.0	0.0
Incr Delay (d2), s/veh	10.7	1.2	0.0	0.4	0.0	31.9	668.6	0.0	0.1	0.1	0.0	0.0
Initial Q Delay(d3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
%ile BackOfQ(95%),veh/ln	2.2	10.6	0.0	1.0	0.0	54.8	89.2	0.0	1.9	0.3	0.0	0.0
LnGrp Delay(d),s/veh	55.7	16.1	0.0	21.0	0.0	54.4	702.2	0.0	18.3	21.8	0.0	0.0
LnGrp LOS	E	B		C		F	F		B	C		
Approach Vol, veh/h		467			945			642			9	
Approach Delay, s/veh		19.5			53.3			635.1			21.8	
Approach LOS		B			D			F			C	
Timer	1	2	3	4	5	6	7	8				
Assigned Phs		2		4		6		8				
Phs Duration (G+Y+Rc), s		50.0		40.0		50.0		40.0				
Change Period (Y+Rc), s		6.0		7.0		6.0		7.0				
Max Green Setting (Gmax), s		44.0		33.0		44.0		33.0				
Max Q Clear Time (g_c+I1), s		47.5		36.0		47.0		36.0				
Green Ext Time (p_c), s		0.0		0.0		0.0		0.0				
Intersection Summary												
HCM 2010 Ctrl Delay				226.5								
HCM 2010 LOS				F								

HCM 2010 TWSC
 3: King of Prussia Rd & Septa Driveway

01/16/2018

Intersection						
Int Delay, s/veh	3.2					
Movement	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations	Y		T		T	T
Traffic Vol, veh/h	21	42	988	116	149	308
Future Vol, veh/h	21	42	988	116	149	308
Conflicting Peds, #/hr	2	10	0	17	17	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	None	-	None	-	None
Storage Length	0	-	-	-	100	-
Veh in Median Storage, #	0	-	0	-	-	0
Grade, %	0	-	0	-	-	0
Peak Hour Factor	87	87	87	87	87	87
Heavy Vehicles, %	0	42	2	0	22	5
Mvmt Flow	24	48	1136	133	171	354

Major/Minor	Minor1	Major1	Major2		
Conflicting Flow All	1918	1229	0	0	1286
Stage 1	1219	-	-	-	-
Stage 2	699	-	-	-	-
Critical Hdwy	6.4	6.62	-	-	4.32
Critical Hdwy Stg 1	5.4	-	-	-	-
Critical Hdwy Stg 2	5.4	-	-	-	-
Follow-up Hdwy	3.5	3.678	-	-	2.398
Pot Cap-1 Maneuver	75	179	-	-	478
Stage 1	282	-	-	-	-
Stage 2	497	-	-	-	-
Platoon blocked, %			-	-	-
Mov Cap-1 Maneuver	47	175	-	-	474
Mov Cap-2 Maneuver	157	-	-	-	-
Stage 1	278	-	-	-	-
Stage 2	317	-	-	-	-

Approach	WB	NB	SB
HCM Control Delay, s	41.4	0	5.5
HCM LOS	E		

Minor Lane/Major Mvmt	NBT	NBRWBLn1	SBL	SBT
Capacity (veh/h)	-	-	169	474
HCM Lane V/C Ratio	-	-	0.428	0.361
HCM Control Delay (s)	-	-	41.4	16.8
HCM Lane LOS	-	-	E	C
HCM 95th %tile Q(veh)	-	-	1.9	1.6

HCM 2010 Signalized Intersection Summary
 5: King of Prussia Rd & Raider Rd

01/16/2018

Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		↔		↖	↗		↖	↗	↖	↗	↖	↗
Traffic Volume (veh/h)	9	0	133	99	0	22	177	1071	369	52	268	59
Future Volume (veh/h)	9	0	133	99	0	22	177	1071	369	52	268	59
Number	7	4	14	3	8	18	5	2	12	1	6	16
Initial Q (Qb), veh	0	0	0	0	0	0	0	0	0	0	0	0
Ped-Bike Adj(A_pbT)	1.00		1.00	1.00		1.00	1.00		0.99	1.00		0.99
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Adj Sat Flow, veh/h/ln	1800	1792	1800	1800	1800	1800	1800	1765	1800	1800	1664	1800
Adj Flow Rate, veh/h	12	0	171	127	0	28	227	1373	473	67	344	76
Adj No. of Lanes	0	1	0	1	1	0	1	1	1	1	1	0
Peak Hour Factor	0.78	0.78	0.78	0.78	0.78	0.78	0.78	0.78	0.78	0.78	0.78	0.78
Percent Heavy Veh, %	0	0	0	0	0	0	0	2	0	0	10	10
Cap, veh/h	54	10	267	259	0	287	662	1229	1059	84	919	203
Arrive On Green	0.19	0.00	0.19	0.19	0.00	0.19	0.70	0.70	0.70	0.70	0.70	0.70
Sat Flow, veh/h	49	51	1427	1233	0	1530	981	1765	1521	254	1319	291
Grp Volume(v), veh/h	183	0	0	127	0	28	227	1373	473	67	0	420
Grp Sat Flow(s),veh/h/ln	1527	0	0	1233	0	1530	981	1765	1521	254	0	1610
Q Serve(g_s), s	1.2	0.0	0.0	2.9	0.0	1.3	10.7	60.0	11.8	0.0	0.0	9.2
Cycle Q Clear(g_c), s	9.5	0.0	0.0	12.4	0.0	1.3	19.9	60.0	11.8	60.0	0.0	9.2
Prop In Lane	0.07		0.93	1.00		1.00	1.00		1.00	1.00		0.18
Lane Grp Cap(c), veh/h	331	0	0	259	0	287	662	1229	1059	84	0	1122
V/C Ratio(X)	0.55	0.00	0.00	0.49	0.00	0.10	0.34	1.12	0.45	0.80	0.00	0.37
Avail Cap(c_a), veh/h	398	0	0	314	0	355	662	1229	1059	84	0	1122
HCM Platoon Ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(I)	1.00	0.00	0.00	1.00	0.00	1.00	1.00	1.00	1.00	1.00	0.00	1.00
Uniform Delay (d), s/veh	32.3	0.0	0.0	34.1	0.0	29.0	9.4	13.1	5.8	43.1	0.0	5.4
Incr Delay (d2), s/veh	1.4	0.0	0.0	1.4	0.0	0.1	1.4	64.2	1.4	54.2	0.0	1.0
Initial Q Delay(d3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
%ile BackOfQ(95%),veh/ln	7.5	0.0	0.0	5.4	0.0	1.0	5.6	91.1	9.0	5.1	0.0	7.8
LnGrp Delay(d),s/veh	33.7	0.0	0.0	35.6	0.0	29.1	10.9	77.2	7.1	97.2	0.0	6.3
LnGrp LOS	C			D			C	B	F	A	F	A
Approach Vol, veh/h		183			155			2073			487	
Approach Delay, s/veh		33.7			34.4			54.0			18.8	
Approach LOS		C			C			D			B	
Timer	1	2	3	4	5	6	7	8				
Assigned Phs	2		4		6		8					
Phs Duration (G+Y+Rc), s	65.0		21.1		65.0		21.1					
Change Period (Y+Rc), s	6.0		6.0		6.0		6.0					
Max Green Setting (Gmax), s	59.0		19.0		59.0		19.0					
Max Q Clear Time (g_c+I1), s	62.0		11.5		62.0		14.4					
Green Ext Time (p_c), s	0.0		1.1		0.0		0.7					
Intersection Summary												
HCM 2010 Ctrl Delay			45.7									
HCM 2010 LOS			D									

HCM 2010 TWSC
6: King of Prussia Rd & Southern Driveway

01/16/2018

Intersection						
Int Delay, s/veh	0.2					
Movement	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations	↔		↕		↔	↕
Traffic Vol, veh/h	2	2	1611	6	6	493
Future Vol, veh/h	2	2	1611	6	6	493
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	None	-	None	-	None
Storage Length	0	-	-	-	100	-
Veh in Median Storage, #	0	-	0	-	-	0
Grade, %	0	-	0	-	-	0
Peak Hour Factor	83	83	83	83	83	83
Heavy Vehicles, %	0	0	2	0	0	8
Mvmt Flow	2	2	1941	7	7	594

Major/Minor	Minor1	Major1	Major2		
Conflicting Flow All	2553	974	0	0	1948
Stage 1	1945	-	-	-	-
Stage 2	608	-	-	-	-
Critical Hdwy	6.6	6.9	-	-	4.1
Critical Hdwy Stg 1	5.8	-	-	-	-
Critical Hdwy Stg 2	5.4	-	-	-	-
Follow-up Hdwy	3.5	3.3	-	-	2.2
Pot Cap-1 Maneuver	26	255	-	-	304
Stage 1	100	-	-	-	-
Stage 2	547	-	-	-	-
Platoon blocked, %			-	-	-
Mov Cap-1 Maneuver	25	255	-	-	304
Mov Cap-2 Maneuver	25	-	-	-	-
Stage 1	100	-	-	-	-
Stage 2	534	-	-	-	-

Approach	WB	NB	SB
HCM Control Delay, s	92.2	0	0.2
HCM LOS	F		

Minor Lane/Major Mvmt	NBT	NBRWBLn1	SBL	SBT
Capacity (veh/h)	-	-	46	304
HCM Lane V/C Ratio	-	-	0.105	0.024
HCM Control Delay (s)	-	-	92.2	17.1
HCM Lane LOS	-	-	F	C
HCM 95th %tile Q(veh)	-	-	0.3	0.1

HCM 2010 Signalized Intersection Summary

8: I-476 SB Off Ramp & Lancaster Ave

01/16/2018



Movement	EBT	EBR	WBL	WBT	NBL	NBR		
Lane Configurations	↑↑↑		↔	↑↑	↔	↔		
Traffic Volume (veh/h)	863	0	189	1247	807	853		
Future Volume (veh/h)	863	0	189	1247	807	853		
Number	4	14	3	8	5	12		
Initial Q (Qb), veh	0	0	0	0	0	0		
Ped-Bike Adj(A_pbT)		1.00	1.00		1.00	1.00		
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00		
Adj Sat Flow, veh/h/ln	1730	0	1715	1782	1800	1785		
Adj Flow Rate, veh/h	881	0	193	1272	823	0		
Adj No. of Lanes	3	0	2	2	2	1		
Peak Hour Factor	0.98	0.98	0.98	0.98	0.98	0.98		
Percent Heavy Veh, %	3	0	6	2	2	7		
Cap, veh/h	2263	0	293	2089	972	443		
Arrive On Green	0.48	0.00	0.03	0.20	0.29	0.00		
Sat Flow, veh/h	5035	0	3169	3476	3326	1517		
Grp Volume(v), veh/h	881	0	193	1272	823	0		
Grp Sat Flow(s),veh/h/ln	1574	0	1584	1693	1663	1517		
Q Serve(g_s), s	13.1	0.0	6.6	37.6	25.6	0.0		
Cycle Q Clear(g_c), s	13.1	0.0	6.6	37.6	25.6	0.0		
Prop In Lane		0.00	1.00		1.00	1.00		
Lane Grp Cap(c), veh/h	2263	0	293	2089	972	443		
V/C Ratio(X)	0.39	0.00	0.66	0.61	0.85	0.00		
Avail Cap(c_a), veh/h	2263	0	317	2089	1421	648		
HCM Platoon Ratio	1.00	1.00	0.33	0.33	1.00	1.00		
Upstream Filter(I)	1.00	0.00	0.62	0.62	1.00	0.00		
Uniform Delay (d), s/veh	18.3	0.0	51.6	31.7	36.6	0.0		
Incr Delay (d2), s/veh	0.5	0.0	2.8	0.8	3.3	0.0		
Initial Q Delay(d3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0		
%ile BackOfQ(95%),veh/ln	9.8	0.0	5.3	23.4	18.0	0.0		
LnGrp Delay(d),s/veh	18.9	0.0	54.4	32.6	39.9	0.0		
LnGrp LOS	B		D	C	D			
Approach Vol, veh/h	881			1465	823			
Approach Delay, s/veh	18.9			35.5	39.9			
Approach LOS	B			D	D			
Timer	1	2	3	4	5	6	7	8
Assigned Phs		2	3	4				8
Phs Duration (G+Y+Rc), s		37.1	15.2	57.7				72.9
Change Period (Y+Rc), s		6.0	6.0	6.0				6.0
Max Green Setting (Gmax), s		46.0	10.0	36.0				52.0
Max Q Clear Time (g_c+I1), s		28.1	9.1	15.6				40.1
Green Ext Time (p_c), s		3.0	0.1	14.9				9.6
Intersection Summary								
HCM 2010 Ctrl Delay			32.0					
HCM 2010 LOS			C					

HCM 2010 Signalized Intersection Summary
 9: Hillside Circuit & Lancaster Ave

01/16/2018



Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↔↔	↑↔		↔	↑↑	↔		↔	↔			
Traffic Volume (veh/h)	584	1595	4	2	895	494	6	2	2	0	0	0
Future Volume (veh/h)	584	1595	4	2	895	494	6	2	2	0	0	0
Number	5	2	12	1	6	16	3	8	18			
Initial Q (Qb), veh	0	0	0	0	0	0	0	0	0			
Ped-Bike Adj(A_pbT)	1.00		1.00	1.00		1.00	1.00		0.88			
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00			
Adj Sat Flow, veh/h/ln	1782	1748	1800	1800	1765	1835	1800	1800	1800			
Adj Flow Rate, veh/h	608	1661	4	2	932	0	6	2	2			
Adj No. of Lanes	2	2	0	1	2	1	0	1	1			
Peak Hour Factor	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96			
Percent Heavy Veh, %	1	3	3	0	2	2	0	0	0			
Cap, veh/h	705	2843	7	18	2123	988	21	7	22			
Arrive On Green	0.43	1.00	1.00	0.01	0.63	0.00	0.02	0.02	0.02			
Sat Flow, veh/h	3293	3398	8	1714	3353	1560	1301	434	1345			
Grp Volume(v), veh/h	608	811	854	2	932	0	8	0	2			
Grp Sat Flow(s),veh/h/ln	1646	1660	1746	1714	1676	1560	1735	0	1345			
Q Serve(g_s), s	18.4	0.0	0.0	0.1	15.5	0.0	0.5	0.0	0.2			
Cycle Q Clear(g_c), s	18.4	0.0	0.0	0.1	15.5	0.0	0.5	0.0	0.2			
Prop In Lane	1.00		0.00	1.00		1.00	0.75		1.00			
Lane Grp Cap(c), veh/h	705	1389	1461	18	2123	988	28	0	22			
V/C Ratio(X)	0.86	0.58	0.58	0.11	0.44	0.00	0.28	0.00	0.09			
Avail Cap(c_a), veh/h	928	1389	1461	109	2123	988	110	0	86			
HCM Platoon Ratio	2.00	2.00	2.00	1.00	1.00	1.00	1.00	1.00	1.00			
Upstream Filter(I)	0.09	0.09	0.09	1.00	1.00	0.00	1.00	0.00	1.00			
Uniform Delay (d), s/veh	30.0	0.0	0.0	53.9	10.2	0.0	53.5	0.0	53.3			
Incr Delay (d2), s/veh	0.7	0.2	0.2	2.6	0.7	0.0	5.4	0.0	1.8			
Initial Q Delay(d3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
%ile BackOfQ(95%),veh/ln	9.8	0.1	0.1	0.1	11.7	0.0	0.5	0.0	0.1			
LnGrp Delay(d),s/veh	30.6	0.2	0.2	56.5	10.9	0.0	58.8	0.0	55.1			
LnGrp LOS	C	A	A	E	B		E		E			
Approach Vol, veh/h		2273			934			10				
Approach Delay, s/veh		8.3			11.0			58.1				
Approach LOS		A			B			E				
Timer	1	2	3	4	5	6	7	8				
Assigned Phs	1	2			5	6		8				
Phs Duration (G+Y+Rc), s	6.2	97.0			28.5	74.7		6.8				
Change Period (Y+Rc), s	6.0	6.0			6.0	6.0		6.0				
Max Green Setting (Gmax), s	6.0	80.0			30.0	56.0		6.0				
Max Q Clear Time (g_c+1/2), s	11.6	2.5			20.9	18.0		2.7				
Green Ext Time (p_c), s	0.0	43.6			1.6	27.8		0.0				
Intersection Summary												
HCM 2010 Ctrl Delay					9.2							
HCM 2010 LOS					A							
Notes												

HCM 2010 Signalized Intersection Summary

10: Radnor Chester Rd

01/16/2018



Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (veh/h)	142	1006	54	216	1507	446	94	380	85	98	135	109
Future Volume (veh/h)	142	1006	54	216	1507	446	94	380	85	98	135	109
Number	5	2	12	1	6	16	3	8	18	7	4	14
Initial Q (Qb), veh	0	0	0	0	0	0	0	0	0	0	0	0
Ped-Bike Adj(A_pbT)	1.00		1.00	1.00		1.00	1.00		1.00	1.00		1.00
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Adj Sat Flow, veh/h/ln	1739	1739	1809	1713	1747	1764	1764	1746	1764	1690	1724	1791
Adj Flow Rate, veh/h	148	1048	56	225	1570	465	98	396	89	102	141	114
Adj No. of Lanes	1	2	0	1	2	1	0	2	0	1	2	0
Peak Hour Factor	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96
Percent Heavy Veh, %	4	4	4	4	2	1	1	1	1	6	3	3
Cap, veh/h	171	1461	78	264	1520	685	153	501	114	213	610	459
Arrive On Green	0.06	0.46	0.46	0.06	0.46	0.46	0.24	0.24	0.24	0.05	0.34	0.34
Sat Flow, veh/h	1657	3191	170	1632	3319	1497	453	2069	469	1609	1782	1341
Grp Volume(v), veh/h	148	543	561	225	1570	465	297	0	286	102	129	126
Grp Sat Flow(s),veh/h/ln	1657	1652	1709	1632	1660	1497	1485	0	1506	1609	1638	1486
Q Serve(g_s), s	5.3	29.2	29.2	7.0	50.4	26.9	19.1	0.0	19.5	5.1	6.2	6.7
Cycle Q Clear(g_c), s	5.3	29.2	29.2	7.0	50.4	26.9	20.8	0.0	19.5	5.1	6.2	6.7
Prop In Lane	1.00		0.10	1.00		1.00	0.33		0.31	1.00		0.90
Lane Grp Cap(c), veh/h	171	756	782	264	1520	685	403	0	365	213	560	508
V/C Ratio(X)	0.87	0.72	0.72	0.85	1.03	0.68	0.74	0.00	0.78	0.48	0.23	0.25
Avail Cap(c_a), veh/h	171	756	782	264	1520	685	448	0	411	213	610	554
HCM Platoon Ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(I)	1.00	1.00	1.00	1.00	1.00	1.00	1.00	0.00	1.00	1.00	1.00	1.00
Uniform Delay (d), s/veh	26.3	24.1	24.1	25.7	29.8	23.5	39.3	0.0	39.0	29.6	25.8	26.0
Incr Delay (d2), s/veh	34.3	5.8	5.6	22.3	32.1	5.3	5.7	0.0	8.6	1.7	0.2	0.3
Initial Q Delay(d3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
%ile BackOfQ(95%),veh/ln	0.1	20.7	21.3	9.1	53.6	17.8	14.1	0.0	13.9	4.2	5.1	5.1
LnGrp Delay(d),s/veh	60.6	29.8	29.7	48.0	61.9	28.8	45.0	0.0	47.6	31.2	26.0	26.3
LnGrp LOS	E	C	C	D	F	C	D		D	C	C	C
Approach Vol, veh/h		1252			2260			583			357	
Approach Delay, s/veh		33.4			53.7			46.2			27.6	
Approach LOS		C			D			D			C	
Timer	1	2	3	4	5	6	7	8				
Assigned Phs	1	2		4	5	6	7	8				
Phs Duration (G+Y+Rc), s	2.0	55.4		42.6	12.0	55.4	11.0	31.6				
Change Period (Y+Rc), s	6.0	6.0		6.0	6.0	6.0	6.0	6.0				
Max Green Setting (Gmax), s	6.0	46.0		40.0	6.0	46.0	5.0	29.0				
Max Q Clear Time (g_c+19.5), s	6.0	31.7		8.7	7.8	52.9	7.6	22.8				
Green Ext Time (p_c), s	0.0	13.1		6.2	0.0	0.0	0.0	2.8				
Intersection Summary												
HCM 2010 Ctrl Delay				44.9								
HCM 2010 LOS				D								

HCM 2010 Signalized Intersection Summary
 1: King of Prussia Rd & Parking Drive/Matsonford Rd


01/11/2018

Movement	EBL	EBT	EBR	WBL	WBT	WBR	SEL	SET	SER	NWL	NWT	NWR
Lane Configurations												
Traffic Volume (veh/h)	3	4	9	543	1	220	123	767	1	7	503	274
Future Volume (veh/h)	3	4	9	543	1	220	123	767	1	7	503	274
Number	3	8	18	7	4	14	5	2	12	1	6	16
Initial Q (Qb), veh	0	0	0	0	0	0	0	0	0	0	0	0
Ped-Bike Adj(A_pbT)	1.00		1.00	1.00		1.00	1.00		1.00	1.00		1.00
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Adj Sat Flow, veh/h/ln	1800	1800	1800	1800	1891	1891	1773	1844	1844	1782	1782	1853
Adj Flow Rate, veh/h	3	4	10	590	1	239	134	834	1	8	547	0
Adj No. of Lanes	1	1	0	1	1	0	1	1	0	1	1	1
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
Percent Heavy Veh, %	0	0	0	1	0	0	0	0	0	0	0	0
Cap, veh/h	413	178	444	633	3	623	288	921	1	141	641	567
Arrive On Green	0.39	0.39	0.39	0.39	0.39	0.39	0.08	0.50	0.50	0.36	0.36	0.00
Sat Flow, veh/h	1158	457	1142	1422	7	1601	1689	1841	2	661	1782	1575
Grp Volume(v), veh/h	3	0	14	590	0	240	134	0	835	8	547	0
Grp Sat Flow(s),veh/h/ln	1158	0	1599	1422	0	1608	1689	0	1844	661	1782	1575
Q Serve(g_s), s	0.2	0.0	0.5	35.0	0.0	9.6	4.1	0.0	37.3	1.0	25.5	0.0
Cycle Q Clear(g_c), s	9.3	0.0	0.5	35.0	0.0	9.6	4.1	0.0	37.3	25.2	25.5	0.0
Prop In Lane	1.00		0.71	1.00		1.00	1.00		0.00	1.00		1.00
Lane Grp Cap(c), veh/h	413	0	622	633	0	625	288	0	922	141	641	567
V/C Ratio(X)	0.01	0.00	0.02	0.93	0.00	0.38	0.46	0.00	0.91	0.06	0.85	0.00
Avail Cap(c_a), veh/h	413	0	622	633	0	625	296	0	922	141	641	567
HCM Platoon Ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(I)	1.00	0.00	1.00	1.00	0.00	1.00	1.00	0.00	1.00	0.80	0.80	0.00
Uniform Delay (d), s/veh	22.9	0.0	17.0	28.6	0.0	19.8	18.8	0.0	20.6	37.6	26.6	0.0
Incr Delay (d2), s/veh	0.0	0.0	0.0	20.8	0.0	0.4	1.2	0.0	14.1	0.6	11.1	0.0
Initial Q Delay(d3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
%ile BackOfQ(95%),veh/ln	0.1	0.0	0.4	25.2	0.0	7.7	3.6	0.0	30.2	0.4	20.0	0.0
LnGrp Delay(d),s/veh	22.9	0.0	17.0	49.4	0.0	20.1	19.9	0.0	34.7	38.2	37.7	0.0
LnGrp LOS	C		B	D		C	B		C	D	D	
Approach Vol, veh/h		17			830			969			555	
Approach Delay, s/veh		18.0			40.9			32.6			37.7	
Approach LOS		B			D			C			D	
Timer	1	2	3	4	5	6	7	8				
Assigned Phs		2		4	5	6		8				
Phs Duration (G+Y+Rc), s		50.0		40.0	12.6	37.4		40.0				
Change Period (Y+Rc), s		6.0		6.0	6.0	6.0		6.0				
Max Green Setting (Gmax), s		44.0		34.0	7.0	31.0		34.0				
Max Q Clear Time (g_c+I1), s		39.3		37.5	6.6	28.0		11.8				
Green Ext Time (p_c), s		3.4		0.0	0.0	2.2		3.5				
Intersection Summary												
HCM 2010 Ctrl Delay				36.6								
HCM 2010 LOS				D								

HCM 2010 Signalized Intersection Summary

2: Radnor Chester Rd & King of Prussia Rd

01/11/2018



Movement	EBL	EBT	EBR	WBL	WBT	WBR	NEL	NET	NER	SWL	SWT	SWR
Lane Configurations												
Traffic Volume (veh/h)	8	766	677	59	426	1	409	7	145	32	37	50
Future Volume (veh/h)	8	766	677	59	426	1	409	7	145	32	37	50
Number	5	2	12	1	6	16	7	4	14	3	8	18
Initial Q (Qb), veh	0	0	0	0	0	0	0	0	0	0	0	0
Ped-Bike Adj(A_pbT)	1.00		1.00	1.00		1.00	1.00		0.99	1.00		0.99
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Adj Sat Flow, veh/h/ln	1782	1782	1872	1836	1835	1854	1782	1664	1835	1809	1743	1809
Adj Flow Rate, veh/h	8	798	0	61	444	1	426	7	151	33	39	52
Adj No. of Lanes	1	1	1	1	1	0	0	1	1	0	1	0
Peak Hour Factor	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96
Percent Heavy Veh, %	1	1	0	1	1	1	14	14	1	3	3	3
Cap, veh/h	325	772	690	80	793	2	282	3	685	51	57	41
Arrive On Green	0.43	0.43	0.00	0.43	0.43	0.43	0.44	0.44	0.44	0.44	0.44	0.44
Sat Flow, veh/h	950	1782	1591	705	1830	4	455	7	1540	0	129	93
Grp Volume(v), veh/h	8	798	0	61	0	445	433	0	151	124	0	0
Grp Sat Flow(s),veh/h/ln	950	1782	1591	705	0	1834	463	0	1540	222	0	0
Q Serve(g_s), s	0.6	39.0	0.0	0.0	0.0	16.3	0.0	0.0	5.4	0.0	0.0	0.0
Cycle Q Clear(g_c), s	16.4	39.0	0.0	39.0	0.0	16.3	40.0	0.0	5.4	40.0	0.0	0.0
Prop In Lane	1.00		1.00	1.00		0.00	0.98		1.00	0.27		0.42
Lane Grp Cap(c), veh/h	325	772	690	80	0	795	285	0	685	149	0	0
V/C Ratio(X)	0.02	1.03	0.00	0.76	0.00	0.56	1.52	0.00	0.22	0.83	0.00	0.00
Avail Cap(c_a), veh/h	325	772	690	80	0	795	285	0	685	149	0	0
HCM Platoon Ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(I)	0.09	0.09	0.00	1.00	0.00	1.00	1.00	0.00	1.00	1.00	0.00	0.00
Uniform Delay (d), s/veh	25.0	25.5	0.0	45.0	0.0	19.1	30.6	0.0	15.4	21.7	0.0	0.0
Incr Delay (d2), s/veh	0.0	19.9	0.0	49.4	0.0	2.8	250.7	0.0	0.2	30.9	0.0	0.0
Initial Q Delay(d3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
%ile BackOfQ(95%),veh/ln	0.3	41.5	0.0	4.7	0.0	13.8	48.4	0.0	4.2	5.7	0.0	0.0
LnGrp Delay(d),s/veh	25.0	45.4	0.0	94.4	0.0	21.9	281.3	0.0	15.6	52.5	0.0	0.0
LnGrp LOS	C	F		F		C	F		B	D		
Approach Vol, veh/h		806			506			584			124	
Approach Delay, s/veh		45.2			30.7			212.6			52.5	
Approach LOS		D			C			F			D	
Timer	1	2	3	4	5	6	7	8				
Assigned Phs		2		4		6		8				
Phs Duration (G+Y+Rc), s		44.0		46.0		44.0		46.0				
Change Period (Y+Rc), s		6.0		7.0		6.0		7.0				
Max Green Setting (Gmax), s		38.0		39.0		38.0		39.0				
Max Q Clear Time (g_c+I1), s		41.5		42.0		41.5		42.0				
Green Ext Time (p_c), s		0.0		0.0		0.0		0.0				
Intersection Summary												
HCM 2010 Ctrl Delay				90.4								
HCM 2010 LOS				F								

HCM 2010 TWSC
 3: King of Prussia Rd & Septa Driveway

01/11/2018

Intersection						
Int Delay, s/veh	4.4					
Movement	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations	↖ ↗		↖		↖ ↗	↖ ↗
Traffic Vol, veh/h	76	85	409	17	54	988
Future Vol, veh/h	76	85	409	17	54	988
Conflicting Peds, #/hr	10	2	0	17	17	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	None	-	None	-	None
Storage Length	0	-	-	-	100	-
Veh in Median Storage, #	0	-	0	-	-	0
Grade, %	0	-	0	-	-	0
Peak Hour Factor	85	85	85	85	85	85
Heavy Vehicles, %	0	17	1	0	17	1
Mvmt Flow	89	100	481	20	64	1162

Major/Minor	Minor1	Major1	Major2		
Conflicting Flow All	1807	510	0	0	518
Stage 1	508	-	-	-	-
Stage 2	1299	-	-	-	-
Critical Hdwy	6.4	6.37	-	-	4.27
Critical Hdwy Stg 1	5.4	-	-	-	-
Critical Hdwy Stg 2	5.4	-	-	-	-
Follow-up Hdwy	3.5	3.453	-	-	2.353
Pot Cap-1 Maneuver	~ 88	535	-	-	976
Stage 1	608	-	-	-	-
Stage 2	258	-	-	-	-
Platoon blocked, %					
Mov Cap-1 Maneuver	~ 80	527	-	-	974
Mov Cap-2 Maneuver	184	-	-	-	-
Stage 1	599	-	-	-	-
Stage 2	239	-	-	-	-





















Approach	WB	NB	SB
HCM Control Delay, s	41	0	0.5
HCM LOS	E		

Minor Lane/Major Mvmt	NBT	NBRWBLn1	SBL	SBT
Capacity (veh/h)	-	-	280	974
HCM Lane V/C Ratio	-	-	0.676	0.065
HCM Control Delay (s)	-	-	41	9
HCM Lane LOS	-	-	E	A
HCM 95th %tile Q(veh)	-	-	4.5	0.2

Notes
 ~: Volume exceeds capacity \$: Delay exceeds 300s +: Computation Not Defined *: All major volume in platoon

HCM 2010 Signalized Intersection Summary
 5: King of Prussia Rd & Raider Rd

01/11/2018

												
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (veh/h)	5	0	42	272	0	60	24	299	101	14	1117	5
Future Volume (veh/h)	5	0	42	272	0	60	24	299	101	14	1117	5
Number	7	4	14	3	8	18	5	2	12	1	6	16
Initial Q (Qb), veh	0	0	0	0	0	0	0	0	0	0	0	0
Ped-Bike Adj(A_pbT)	1.00		1.00	1.00		1.00	1.00		1.00	1.00		1.00
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Adj Sat Flow, veh/h/ln	1800	1800	1800	1800	1800	1800	1800	1782	1800	1800	1782	1800
Adj Flow Rate, veh/h	5	0	45	289	0	64	26	318	107	15	1188	5
Adj No. of Lanes	0	1	0	1	1	0	1	1	1	1	1	0
Peak Hour Factor	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94
Percent Heavy Veh, %	0	0	0	0	0	0	0	1	0	0	1	1
Cap, veh/h	58	20	307	396	0	340	80	1188	1018	661	1182	5
Arrive On Green	0.22	0.00	0.22	0.22	0.00	0.22	0.67	0.67	0.67	0.67	0.67	0.67
Sat Flow, veh/h	63	91	1382	1383	0	1530	477	1782	1527	977	1773	7
Grp Volume(v), veh/h	50	0	0	289	0	64	26	318	107	15	0	1193
Grp Sat Flow(s),veh/h/ln	1536	0	0	1383	0	1530	477	1782	1527	977	0	1781
Q Serve(g_s), s	0.0	0.0	0.0	15.5	0.0	3.1	0.0	6.5	2.3	0.6	0.0	60.0
Cycle Q Clear(g_c), s	2.3	0.0	0.0	17.8	0.0	3.1	60.0	6.5	2.3	7.1	0.0	60.0
Prop In Lane	0.10		0.90	1.00		1.00	1.00		1.00	1.00		0.00
Lane Grp Cap(c), veh/h	385	0	0	396	0	340	80	1188	1018	661	0	1187
V/C Ratio(X)	0.13	0.00	0.00	0.73	0.00	0.19	0.32	0.27	0.11	0.02	0.00	1.00
Avail Cap(c_a), veh/h	385	0	0	396	0	340	80	1188	1018	661	0	1187
HCM Platoon Ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(I)	1.00	0.00	0.00	1.00	0.00	1.00	1.00	1.00	1.00	1.00	0.00	1.00
Uniform Delay (d), s/veh	28.1	0.0	0.0	33.9	0.0	28.4	45.0	6.1	5.4	7.5	0.0	15.0
Incr Delay (d2), s/veh	0.2	0.0	0.0	6.7	0.0	0.3	10.5	0.6	0.2	0.1	0.0	27.3
Initial Q Delay(d3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
%ile BackOfQ(95%),veh/ln	1.8	0.0	0.0	12.3	0.0	2.4	1.6	6.1	1.8	0.3	0.0	68.4
LnGrp Delay(d),s/veh	28.3	0.0	0.0	40.6	0.0	28.7	55.5	6.6	5.6	7.6	0.0	42.3
LnGrp LOS	C			D		C	E	A	A	A		F
Approach Vol, veh/h		50			353			451				1208
Approach Delay, s/veh		28.3			38.5			9.2				41.9
Approach LOS		C			D			A				D
Timer	1	2	3	4	5	6	7	8				
Assigned Phs		2		4		6		8				
Phs Duration (G+Y+Rc), s		65.0		25.0		65.0		25.0				
Change Period (Y+Rc), s		6.0		6.0		6.0		6.0				
Max Green Setting (Gmax), s		59.0		19.0		59.0		19.0				
Max Q Clear Time (g_c+I1), s		62.0		4.3		62.0		19.8				
Green Ext Time (p_c), s		0.0		1.4		0.0		0.0				
Intersection Summary												
HCM 2010 Ctrl Delay				33.8								
HCM 2010 LOS				C								

HCM 2010 TWSC
6: King of Prussia Rd & Southern Driveway

01/11/2018

Intersection						
Int Delay, s/veh	0.2					
Movement	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations						
Traffic Vol, veh/h	4	4	419	2	2	1425
Future Vol, veh/h	4	4	419	2	2	1425
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	None	-	None	-	None
Storage Length	0	-	-	-	100	-
Veh in Median Storage, #	0	-	0	-	-	0
Grade, %	0	-	0	-	-	0
Peak Hour Factor	94	94	94	94	94	94
Heavy Vehicles, %	0	0	1	0	0	1
Mvmt Flow	4	4	446	2	2	1516

Major/Minor	Minor1	Major1	Major2		
Conflicting Flow All	1967	224	0	0	448
Stage 1	447	-	-	-	-
Stage 2	1520	-	-	-	-
Critical Hdwy	6.6	6.9	-	-	4.1
Critical Hdwy Stg 1	5.8	-	-	-	-
Critical Hdwy Stg 2	5.4	-	-	-	-
Follow-up Hdwy	3.5	3.3	-	-	2.2
Pot Cap-1 Maneuver	63	786	-	-	1123
Stage 1	617	-	-	-	-
Stage 2	201	-	-	-	-
Platoon blocked, %			-	-	-
Mov Cap-1 Maneuver	63	786	-	-	1123
Mov Cap-2 Maneuver	63	-	-	-	-
Stage 1	617	-	-	-	-
Stage 2	201	-	-	-	-

Approach	WB	NB	SB
HCM Control Delay, s	38.2	0	0
HCM LOS	E		

Minor Lane/Major Mvmt	NBT	NBRWBLn1	SBL	SBT
Capacity (veh/h)	-	-	117	1123
HCM Lane V/C Ratio	-	-	0.073	0.002
HCM Control Delay (s)	-	-	38.2	8.2
HCM Lane LOS	-	-	E	A
HCM 95th %tile Q(veh)	-	-	0.2	0

HCM 2010 Signalized Intersection Summary


7: I-476 Off Ramp/King of Prussia Rd & Lancaster Ave

01/11/2018

Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (veh/h)	103	1567	0	0	589	182	277	235	218	845	0	459
Future Volume (veh/h)	103	1567	0	0	589	182	277	235	218	845	0	459
Number	5	2	12	1	6	16	3	8	18	7	4	14
Initial Q (Qb), veh	0	0	0	0	0	0	0	0	0	0	0	0
Ped-Bike Adj(A_pbT)	1.00		1.00	1.00		1.00	1.00		1.00	1.00		1.00
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Adj Sat Flow, veh/h/ln	1791	1773	0	0	1800	1872	1764	1782	1782	1764	0	1853
Adj Flow Rate, veh/h	110	1667	0	0	627	0	295	250	232	899	0	488
Adj No. of Lanes	2	2	0	0	2	1	2	2	0	2	0	1
Peak Hour Factor	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94
Percent Heavy Veh, %	0	1	0	0	1	1	1	0	0	1	0	0
Cap, veh/h	216	1623	0	0	1270	591	1393	277	248	858	0	0
Arrive On Green	0.07	0.48	0.00	0.00	0.74	0.00	0.43	0.16	0.16	0.22	0.00	0.01
Sat Flow, veh/h	3309	3458	0	0	3510	1591	3260	1695	1513	3260	899	
Grp Volume(v), veh/h	110	1667	0	0	627	0	295	250	232	899	88.1	
Grp Sat Flow(s),veh/h/ln	1655	1685	0	0	1710	1591	1630	1693	1515	1630	F	
Q Serve(g_s), s	3.5	53.0	0.0	0.0	8.2	0.0	6.3	15.9	16.7	24.0		
Cycle Q Clear(g_c), s	3.5	53.0	0.0	0.0	8.2	0.0	6.3	15.9	16.7	24.0		
Prop In Lane	1.00		0.00	0.00		1.00	1.00		1.00	1.00		
Lane Grp Cap(c), veh/h	216	1623	0	0	1270	591	1393	277	248	858		
V/C Ratio(X)	0.51	1.03	0.00	0.00	0.49	0.00	0.21	0.90	0.94	1.05		
Avail Cap(c_a), veh/h	391	1623	0	0	1270	591	1393	277	248	858		
HCM Platoon Ratio	1.00	1.00	1.00	1.00	2.00	2.00	1.00	1.00	1.00	1.00		
Upstream Filter(I)	0.86	0.86	0.00	0.00	0.86	0.00	1.00	1.00	1.00	1.00		
Uniform Delay (d), s/veh	49.7	28.5	0.0	0.0	10.0	0.0	19.8	45.1	45.4	44.2		
Incr Delay (d2), s/veh	1.6	27.9	0.0	0.0	1.2	0.0	0.1	30.0	40.3	43.9		
Initial Q Delay(d3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
%ile BackOfQ(95%),veh/ln	3.0	55.6	0.0	0.0	6.9	0.0	5.1	14.8	14.9	9.4		
LnGrp Delay(d),s/veh	51.3	56.4	0.0	0.0	11.2	0.0	19.9	75.1	85.7	88.1		
LnGrp LOS	D	F			B		B	E	F	F		
Approach Vol, veh/h		1777			627			777				
Approach Delay, s/veh		56.1			11.2			57.3				
Approach LOS		E			B			E				
Timer	1	2	3	4	5	6	7	8				
Assigned Phs		2	3		5	6	7	8				
Phs Duration (G+Y+Rc), s		58.0	52.0		12.2	45.8	29.0	23.0				
Change Period (Y+Rc), s		6.0	6.0		6.0	6.0	6.0	6.0				
Max Green Setting (Gmax), s		52.0	23.0		12.0	34.0	23.0	17.0				
Max Q Clear Time (g_c+I1), s		55.5	8.8		6.0	10.7	26.5	18.7				
Green Ext Time (p_c), s		0.0	0.8		0.1	17.8	0.0	0.0				
Intersection Summary												
HCM 2010 Ctrl Delay			56.5									
HCM 2010 LOS			E									

HCM 2010 Signalized Intersection Summary
 8: I-476 SB Off Ramp & Lancaster Ave

01/11/2018



Movement	EBT	EBR	WBL	WBT	NBL	NBR		
Lane Configurations	↑↑↑		↵↵	↑↑	↵↵	↵		
Traffic Volume (veh/h)	1072	0	580	782	627	516		
Future Volume (veh/h)	1072	0	580	782	627	516		
Number	4	14	3	8	5	12		
Initial Q (Qb), veh	0	0	0	0	0	0		
Ped-Bike Adj(A_pbT)		1.00	1.00		1.00	1.00		
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00		
Adj Sat Flow, veh/h/ln	1764	0	1800	1800	1818	1891		
Adj Flow Rate, veh/h	1105	0	598	806	646	0		
Adj No. of Lanes	3	0	2	2	2	1		
Peak Hour Factor	0.97	0.97	0.97	0.97	0.97	0.97		
Percent Heavy Veh, %	1	0	1	1	1	1		
Cap, veh/h	2036	0	707	2328	767	367		
Arrive On Green	0.42	0.00	0.28	0.91	0.23	0.00		
Sat Flow, veh/h	5134	0	3326	3510	3359	1607		
Grp Volume(v), veh/h	1105	0	598	806	646	0		
Grp Sat Flow(s),veh/h/ln	1606	0	1663	1710	1679	1607		
Q Serve(g_s), s	18.9	0.0	18.6	3.6	20.2	0.0		
Cycle Q Clear(g_c), s	18.9	0.0	18.6	3.6	20.2	0.0		
Prop In Lane		0.00	1.00		1.00	1.00		
Lane Grp Cap(c), veh/h	2036	0	707	2328	767	367		
V/C Ratio(X)	0.54	0.00	0.85	0.35	0.84	0.00		
Avail Cap(c_a), veh/h	2036	0	847	2328	916	438		
HCM Platoon Ratio	1.00	1.00	1.33	1.33	1.00	1.00		
Upstream Filter(I)	1.00	0.00	0.75	0.75	1.00	0.00		
Uniform Delay (d), s/veh	23.8	0.0	37.8	1.8	40.5	0.0		
Incr Delay (d2), s/veh	1.0	0.0	5.3	0.3	6.2	0.0		
Initial Q Delay(d3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0		
%ile BackOfQ(95%),veh/ln	3.4	0.0	13.4	3.0	15.2	0.0		
LnGrp Delay(d),s/veh	24.8	0.0	43.0	2.1	46.7	0.0		
LnGrp LOS	C		D	A	D			
Approach Vol, veh/h	1105			1404	646			
Approach Delay, s/veh	24.8			19.6	46.7			
Approach LOS	C			B	D			
Timer	1	2	3	4	5	6	7	8
Assigned Phs		2	3	4				8
Phs Duration (G+Y+Rc), s		30.1	28.4	51.5				79.9
Change Period (Y+Rc), s		6.0	6.0	6.0				6.0
Max Green Setting (Gmax), s		29.0	27.0	36.0				69.0
Max Q Clear Time (g_c+11), s		22.7	21.1	21.4				6.1
Green Ext Time (p_c), s		1.4	1.2	10.4				23.1
Intersection Summary								
HCM 2010 Ctrl Delay			27.0					
HCM 2010 LOS			C					

HCM 2010 Signalized Intersection Summary

9: Hillside Circuit & Lancaster Ave

01/11/2018



Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↔↔	↑↔		↔	↑↑	↔		↔	↔			
Traffic Volume (veh/h)	1170	1796	15	6	734	595	3	1	2	0	0	0
Future Volume (veh/h)	1170	1796	15	6	734	595	3	1	2	0	0	0
Number	5	2	12	1	6	16	3	8	18			
Initial Q (Qb), veh	0	0	0	0	0	0	0	0	0			
Ped-Bike Adj(A_pbT)	1.00		0.98	1.00		1.00	1.00		0.90			
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00			
Adj Sat Flow, veh/h/ln	1782	1731	1800	1800	1782	1853	1800	1800	1800			
Adj Flow Rate, veh/h	1219	1871	16	6	765	0	3	1	2			
Adj No. of Lanes	2	2	0	1	2	1	0	1	1			
Peak Hour Factor	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96			
Percent Heavy Veh, %	1	4	4	0	1	1	0	0	0			
Cap, veh/h	1227	2795	24	23	1616	752	18	6	19			
Arrive On Green	0.75	1.00	1.00	0.01	0.48	0.00	0.01	0.01	0.01			
Sat Flow, veh/h	3293	3342	29	1714	3386	1575	1301	434	1375			
Grp Volume(v), veh/h	1219	919	968	6	765	0	4	0	2			
Grp Sat Flow(s),veh/h/ln	1646	1645	1726	1714	1693	1575	1735	0	1375			
Q Serve(g_s), s	39.9	0.0	0.0	0.4	16.8	0.0	0.3	0.0	0.2			
Cycle Q Clear(g_c), s	39.9	0.0	0.0	0.4	16.8	0.0	0.3	0.0	0.2			
Prop In Lane	1.00		0.02	1.00		1.00	0.75		1.00			
Lane Grp Cap(c), veh/h	1227	1376	1443	23	1616	752	24	0	19			
V/C Ratio(X)	0.99	0.67	0.67	0.26	0.47	0.00	0.17	0.00	0.11			
Avail Cap(c_a), veh/h	1227	1376	1443	109	1616	752	110	0	87			
HCM Platoon Ratio	2.00	2.00	2.00	1.00	1.00	1.00	1.00	1.00	1.00			
Upstream Filter(I)	0.09	0.09	0.09	1.00	1.00	0.00	1.00	0.00	1.00			
Uniform Delay (d), s/veh	13.9	0.0	0.0	53.7	19.4	0.0	53.6	0.0	53.6			
Incr Delay (d2), s/veh	6.3	0.2	0.2	5.6	1.0	0.0	3.3	0.0	2.5			
Initial Q Delay(d3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
%ile BackOfQ(95%),veh/ln	20.4	0.2	0.2	0.4	12.7	0.0	0.3	0.0	0.1			
LnGrp Delay(d),s/veh	20.1	0.2	0.2	59.3	20.4	0.0	56.9	0.0	56.0			
LnGrp LOS	C	A	A	E	C		E		E			
Approach Vol, veh/h		3106			771			6				
Approach Delay, s/veh		8.0			20.7			56.6				
Approach LOS		A			C			E				
Timer	1	2	3	4	5	6	7	8				
Assigned Phs	1	2			5	6		8				
Phs Duration (G+Y+Rc), s	6.5	97.0			46.0	57.5		6.5				
Change Period (Y+Rc), s	6.0	6.0			6.0	6.0		6.0				
Max Green Setting (Gmax), s	6.0	80.0			40.0	46.0		6.0				
Max Q Clear Time (g_c+12.5), s	6.0	2.5			42.4	19.3		2.7				
Green Ext Time (p_c), s	0.0	47.4			0.0	22.0		0.0				
Intersection Summary												
HCM 2010 Ctrl Delay				10.6								
HCM 2010 LOS				B								
Notes												

Crash Data Summary Report

UNIVERSITY OF PENNSYLVANIA HEALTH SYSTEMS

LANCASTER AVENUE & KING OF PRUSSIA ROAD
RADNOR, PENNSYLVANIA



James P. Markham, PE

Pennsylvania Professional Engineer License No. PE061283

Prepared For:

University of Pennsylvania Health System
3400 Civic Center Boulevard
Philadelphia, PA 19104

February 2018
UPHS 1507



UNIVERSITY OF
PENNSYLVANIA
HEALTH SYSTEM



PARTNERS FOR WHAT'S POSSIBLE

pennoni.com

TABLE OF CONTENTS

EXISTING CRASH HISTORY	1
REPORTABLE CRASH DATA.....	1
REPORTABLE CRASH SUMMARY	2
REPORTABLE CRASH SUMMARY TABLES	2
<i>Table 1 Crash Year Summary</i>	<i>2</i>
<i>Table 2 Collision Type.....</i>	<i>2</i>
<i>Table 3 Crash Severity Level.....</i>	<i>3</i>
<i>Table 4 Vehicle Type.....</i>	<i>3</i>
<i>Table 5 Driver Actions</i>	<i>4</i>
<i>Table 6 Road Condition.....</i>	<i>4</i>
<i>Table 7 Illumination.....</i>	<i>5</i>
<i>Table 8 Weather</i>	<i>5</i>
REPORTABLE CRASH RATE.....	6
NON-REPORTABLE CRASH DATA	6
NON-REPORTABLE CRASH SUMMARY	7
NON-REPORTABLE CRASH SUMMARY TABLES.....	7
<i>Table 9 Crash Year Summary</i>	<i>7</i>
<i>Table 10 Collision Type</i>	<i>7</i>
CRASH EVALUATION.....	8

APPENDICES

Appendix A – 2011-2015 Crash Data

Existing Crash History

Crash histories, engineering extracts, summary and resume pages for the length of the study area were requested. The accident data represents the five-year period from January 2011 to December 2015 and is the most recent data available from The Pennsylvania Department of Transportation (PennDOT) and the Radnor Police Department at the time of preparation of this report. The study area focuses on King of Prussia Road from Matsonford Road (SR 1038) to the Southern Driveway and Lancaster Avenue (SR 0030) from I-476 NB On Ramp/Hillside Circle to Radnor Chester Road (SR 1021) in the Township of Radnor in Delaware County. The study area includes six intersections: King of Prussia Road at Matsonford Road, King of Prussia at Radnor Chester Road, SR 0030 at I-476 SB Off Ramp, SR 0030 at I-476 NB Off Ramp/King of Prussia Road, SR 0030 at I-476 NB On Ramp/Hillside Circle and SR 0030 at Radnor Chester Road. PennDOT was able to provide information for the following segments:

- SR 1021 from Segments/Offsets 0060/1041 to 0060/1321 in Delaware County
- SR 1021 from Segments/Offsets 0050/2631 to 0060/0100 in Delaware County
- SR 0030 from Segments/Offsets 0070/0339 to 0070/0672 in Delaware County and Segments/Offsets 0010/1220 to 0010/1320
- SR 0030 from Segments/Offsets 0060/1604 to 0060/2243, from Segments/Offsets 0250/0000 to 0250/0232 and from Segments/Offsets 0500/1239 to 0500/1560 in Delaware County
- SR 0030 from Segments/Offsets 0070/0986 to 0070/1372 and from Segments/Offsets 0750/0000 to 0750/0226 in Delaware County
- SR 0030 in Delaware County (entire local section) – no cluster
- SR 0030 from Segments/Offsets 0050/2604 to 0060/0100 in Delaware County

The engineering extract summary classifies accident data into various categories. Crashes are classified as either reportable or non-reportable. A reportable crash is an incident that occurs on a highway or traffic way that is open to the public by right, involves at least one motor vehicle in transport, and involves either Injury to or death of any person and/or damage to any vehicle to the extent that it cannot be driven under its own power and therefore requires towing. Accidents are broken down by available information such as year, collision type, level of severity, driver actions, vehicle types, roadway conditions, lighting conditions and weather. For each category, data is presented by number of vehicles per year and by the percentage of total vehicles in the time frame.

A total of eighty-seven (87) reportable crashes and seventy-one (71) non-reportable crashes within the study limits for the five-year study period. The crash data for this project is broken down by all the study intersections along King of Prussia Road and along Lancaster Avenue. Midblock locations are not included in the study.

Reportable Crash Data

Analysis of the reportable crashes is based on PennDOT's CDART Crash Summary sheet. Crashes were generally distributed evenly between the years 2011 and 2015. There were six collision types that occurred in the study area at the various intersections, with angle collisions making up 39% of all crashes, occurring primarily at or near intersections. Rear-end collisions are particularly high as well with 28 crashes (32%) which is most likely caused by the higher travel speeds along Lancaster Avenue (SR 0030).

The second highest collision type is rear end (32% of all crashes). Within the study area, the highest concentration of pedestrian accidents (2) occurred at the intersections of King of Prussia Road & Matsonford Road (SR 1038) and King of Prussia Road & Radnor Chester Road (SR 1021)

Refer to Tables 1 through 8 of the Reportable Crash Summary for specific crash totals and attributes within the study area.

Reportable Crash Summary

Reportable Crash Summary Tables

Table 1 Crash Year Summary

Year	King of Prussia Road & Matsonford Road (SR 1038)		King of Prussia Road & Radnor Chester Road (SR 1021)		Lancaster Avenue (SR 0030) & King of Prussia Road/I-476 NB Off Ramp		Lancaster Avenue (SR 0030) & I-476 SB On/Off Ramps		Lancaster Avenue (SR 0030 & I-476 NB On Ramp/Hillside Circle		Lancaster Avenue (SR 0030) & Radnor Chester Road (SR 1021)		
	Total	TOT.	(%)	TOT.	(%)	TOT.	(%)	TOT.	(%)	TOT.	(%)	TOT.	(%)
2011	19	2	25%	5	26%	2	18%	1	17%	5	26%	4	17%
2012	14	2	25%	2	11%	1	9%	2	33%	3	16%	4	17%
2013	19	3	38%	1	5%	1	9%	2	33%	6	32%	6	25%
2014	15	0	0%	6	32%	4	36%	0	0%	1	5%	4	17%
2015	20	1	13%	5	26%	3	27%	1	17%	4	21%	6	25%
Total	87	8	100%	19	100%	11	100%	6	100%	19	100%	24	100%

Table 2 Collision Type

Collision Type	King of Prussia Road & Matsonford Road (SR 1038)		King of Prussia Road & Radnor Chester Road (SR 1021)		Lancaster Avenue (SR 0030) & King of Prussia Road/I-476 NB Off Ramp		Lancaster Avenue (SR 0030) & I-476 SB On/Off Ramps		Lancaster Avenue (SR 0030 & I-476 NB On Ramp/Hillside Circle		Lancaster Avenue (SR 0030) & Radnor Chester Road (SR 1021)		
	Total	TOT.	(%)	TOT.	(%)	TOT.	(%)	TOT.	(%)	TOT.	(%)	TOT.	(%)
Hit Fixed Object	12	0	0%	6	32%	2	18%	1	17%	1	5%	2	8%
Angle	34	2	25%	7	37%	4	36%	0	0%	9	47%	12	50%
Same Direction SS	0	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%
Rear End	28	4	50%	3	16%	5	45%	5	83%	5	26%	6	25%
Non Coll	0	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%
Opposite Direction SS	2	0	0%	1	5%	0	0%	0	0%	1	5%	0	0%
Pedestrian	2	1	13%	1	5%	0	0%	0	0%	0	0%	0	0%
Head on Collision	9	1	13%	1	5%	0	0%	0	0%	3	16%	4	17%
Backing	0	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%
Total	87	8	100%	19	100%	11	100%	6	100%	19	100%	24	100%

Table 3 Crash Severity Level

Crash Severity Level	King of Prussia Road & Matsonford Road (SR 1038)		King of Prussia Road & Radnor Chester Road (SR 1021)		Lancaster Avenue (SR 0030) & King of Prussia Road/I-476 NB Off Ramp		Lancaster Avenue (SR 0030) & I-476 SB On/Off Ramps		Lancaster Avenue (SR 0030 & I-476 NB On Ramp/Hillside Circle		Lancaster Avenue (SR 0030) & Radnor Chester Road (SR 1021)	
	Total	(%)	TOT.	(%)	TOT.	(%)	TOT.	(%)	TOT.	(%)	TOT.	(%)
Major	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%
Moderate	2	0%	1	5%	0	0%	1	17%	0	0%	0	0%
Minor	7	25%	1	5%	0	0%	2	33%	1	5%	1	4%
UNK Severity	17	25%	2	11%	2	18%	0	0%	5	26%	6	25%
UNK If Injured	1	0%	0	0%	0	0%	0	0%	0	0%	1	4%
PDO	60	50%	4	79%	15	79%	9	82%	13	68%	16	67%
Total	87	100%	8	100%	19	100%	11	100%	19	100%	24	100%

Table 4 Vehicle Type

Crash Severity Count	King of Prussia Road & Matsonford Road (SR 1038)		King of Prussia Road & Radnor Chester Road (SR 1021)		Lancaster Avenue (SR 0030) & King of Prussia Road/I-476 NB Off Ramp		Lancaster Avenue (SR 0030) & I-476 SB On/Off Ramps		Lancaster Avenue (SR 0030 & I-476 NB On Ramp/Hillside Circle		Lancaster Avenue (SR 0030) & Radnor Chester Road (SR 1021)	
	Total	(%)	TOT.	(%)	TOT.	(%)	TOT.	(%)	TOT.	(%)	TOT.	(%)
Fatalities	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%
Major	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%
Moderate	2	0%	1	25%	0	0%	1	33%	0	0%	0	0%
Minor	7	50%	1	25%	0	0%	2	67%	1	17%	1	14%
UNK Severity	17	50%	2	50%	2	100%	0	0%	5	83%	6	86%
UNK If Injured	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%
Total	26	100%	4	100%	2	100%	3	100%	6	100%	7	100%

Table 5 Driver Actions

Driver Actions	King of Prussia Road & Matsonford Road (SR 1038)		King of Prussia Road & Radnor Chester Road (SR 1021)		Lancaster Avenue (SR 0030) & King of Prussia Road/I-476 NB Off Ramp		Lancaster Avenue (SR 0030) & I-476 SB On/Off Ramps		Lancaster Avenue (SR 0030 & I-476 NB On Ramp/Hillside Circle		Lancaster Avenue (SR 0030) & Radnor Chester Road (SR 1021)	
	TOT.	(%)	TOT.	(%)	TOT.	(%)	TOT.	(%)	TOT.	(%)	TOT.	(%)
No Contributing Action	82	50%	12	36%	16	62%	4	36%	23	48%	19	35%
Unknown	3	0%	2	6%	0	0%	0	0%	0	0%	1	2%
Improper/ Careless Turn	25	19%	6	18%	2	8%	0	0%	3	6%	11	20%
Too Fast for Condition	10	0%	0	0%	3	12%	1	9%	2	4%	4	7%
Other Improper Driving	10	0%	4	12%	2	8%	2	18%	0	0%	2	4%
Careless Pass/ LN Change	4	0%	0	0%	0	0%	0	0%	4	8%	0	0%
Tailgating	5	13%	0	0%	0	0%	0	0%	2	4%	1	2%
Affected Physical Condition	6	0%	0	0%	0	0%	1	9%	2	4%	3	6%
Running Red Light	20	0%	3	9%	1	4%	0	0%	9	19%	7	13%
Careless Parking/ Unpark	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%
Careless/ Illegal Backing	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%
Driver Inexperienced	2	0%	1	3%	0	0%	0	0%	0	0%	1	2%
Driver Was Distracted	16	6%	4	12%	2	8%	3	27%	3	6%	3	6%
Others	5	13%	1	3%	0	0%	0	0%	0	0%	2	4%
TOTAL	188	100%	33	100%	26	100%	11	100%	48	100%	54	100%

Table 6 Road Condition

Road Condition	King of Prussia Road & Matsonford Road (SR 1038)		King of Prussia Road & Radnor Chester Road (SR 1021)		Lancaster Avenue (SR 0030) & King of Prussia Road/I-476 NB Off Ramp		Lancaster Avenue (SR 0030) & I-476 SB On/Off Ramps		Lancaster Avenue (SR 0030 & I-476 NB On Ramp/Hillside Circle		Lancaster Avenue (SR 0030) & Radnor Chester Road (SR 1021)	
	TOT.	(%)	TOT.	(%)	TOT.	(%)	TOT.	(%)	TOT.	(%)	TOT.	(%)
Total	87	100%	19	100%	11	100%	6	100%	19	100%	24	100%
Dry	70	63%	18	95%	7	64%	3	50%	15	79%	22	92%
Wet	14	38%	1	5%	2	18%	3	50%	3	16%	2	8%
Snow	2	0%	0	0%	1	9%	0	0%	1	5%	0	0%
Ice Patch	1	0%	0	0%	1	9%	0	0%	0	0%	0	0%
Other	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%

Table 7 Illumination

Illumination	King of Prussia Road & Matsonford Road (SR 1038)		King of Prussia Road & Radnor Chester Road (SR 1021)		Lancaster Avenue (SR 0030) & King of Prussia Road/I-476 NB Off Ramp		Lancaster Avenue (SR 0030) & I-476 SB On/Off Ramps		Lancaster Avenue (SR 0030 & I-476 NB On Ramp/Hillside Circle		Lancaster Avenue (SR 0030) & Radnor Chester Road (SR 1021)		
	Total	TOT.	(%)	TOT.	(%)	TOT.	(%)	TOT.	(%)	TOT.	(%)	TOT.	(%)
Daylight	56	8	100%	17	89%	5	45%	3	50%	9	47%	14	58%
Dark	0	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%
Dawn	1	0	0%	0	0%	1	9%	0	0%	0	0%	0	0%
Street Lights	30	0	0%	2	11%	5	45%	3	50%	10	53%	10	42%
Total	87	8	100%	19	100%	11	100%	6	100%	19	100%	24	100%

Table 8 Weather

Weather	King of Prussia Road & Matsonford Road (SR 1038)		King of Prussia Road & Radnor Chester Road (SR 1021)		Lancaster Avenue (SR 0030) & King of Prussia Road/I-476 NB Off Ramp		Lancaster Avenue (SR 0030) & I-476 SB On/Off Ramps		Lancaster Avenue (SR 0030 & I-476 NB On Ramp/Hillside Circle		Lancaster Avenue (SR 0030) & Radnor Chester Road (SR 1021)		
	Total	TOT.	(%)	TOT.	(%)	TOT.	(%)	TOT.	(%)	TOT.	(%)	TOT.	(%)
Clear	72	6	75%	18	95%	7	64%	4	67%	15	79%	22	92%
Rain	10	2	25%	1	5%	2	18%	2	33%	1	5%	2	8%
Rain/ Fog	2	0	0%	0	0%	0	0%	0	0%	2	11%	0	0%
Snow	3	0	0%	0	0%	2	18%	0	0%	1	5%	0	0%
Unclear	0	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%
Total	87	8	100%	19	100%	11	100%	6	100%	19	100%	24	100%

Reportable Crash Rate

$$\text{Crash Rate} = (548 \times N) / (L \times \text{ADT})$$

Where: 548 = Conversion Factor
N = number of crashes per section of roadway
L = length of roadway section in miles
ADT = average daily traffic

Compare the study area crash rate to corresponding statewide rates found in the Statewide Homogenous Report for 2011-2015, obtained from the PennDOT Traffic Safety Unit (See **Appendix A**).

Lancaster Avenue (SR 0030) from Radnor Chester Road (SR 1021) to I-476 NB On Ramp/Hillside Circle and King of Prussia Road from Lancaster Avenue (SR 0030) to Matsonford Road (SR 1038)

N = 87 crashes
L = 1.42 miles
ADT: WB = 15,314 vpd (From PennDOT ITMS - Seg 0061, Offset 0000)
SB = 15,644 vpd (From PennDOT ITMS - Seg 0080, Offset 0000)
TOTAL = 30,958 vpd

2011-2015 Statewide Average for Urban NFAC Divided (0-99 ft width) ADT 0 - 99,999 = 1.91 crashes per million

$$\text{SR 0030 Crash Rate} = (548 \times 87) / (1.42 \times 30,958) = \mathbf{1.08 < 1.91}$$

The crash rate was calculated for the entire length of the study corridor along SR 0030 and King of Prussia Road. This method was used because there are no statewide crash rates to compare to individual intersections. The crash rate calculated for the study area is lower than the Statewide Average for Urban NFAC Divided highways with 0-99 ft width and ADT of 0 to 99,000 VPD.

Non-Reportable Crash Data

Crash data at the study intersections was requested from the Radnor Police Department. They Radnor Police Department provided crash data for non-reportable crashes at the intersections of King of Prussia Road & Matsonford Road (SR 1038), King of Prussia Road & Radnor Chester Road (SR 1021), and Lancaster Avenue (SR 0030) & King of Prussia Road/I-476 NB Off Ramp. Crashes were present in all 5 year evaluated, primarily distributed between the years 2012 and 2015. There were four collision types that occurred in the study area at the intersections, with rear-end and same direction side-swipe making up approximately 89% of the total crashes. The remaining 11% of the crashes were composed of angle crashes (8%) and fixed object crashes (3%).

Refer to Tables 9 and 10 of the Non-Reportable Crash Summary for specific crash totals.

Non-Reportable Crash Summary

Non-Reportable Crash Summary Tables

Table 9 Crash Year Summary

Year	Year		King of Prussia Road & Matsonford Road (SR 1038)		King of Prussia Road & Radnor Chester Road (SR 1021)		Lancaster Avenue (SR 0030) & King of Prussia Road/I-476 NB Off Ramp	
	Total	(%)	TOT.	(%)	TOT.	(%)	TOT.	(%)
2011	5	7%	0	0%	0	0%	5	11%
2012	16	23%	3	19%	4	50%	9	19%
2013	12	17%	2	13%	2	25%	8	17%
2014	23	32%	7	44%	2	25%	14	30%
2015	15	21%	4	25%	0	0%	11	23%
Total	71	100%	16	100%	8	100%	47	100%

Table 10 Collision Type

Collision Type	Collision Type		King of Prussia Road & Matsonford Road (SR 1038)		King of Prussia Road & Radnor Chester Road (SR 1021)		Lancaster Avenue (SR 0030) & King of Prussia Road/I-476 NB Off Ramp	
	Total	(%)	TOT.	(%)	TOT.	(%)	TOT.	(%)
Hit Fixed Object	2	3%	1	6%	1	13%	0	0%
Angle	6	8%	3	19%	2	25%	1	2%
Same Direction SS	19	27%	2	13%	3	38%	14	30%
Rear End	44	62%	10	63%	2	25%	32	68%
Non Coll	0	0%	0	0%	0	0%	0	0%
Opposite Direction SS	0	0%	0	0%	0	0%	0	0%
Pedestrian	0	0%	0	0%	0	0%	0	0%
Head on Collision	0	0%	0	0%	0	0%	0	0%
Backing	0	0%	0	0%	0	0%	0	0%
Total	71	100%	16	100%	8	100%	47	100%

Crash Evaluation

Based on the historical crash data included in this report, the highest frequency of reported crashes at the study intersections are angle crashes (32) followed by rear end (28). The highest frequency of non-reported crashes at the study intersections are rear end (44) followed by same direction sideswipe (19). At each of the study intersections, the number of correctable crash incidents (reportable and non-reportable) in a rolling 12 month analysis period was evaluated. The following is the summary of the evaluation of correctable crashes:

King of Prussia Road & Matsonford Road (SR 1038)

- 6 correctable crashes from 2011-2015
- Maximum 3 correctable crashes in a 12 month period (April 2011-April 2012, October 2011-October 2012)

King of Prussia Road & Radnor Chester Road (SR 1021)

- 10 correctable crashes from 2011-2015
- Maximum 4 correctable crashes in a 12 month period (February 2014-February 2015)

Lancaster Avenue (SR 0030) & King of Prussia Road/I-476 NB Off Ramp

- 5 correctable crashes from 2011-2015
- Maximum 4 correctable crashes in a 12 month period (December 2014-December 2015)

Lancaster Avenue (SR 0030) & I-476 SB On/Off Ramps

- 0 correctable crashes from 2011-2015

Lancaster Avenue (SR 0030) & I-476 NB On Ramp/Hillside Circle

- 12 correctable crashes from 2011-2015
- Maximum 6 correctable crashes in a 12 month period (December 2012-December 2013)

Lancaster Avenue (SR 0030) & Radnor Chester Road (SR 1021)

- 15 correctable crashes from 2011-2015
- Maximum 5 correctable crashes in a 12 month period (September 2011-September 2012, March 2012-March 2013, July 2012- July 2013, March 2103-March 2014, May 2013-May 2014, September 2013-September 2014)

A graphic of the correctable crashes is provided in **Appendix A**.

The only intersection with 5 or more correctable crashes in a 12 month period is Lancaster Avenue & I-476 NB On Ramp/Hillside Circle. A closer look at the crashes indicates that the 5 correctable crashes in a 12 month period at Lancaster Avenue & I-476 NB On-Ramp/Hillside Circle involve several different combinations of vehicular movements and that 3 of the crashes involved a vehicle running a red light and 1 involved an illegal U-turn. Due to the varied nature of the 5 correctable crashes observed in a 12 month period, there are no intersection improvements recommended to mitigate the crashes.

In general, it is recommended that the existing yellow and all-red times at all study intersections should be re-evaluated in accordance to current PennDOT standards. Typically, a warranted increase in the yellow change interval or all red clearance interval can result in a reduction in rear end crashes and could reduce instances of vehicles running red lights.

APPENDIX A

2011-2015 Crash Data

CRASH DATA SUMMARY REPORT

**UNIVERSITY OF PENNSYLVANIA HEALTH
SYSTEMS**

SR 1021 ATSR 1038 IN RADNOR TWP IN DELAWARE CO LOG 17381-01



Sorted by County, Route, Segment, Offset

Date Range: 1/1/2011 to 12/31/2015

Area of Interest:

(In County 23 On State Route 1021(P) Between Segment 0060 Offset 1041 and Segment 0060 Offset 1321) or (In County 23 On State Route 1038(P) Between Segment 0010 Offset 0 and Segment 0010 Offset 195)

USER ID/QUERY ID:
jporemba / 002016052602Z

DIST	CO	COUNTY	ROUTE	BEG SEG	END SEG	END OFF	LENGTH	TOTAL CRASHES	SELECT CRASHES	SELECT ATAL COUNT	SELECT INJ COUNT	RATIO	SELECT CONCENTRATION (PER 1000 FT)	AVG ADT	SELECT RASH RATE
06	23	DELAWARE	1021	0060	0060	1221	0	8	8	0	5	100.0%	1.0	15710	
06	23	DELAWARE	1038	0010	0010	0	0	8	8	0	5	100.0%	1.0	9733	

IMPORTANT: This traffic engineering and safety study is confidential pursuant to 75 Pa. C.S. §3754 and 23 U.S.C. §409 and may not be disclosed or used in litigation without written permission from PennDOT.

Print Date: 5/26/2016

Page 1 of 2

SR 1021 ATSR 1038 IN RADNOR TWP IN DELAWARE CO LOG 17381-01



Sorted by County, Route, Segment, Offset

USER ID/QUERY ID:

jporemba/ 0020160526027

Date Range: 1/1/2011 to 12/31/2015

Area of (In County 23 On State Route 1021(P) Between Segment 0060 Offset 1041 and Segment 0060 Offset 1321) or

Interest: (In County 23 On State Route 1038(P) Between Segment 0010 Offset 0 and Segment 0010 Offset 195)

CRN	CO DATE	DAY TIME	LIGHTING	ROAD SURF	WEATHER	FAT	INJ	PED	VEH	MAX SEVERITY	
1	2011036613	23 04/01/2011	FRI 07:30	DAYLIGHT	WET	RAIN	0	0	0	2	PROP DMG ONLY
ENV RDWY FACTORS: OTHER WEATHER CONDITIONS T-INT 1021/0060/1221 1038/0010/0000 VEH: 1 SUV TRAVELING SOUTH IN LEFT TURN LANE TURNING LEFT VEH EVENTS: HIT UNIT 02 DVR ACTIONS: IMPROPER/CARELESS TURN VEH: 2 AUTOMOBILE TRAVELING NORTH IN RIGHT LANE GOING STRAIGHT VEH EVENTS: STRUCK BY UNIT 01 DVR ACTIONS: NO CONTRIBUTING ACTION											
2	2011107105	23 10/13/2011	THR 08:29	DAYLIGHT	WET	RAIN	0	2	0	2	MINOR INJURY
ENV RDWY FACTORS: NONE T-INT 1021/0060/1221 1038/0010/0000 VEH: 1 AUTOMOBILE TRAVELING EAST IN RIGHT LANE TURNING LEFT VEH EVENTS: HIT UNIT 02 DVR ACTIONS: IMPROPER/CARELESS TURN VEH: 2 AUTOMOBILE TRAVELING WEST IN RIGHT LANE GOING STRAIGHT VEH EVENTS: STRUCK BY UNIT 01 DVR ACTIONS: NO CONTRIBUTING ACTION											
3	2012017731	23 02/15/2012	WED 07:53	DAYLIGHT	DRY	CLEAR	0	1	0	3	MINOR INJURY
ENV RDWY FACTORS: NONE T-INT 1021/0060/1221 1038/0010/0000 VEH: 1 AUTOMOBILE TRAVELING NORTH IN RIGHT LANE GOING STRAIGHT VEH EVENTS: HIT UNIT 02 DVR ACTIONS: TAILGATING TOO FAST FOR CONDITIONS VEH: 2 SUV TRAVELING NORTH IN RIGHT LANE STOPPED IN TRAFFIC LANE VEH EVENTS: STRUCK BY UNIT 01 HIT UNIT 03 DVR ACTIONS: NO CONTRIBUTING ACTION VEH: 3 SUV TRAVELING NORTH IN RIGHT LANE SLOWING OR STOPPING IN LANE VEH EVENTS: STRUCK BY UNIT 02 DVR ACTIONS: NO CONTRIBUTING ACTION											
4	2012090466	23 09/12/2012	WED 08:49	DAYLIGHT	DRY	CLEAR	0	0	0	2	PROP DMG ONLY
ENV RDWY FACTORS: GLARE T-INT 1021/0060/1221 1038/0010/0000 VEH: 1 AUTOMOBILE TRAVELING SOUTH IN LEFT TURN LANE TURNING LEFT VEH EVENTS: HIT UNIT 02 DVR ACTIONS: IMPROPER/CARELESS TURN VEH: 2 AUTOMOBILE TRAVELING NORTH IN OTHER FWD MOVING LANE GOING STRAIGHT VEH EVENTS: STRUCK BY UNIT 01 DVR ACTIONS: NO CONTRIBUTING ACTION											
5	2013029062	23 02/26/2013	TUE 07:33	DAYLIGHT	DRY	CLEAR	0	1	0	2	UNK SEVERITY
ENV RDWY FACTORS: NONE T-INT 1021/0060/1221 1038/0010/0000 VEH: 1 AUTOMOBILE TRAVELING NORTH IN RIGHT LANE GOING STRAIGHT VEH EVENTS: HIT UNIT 02 DVR ACTIONS: OTHER IMPROPER DRIV ACTIONS VEH: 2 SUV TRAVELING NORTH IN RIGHT LANE STOPPED IN TRAFFIC LANE VEH EVENTS: STRUCK BY UNIT 01 DVR ACTIONS: NO CONTRIBUTING ACTION											

SR 1021 ATSR 1038 IN RADNOR TWP IN DELAWARE CO LOG 17381-01



Sorted by County, Route, Segment, Offset

USER ID/QUERY ID:

Date Range: 1/1/2011 to 12/31/2015

jporemba/ 0020160526027

Area of (In County 23 On State Route 1021(P) Between Segment 0060 Offset 1041 and Segment 0060 Offset 1321) or

Interest: (In County 23 On State Route 1038(P) Between Segment 0010 Offset 0 and Segment 0010 Offset 195)

CRN	CO DATE	DAY TIME	LIGHTING	ROAD SURF	WEATHER	FAT	INJ	PED	VEH	MAX SEVERITY	
6	2013067962	23 07/03/2013	WED 18:25	DAYLIGHT	WET	CLEAR	0	0	0	2	PROP DMG ONLY
ENV RDWY FACTORS: NONE 4WAY 1021/0060/1221 1038/0010/0000 REAR-END											
VEH: 1 AUTOMOBILE TRAVELING SOUTH IN RIGHT LANE GOING STRAIGHT VEH EVENTS: HIT UNIT 02 DVR ACTIONS: TAILGATING											
VEH: 2 AUTOMOBILE TRAVELING SOUTH IN RIGHT LANE SLOWING OR STOPPING IN LANE VEH EVENTS: STRUCK BY UNIT 01 DVR ACTIONS: SUDDEN SLOWING / STOPPING											
7	2013120337	23 11/19/2013	TUE 14:26	DAYLIGHT	DRY	CLEAR	0	1	1	1	UNK SEVERITY
ENV RDWY FACTORS: NONE OTHR 1021/0060/1221 1038/0010/0000 PEDESTRIAN											
VEH: 1 SUV TRAVELING IN OTHER GOING STRAIGHT VEH EVENTS: STRUCK BY UNIT 02 DVR ACTIONS: NO CONTRIBUTING ACTION											
VEH: 2 VEH EVENTS: HIT UNIT 01											
8	2015104287	23 10/05/2015	MON 09:40	DAYLIGHT	DRY	CLEAR	0	0	0	2	PROP DMG ONLY
ENV RDWY FACTORS: NONE T-INT 1021/0060/1221 1038/0010/0000 REAR-END											
VEH: 1 AUTOMOBILE TRAVELING NORTH IN RIGHT LANE CHANGING LANES OR MERGING VEH EVENTS: HIT UNIT 02 DVR ACTIONS: DRIVER WAS DISTRACTED											
VEH: 2 VAN TRAVELING NORTH IN RIGHT LANE SLOWING OR STOPPING IN LANE VEH EVENTS: STRUCK BY UNIT 01 DVR ACTIONS: NO CONTRIBUTING ACTION											

SR 1021 ATSR 1038 IN RADNOR TWP IN DELAWARE CO LOG 17381-01

Sorted by County, Route, Segment, Offset

NOTES:

- 1 The data available in this application is dynamic and should be used with care. Please take note of the following data alerts:
- 2 2016 crash records are incomplete
Data for the current year, 2016, is not fully represented in CDART. Crashes will be added for this year as they are made available to the Department. Include this year in queries with caution.
- 3 Complete data years
Complete records of reportable crashes are available in CDART for the following years : 1997 - 2015

REPORT PARAMETERS:

Query ID: [0020160526027](#)

User ID: jporemba

Area of Interest: (In County 23 On State Route 1021(P) Between Segment 0060 Offset 1041 and Segment 0060 Offset 1321) or (In County 23 On State Route 1038(P) Between Segment 0010 Offset 0 and Segment 0010 Offset 195)

Date Range: 1/1/2011 to 12/31/2015

Criteria:

SR 1021 ATSR 1038 IN RADNOR TWP IN DELAWARE CO LOG 17381-01



Date Range: 1/1/2011 to 12/31/2015
 Area of Interest: (In County 23 On State Route 1021(P) Between Segment 0060 Offset 1041 and Segment 0060 Offset 1321) or (In County 23 On State Route 1038(P) Between Segment 0010 Offset 0 and Segment 0010 Offset 195)
 USER ID/QUERY ID: jporambar_0020160526027

MONTH OF YEAR

	FEB	APR	JUL	SEP	OCT	NOV
CRASHES	2	1	1	1	2	1
PCT	25%	13%	13%	13%	25%	13%
TOTAL	8					8
	25%	13%	13%	13%	25%	13%
	100%				100%	

DAY OF WEEK

	MON	TUE	WED	THR	FRI
CRASHES	1	2	3	1	1
PCT	13%	25%	38%	13%	13%
TOTAL	8				8
	13%	25%	38%	13%	13%
	100%				100%

HOUR OF DAY

	07	08	09	14	18
CRASHES	3	2	1	1	1
PCT	38%	25%	13%	13%	13%
TOTAL	8				8
	38%	25%	13%	13%	13%
	100%				100%

YEAR

	CRASHES	PCT
2011	2	25%
2012	2	25%
2013	3	38%
2015	1	13%
TOTAL	8	100%

COLLISION TYPE

	CRASHES	PCT
REAR END	4	50%
ANGLE	2	25%
HEAD ON	1	13%
PEDESTRIAN	1	13%
TOTAL	8	100%

CRASH SEVERITY LEVEL

	CRASHES	PCT
MINOR	2	25%
UNK SEVERITY	2	25%
PDO	4	50%
TOTAL	8	100%

SEVERITY COUNT

	PERSONS
FATALITIES	0
MAJOR	0
MODERATE	0
MINOR	2
UNK SEVERITY	3
UNK IF INJURED	0

DRIVER ACTIONS

	ACTIONS	PCT
NO CONTRIBUTING ACTION	8	47%
IMPROPER/CARELESS TURN	3	18%
TAILGATING	2	12%
DRIVER WAS DISTRACTED	1	6%
OTHER IMPROPER DRIVING	1	6%
SUDDEN SLOWING/STOP	1	6%
TOO FAST FOR CONDITION	1	6%
TOTAL	17	100%

VEHICLE TYPE

	VEHICLES	PCT
AUTOMOBILE	10	63%
SUV	5	31%
VAN	1	6%
TOTAL	16	100%

ROAD CONDITION

	CRASHES	PCT
DRY	5	63%
WET	3	38%
TOTAL	8	100%

ILLUMINATION

	CRASHES	PCT
DAYLIGHT	8	100%
TOTAL	8	100%

WEATHER

	CRASHES	PCT
CLEAR	6	75%
RAIN	2	25%
TOTAL	8	100%

ENVIR/ROADWAY FACTORS

	FACTORS	PCT
NONE	6	75%
GLARE	1	13%
OTHER WEATHER COND	1	13%
TOTAL	8	100%

CDART - CRASH SUMMARY REPORT (09-06)

NOTES:

- 1 The data available in this application is dynamic and should be used with care. Please take note of the following data alerts:
- 2 2016 crash records are incomplete
Data for the current year, 2016, is not fully represented in CDART. Crashes will be added for this year as they are made available to the Department. Include this year in queries with caution.
- 3 Complete data years
Complete records of reportable crashes are available in CDART for the following years : 1997 - 2015

REPORT PARAMETERS:

Query ID: [002016052602Z](#)
User ID: jporemba
Area of Interest: (In County 23 On State Route 1021(P) Between Segment 0060 Offset 1041 and Segment 0060 Offset 1321) or (In County 23 On State Route 1038(P) Between Segment 0010 Offset 0 and Segment 0010 Offset 195)
Date Range: 1/1/2011 to 12/31/2015
Criteria:



SR 1021 AT KING OF PRUSSIA RD IN RADNOR TWP IN DELAWARE CO LOG 17381-02

Sorted by County, Route, Segment, Offset

Date Range: 1/1/2011 to 12/31/2015

Area of Interest:

(In County 23 On State Route 1021(P) Between Segment 0050 Offset 2631 and Segment 0060 Offset 100)

USER ID/QUERY ID:
jporemba / 0020160526028

DIST	CO	COUNTY	ROUTE	BEG SEG	END SEG	BEG OFF	END OFF	LENGTH	TOTAL CRASHES	SELECT CRASHES	SELECT ATAL COUNT	SELECT INJ COUNT	RATIO	SELECT CONCENTRATION (PER 1000 FT)	AVG ADT	SELECT RASH RATE
06	23	DELAWARE	1021	0050	0060	2672	0060	13	19	19	0	5	100.0%	263.9	10258	74.43

IMPORTANT: This traffic engineering and safety study is confidential pursuant to 75 Pa. C.S. §3754 and 23 U.S.C. §409 and may not be disclosed or used in litigation without written permission from PennDOT.

Print Date: 5/26/2016

Page 1 of 2

<u>DIST</u>	<u>CO</u>	<u>COUNTY</u>	<u>ROUTE</u>	<u>BEG</u>	<u>END</u>	<u>BEG</u>	<u>END</u>	<u>LENGTH</u>	<u>TOTAL</u>	<u>SELECT</u>	<u>SELECT</u>	<u>SELECT</u>	<u>SELECT</u>	<u>SELECT</u>	<u>SELECT</u>	<u>AVG</u>
				<u>SEG</u>	<u>OFF</u>	<u>SEG</u>	<u>OFF</u>		<u>CRASHES</u>	<u>CRASHES</u>	<u>ATL</u>	<u>INJ</u>	<u>RATIO</u>	<u>CONCENTRATION</u>	<u>ADT</u>	<u>RASH</u>
											<u>COUNT</u>	<u>COUNT</u>		<u>(PER 1000 FT)</u>		<u>RATE</u>

SR 1021 AT KING OF PRUSSIA RD IN RADNOR TWP IN DELAWARE CO LOG 17381-02

NOTES:

- The data available in this application is dynamic and should be used with care. Please take note of the following data alerts:
- 2016 crash records are incomplete
Data for the current year, 2016, is not fully represented in CDART. Crashes will be added for this year as they are made available to the Department. Include this year in queries with caution.
Complete data years
- Complete records of reportable crashes are available in CDART for the following years : 1997 - 2015

QUERY PARAMETERS:

Note: This report includes data for state roads only

Query ID: [0020160526028](#)

User ID: jporemba

Min Crashes: 5 Crashes

Cluster:

Tolerance: 1000 ft

Max Gap: 0 ft

Min Ratio: 0 %

Area of Interest: (In County 23 On State Route 1021(P) Between Segment 0050 Offset 2631 and Segment 0060 Offset 100)

Date: 1/1/2011 to 12/31/2015

Criteria: STATE_ROAD

SR 1021 AT KING OF PRUSSIA RD IN RADNOR TWP IN DELAWARE CO LOG 17381-02



Sorted by County, Route, Segment, Offset

USER ID/QUERY ID:

jporemba/ 0020160526028

Date Range: 1/1/2011 to 12/31/2015

Area of Interest: (In County 23 On State Route 1021(P) Between Segment 0050 Offset 2631 and Segment 0060 Offset 100)

CRN	CO DATE	DAY TIME	LIGHTING	ROAD SURF	WEATHER	FAT	INJ	PED	VEH	MAX SEVERITY
1	2012118611	23 11/26/2012	MON 10:42	DAYLIGHT	DRY	CLEAR	0	0	0 1	PROP DMG ONLY
ENV RDWY FACTORS: NONE MIDB 1021/0050/2672 VEH: 1 LARGE TRUCK TRAVELING NORTH IN LEFT LANE GOING STRAIGHT VEH EVENTS: HIT OTHER FIXED OBJECT DVR ACTIONS: OTHER IMPROPER DRIV ACTIONS HIT FIXED OBJ										
2	2011003801	23 01/04/2011	TUE 06:48	DAYLIGHT	DRY	CLEAR	0	0	0 2	PROP DMG ONLY
ENV RDWY FACTORS: NONE Y-INT 1021/0060/0000 KING OF PRUSSIA RD VEH: 1 AUTOMOBILE TRAVELING SOUTH IN RIGHT LANE GOING STRAIGHT VEH EVENTS: HIT UNIT 02 HIT CURB HIT TREE OR SHRUBBERY DVR ACTIONS: RUNNING RED LIGHT VEH: 2 AUTOMOBILE TRAVELING NORTH IN RIGHT LANE GOING STRAIGHT VEH EVENTS: STRUCK BY UNIT 01 HIT CURB HIT TREE OR SHRUBBERY DVR ACTIONS: NO CONTRIBUTING ACTION										
3	2011036602	23 03/29/2011	TUE 08:15	DAYLIGHT	DRY	CLEAR	0	0	0 2	PROP DMG ONLY
ENV RDWY FACTORS: NONE Y-INT 1021/0060/0000 KING OF PRUSSIA RD VEH: 1 AUTOMOBILE TRAVELING NORTH IN RIGHT LANE GOING STRAIGHT VEH EVENTS: HIT UNIT 02 DVR ACTIONS: OTHER IMPROPER DRIV ACTIONS VEH: 2 VAN TRAVELING NORTH IN RIGHT LANE STOPPED IN TRAFFIC LANE VEH EVENTS: STRUCK BY UNIT 01 DVR ACTIONS: NO CONTRIBUTING ACTION										
4	2011071073	23 07/14/2011	THR 14:54	DAYLIGHT	DRY	CLEAR	0	0	0 2	PROP DMG ONLY
ENV RDWY FACTORS: NONE Y-INT 1021/0060/0000 KING OF PRUSSIA RD VEH: 1 SUV TRAVELING SOUTH IN RIGHT LANE GOING STRAIGHT VEH EVENTS: STRUCK BY UNIT 02 DVR ACTIONS: RUNNING RED LIGHT VEH: 2 SUV TRAVELING WEST IN LEFT OF TRAFFICWAY GOING STRAIGHT VEH EVENTS: HIT UNIT 01 DVR ACTIONS: NO CONTRIBUTING ACTION										
5	2011131693	23 12/14/2011	WED 17:14	STREET LT	DRY	CLEAR	0	1	1 1	MODERATE INJURY
ENV RDWY FACTORS: NONE T-INT 1021/0060/0000 KING OF PRUSSIA RD VEH: 1 SUV TRAVELING SOUTH IN OTHER FWD MOVING LANE TURNING LEFT VEH EVENTS: HIT UNIT 02 DVR ACTIONS: IMPROPER/CARELESS TURN VEH: 2 VEH EVENTS: STRUCK BY UNIT 01 PEDESTRIAN										

SR 1021 AT KING OF PRUSSIA RD IN RADNOR TWP IN DELAWARE CO LOG 17381-02



Sorted by County, Route, Segment, Offset

USER ID/QUERY ID:

jporemba/ 0020160526028

Date Range: 1/1/2011 to 12/31/2015

Area of Interest: (In County 23 On State Route 1021(P) Between Segment 0050 Offset 2631 and Segment 0060 Offset 100)

CRN	CO DATE	DAY TIME	LIGHTING	ROAD SURF	WEATHER	FAT	INJ	PED	VEH	MAX SEVERITY
6	2014049230	23 05/14/2014	WED 14:24	DAYLIGHT	DRY	CLEAR	0	0	0 2	PROP DMG ONLY
ENV RDWY FACTORS: NONE ANGLE T-INT 1021/0060/0000 KING OF PRUSSIA RD VEH: 1 AUTOMOBILE TRAVELING SOUTH IN RIGHT LANE GOING STRAIGHT VEH EVENTS: HIT UNIT 02 DVR ACTIONS: UNKNOWN VEH: 2 AUTOMOBILE TRAVELING SOUTH IN LEFT TURN LANE TURNING LEFT VEH EVENTS: STRUCK BY UNIT 01 DVR ACTIONS: UNKNOWN										
7	2014081381	23 08/21/2014	THR 11:59	DAYLIGHT	DRY	CLEAR	0	0	0 2	PROP DMG ONLY
ENV RDWY FACTORS: NONE ANGLE T-INT 1021/0060/0000 KING OF PRUSSIA RD VEH: 1 SUV TRAVELING SOUTH IN RIGHT LANE GOING STRAIGHT VEH EVENTS: HIT UNIT 02 DVR ACTIONS: RUNNING RED LIGHT VEH: 2 SUV TRAVELING SOUTH IN RIGHT LANE GOING STRAIGHT VEH EVENTS: STRUCK BY UNIT 01 DVR ACTIONS: NO CONTRIBUTING ACTION										
8	2014107874	23 10/28/2014	TUE 13:09	DAYLIGHT	DRY	CLEAR	0	2	0 2	UNK SEVERITY
ENV RDWY FACTORS: NONE ANGLE 4WAY 1021/0060/0000 KING OF PRUSSIA RD VEH: 1 SUV TRAVELING EAST IN RIGHT LANE TURNING LEFT VEH EVENTS: HIT UNIT 02 DVR ACTIONS: IMPROPER/CARELESS TURN VEH: 2 AUTOMOBILE TRAVELING WEST IN RIGHT LANE GOING STRAIGHT VEH EVENTS: STRUCK BY UNIT 01 DVR ACTIONS: NO CONTRIBUTING ACTION										
9	2015053380	23 05/01/2015	FRI 01:06	STREET LT	DRY	CLEAR	0	0	0 1	PROP DMG ONLY
ENV RDWY FACTORS: NONE HIT FIXED OBJ OTHR 1021/0060/0000 KING OF PRUSSIA RD VEH: 1 LARGE TRUCK TRAVELING WEST IN RIGHT LANE GOING STRAIGHT VEH EVENTS: HIT OTHER FIXED OBJECT DVR ACTIONS: FAILURE TO RESPOND TO TCD OTHER IMPROPER DRIV ACTIONS										
10	2013085092	23 08/19/2013	MON 13:50	DAYLIGHT	DRY	CLEAR	0	0	0 1	PROP DMG ONLY
ENV RDWY FACTORS: NONE HIT FIXED OBJ MIDB 1021/0060/0009 VEH: 1 SMALL TRUCK TRAVELING NORTH IN RIGHT LANE GOING STRAIGHT VEH EVENTS: HIT OTHER FIXED OBJECT DVR ACTIONS: FAILURE TO RESPOND TO TCD										
11	2015115454	23 11/03/2015	TUE 09:38	DAYLIGHT	DRY	CLEAR	0	0	0 1	PROP DMG ONLY
ENV RDWY FACTORS: NONE HIT FIXED OBJ MIDB 1021/0060/0009 VEH: 1 SMALL TRUCK TRAVELING NORTH IN RIGHT LANE GOING STRAIGHT VEH EVENTS: HIT CONCRETE / LONGIT BARRIER DVR ACTIONS: FAILURE TO RESPOND TO TCD										

SR 1021 AT KING OF PRUSSIA RD IN RADNOR TWP IN DELAWARE CO LOG 17381-02



Sorted by County, Route, Segment, Offset

USER ID/QUERY ID:

Date Range: 1/1/2011 to 12/31/2015

jporemba/ 0020160526028

Area of Interest: (In County 23 On State Route 1021(P) Between Segment 0050 Offset 2631 and Segment 0060 Offset 100)

CRN	CO DATE	DAY TIME	LIGHTING	ROAD SURF	WEATHER	FAT	INJ	PED	VEH	MAX SEVERITY
12	2011023989	23 02/25/2011	FRI 11:55	DAYLIGHT	DRY	CLEAR	0	0	0 2	PROP DMG ONLY OPP DIR SIDESW
ENV RDWY FACTORS: NONE 4WAY 1021/0060/0013 N RADNOR CHESTER RD VEH: 1 AUTOMOBILE TRAVELING NORTH IN ONCOMING TRAFFIC LANE TURNING LEFT VEH EVENTS: HIT UNIT 02 DVR ACTIONS: IMPROPER/CARELESS TURN VEH: 2 SMALL TRUCK TRAVELING SOUTH IN OTHER FWD MOVING LANE GOING STRAIGHT VEH EVENTS: STRUCK BY UNIT 01 DVR ACTIONS: NO CONTRIBUTING ACTION										
13	2012019428	23 02/16/2012	THR 09:19	DAYLIGHT	DRY	CLEAR	0	0	0 2	PROP DMG ONLY ANGLE
ENV RDWY FACTORS: NONE T-INT 1021/0060/0013 RADNOR CHESTER RD VEH: 1 AUTOMOBILE TRAVELING NORTH IN RIGHT LANE TURNING LEFT VEH EVENTS: STRUCK BY UNIT 02 DVR ACTIONS: IMPROPER/CARELESS TURN OTHER IMPROPER DRIV ACTIONS VEH: 2 AUTOMOBILE TRAVELING SOUTH IN RIGHT LANE GOING STRAIGHT VEH EVENTS: HIT UNIT 01 DVR ACTIONS: NO CONTRIBUTING ACTION										
14	2014093129	23 09/23/2014	TUE 09:29	DAYLIGHT	DRY	CLEAR	0	0	0 1	PROP DMG ONLY HIT FIXED OBJ
ENV RDWY FACTORS: NONE OTHR 1021/0060/0013 RADNOR CHESTER RD VEH: 1 AUTOMOBILE TRAVELING WEST IN OTHER GOING STRAIGHT VEH EVENTS: HIT OTHER FIXED OBJECT DVR ACTIONS: DRIVER WAS DISTRACTED										
15	2014119057	23 11/17/2014	MON 15:33	DAYLIGHT	WET	RAIN	0	1	0 2	MINOR INJURY REAR-END
ENV RDWY FACTORS: NONE 4WAY 1021/0060/0013 N RADNOR CHESTER RD VEH: 1 AUTOMOBILE TRAVELING NORTH IN RIGHT LANE GOING STRAIGHT VEH EVENTS: HIT UNIT 02 DVR ACTIONS: DRIVER WAS DISTRACTED VEH: 2 AUTOMOBILE TRAVELING NORTH IN RIGHT LANE STOPPED IN TRAFFIC LANE VEH EVENTS: STRUCK BY UNIT 01 DVR ACTIONS: NO CONTRIBUTING ACTION										
16	2014130298	23 12/15/2014	MON 14:40	DAYLIGHT	DRY	CLEAR	0	0	0 2	PROP DMG ONLY REAR-END
ENV RDWY FACTORS: NONE T-INT 1021/0060/0013 RADNOR CHESTER RD VEH: 1 AUTOMOBILE TRAVELING NORTH IN RIGHT LANE GOING STRAIGHT VEH EVENTS: HIT UNIT 02 DVR ACTIONS: DRIVER WAS DISTRACTED VEH: 2 AUTOMOBILE TRAVELING NORTH IN RIGHT LANE STOPPED IN TRAFFIC LANE VEH EVENTS: STRUCK BY UNIT 01 DVR ACTIONS: NO CONTRIBUTING ACTION										
17	2015068907	23 06/22/2015	MON 19:29	DAYLIGHT	DRY	CLEAR	0	0	0 1	PROP DMG ONLY HIT FIXED OBJ
ENV RDWY FACTORS: NONE T-INT 1021/0060/0013 N RADNOR CHESTER RD VEH: 1 AUTOMOBILE TRAVELING SOUTH IN LEFT TURN LANE TURNING LEFT VEH EVENTS: HIT CURB DVR ACTIONS: DRIVER INEXPERIENCED										

SR 1021 AT KING OF PRUSSIA RD IN RADNOR TWP IN DELAWARE CO LOG 17381-02



Sorted by County, Route, Segment, Offset

USER ID/QUERY ID:

Date Range: 1/1/2011 to 12/31/2015

jporemba/ 0020160526028

Area of Interest: (In County 23 On State Route 1021(P) Between Segment 0050 Offset 2631 and Segment 0060 Offset 100)

CRN	CO DATE	DAY TIME	LIGHTING	ROAD SURF	WEATHER	FAT	INJ	PED	VEH	MAX SEVERITY	
18	2015091877	23 09/03/2015	THR 16:10	DAYLIGHT	DRY	CLEAR	0	1	0	2	UNK SEVERITY
ENV RDWY FACTORS: NONE MULT 1021/0060/0013 RADNOR CHESTER RD VEH: 1 AUTOMOBILE TRAVELING NORTH IN LEFT TURN LANE TURNING LEFT VEH EVENTS: HIT UNIT 02 DVR ACTIONS: IMPROPER/CARELESS TURN VEH: 2 AUTOMOBILE TRAVELING SOUTH IN OTHER FWD MOVING LANE GOING STRAIGHT VEH EVENTS: STRUCK BY UNIT 01 DVR ACTIONS: NO CONTRIBUTING ACTION											
19	2015101856	23 09/18/2015	FRI 12:09	DAYLIGHT	DRY	CLEAR	0	0	0	2	PROP DMG ONLY
ENV RDWY FACTORS: NONE 4WAY 1021/0060/0013 N RADNOR CHESTER RD VEH: 1 AUTOMOBILE TRAVELING EAST IN LEFT LANE GOING STRAIGHT VEH EVENTS: HIT UNIT 02 DVR ACTIONS: DRIVER WAS DISTRACTED VEH: 2 AUTOMOBILE TRAVELING SOUTH IN RIGHT LANE GOING STRAIGHT VEH EVENTS: STRUCK BY UNIT 01 DVR ACTIONS: NO CONTRIBUTING ACTION											

SR 1021 AT KING OF PRUSSIA RD IN RADNOR TWP IN DELAWARE CO LOG 17381-02

Sorted by County, Route, Segment, Offset

NOTES:

- 1 The data available in this application is dynamic and should be used with care. Please take note of the following data alerts:
- 2 2016 crash records are incomplete
Data for the current year, 2016, is not fully represented in CDART. Crashes will be added for this year as they are made available to the Department. Include this year in queries with caution.
- 3 Complete data years
Complete records of reportable crashes are available in CDART for the following years : 1997 - 2015

REPORT PARAMETERS:

Query ID: [0020160526028](#)

User ID: jporemba

Area of Interest: (In County 23 On State Route 1021(P) Between Segment 0050 Offset 2631 and Segment 0060 Offset 100)

Date Range: 1/1/2011 to 12/31/2015

Criteria:

SR 1021 AT KING OF PRUSSIA RD IN RADNOR TWP IN DELAWARE CO LOG 17381-02



Date Range: 1/1/2011 to 12/31/2015
 Area of Interest: (In County 23 On State Route 1021(P) Between Segment 0050 Offset 2631 and Segment 0060 Offset 100)
 USER ID/QUERY ID: jporombal_0020160526028

MONTH OF YEAR

	JAN	FEB	MAR	MAY	JUN	JUL	AUG	SEP	OCT	NOV	DEC
CRASHES	1	2	1	2	1	1	2	3	1	3	2
PCT	5%	11%	5%	11%	5%	5%	11%	16%	5%	16%	11%
	19										100%

DAY OF WEEK

	MON	TUE	WED	THR	FRI
CRASHES	5	5	2	4	3
PCT	26%	26%	11%	21%	16%
	100%				100%

HOUR OF DAY

	01	06	08	09	10	11	12	13	14	15	16	17	19
CRASHES	1	1	1	3	1	2	1	2	3	1	1	1	1
PCT	5%	5%	5%	16%	5%	11%	5%	11%	16%	5%	5%	5%	5%
													100%

YEAR

YEAR	CRASHES	PCT
2011	5	26%
2012	2	11%
2013	1	5%
2014	6	32%
2015	5	26%
TOTAL	19	100%

COLLISION TYPE

	CRASHES	PCT
ANGLE	7	37%
HIT FIX OBJ	6	32%
REAR END	3	16%
HEAD ON	1	5%
OPP DIR SS	1	5%
PEDESTRIAN	1	5%
TOTAL	19	100%

CRASH SEVERITY LEVEL

	CRASHES	PCT
MODERATE	1	5%
MINOR	1	5%
UNK SEVERITY	2	11%
PDO	15	79%
TOTAL	19	100%

SEVERITY COUNT

	PERSONS
FATALITIES	0
MAJOR	0
MODERATE	1
MINOR	1
UNK SEVERITY	3
UNK IF INJURED	0

DRIVER ACTIONS

	ACTIONS	PCT
NO CONTRIBUTING ACTION	11	33%
IMPROPER/CARELESS TURN	5	15%
DRIVER WAS DISTRACTED	4	12%
OTHER IMPROPER DRIVING	4	12%
FAILURE TO RESPOND TCD	3	9%
RUNNING RED LIGHT	3	9%
UNKNOWN	2	6%
DRIVER INEXPERIENCED	1	3%
TOTAL	33	100%

VEHICLE TYPE

	VEHICLES	PCT
AUTOMOBILE	19	61%
SUV	6	19%
SMALL TRUCK	3	10%
LARGE TRUCK	2	6%
VAN	1	3%
TOTAL	31	100%

ROAD CONDITION

	CRASHES	PCT
DRY	18	95%
WET	1	5%
TOTAL	19	100%

ILLUMINATION

	CRASHES	PCT
DAYLIGHT	17	89%
STREET LIGHTS	2	11%
TOTAL	19	100%

WEATHER

	CRASHES	PCT
CLEAR	18	95%
RAIN	1	5%
TOTAL	19	100%

ENVIR/ROADWAY FACTORS

	FACTORS	PCT
NONE	19	100%
TOTAL	19	100%

CDART - CRASH SUMMARY REPORT (09-06)

NOTES:

- 1 The data available in this application is dynamic and should be used with care. Please take note of the following data alerts:
- 2 2016 crash records are incomplete. Data for the current year, 2016, is not fully represented in CDART. Crashes will be added for this year as they are made available to the Department. Include this year in queries with caution.
- 3 Complete data years
Complete records of reportable crashes are available in CDART for the following years : 1997 - 2015

REPORT PARAMETERS:

Query ID: [0020160526028](#)

User ID: jporemba

Area of Interest: (In County 23 On State Route 1021(P) Between Segment 0050 Offset 2631 and Segment 0060 Offset 100)

Date Range: 1/1/2011 to 12/31/2015

Criteria:



SR 30 AT SR 476 OFF RAMP / KING OF PRUSSIA RD IN DELAWARE CO LOG 17381-03

Sorted by County, Route, Segment, Offset

Date Range: 1/1/2011 to 12/31/2015

Area of Interest:

(In County 23 On State Route 0030(P) Between Segment 0070 Offset 339 and Segment 0070 Offset 672) or (In County 23 On State Route 8039(P) Between Segment 0010 Offset 1220 and Segment 0010 Offset 1320)
 (In County 23 On State Route 0030(P) Between Segment 0070 Offset 672) or (In County 23 On State Route 8039(P) Between Segment 0010 Offset 1220 and Segment 0010 Offset 1320)

USER ID/QUERY ID:
 jporemba / 0020160526029

DIST	CO	COUNTY	ROUTE	BEG SEG	END SEG	BEG OFF	END OFF	LENGTH	TOTAL CRASHES	SELECT CRASHES	SELECT ATAL COUNT	SELECT INJ COUNT	RATIO	CONCENTRATION (PER 1000 FT)	AVG ADT	SELECT RASH RATE
06	23	DELAWARE	0030	0070	0070	340	440	100	13	13	0	4	100.0%	130.0	15301	24.58
06	23	DELAWARE	0030	0071	0071	439	439	0	10	10	0	3	100.0%	1.0	8918	
06	23	DELAWARE	8039	0010	0010	1320	1320	0	16	11	0	3	68.8%	1.0	8204	

IMPORTANT: This traffic engineering and safety study is confidential pursuant to 75 Pa. C.S. §3754 and 23 U.S.C. §409 and may not be disclosed or used in litigation without written permission from PennDOT.

Print Date: 5/26/2016

Page 1 of 2

SR 30 AT SR 476 OFF RAMP / KING OF PRUSSIA RD IN DELAWARE CO LOG 17381-03

NOTES:

- 1 The data available in this application is dynamic and should be used with care. Please take note of the following data alerts:
- 2 2016 crash records are incomplete
Data for the current year, 2016, is not fully represented in CDART. Crashes will be added for this year as they are made available to the Department. Include this year in queries with caution.
Complete data years
Complete records of reportable crashes are available in CDART for the following years : 1997 - 2015
- 3

QUERY PARAMETERS:

Note: This report includes data for state roads only

Query ID: [0020160526029](#)

User ID: jporemba

Min Crashes: 5 Crashes

Cluster:

Tolerance: 1000 ft

Max Gap: 0 ft

Min Ratio: 0 %

Area of Interest: (In County 23 On State Route 0030(P) Between Segment 0070 Offset 339 and Segment 0070 Offset 672) or (In County 23 On State Route 0030(S) Between Segment 0071 Offset 339 and Segment 0071 Offset 672) or (In County 23 On State Route 8039(P) Between Segment 0010 Offset 1220 and Segment 0010 Offset 1320)

Date: 1/1/2011 to 12/31/2015

Criteria:

STATE_ROAD

IMPORTANT: This traffic engineering and safety study is confidential pursuant to 75 Pa. C.S. §3754 and 23 U.S.C. §409 and may not be disclosed or used in litigation without written permission from PennDOT.

Print Date: 5/26/2016

Page 2 of 2

SR 30 AT SR 476 OFF RAMP / KING OF PRUSSIA RD IN DELAWARE CO LOG 17381-03



Sorted by County, Route, Segment, Offset

USER ID/QUERY ID:

jporemba/ 0020160526029

Date Range: 1/1/2011 to 12/31/2015

Area of (In County 23 On State Route 0030(P) Between Segment 0070 Offset 339 and Segment 0070 Offset 672) or (In

Interest: County 23 On State Route 0030(S) Between Segment 0071 Offset 339 and Segment 0071 Offset 672) or (In County 23 On State Route 8039(P) Between Segment 0010 Offset 1220 and Segment 0010 Offset 1320)

CRN	CO DATE	DAY TIME	LIGHTING	ROAD SURF	WEATHER	FAT	INJ	PED	VEH	MAX SEVERITY	
1	2011052504	23 05/23/2011	MON 10:07	DAYLIGHT	DRY	CLEAR	0	1	0	2	MINOR INJURY
ENV RDWY FACTORS: NONE MIDB 0030/0070/0340 VEH: 1 AUTOMOBILE TRAVELING EAST IN LEFT LANE GOING STRAIGHT VEH EVENTS: HIT UNIT 02 DVR ACTIONS: PROCEED W/O CLEARANCE VEH: 2 AUTOMOBILE TRAVELING EAST IN LEFT LANE STOPPED IN TRAFFIC LANE VEH EVENTS: STRUCK BY UNIT 01 DVR ACTIONS: NO CONTRIBUTING ACTION											
2	2013082405	23 08/10/2013	SAT 21:12	STREET LT	DRY	CLEAR	0	0	0	3	PROP DMG ONLY
ENV RDWY FACTORS: NONE MIDB 0030/0070/0340 VEH: 1 AUTOMOBILE TRAVELING EAST IN LEFT LANE GOING STRAIGHT VEH EVENTS: HIT UNIT 02 DVR ACTIONS: OTHER IMPROPER DRIV ACTIONS VEH: 2 SUV TRAVELING EAST IN LEFT LANE STOPPED IN TRAFFIC LANE VEH EVENTS: STRUCK BY UNIT 01 STRUCK BY UNIT 03 DVR ACTIONS: NO CONTRIBUTING ACTION VEH: 3 AUTOMOBILE TRAVELING EAST IN LEFT LANE STOPPED IN TRAFFIC LANE VEH EVENTS: STRUCK BY UNIT 02 DVR ACTIONS: NO CONTRIBUTING ACTION											
3	2011015432	23 01/26/2011	WED 06:09	STREET LT	SNOW	SNOW	0	0	0	3	PROP DMG ONLY
ENV RDWY FACTORS: SLIPPERY ROAD (ICE/SNOW) OTHER WEATHER CONDITIONS 4WAY 0030/0070/0440 0030/0071/0439 8039/0010/1320 KING OF PRUSSIA RD HIT FIXED OBJ VEH: 1 SMALL TRUCK TRAVELING NORTH IN LEFT TURN LANE TURNING LEFT VEH EVENTS: HIT UNIT 02 STRUCK BY UNIT 03 DVR ACTIONS: NO CONTRIBUTING ACTION VEH: 2 AUTOMOBILE TRAVELING NORTH IN LEFT TURN LANE TURNING LEFT VEH EVENTS: HIT CURB STRUCK BY UNIT 01 DVR ACTIONS: NO CONTRIBUTING ACTION VEH: 3 AUTOMOBILE TRAVELING NORTH IN LEFT TURN LANE TURNING LEFT VEH EVENTS: HIT UNIT 01 DVR ACTIONS: NO CONTRIBUTING ACTION											
4	2011128066	23 12/06/2011	TUE 11:32	DAYLIGHT	WET	RAIN	0	1	0	2	UNK SEVERITY
ENV RDWY FACTORS: NONE 4WAY 0030/0070/0440 0030/0071/0439 8039/0010/1320 KING OF PRUSSIA RD REAR-END VEH: 1 AUTOMOBILE TRAVELING EAST IN RIGHT LANE GOING STRAIGHT VEH EVENTS: HIT UNIT 02 DVR ACTIONS: DRIVER WAS DISTRACTED VEH: 2 AUTOMOBILE TRAVELING EAST IN RIGHT LANE STOPPED IN TRAFFIC LANE VEH EVENTS: STRUCK BY UNIT 01 DVR ACTIONS: NO CONTRIBUTING ACTION											

SR 30 AT SR 476 OFF RAMP / KING OF PRUSSIA RD IN DELAWARE CO LOG 17381-03



Sorted by County, Route, Segment, Offset

USER ID/QUERY ID:

Date Range: 1/1/2011 to 12/31/2015

jporemba/ 0020160526029

Area of (In County 23 On State Route 0030(P) Between Segment 0070 Offset 339 and Segment 0070 Offset 672) or (In
Interest: County 23 On State Route 0030(S) Between Segment 0071 Offset 339 and Segment 0071 Offset 672) or (In
County 23 On State Route 8039(P) Between Segment 0010 Offset 1220 and Segment 0010 Offset 1320)

CRN	CO DATE	DAY TIME	LIGHTING	ROAD SURF	WEATHER	FAT	INJ	PED	VEH	MAX SEVERITY	
5	2012055204	23 06/01/2012	FRI 16:53	DAYLIGHT	DRY	CLEAR	0	2	0	3	UNK SEVERITY
ENV RDWY FACTORS: NONE REAR-END											
4WAY 0030/0070/0440 0030/0071/0439 8039/0010/1320 KING OF PRUSSIA RD											
VEH: 1 VAN TRAVELING NORTH IN LEFT TURN LANE GOING STRAIGHT											
VEH EVENTS: HIT UNIT 02											
DVR ACTIONS: SPEEDING TOO FAST FOR CONDITIONS											
VEH: 2 AUTOMOBILE TRAVELING NORTH IN RIGHT LANE GOING STRAIGHT											
VEH EVENTS: STRUCK BY UNIT 01 HIT UNIT 03											
DVR ACTIONS: NO CONTRIBUTING ACTION											
VEH: 3 AUTOMOBILE TRAVELING NORTH IN RIGHT LANE GOING STRAIGHT											
VEH EVENTS: STRUCK BY UNIT 02											
DVR ACTIONS: NO CONTRIBUTING ACTION											
6	2013009054	23 01/16/2013	WED 21:00	STREET LT	DRY	CLEAR	0	0	0	4	PROP DMG ONLY
ENV RDWY FACTORS: NONE REAR-END											
4WAY 0030/0070/0440 0030/0071/0439 8039/0010/1320 KING OF PRUSSIA RD											
VEH: 1 AUTOMOBILE TRAVELING EAST IN LEFT LANE GOING STRAIGHT											
VEH EVENTS: HIT UNIT 02											
DVR ACTIONS: DRIVER WAS DISTRACTED TAILGATING											
VEH: 2 AUTOMOBILE TRAVELING EAST IN LEFT LANE STOPPED IN TRAFFIC LANE											
VEH EVENTS: STRUCK BY UNIT 01 HIT UNIT 03											
DVR ACTIONS: NO CONTRIBUTING ACTION											
VEH: 3 AUTOMOBILE TRAVELING EAST IN LEFT LANE STOPPED IN TRAFFIC LANE											
VEH EVENTS: STRUCK BY UNIT 02 HIT UNIT 04											
DVR ACTIONS: NO CONTRIBUTING ACTION											
VEH: 4 AUTOMOBILE TRAVELING EAST IN LEFT LANE STOPPED IN TRAFFIC LANE											
VEH EVENTS: STRUCK BY UNIT 03											
DVR ACTIONS: NO CONTRIBUTING ACTION											
7	2014029660	23 03/06/2014	THR 13:39	DAYLIGHT	DRY	CLEAR	0	0	0	3	PROP DMG ONLY
ENV RDWY FACTORS: NONE REAR-END											
4WAY 0030/0070/0440 0030/0071/0439 8039/0010/1320 KING OF PRUSSIA RD											
VEH: 1 AUTOMOBILE TRAVELING EAST IN OTHER FWD MOVING LANE GOING STRAIGHT											
VEH EVENTS: HIT UNIT 02											
DVR ACTIONS: TOO FAST FOR CONDITIONS											
VEH: 2 SUV TRAVELING EAST IN OTHER FWD MOVING LANE STOPPED IN TRAFFIC LANE											
VEH EVENTS: STRUCK BY UNIT 01 HIT UNIT 03											
DVR ACTIONS: NO CONTRIBUTING ACTION											
VEH: 3 SUV TRAVELING EAST IN OTHER FWD MOVING LANE STOPPED IN TRAFFIC LANE											
VEH EVENTS: STRUCK BY UNIT 02											
DVR ACTIONS: NO CONTRIBUTING ACTION											
8	2014097357	23 09/26/2014	FRI 05:48	DAWN	DRY	CLEAR	0	0	0	2	PROP DMG ONLY
ENV RDWY FACTORS: NONE REAR-END											
4WAY 0030/0070/0440 0030/0071/0439 8039/0010/1320 KING OF PRUSSIA RD											
VEH: 1 AUTOMOBILE TRAVELING EAST IN LEFT LANE GOING STRAIGHT											
VEH EVENTS: HIT UNIT 02											
DVR ACTIONS: OTHER IMPROPER DRIV ACTIONS											
VEH: 2 AUTOMOBILE TRAVELING EAST IN LEFT LANE STOPPED IN TRAFFIC LANE											
VEH EVENTS: STRUCK BY UNIT 01											
DVR ACTIONS: NO CONTRIBUTING ACTION											

SR 30 AT SR 476 OFF RAMP / KING OF PRUSSIA RD IN DELAWARE CO LOG 17381-03



Sorted by County, Route, Segment, Offset

USER ID/QUERY ID:

jporemba/ 0020160526029

Date Range: 1/1/2011 to 12/31/2015

Area of (In County 23 On State Route 0030(P) Between Segment 0070 Offset 339 and Segment 0070 Offset 672) or (In

Interest: County 23 On State Route 0030(S) Between Segment 0071 Offset 339 and Segment 0071 Offset 672) or (In

County 23 On State Route 8039(P) Between Segment 0010 Offset 1220 and Segment 0010 Offset 1320)

CRN	CO DATE	DAY TIME	LIGHTING	ROAD SURF	WEATHER	FAT	INJ	PED	VEH	MAX SEVERITY
9	2014100281	23 10/12/2014	SUN 22:29	STREET LT	DRY	CLEAR	0	0	0 1	PROP DMG ONLY HIT FIXED OBJ
ENV RDWY FACTORS: NONE 4WAY 0030/0070/0440 0030/0071/0439 8039/0010/1320 KING OF PRUSSIA RD VEH: 1 AUTOMOBILE TRAVELING NORTH IN LEFT TURN LANE TURNING LEFT ALC TEST: 99 VEH EVENTS: HIT CURB DVR ACTIONS: IMPROPER/CARELESS TURN										
10	2014123898	23 12/08/2014	MON 17:48	STREET LT	DRY	CLEAR	0	0	0 2	PROP DMG ONLY ANGLE
ENV RDWY FACTORS: NONE ONRM 0030/0070/0440 8039/0010/1320 VEH: 1 SUV TRAVELING NORTH IN OTHER CHANGING LANES OR MERGING VEH EVENTS: HIT UNIT 02 DVR ACTIONS: IMPROPER/CARELESS TURN FAILURE TO RESPOND TO TCD IMPROPER ENTRANCE TO HIGHWAY VEH: 2 VAN TRAVELING NORTH IN RIGHT LANE GOING STRAIGHT VEH EVENTS: STRUCK BY UNIT 01 DVR ACTIONS: NO CONTRIBUTING ACTION										
11	2015010866	23 01/24/2015	SAT 20:28	STREET LT	ICE PATCH	SNOW	0	0	0 2	PROP DMG ONLY ANGLE
ENV RDWY FACTORS: OTHER WEATHER CONDITIONS 4WAY 0030/0070/0440 0030/0071/0439 8039/0010/1320 KING OF PRUSSIA RD VEH: 1 SUV TRAVELING NORTH IN RIGHT LANE GOING STRAIGHT VEH EVENTS: HIT UNIT 02 DVR ACTIONS: SUDDEN SLOWING / STOPPING VEH: 2 AUTOMOBILE TRAVELING EAST IN RIGHT LANE GOING STRAIGHT VEH EVENTS: STRUCK BY UNIT 01 DVR ACTIONS: NO CONTRIBUTING ACTION										
12	2015052147	23 04/22/2015	WED 14:59	DAYLIGHT	DRY	CLEAR	0	0	0 2	PROP DMG ONLY ANGLE
ENV RDWY FACTORS: NONE 4WAY 0030/0070/0440 0030/0071/0439 8039/0010/1320 KING OF PRUSSIA RD VEH: 1 SUV TRAVELING WEST IN RIGHT LANE GOING STRAIGHT VEH EVENTS: HIT UNIT 02 DVR ACTIONS: TOO FAST FOR CONDITIONS VEH: 2 SMALL TRUCK TRAVELING NORTH IN LEFT TURN LANE TURNING LEFT VEH EVENTS: STRUCK BY UNIT 01 DVR ACTIONS: NO CONTRIBUTING ACTION										
13	2015058902	23 05/21/2015	THR 12:04	DAYLIGHT	WET	RAIN	0	0	0 2	PROP DMG ONLY ANGLE
ENV RDWY FACTORS: NONE 4WAY 0030/0070/0440 0030/0071/0439 8039/0010/1320 KING OF PRUSSIA RD VEH: 1 AUTOMOBILE TRAVELING EAST IN RIGHT LANE GOING STRAIGHT VEH EVENTS: STRUCK BY UNIT 02 DVR ACTIONS: NO CONTRIBUTING ACTION VEH: 2 AUTOMOBILE TRAVELING NORTH IN RIGHT LANE GOING STRAIGHT VEH EVENTS: HIT UNIT 01 DVR ACTIONS: RUNNING RED LIGHT										

SR 30 AT SR 476 OFF RAMP / KING OF PRUSSIA RD IN DELAWARE CO LOG 17381-03

Sorted by County, Route, Segment, Offset

NOTES:

- 1 The data available in this application is dynamic and should be used with care. Please take note of the following data alerts:
- 2 2016 crash records are incomplete
Data for the current year, 2016, is not fully represented in CDART. Crashes will be added for this year as they are made available to the Department. Include this year in queries with caution.
- 3 Complete data years
Complete records of reportable crashes are available in CDART for the following years : 1997 - 2015

REPORT PARAMETERS:

Query ID: [0020160526029](#)

User ID: jporemba

Area of Interest: (In County 23 On State Route 0030(P) Between Segment 0070 Offset 339 and Segment 0070 Offset 672) or (In County 23 On State Route 0030(S) Between Segment 0071 Offset 339 and Segment 0071 Offset 672) or (In County 23 On State Route 8039(P) Between Segment 0010 Offset 1220 and Segment 0010 Offset 1320)

Date Range: 1/1/2011 to 12/31/2015

Criteria:

SR 30 AT SR 476 OFF RAMP / KING OF PRUSSIA RD IN DELAWARE CO LOG 17381-03



Date Range: 1/1/2011 to 12/31/2015

Area of Interest: (In County 23 On State Route 0030(P) Between Segment 0070 Offset 339 and Segment 0071 Offset 672) or (In County 23 On State Route 8039(P) Between Route 0030(S) Between Segment 0071 Offset 339 and Segment 0071 Offset 672) or (In County 23 On State Route 8039(P) Between Segment 0010 Offset 1220 and Segment 0010 Offset 1320)

USER_ID/QUERY ID:
jporambar_0020160526029

MONTH OF YEAR

	JAN	MAR	APR	MAY	JUN	AUG	SEP	OCT	DEC
CRASHES	3	1	1	2	1	1	1	1	2
PCT	23%	8%	8%	15%	8%	8%	8%	8%	15%

DAY OF WEEK

	SUN	MON	TUE	WED	THUR	FRI	SAT
CRASHES	1	2	1	3	2	2	2
PCT	8%	15%	8%	23%	15%	15%	15%

HOUR OF DAY

	05	06	10	11	12	13	14	16	17	20	21	22
CRASHES	1	1	1	1	1	1	1	1	1	1	2	1
PCT	8%	8%	8%	8%	8%	8%	8%	8%	8%	8%	15%	8%

YEAR

YEAR	CRASHES	PCT
2011	3	23%
2012	1	8%
2013	2	15%
2014	4	31%
2015	3	23%
TOTAL	13	100%

COLLISION TYPE

	CRASHES	PCT
REAR END	7	54%
ANGLE	4	31%
HIT FIX OBJ	2	15%
TOTAL	13	100%

CRASH SEVERITY LEVEL

	CRASHES	PCT
MINOR	1	8%
UNK SEVERITY	2	15%
PDO	10	77%
TOTAL	13	100%

SEVERITY COUNT

	PERSONS
FATALITIES	0
MAJOR	0
MODERATE	0
MINOR	1
UNK SEVERITY	3
UNK IF INJURED	0

DRIVER ACTIONS

	ACTIONS	PCT
NO CONTRIBUTING ACTION	19	54%
TOO FAST FOR CONDITION	3	9%
DRIVER WAS DISTRACTED	2	6%
IMPROPER/CARELESS TURN	2	6%
OTHER IMPROPER DRIVING	2	6%
FAILURE TO RESPOND TCD	1	3%
IMPROPER ENTRANCE HWY	1	3%
PROCEED W/O CLEARANCE	1	3%
RUNNING RED LIGHT	1	3%
SPEEDING	1	3%
SUDDEN SLOWING/STOP	1	3%
TAILGATING	1	3%
TOTAL	35	100%

VEHICLE TYPE

	VEHICLES	PCT
AUTOMOBILE	21	68%
SUV	6	19%
SMALL TRUCK	2	6%
VAN	2	6%
TOTAL	31	100%

ROAD CONDITION

	CRASHES	PCT
DRY	9	69%
WET	2	15%
ICE PATCH	1	8%
SNOW	1	8%
TOTAL	13	100%

ILLUMINATION

	CRASHES	PCT
DAYLIGHT	6	46%
STREET LIGHTS	6	46%
DAWN	1	8%
TOTAL	13	100%

WEATHER

	CRASHES	PCT
CLEAR	9	69%
RAIN	2	15%
SNOW	2	15%
TOTAL	13	100%

ENVIR/ROADWAY FACTORS

	FACTORS	PCT
NONE	11	79%
OTHER WEATHER COND	2	14%
SLIPPERY ICE/SNOW	1	7%
TOTAL	14	100%

IMPORTANT: This traffic engineering and safety study is confidential pursuant to 75 Pa. C.S. §3754 and 23 U.S.C. §409 and may not be disclosed or used in litigation without written permission from PennDOT.

CDART - CRASH SUMMARY REPORT (09-06)

NOTES:

- 1 The data available in this application is dynamic and should be used with care. Please take note of the following data alerts:
- 2 2016 crash records are incomplete
Data for the current year, 2016, is not fully represented in CDART. Crashes will be added for this year as they are made available to the Department. Include this year in queries with caution.
- 3 Complete data years
Complete records of reportable crashes are available in CDART for the following years : 1997 - 2015

REPORT PARAMETERS:

Query ID: [0020160526029](#)
User ID: jporemba
Area of Interest: (In County 23 On State Route 0030(P) Between Segment 0070 Offset 339 and Segment 0070 Offset 672) or (In County 23 On State Route 0030(S) Between Segment 0071 Offset 339 and Segment 0071 Offset 672) or (In County 23 On State Route 8039(P) Between Segment 0010 Offset 1220 and Segment 0010 Offset 1320)
Date Range: 1/1/2011 to 12/31/2015
Criteria:



SR 30 AT SR 476 SB ON / OFF RAMPS IN RADNOR TWP IN DELAWARE CO LOG 17381-04

Sorted by County, Route, Segment, Offset

USER ID/QUERY ID:

Date Range: 1/1/2011 to 12/31/2015

jporemba / 0020160526033

Area of Interest:

(In County 23 On State Route 0030(P) Between Segment 0060 Offset 1604 and Segment 0060 Offset 2243) or (In County 23 On State Route 0030(S) Between Segment 0061 Offset 1604 and Segment 0061 Offset 2243) or (In County 23 On State Route 8039(P) Between Segment 0250 Offset 0 and Segment 0250 Offset 232) or (In County 23 On State Route 8039(P) Between Segment 0260 Offset 0 and Segment 0260 Offset 210) or (In County 23 On State Route 8039(P) Between Segment 0500 Offset 1239 and Segment 0500 Offset 1500) See more details at the end of the report

DIST	CO	COUNTY	ROUTE	BEG SEG	BEG OFF	END SEG	END OFF	LENGTH	TOTAL CRASHES	SELECT CRASHES	SELECT ATAL COUNT	SELECT INJ COUNT	SELECT RATIO	SELECT CONCENTRATION (PER 1000 FT)	AVG SELECT ADT	SELECT RASH RATE
06	23	DELAWARE	0030	0060	1604	0060	1913	309	10	10	0	4	100.0%	32.4	10517	8.90
06	23	DELAWARE	0030	0061	1850	0061	2172	322	8	8	0	4	100.0%	24.8	8918	8.06
06	23	DELAWARE	8039	0250	0	0250	0	0	16	5	0	4	31.3%	1.0	7320	
06	23	DELAWARE	8039	0500	1386	0500	1560	174	25	8	0	3	32.0%	46.0	10820	12.29

IMPORTANT: This traffic engineering and safety study is confidential pursuant to 75 Pa. C.S. §3754 and 23 U.S.C. §409 and may not be disclosed or used in litigation without written permission from PennDOT.

Print Date: 5/26/2016

Page 1 of 2

SR 30 AT SR 476 SB ON / OFF RAMPS IN RADNOR TWP IN DELAWARE CO LOG 17381-04

NOTES:

- 1 The data available in this application is dynamic and should be used with care. Please take note of the following data alerts:
- 2 2016 crash records are incomplete
Data for the current year, 2016, is not fully represented in CDART. Crashes will be added for this year as they are made available to the Department. Include this year in queries with caution.
Complete data years
- 3 Complete records of reportable crashes are available in CDART for the following years : 1997 - 2015

QUERY PARAMETERS:

Note: This report includes data for state roads only

Query ID: [0020160526033](#)

User ID: jporemba

Min Crashes: 5 Crashes

Cluster

Tolerance: 1000 ft

Max Gap: 0 ft

Min Ratio: 0 %

Area of Interest: (In County 23 On State Route 0030(P) Between Segment 0060 Offset 1604 and Segment 0060 Offset 2243) or (In County 23 On State Route 0030(S) Between Segment 0061 Offset 1604 and Segment 0061 Offset 2243) or (In County 23 On State Route 8039(P) Between Segment 0250 Offset 0 and Segment 0250 Offset 232) or (In County 23 On State Route 8039(P) Between Segment 0260 Offset 0 and Segment 0260 Offset 210) or (In County 23 On State Route 8039(P) Between Segment 0500 Offset 1239 and Segment 0500 Offset 1560)

Date: 1/1/2011 to 12/31/2015

Criteria:

STATE_ROAD

SR 30 AT SR 476 SB ON / OFF RAMPS IN RADNOR TWP IN DELAWARE CO LOG 17381-04



Sorted by County, Route, Segment, Offset

USER ID/QUERY ID:

jporemba/ 0020160526033

Date Range: 1/1/2011 to 12/31/2015

Area of (In County 23 On State Route 0030(P) Between Segment 0060 Offset 1604 and Segment 0060 Offset 2243) or

Interest: (In County 23 On State Route 0030(S) Between Segment 0061 Offset 1604 and Segment 0061 Offset 2243) or
(In County 23 On State Route 8039(P) Between Segment 0250 Offset 0 and Segment 0250 Offset 232) or (In County 23 On Sta...**See more details at the end of the report**

CRN	CO DATE	DAY TIME	LIGHTING	ROAD SURF	WEATHER	FAT	INJ	PED	VEH	MAX SEVERITY	
1	2012029607	23 03/15/2012	THR 19:42	DARK	DRY	CLEAR	0	0	0	2	PROP DMG ONLY
ENV RDWY FACTORS: NONE REAR-END MIDB 0030/0060/1604 VEH: 1 SUV TRAVELING EAST IN LEFT LANE SLOWING OR STOPPING IN LANE VEH EVENTS: HIT UNIT 02 DVR ACTIONS: UNKNOWN VEH: 2 AUTOMOBILE TRAVELING EAST IN RIGHT TURN LANE SLOWING OR STOPPING IN LANE VEH EVENTS: STRUCK BY UNIT 01 DVR ACTIONS: NO CONTRIBUTING ACTION											
2	2013061942	23 06/12/2013	WED 17:17	DAYLIGHT	DRY	CLEAR	0	0	0	2	PROP DMG ONLY
ENV RDWY FACTORS: NONE REAR-END T-INT 0030/0060/1704 8039/0260/0000 VEH: 1 AUTOMOBILE TRAVELING EAST IN RIGHT LANE GOING STRAIGHT VEH EVENTS: HIT UNIT 02 DVR ACTIONS: AFFECTED BY PHYSICAL COND VEH: 2 SMALL TRUCK TRAVELING EAST IN RIGHT LANE GOING STRAIGHT VEH EVENTS: STRUCK BY UNIT 01 DVR ACTIONS: NO CONTRIBUTING ACTION											
3	2011022833	23 02/24/2011	THR 21:15	STREET LT	WET	RAIN	0	1	0	2	MINOR INJURY
ENV RDWY FACTORS: OTHER WEATHER CONDITIONS REAR-END 4WAY 0030/0060/1874 0030/0061/1870 8039/0250/0000 8039/0500/1560 VEH: 1 VAN TRAVELING EAST IN OTHER FWD MOVING LANE GOING STRAIGHT VEH EVENTS: HIT UNIT 02 DVR ACTIONS: DRIVER WAS DISTRACTED VEH: 2 AUTOMOBILE TRAVELING EAST IN OTHER FWD MOVING LANE STOPPED IN TRAFFIC LANE VEH EVENTS: STRUCK BY UNIT 01 DVR ACTIONS: NO CONTRIBUTING ACTION											
4	2013072874	23 07/12/2013	FRI 10:12	DAYLIGHT	DRY	CLEAR	0	1	0	2	MINOR INJURY
ENV RDWY FACTORS: NONE REAR-END T-INT 0030/0060/1874 0030/0061/1880 8039/0250/0000 VEH: 1 SMALL TRUCK TRAVELING EAST IN LEFT LANE GOING STRAIGHT VEH EVENTS: HIT UNIT 02 DVR ACTIONS: OTHER IMPROPER DRIV ACTIONS VEH: 2 AUTOMOBILE TRAVELING EAST IN LEFT LANE STOPPED IN TRAFFIC LANE VEH EVENTS: STRUCK BY UNIT 01 DVR ACTIONS: OTHER IMPROPER DRIV ACTIONS											
5	2014111723	23 11/05/2014	WED 14:30	DAYLIGHT	DRY	CLEAR	0	0	0	2	PROP DMG ONLY
ENV RDWY FACTORS: NONE REAR-END OFRM 0030/0060/1874 8039/0250/0000 VEH: 1 AUTOMOBILE TRAVELING SOUTH IN RIGHT LANE CHANGING LANES OR MERGING VEH EVENTS: HIT UNIT 02 DVR ACTIONS: OTHER IMPROPER DRIV ACTIONS VEH: 2 AUTOMOBILE TRAVELING EAST IN OTHER FWD MOVING LANE SLOWING OR STOPPING IN LANE VEH EVENTS: STRUCK BY UNIT 01 DVR ACTIONS: NO CONTRIBUTING ACTION											

SR 30 AT SR 476 SB ON / OFF RAMPS IN RADNOR TWP IN DELAWARE CO LOG 17381-04



Sorted by County, Route, Segment, Offset

USER ID/QUERY ID:

jporemba/ 0020160526033

Date Range: 1/1/2011 to 12/31/2015

Area of Interest: (In County 23 On State Route 0030(P) Between Segment 0060 Offset 1604 and Segment 0060 Offset 2243) or (In County 23 On State Route 0030(S) Between Segment 0061 Offset 1604 and Segment 0061 Offset 2243) or (In County 23 On State Route 8039(P) Between Segment 0250 Offset 0 and Segment 0250 Offset 232) or (In County 23 On Sta...**See more details at the end of the report**

CRN	CO DATE	DAY TIME	LIGHTING	ROAD SURF	WEATHER	FAT	INJ	PED	VEH	MAX SEVERITY
6	2015079167	23 07/23/2015	THR 23:30	STREET LT	DRY	CLEAR	0	2	0 2	MODERATE INJURY
ENV RDWY FACTORS: NONE 4WAY 0030/0060/1874 0030/0061/1850 8039/0250/0000 VEH: 1 AUTOMOBILE TRAVELING EAST IN RIGHT LANE GOING STRAIGHT ALC TEST: 99 VEH EVENTS: HIT UNIT 02 DVR ACTIONS: AFFECTED BY PHYSICAL COND DRIVER WAS DISTRACTED VEH: 2 AUTOMOBILE TRAVELING EAST IN RIGHT LANE STOPPED IN TRAFFIC LANE VEH EVENTS: STRUCK BY UNIT 01 DVR ACTIONS: NO CONTRIBUTING ACTION										
7	2011128093	23 12/11/2011	SUN 10:57	DAYLIGHT	DRY	CLEAR	0	0	0 2	PROP DMG ONLY
ENV RDWY FACTORS: NONE OFRM 0030/0060/1913 0030/0061/1880 8039/0500/1560 VEH: 1 SUV TRAVELING EAST IN ONE LANE ROAD GOING STRAIGHT VEH EVENTS: HIT UNIT 02 DVR ACTIONS: DRIVER WAS DISTRACTED PROCEED W/O CLEARANCE VEH: 2 VAN TRAVELING EAST IN ONE LANE ROAD STOPPED IN TRAFFIC LANE VEH EVENTS: STRUCK BY UNIT 01 DVR ACTIONS: NO CONTRIBUTING ACTION										
8	2012023494	23 03/01/2012	THR 08:20	DAYLIGHT	WET	CLEAR	0	0	0 1	PROP DMG ONLY
ENV RDWY FACTORS: OTHER ENVIRONMENTAL FACTOR T-INT 0030/0060/1913 0030/0061/1880 8039/0250/0000 8039/0500/1560 VEH: 1 AUTOMOBILE TRAVELING NORTH IN RIGHT TURN LANE GOING STRAIGHT VEH EVENTS: HIT CURB HIT TRAFFIC ISLAND / CHANNELIZATION HIT TRAFFIC SIGN DVR ACTIONS: TOO FAST FOR CONDITIONS										
9	2013002065	23 12/07/2012	FRI 22:26	STREET LT	WET	RAIN	0	0	0 2	PROP DMG ONLY
ENV RDWY FACTORS: UNKNOWN T-INT 0030/0060/1913 0030/0061/1880 8039/0500/1560 VEH: 1 AUTOMOBILE TRAVELING EAST IN LEFT LANE GOING STRAIGHT VEH EVENTS: HIT UNIT 02 DVR ACTIONS: DRIVER WAS DISTRACTED VEH: 2 SUV TRAVELING EAST IN LEFT LANE STOPPED IN TRAFFIC LANE VEH EVENTS: STRUCK BY UNIT 01 DVR ACTIONS: NO CONTRIBUTING ACTION										
10	2013042940	23 04/14/2013	SUN 13:30	DAYLIGHT	DRY	CLEAR	0	0	0 2	PROP DMG ONLY
ENV RDWY FACTORS: NONE OFRM 0030/0060/1913 0030/0061/1880 8039/0500/1560 VEH: 1 AUTOMOBILE TRAVELING EAST IN ONE LANE ROAD PASSING/OVERTAKING VEH VEH EVENTS: HIT UNIT 02 DVR ACTIONS: CARELESS PASS OR LANE CHANGE IMPROPER/CARELESS TURN VEH: 2 AUTOMOBILE TRAVELING SOUTH IN ONE LANE ROAD STOPPED IN TRAFFIC LANE VEH EVENTS: STRUCK BY UNIT 01 DVR ACTIONS: NO CONTRIBUTING ACTION										

SR 30 AT SR 476 SB ON / OFF RAMP IN RADNOR TWP IN DELAWARE CO LOG 17381-04



Sorted by County, Route, Segment, Offset

USER ID/QUERY ID:

Date Range: 1/1/2011 to 12/31/2015

jporemba/ 0020160526033

Area of Interest: (In County 23 On State Route 0030(P) Between Segment 0060 Offset 1604 and Segment 0060 Offset 2243) or (In County 23 On State Route 0030(S) Between Segment 0061 Offset 1604 and Segment 0061 Offset 2243) or (In County 23 On State Route 8039(P) Between Segment 0250 Offset 0 and Segment 0250 Offset 232) or (In County 23 On Sta...**See more details at the end of the report**

CRN	CO DATE	DAY TIME	LIGHTING	ROAD SURF	WEATHER	FAT	INJ	PED	VEH	MAX SEVERITY	
11	2012055605	23 05/17/2012	THR 17:35	DAYLIGHT	DRY	CLEAR	0	0	0	2	PROP DMG ONLY
ENV RDWY FACTORS: NONE REAR-END MIDB 0030/0061/2172 ----- VEH: 1 SUV TRAVELING WEST IN LEFT LANE GOING STRAIGHT VEH EVENTS: HIT UNIT 02 DVR ACTIONS: DRIVER WAS DISTRACTED ----- VEH: 2 SUV TRAVELING WEST IN LEFT LANE STOPPED IN TRAFFIC LANE VEH EVENTS: STRUCK BY UNIT 01 DVR ACTIONS: NO CONTRIBUTING ACTION											
12	2015062927	23 06/15/2015	MON 11:40	DAYLIGHT	DRY	CLEAR	0	1	0	2	MINOR INJURY
ENV RDWY FACTORS: NONE REAR-END OFRM 0030/0500/1339 8039/0500/1450 ----- VEH: 1 AUTOMOBILE TRAVELING EAST IN RIGHT LANE SLOWING OR STOPPING IN LANE VEH EVENTS: STRUCK BY UNIT 02 DVR ACTIONS: NO CONTRIBUTING ACTION ----- VEH: 2 AUTOMOBILE TRAVELING EAST IN RIGHT LANE SLOWING OR STOPPING IN LANE VEH EVENTS: HIT UNIT 01 DVR ACTIONS: DRIVER WAS DISTRACTED											
13	2011066459	23 06/21/2011	TUE 08:33	DAYLIGHT	DRY	CLEAR	0	1	0	2	MINOR INJURY
ENV RDWY FACTORS: NONE REAR-END MIDB 8039/0500/1386 ----- VEH: 1 SUV TRAVELING EAST IN OTHER FWD MOVING LANE GOING STRAIGHT VEH EVENTS: HIT UNIT 02 DVR ACTIONS: TAILGATING ----- VEH: 2 AUTOMOBILE TRAVELING EAST IN OTHER FWD MOVING LANE STOPPED IN TRAFFIC LANE VEH EVENTS: STRUCK BY UNIT 01 DVR ACTIONS: NO CONTRIBUTING ACTION											
14	2011047403	23 05/05/2011	THR 09:34	DAYLIGHT	DRY	CLEAR	0	0	0	2	PROP DMG ONLY
ENV RDWY FACTORS: NONE REAR-END MIDB 8039/0500/1471 ----- VEH: 1 AUTOMOBILE TRAVELING EAST IN RIGHT TURN LANE SLOWING OR STOPPING IN LANE VEH EVENTS: HIT UNIT 02 DVR ACTIONS: TOO FAST FOR CONDITIONS ----- VEH: 2 LARGE TRUCK TRAVELING EAST IN RIGHT LANE STOPPED IN TRAFFIC LANE VEH EVENTS: STRUCK BY UNIT 01 DVR ACTIONS: NO CONTRIBUTING ACTION											

SR 30 AT SR 476 SB ON / OFF RAMPS IN RADNOR TWP IN DELAWARE CO LOG 17381-04

Sorted by County, Route, Segment, Offset

NOTES:

- 1 The data available in this application is dynamic and should be used with care. Please take note of the following data alerts:
- 2 2016 crash records are incomplete
Data for the current year, 2016, is not fully represented in CDART. Crashes will be added for this year as they are made available to the Department. Include this year in queries with caution.
- 3 Complete data years
Complete records of reportable crashes are available in CDART for the following years : 1997 - 2015

REPORT PARAMETERS:

Query ID: [0020160526033](#)

User ID: jporemba

Area of Interest: (In County 23 On State Route 0030(P) Between Segment 0060 Offset 1604 and Segment 0060 Offset 2243) or (In County 23 On State Route 0030(S) Between Segment 0061 Offset 1604 and Segment 0061 Offset 2243) or (In County 23 On State Route 8039(P) Between Segment 0250 Offset 0 and Segment 0250 Offset 232) or (In County 23 On State Route 8039(P) Between Segment 0260 Offset 0 and Segment 0260 Offset 210) or (In County 23 On State Route 8039(P) Between Segment 0500 Offset 1239 and Segment 0500 Offset 1560)

Date Range: 1/1/2011 to 12/31/2015

Criteria:

SR 30 AT SR 476 SB ON / OFF RAMPS IN RADNOR TWP IN DELAWARE CO LOG 17381-04



USER ID/QUERY ID:
jporambar_0020160526033

Date Range: 1/1/2011 to 12/31/2015

Area of Interest: (In County 23 On State Route 0030(P) Between Segment 0060 Offset 1604 and Segment 0060 Offset 2243) or (In County 23 On State Route 0030(S) Between Segment 0061 Offset 1604 and Segment 0061 Offset 2243) or (In County 23 On State Route 8039(P) Between Segment 0250 Offset 0 and Segment 0250 Offset 232) or (In County 23 On State Route 8039(P) Between Segment 0260 Offset 0 and Segment 0260 Offset 210)...See more details at the end of the report

MONTH OF YEAR

	FEB	MAR	APR	MAY	JUN	JUL	NOV	DEC
CRASHES	1	2	1	2	3	2	1	2
PCT	7%	14%	7%	14%	21%	14%	7%	14%
TOTAL	14	14	14	14	14	14	14	14
PCT	100%	100%	100%	100%	100%	100%	100%	100%

DAY OF WEEK

	SUN	MON	TUE	WED	THR	FRI
CRASHES	2	1	1	2	6	2
PCT	14%	7%	7%	14%	43%	14%
TOTAL	14	14	14	14	14	14
PCT	100%	100%	100%	100%	100%	100%

HOUR OF DAY

	08	09	10	11	13	14	17	19	21	22	23
CRASHES	2	1	2	1	1	1	2	1	1	1	1
PCT	14%	7%	14%	7%	7%	7%	14%	7%	7%	7%	7%
TOTAL	14	14	14	14	14	14	14	14	14	14	14
PCT	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%

YEAR

	CRASHES	PCT
2011	4	29%
2012	4	29%
2013	3	21%
2014	1	7%
2015	2	14%
TOTAL	14	100%

COLLISION TYPE

	CRASHES	PCT
REAR END	12	86%
HIT FIX OBJ	1	7%
SAME DIR SS	1	7%
TOTAL	14	100%

CRASH SEVERITY LEVEL

	CRASHES	PCT
MODERATE	1	7%
MINOR	4	29%
PDO	9	64%
TOTAL	14	100%

SEVERITY COUNT

	PERSONS
FATALITIES	0
MAJOR	0
MODERATE	1
MINOR	4
UNK SEVERITY	1
UNK IF INJURED	0

DRIVER ACTIONS

	ACTIONS	PCT
NO CONTRIBUTING ACTION	12	40%
DRIVER WAS DISTRACTED	6	20%
OTHER IMPROPER DRIVING	3	10%
AFFECTED PHYSICAL COND	2	7%
TOO FAST FOR CONDITION	2	7%
CARELESS PASS/IN CHNG	1	3%
IMPROPER/CARELESS TURN	1	3%
PROCEED W/O CLEARANCE	1	3%
TAILGATING	1	3%
UNKNOWN	1	3%
TOTAL	30	100%

VEHICLE TYPE

	VEHICLES	PCT
AUTOMOBILE	16	59%
SUV	6	22%
SMALL TRUCK	2	7%
VAN	2	7%
LARGE TRUCK	1	4%
TOTAL	27	100%

ROAD CONDITION

	CRASHES	PCT
DRY	11	79%
WET	3	21%
TOTAL	14	100%

ILLUMINATION

	CRASHES	PCT
DAYLIGHT	10	71%
STREET LIGHTS	3	21%
DARK	1	7%
TOTAL	14	100%

WEATHER

	CRASHES	PCT
CLEAR	12	86%
RAIN	2	14%
TOTAL	14	100%

ENVIR/ROADWAY FACTORS

	FACTORS	PCT
NONE	11	79%
OTHER ENVIR FACTOR	1	7%
OTHER WEATHER COND	1	7%
UNKNOWN	1	7%
TOTAL	14	100%

IMPORTANT: This traffic engineering and safety study is confidential pursuant to 75 Pa. C.S. §3754 and 23 U.S.C. §409 and may not be disclosed or used in litigation without written permission from PennDOT.

CDART - CRASH SUMMARY REPORT (09-06)

NOTES:

- 1 The data available in this application is dynamic and should be used with care. Please take note of the following data alerts:
- 2 2016 crash records are incomplete. Data for the current year, 2016, is not fully represented in CDART. Crashes will be added for this year as they are made available to the Department. Include this year in queries with caution.
- 3 Complete data years
Complete records of reportable crashes are available in CDART for the following years : 1997 - 2015

REPORT PARAMETERS:

Query ID: [0020160526033](#)
User ID: jporemba
Area of Interest: (In County 23 On State Route 0030(P) Between Segment 0060 Offset 1604 and Segment 0060 Offset 2243) or (In County 23 On State Route 0030(S) Between Segment 0061 Offset 1604 and Segment 0061 Offset 2243) or (In County 23 On State Route 8039(P) Between Segment 0250 Offset 0 and Segment 0250 Offset 232) or (In County 23 On State Route 8039(P) Between Segment 0260 Offset 0 and Segment 0260 Offset 210) or (In County 23 On State Route 8039(P) Between Segment 0500 Offset 1239 and Segment 0500 Offset 1560)
Date Range: 1/1/2011 to 12/31/2015
Criteria:



SR 30 AT SR 476 NB ON RAMP IN DELAWARE CO LOG 17381-05

Sorted by County, Route, Segment, Offset

Date Range: 1/1/2011 to 12/31/2015

Area of Interest:

(In County 23 On State Route 0030(P) Between Segment 0070 Offset 986 and Segment 0070 Offset 1372) or (In County 23 On State Route 0030(S) Between Segment 0071 Offset 986 and Segment 0071 Offset 1372) or (In County 23 On State Route 8039(P) Between Segment 0750 Offset 0 and Segment 0750 Offset 226)

USER ID/QUERY ID:
jporemba / 0020160526037

DIST	CO	COUNTY	ROUTE	BEG SEG	END SEG	BEG OFF	END OFF	LENGTH	TOTAL CRASHES	SELECT CRASHES	SELECT ATAL COUNT	SELECT INJ COUNT	SELECT RATIO	SELECT CONCENTRATION (PER 1000 FT)	AVG ADT	SELECT RASH RATE
06	23	DELAWARE	0030	0070	0070	900	1122	222	17	17	0	8	100.0%	76.6	15301	14.48
06	23	DELAWARE	0030	0071	0071	1092	1129	37	17	17	0	8	100.0%	459.5	8918	149.06
06	23	DELAWARE	8039	0750	0750	0	126	126	23	18	0	7	78.3%	142.9	11552	35.78

IMPORTANT: This traffic engineering and safety study is confidential pursuant to 75 Pa. C.S. §3754 and 23 U.S.C. §409 and may not be disclosed or used in litigation without written permission from PennDOT.

Print Date: 5/26/2016

Page 1 of 2

SR 30 AT SR 476 NB ON RAMP IN DELAWARE CO LOG 17381-05

NOTES:

- 1 The data available in this application is dynamic and should be used with care. Please take note of the following data alerts:
- 2 2016 crash records are incomplete. Data for the current year, 2016, is not fully represented in CDART. Crashes will be added for this year as they are made available to the Department. Include this year in queries with caution.
- 3 Complete data years
Complete records of reportable crashes are available in CDART for the following years : 1997 - 2015

QUERY PARAMETERS:

Note: This report includes data for state roads only

Query ID: [0020160526037](#)

User ID: jporemba

Min Crashes: 5 Crashes

Cluster:

Tolerance: 1000 ft

Max Gap: 0 ft

Min Ratio: 0 %

Area of Interest: (In County 23 On State Route 0030(P) Between Segment 0070 Offset 986 and Segment 0070 Offset 1372) or (In County 23 On State Route 0030(S) Between Segment 0071 Offset 986 and Segment 0071 Offset 1372) or (In County 23 On State Route 8039(P) Between Segment 0750 Offset 0 and Segment 0750 Offset 226)

Date: 1/1/2011 to 12/31/2015

Criteria:

STATE_ROAD

SR 30 AT SR 476 NB ON RAMP

IN DELAWARE CO LOG 17381-05



Sorted by County, Route, Segment, Offset

USER ID/QUERY ID:

jporemba/ 0020160526037

Date Range: 1/1/2011 to 12/31/2015

Area of (In County 23 On State Route 0030(P) Between Segment 0070 Offset 986 and Segment 0070 Offset 1372) or

Interest: (In County 23 On State Route 0030(S) Between Segment 0071 Offset 986 and Segment 0071 Offset 1372) or

(In County 23 On State Route 8039(P) Between Segment 0750 Offset 0 and Segment 0750 Offset 226)

CRN	CO DATE	DAY TIME	LIGHTING	ROAD SURF	WEATHER	FAT	INJ	PED	VEH	MAX SEVERITY	
1	2011004395	23 01/01/2011	SAT 22:07	STREET LT	DRY	CLEAR	0	0	0	2	PROP DMG ONLY
ENV RDWY FACTORS: NONE ANGLE 4WAY 0030/0070/0900 0030/0071/1092 8039/0750/0000 HILLSIDE CR ----- VEH: 1 SUV TRAVELING WEST IN LEFT LANE GOING STRAIGHT VEH EVENTS: HIT UNIT 02 DVR ACTIONS: NO CONTRIBUTING ACTION ----- VEH: 2 AUTOMOBILE TRAVELING EAST IN LEFT TURN LANE TURNING LEFT VEH EVENTS: STRUCK BY UNIT 01 DVR ACTIONS: IMPROPER/CARELESS TURN											
2	2011029843	23 02/26/2011	SAT 19:33	STREET LT	DRY	CLEAR	0	0	0	2	PROP DMG ONLY
ENV RDWY FACTORS: NONE ANGLE 4WAY 0030/0070/0900 0030/0071/1092 8039/0750/0000 HILLSIDE CR ----- VEH: 1 SUV TRAVELING WEST IN RIGHT LANE GOING STRAIGHT VEH EVENTS: HIT UNIT 02 DVR ACTIONS: RUNNING RED LIGHT ----- VEH: 2 VAN TRAVELING EAST IN LEFT TURN LANE TURNING LEFT VEH EVENTS: STRUCK BY UNIT 01 DVR ACTIONS: NO CONTRIBUTING ACTION											
3	2011107224	23 10/21/2011	FRI 11:14	DAYLIGHT	DRY	CLEAR	0	0	0	2	PROP DMG ONLY
ENV RDWY FACTORS: NONE REAR-END 4WAY 0030/0070/1086 0030/0071/1092 8039/0750/0000 HILLSIDE CR ----- VEH: 1 AUTOMOBILE TRAVELING EAST IN LEFT TURN LANE CHANGING LANES OR MERGING VEH EVENTS: STRUCK BY UNIT 02 DVR ACTIONS: CARELESS PASS OR LANE CHANGE ----- VEH: 2 AUTOMOBILE TRAVELING EAST IN LEFT LANE GOING STRAIGHT VEH EVENTS: HIT UNIT 01 DVR ACTIONS: NO CONTRIBUTING ACTION											
4	2012017122	23 02/13/2012	MON 22:27	STREET LT	DRY	CLEAR	0	0	0	2	PROP DMG ONLY
ENV RDWY FACTORS: NONE ANGLE T-INT 0030/0070/1086 0030/0071/1092 8039/0750/0000 ----- VEH: 1 AUTOMOBILE TRAVELING NORTH IN ONCOMING TRAFFIC LANE TURNING LEFT ON RED VEH EVENTS: STRUCK BY UNIT 02 DVR ACTIONS: RUNNING RED LIGHT ----- VEH: 2 AUTOMOBILE TRAVELING WEST IN RIGHT LANE GOING STRAIGHT VEH EVENTS: HIT UNIT 01 DVR ACTIONS: NO CONTRIBUTING ACTION											
5	2013059764	23 06/06/2013	THR 09:10	DAYLIGHT	DRY	CLEAR	0	0	0	2	PROP DMG ONLY
ENV RDWY FACTORS: NONE HEAD-ON ONRM 0030/0070/1086 8039/0750/0000 ----- VEH: 1 SMALL TRUCK TRAVELING NORTH IN LEFT TURN LANE TURNING LEFT ON RED VEH EVENTS: STRUCK BY UNIT 02 DVR ACTIONS: RUNNING RED LIGHT ----- VEH: 2 AUTOMOBILE TRAVELING WEST IN RIGHT LANE GOING STRAIGHT VEH EVENTS: HIT UNIT 01 DVR ACTIONS: NO CONTRIBUTING ACTION											

SR 30 AT SR 476 NB ON RAMP

IN DELAWARE CO LOG 17381-05



Sorted by County, Route, Segment, Offset

USER ID/QUERY ID:

jporemba/ 0020160526037

Date Range: 1/1/2011 to 12/31/2015

Area of (In County 23 On State Route 0030(P) Between Segment 0070 Offset 986 and Segment 0070 Offset 1372) or

Interest: (In County 23 On State Route 0030(S) Between Segment 0071 Offset 986 and Segment 0071 Offset 1372) or

(In County 23 On State Route 8039(P) Between Segment 0750 Offset 0 and Segment 0750 Offset 226)

CRN	CO DATE	DAY TIME	LIGHTING	ROAD SURF	WEATHER	FAT	INJ	PED	VEH	MAX SEVERITY	
6	2014121151	23 12/02/2014	TUE 19:09	STREET LT	WET	RAIN	0	0	0	2	PROP DMG ONLY
ENV RDWY FACTORS: NONE 4WAY 0030/0070/1086 0030/0071/1092 8039/0750/0000 VEH: 1 AUTOMOBILE TRAVELING WEST IN LEFT LANE GOING STRAIGHT VEH EVENTS: HIT UNIT 02 DVR ACTIONS: RUNNING RED LIGHT VEH: 2 AUTOMOBILE TRAVELING WEST IN LEFT TURN LANE TURNING LEFT VEH EVENTS: STRUCK BY UNIT 01 DVR ACTIONS: NO CONTRIBUTING ACTION											
7	2015059860	23 06/05/2015	FRI 12:23	DAYLIGHT	DRY	CLEAR	0	0	0	2	PROP DMG ONLY
ENV RDWY FACTORS: NONE 4WAY 0030/0070/1086 0030/0071/1092 8039/0750/0000 VEH: 1 AUTOMOBILE TRAVELING WEST IN LEFT LANE GOING STRAIGHT VEH EVENTS: HIT UNIT 02 DVR ACTIONS: TOO FAST FOR CONDITIONS TAILGATING VEH: 2 SMALL TRUCK TRAVELING WEST IN LEFT LANE STOPPED IN TRAFFIC LANE VEH EVENTS: STRUCK BY UNIT 01 DVR ACTIONS: NO CONTRIBUTING ACTION											
8	2011117065	23 11/11/2011	FRI 23:55	STREET LT	DRY	CLEAR	0	1	0	2	UNK SEVERITY
ENV RDWY FACTORS: NONE 4WAY 0030/0070/1122 0030/0071/1092 8039/0750/0000 HILLSIDE CR VEH: 1 AUTOMOBILE TRAVELING EAST IN LEFT LANE TURNING LEFT ON RED VEH EVENTS: STRUCK BY UNIT 02 DVR ACTIONS: RUNNING RED LIGHT TURNING FROM WRONG LANE IMPROPER/CARELESS TURN VEH: 2 SMALL TRUCK TRAVELING WEST IN RIGHT OF TRAFFICWAY GOING STRAIGHT VEH EVENTS: HIT UNIT 01 DVR ACTIONS: NO CONTRIBUTING ACTION											
9	2012028970	23 03/18/2012	SUN 00:03	STREET LT	DRY	CLEAR	0	0	0	3	PROP DMG ONLY
ENV RDWY FACTORS: NONE 4WAY 0030/0070/1122 0030/0071/1092 8039/0750/0000 HILLSIDE CR VEH: 1 SUV TRAVELING EAST IN RIGHT LANE GOING STRAIGHT VEH EVENTS: HIT UNIT 02 DVR ACTIONS: DRIVER WAS DISTRACTED VEH: 2 AUTOMOBILE TRAVELING EAST IN RIGHT LANE STOPPED IN TRAFFIC LANE VEH EVENTS: STRUCK BY UNIT 01 HIT UNIT 03 DVR ACTIONS: NO CONTRIBUTING ACTION VEH: 3 AUTOMOBILE TRAVELING EAST IN RIGHT LANE STOPPED IN TRAFFIC LANE VEH EVENTS: STRUCK BY UNIT 02 DVR ACTIONS: NO CONTRIBUTING ACTION											

SR 30 AT SR 476 NB ON RAMP

IN DELAWARE CO LOG 17381-05



Sorted by County, Route, Segment, Offset

USER ID/QUERY ID:

jporemba/ 0020160526037

Date Range: 1/1/2011 to 12/31/2015

Area of (In County 23 On State Route 0030(P) Between Segment 0070 Offset 986 and Segment 0070 Offset 1372) or

Interest: (In County 23 On State Route 0030(S) Between Segment 0071 Offset 986 and Segment 0071 Offset 1372) or

(In County 23 On State Route 8039(P) Between Segment 0750 Offset 0 and Segment 0750 Offset 226)

CRN	CO DATE	DAY TIME	LIGHTING	ROAD SURF	WEATHER	FAT	INJ	PED	VEH	MAX SEVERITY	
10	2012123971	23 12/08/2012	SAT 18:10	STREET LT	WET	RAIN/FOG	0	2	0	4	UNK SEVERITY
ENV RDWY FACTORS: NONE											
4WAY 0030/0070/1122 0030/0071/1129 8039 RAMP RD HILLSIDE CR											
VEH: 1 AUTOMOBILE TRAVELING EAST IN RIGHT LANE CHANGING LANES OR MERGING											
VEH EVENTS: HIT UNIT 02											
DVR ACTIONS: CARELESS PASS OR LANE CHANGE											
VEH: 2 SUV TRAVELING EAST IN LEFT LANE GOING STRAIGHT											
VEH EVENTS: STRUCK BY UNIT 01 HIT UNIT 03											
DVR ACTIONS: NO CONTRIBUTING ACTION											
VEH: 3 AUTOMOBILE TRAVELING EAST IN LEFT TURN LANE STOPPED IN TRAFFIC LANE											
VEH EVENTS: STRUCK BY UNIT 02 HIT UNIT 04											
DVR ACTIONS: NO CONTRIBUTING ACTION											
VEH: 4 AUTOMOBILE TRAVELING EAST IN LEFT TURN LANE STOPPED IN TRAFFIC LANE											
VEH EVENTS: STRUCK BY UNIT 03											
DVR ACTIONS: NO CONTRIBUTING ACTION											
11	2013030295	23 03/12/2013	TUE 16:44	DAYLIGHT	WET	CLEAR	0	0	0	2	PROP DMG ONLY
ENV RDWY FACTORS: NONE											
4WAY 0030/0070/1122 0030/0071/1092 8039/0750/0000 HILLSIDE CR											
VEH: 1 AUTOMOBILE TRAVELING WEST IN LEFT LANE MAKING A U-TURN											
VEH EVENTS: HIT UNIT 02											
DVR ACTIONS: MAKING ILLEGAL U-TURN RUNNING RED LIGHT DRIVER WAS DISTRACTED											
VEH: 2 AUTOMOBILE TRAVELING EAST IN LEFT LANE GOING STRAIGHT											
VEH EVENTS: STRUCK BY UNIT 01											
DVR ACTIONS: NO CONTRIBUTING ACTION											
12	2013053756	23 05/24/2013	FRI 14:37	DAYLIGHT	DRY	CLEAR	0	0	0	3	PROP DMG ONLY
ENV RDWY FACTORS: NONE											
4WAY 0030/0070/1122 0030/0071/1092 8039/0750/0000 HILLSIDE CR											
VEH: 1 AUTOMOBILE TRAVELING EAST IN RIGHT LANE GOING STRAIGHT											
VEH EVENTS: HIT UNIT 02											
DVR ACTIONS: TAILGATING											
VEH: 2 AUTOMOBILE TRAVELING EAST IN RIGHT LANE GOING STRAIGHT											
VEH EVENTS: STRUCK BY UNIT 01 HIT UNIT 03											
DVR ACTIONS: NO CONTRIBUTING ACTION											
VEH: 3 AUTOMOBILE TRAVELING EAST IN RIGHT LANE SLOWING OR STOPPING IN LANE											
VEH EVENTS: STRUCK BY UNIT 02											
DVR ACTIONS: NO CONTRIBUTING ACTION											
13	2013094065	23 09/07/2013	SAT 21:05	STREET LT	DRY	CLEAR	0	2	0	2	UNK SEVERITY
ENV RDWY FACTORS: NONE											
4WAY 0030/0070/1122 0030/0071/1092 8039/0750/0000 HILLSIDE CR											
VEH: 1 AUTOMOBILE TRAVELING WEST IN LEFT LANE GOING STRAIGHT											
VEH EVENTS: HIT UNIT 02											
DVR ACTIONS: AFFECTED BY PHYSICAL COND RUNNING RED LIGHT											
VEH: 2 SUV TRAVELING EAST IN LEFT TURN LANE TURNING LEFT											
VEH EVENTS: STRUCK BY UNIT 01											
DVR ACTIONS: NO CONTRIBUTING ACTION											

SR 30 AT SR 476 NB ON RAMP

IN DELAWARE CO LOG 17381-05



Sorted by County, Route, Segment, Offset

USER ID/QUERY ID:

jporemba/ 0020160526037

Date Range: 1/1/2011 to 12/31/2015

Area of (In County 23 On State Route 0030(P) Between Segment 0070 Offset 986 and Segment 0070 Offset 1372) or
 Interest: (In County 23 On State Route 0030(S) Between Segment 0071 Offset 986 and Segment 0071 Offset 1372) or
 (In County 23 On State Route 8039(P) Between Segment 0750 Offset 0 and Segment 0750 Offset 226)

CRN	CO DATE	DAY TIME	LIGHTING	ROAD SURF	WEATHER	FAT	INJ	PED	VEH	MAX SEVERITY
14	2013103712	23 10/03/2013	THR 12:21	DAYLIGHT	DRY	CLEAR	0	1	0 2	MINOR INJURY
ENV RDWY FACTORS: NONE 4WAY 0030/0070/1122 0030/0071/1092 8039/0750/0000 HILLSIDE CR VEH: 1 AUTOMOBILE TRAVELING EAST IN LEFT LANE CHANGING LANES OR MERGING VEH EVENTS: STRUCK BY UNIT 02 DVR ACTIONS: CARELESS PASS OR LANE CHANGE VEH: 2 AUTOMOBILE TRAVELING EAST IN RIGHT LANE GOING STRAIGHT VEH EVENTS: HIT UNIT 01 DVR ACTIONS: NO CONTRIBUTING ACTION										
15	2013116026	23 11/15/2013	FRI 19:16	STREET LT	DRY	CLEAR	0	0	0 3	PROP DMG ONLY
ENV RDWY FACTORS: NONE MULT 0030/0070/1122 0030/0071/1092 8039/0750/0000 HILLSIDE CR VEH: 1 SUV TRAVELING WEST IN RIGHT LANE GOING STRAIGHT VEH EVENTS: HIT UNIT 02 DVR ACTIONS: RUNNING RED LIGHT SPEEDING DRIVER WAS DISTRACTED VEH: 2 AUTOMOBILE TRAVELING EAST IN LEFT LANE TURNING LEFT VEH EVENTS: STRUCK BY UNIT 01 HIT UNIT 03 DVR ACTIONS: NO CONTRIBUTING ACTION VEH: 3 AUTOMOBILE TRAVELING EAST IN LEFT LANE TURNING LEFT VEH EVENTS: STRUCK BY UNIT 01 STRUCK BY UNIT 02 DVR ACTIONS: NO CONTRIBUTING ACTION										
16	2015010901	23 01/25/2015	SUN 19:28	STREET LT	DRY	CLEAR	0	2	0 2	UNK SEVERITY
ENV RDWY FACTORS: NONE 4WAY 0030/0070/1122 0030/0071/1092 8039/0750/0000 HILLSIDE CR VEH: 1 AUTOMOBILE TRAVELING EAST IN LEFT TURN LANE TURNING LEFT VEH EVENTS: STRUCK BY UNIT 02 DVR ACTIONS: AFFECTED BY PHYSICAL COND VEH: 2 AUTOMOBILE TRAVELING WEST IN RIGHT LANE GOING STRAIGHT VEH EVENTS: HIT UNIT 01 DVR ACTIONS: NO CONTRIBUTING ACTION										
17	2015104123	23 10/10/2015	SAT 08:55	DAYLIGHT	DRY	CLEAR	0	0	0 2	PROP DMG ONLY
ENV RDWY FACTORS: NONE 4WAY 0030/0070/1122 0030/0071/1092 8039/0750/0000 HILLSIDE CR VEH: 1 SUV TRAVELING WEST IN RIGHT LANE GOING STRAIGHT VEH EVENTS: HIT UNIT 02 DVR ACTIONS: RUNNING RED LIGHT VEH: 2 AUTOMOBILE TRAVELING EAST IN LEFT LANE TURNING LEFT VEH EVENTS: STRUCK BY UNIT 01 DVR ACTIONS: NO CONTRIBUTING ACTION										
18	2015002900	23 01/06/2015	TUE 09:00	DAYLIGHT	SNOW	SNOW	0	0	0 1	PROP DMG ONLY
ENV RDWY FACTORS: SLIPPERY ROAD (ICE/SNOW) OTHER ENVIRONMENTAL FACTOR ONRM 0030/0071/1092 8039/0750/0000 VEH: 1 AUTOMOBILE TRAVELING WEST IN ONE LANE ROAD NEGOTIATING CURVE - RIGHT VEH EVENTS: HIT CURB DVR ACTIONS: IMPROPER/CARELESS TURN										

SR 30 AT SR 476 NB ON RAMP

IN DELAWARE CO LOG 17381-05



Sorted by County, Route, Segment, Offset

USER ID/QUERY ID:

Date Range: 1/1/2011 to 12/31/2015

jporemba/ 0020160526037

Area of (In County 23 On State Route 0030(P) Between Segment 0070 Offset 986 and Segment 0070 Offset 1372) or

Interest: (In County 23 On State Route 0030(S) Between Segment 0071 Offset 986 and Segment 0071 Offset 1372) or

(In County 23 On State Route 8039(P) Between Segment 0750 Offset 0 and Segment 0750 Offset 226)

CRN	CO DATE	DAY TIME	LIGHTING	ROAD SURF	WEATHER	FAT	INJ	PED	VEH	MAX SEVERITY	
19	2011093842	23 09/14/2011	WED 16:20	DAYLIGHT	DRY	CLEAR	0	1	0	2	UNK SEVERITY
ENV RDWY FACTORS: NONE										REAR-END	
Y-INT 8039/0750/0126 8039 TO 8039/0750 RD											

VEH: 1 LARGE TRUCK TRAVELING NORTH IN ONE LANE ROAD CHANGING LANES OR MERGING

VEH EVENTS: HIT UNIT 02

DVR ACTIONS: PROCEED W/O CLEARANCE

VEH: 2 AUTOMOBILE TRAVELING NORTH IN ONE LANE ROAD GOING STRAIGHT

VEH EVENTS: STRUCK BY UNIT 01

DVR ACTIONS: NO CONTRIBUTING ACTION

Sorted by County, Route, Segment, Offset

NOTES:

- 1 The data available in this application is dynamic and should be used with care. Please take note of the following data alerts:
- 2 2016 crash records are incomplete
Data for the current year, 2016, is not fully represented in CDART. Crashes will be added for this year as they are made available to the Department. Include this year in queries with caution.
- 3 Complete data years
Complete records of reportable crashes are available in CDART for the following years : 1997 - 2015

REPORT PARAMETERS:

Query ID: [0020160526037](#)

User ID: jporemba

Area of Interest: (In County 23 On State Route 0030(P) Between Segment 0070 Offset 986 and Segment 0070 Offset 1372) or (In County 23 On State Route 0030(S) Between Segment 0071 Offset 986 and Segment 0071 Offset 1372) or (In County 23 On State Route 8039(P) Between Segment 0750 Offset 0 and Segment 0750 Offset 226)

Date Range: 1/1/2011 to 12/31/2015

Criteria:

SR 30 AT SR 476 NB ON RAMP

IN DELAWARE CO LOG 17381-05



USER ID/QUERY ID:
jporambar_0020160526037

Date Range: 1/1/2011 to 12/31/2015
 Area of Interest: (In County 23 On State Route 0030(P) Between Segment 0070 Offset 986 and Segment 0070 Offset 1372) or (In County 23 On State Route 0030(S) Between Segment 0071 Offset 986 and Segment 0071 Offset 1372) or (In County 23 On State Route 8039(P) Between Segment 0750 Offset 0 and Segment 0750 Offset 226)

MONTH OF YEAR

	JAN	FEB	MAR	MAY	JUN	SEP	OCT	NOV	DEC
CRASHES	3	2	2	1	2	2	3	2	2
PCT	16%	11%	11%	5%	11%	11%	16%	11%	11%

DAY OF WEEK

	SUN	MON	TUE	WED	THR	FRI	SAT
CRASHES	2	1	3	1	2	5	5
PCT	11%	5%	16%	5%	11%	26%	26%

HOUR OF DAY

	00	08	09	11	12	14	16	18	19	21	22	23
CRASHES	1	1	2	1	2	1	2	1	4	1	2	1
PCT	5%	5%	11%	5%	11%	5%	11%	5%	21%	5%	11%	5%

YEAR

YEAR	CRASHES	PCT
2011	5	26%
2012	3	16%
2013	6	32%
2014	1	5%
2015	4	21%
TOTAL	19	100%

COLLISION TYPE

	CRASHES	PCT
ANGLE	9	47%
REAR END	5	26%
HEAD ON	3	16%
HIT FIX OBJ	1	5%
OPP DIR SS	1	5%
TOTAL	19	100%

CRASH SEVERITY LEVEL

	CRASHES	PCT
MINOR	1	5%
UNK SEVERITY	5	26%
PDO	13	68%
TOTAL	19	100%

SEVERITY COUNT

	PERSONS
FATALITIES	0
MAJOR	0
MODERATE	0
MINOR	1
UNK SEVERITY	8
UNK IF INJURED	0

DRIVER ACTIONS

	ACTIONS	PCT
NO CONTRIBUTING ACTION	23	44%
RUNNING RED LIGHT	9	17%
AFFECTED PHYSICAL COND	3	6%
CARELESS PASS/LN CHNG	3	6%
DRIVER WAS DISTRACTED	3	6%
IMPROPER/CARELESS TURN	3	6%
TAILGATING	2	4%
TURN FROM WRONG LANE	2	4%
MAKING ILLEGAL U-TURN	1	2%
PROCEED W/O CLEARANCE	1	2%
SPEEDING	1	2%
TOO FAST FOR CONDITION	1	2%
TOTAL	52	100%

VEHICLE TYPE

	VEHICLES	PCT
AUTOMOBILE	30	71%
SUV	7	17%
SMALL TRUCK	3	7%
LARGE TRUCK	1	2%
VAN	1	2%
TOTAL	42	100%

ROAD CONDITION

	CRASHES	PCT
DRY	15	79%
WET	3	16%
SNOW	1	5%
TOTAL	19	100%

ILLUMINATION

	CRASHES	PCT
STREET LIGHTS	10	53%
DAYLIGHT	9	47%
TOTAL	19	100%

WEATHER

	CRASHES	PCT
CLEAR	16	84%
RAIN	1	5%
RAIN/FOG	1	5%
SNOW	1	5%
TOTAL	19	100%

ENVIR/ROADWAY FACTORS

	FACTORS	PCT
NONE	18	90%
OTHER ENVIR FACTOR	1	5%
SLIPPERY ICE/SNOW	1	5%
TOTAL	20	100%

IMPORTANT: This traffic engineering and safety study is confidential pursuant to 75 Pa. C.S. §3754 and 23 U.S.C. §409 and may not be disclosed or used in litigation without written permission from PennDOT.

CDART - CRASH SUMMARY REPORT (09-06)

NOTES:

- 1 The data available in this application is dynamic and should be used with care. Please take note of the following data alerts:
- 2 2016 crash records are incomplete. Data for the current year, 2016, is not fully represented in CDART. Crashes will be added for this year as they are made available to the Department. Include this year in queries with caution.
- 3 Complete data years
Complete records of reportable crashes are available in CDART for the following years : 1997 - 2015

REPORT PARAMETERS:

Query ID: [0020160526037](#)
User ID: jporemba
Area of Interest: (In County 23 On State Route 0030(P) Between Segment 0070 Offset 986 and Segment 0070 Offset 1372) or (In County 23 On State Route 0030(S) Between Segment 0071 Offset 986 and Segment 0071 Offset 1372) or (In County 23 On State Route 8039(P) Between Segment 0750 Offset 0 and Segment 0750 Offset 226)
Date Range: 1/1/2011 to 12/31/2015
Criteria:

KING OF PRUSSIA RD IN RADNOR TWP IN DELAWARE CO LOG 17381-06



Sorted by County, Route, Segment, Offset

USER ID/QUERY ID:

jporemba/ 0020160526038

Date Range: 1/1/2011 to 12/31/2015

Area of Interest: Imported Crash Numbers

CRN	CO DATE	DAY TIME	LIGHTING	ROAD SURF	WEATHER	FAT	INJ	PED	VEH	MAX SEVERITY	
1	2011015432	23 01/26/2011	WED 06:09	STREET LT	SNOW	SNOW	0	0	0	3	PROP DMG ONLY
ENV RDWY FACTORS: SLIPPERY ROAD (ICE/SNOW) OTHER WEATHER CONDITIONS HIT FIXED OBJ 4WAY 0030/0070/0440 0030/0071/0439 8039/0010/1320 KING OF PRUSSIA RD											
VEH: 1 SMALL TRUCK TRAVELING NORTH IN LEFT TURN LANE TURNING LEFT VEH EVENTS: HIT UNIT 02 STRUCK BY UNIT 03 DVR ACTIONS: NO CONTRIBUTING ACTION											
VEH: 2 AUTOMOBILE TRAVELING NORTH IN LEFT TURN LANE TURNING LEFT VEH EVENTS: HIT CURB STRUCK BY UNIT 01 DVR ACTIONS: NO CONTRIBUTING ACTION											
VEH: 3 AUTOMOBILE TRAVELING NORTH IN LEFT TURN LANE TURNING LEFT VEH EVENTS: HIT UNIT 01 DVR ACTIONS: NO CONTRIBUTING ACTION											
2	2011128066	23 12/06/2011	TUE 11:32	DAYLIGHT	WET	RAIN	0	1	0	2	UNK SEVERITY
ENV RDWY FACTORS: NONE REAR-END 4WAY 0030/0070/0440 0030/0071/0439 8039/0010/1320 KING OF PRUSSIA RD											
VEH: 1 AUTOMOBILE TRAVELING EAST IN RIGHT LANE GOING STRAIGHT VEH EVENTS: HIT UNIT 02 DVR ACTIONS: DRIVER WAS DISTRACTED											
VEH: 2 AUTOMOBILE TRAVELING EAST IN RIGHT LANE STOPPED IN TRAFFIC LANE VEH EVENTS: STRUCK BY UNIT 01 DVR ACTIONS: NO CONTRIBUTING ACTION											
3	2012055204	23 06/01/2012	FRI 16:53	DAYLIGHT	DRY	CLEAR	0	2	0	3	UNK SEVERITY
ENV RDWY FACTORS: NONE REAR-END 4WAY 0030/0070/0440 0030/0071/0439 8039/0010/1320 KING OF PRUSSIA RD											
VEH: 1 VAN TRAVELING NORTH IN LEFT TURN LANE GOING STRAIGHT VEH EVENTS: HIT UNIT 02 DVR ACTIONS: SPEEDING TOO FAST FOR CONDITIONS											
VEH: 2 AUTOMOBILE TRAVELING NORTH IN RIGHT LANE GOING STRAIGHT VEH EVENTS: STRUCK BY UNIT 01 HIT UNIT 03 DVR ACTIONS: NO CONTRIBUTING ACTION											
VEH: 3 AUTOMOBILE TRAVELING NORTH IN RIGHT LANE GOING STRAIGHT VEH EVENTS: STRUCK BY UNIT 02 DVR ACTIONS: NO CONTRIBUTING ACTION											
4	2013009054	23 01/16/2013	WED 21:00	STREET LT	DRY	CLEAR	0	0	0	4	PROP DMG ONLY
ENV RDWY FACTORS: NONE REAR-END 4WAY 0030/0070/0440 0030/0071/0439 8039/0010/1320 KING OF PRUSSIA RD											
VEH: 1 AUTOMOBILE TRAVELING EAST IN LEFT LANE GOING STRAIGHT VEH EVENTS: HIT UNIT 02 DVR ACTIONS: DRIVER WAS DISTRACTED TAILGATING											
VEH: 2 AUTOMOBILE TRAVELING EAST IN LEFT LANE STOPPED IN TRAFFIC LANE VEH EVENTS: STRUCK BY UNIT 01 HIT UNIT 03 DVR ACTIONS: NO CONTRIBUTING ACTION											
VEH: 3 AUTOMOBILE TRAVELING EAST IN LEFT LANE STOPPED IN TRAFFIC LANE VEH EVENTS: STRUCK BY UNIT 02 HIT UNIT 04 DVR ACTIONS: NO CONTRIBUTING ACTION											
VEH: 4 AUTOMOBILE TRAVELING EAST IN LEFT LANE STOPPED IN TRAFFIC LANE VEH EVENTS: STRUCK BY UNIT 03 DVR ACTIONS: NO CONTRIBUTING ACTION											

KING OF PRUSSIA RD IN RADNOR TWP IN DELAWARE CO LOG 17381-06



Sorted by County, Route, Segment, Offset

USER ID/QUERY ID:

jporemba/ 0020160526038

Date Range: 1/1/2011 to 12/31/2015

Area of Interest: Imported Crash Numbers

CRN	CO DATE	DAY TIME	LIGHTING	ROAD SURF	WEATHER	FAT	INJ	PED	VEH	MAX SEVERITY	
5	2014029660	23 03/06/2014	THR 13:39	DAYLIGHT	DRY	CLEAR	0	0	0	3	PROP DMG ONLY
ENV RDWY FACTORS: NONE REAR-END 4WAY 0030/0070/0440 0030/0071/0439 8039/0010/1320 KING OF PRUSSIA RD VEH: 1 AUTOMOBILE TRAVELING EAST IN OTHER FWD MOVING LANE GOING STRAIGHT VEH EVENTS: HIT UNIT 02 DVR ACTIONS: TOO FAST FOR CONDITIONS VEH: 2 SUV TRAVELING EAST IN OTHER FWD MOVING LANE STOPPED IN TRAFFIC LANE VEH EVENTS: STRUCK BY UNIT 01 HIT UNIT 03 DVR ACTIONS: NO CONTRIBUTING ACTION VEH: 3 SUV TRAVELING EAST IN OTHER FWD MOVING LANE STOPPED IN TRAFFIC LANE VEH EVENTS: STRUCK BY UNIT 02 DVR ACTIONS: NO CONTRIBUTING ACTION											
6	2014097357	23 09/26/2014	FRI 05:48	DAWN	DRY	CLEAR	0	0	0	2	PROP DMG ONLY
ENV RDWY FACTORS: NONE REAR-END 4WAY 0030/0070/0440 0030/0071/0439 8039/0010/1320 KING OF PRUSSIA RD VEH: 1 AUTOMOBILE TRAVELING EAST IN LEFT LANE GOING STRAIGHT VEH EVENTS: HIT UNIT 02 DVR ACTIONS: OTHER IMPROPER DRIV ACTIONS VEH: 2 AUTOMOBILE TRAVELING EAST IN LEFT LANE STOPPED IN TRAFFIC LANE VEH EVENTS: STRUCK BY UNIT 01 DVR ACTIONS: NO CONTRIBUTING ACTION											
7	2014100281	23 10/12/2014	SUN 22:29	STREET LT	DRY	CLEAR	0	0	0	1	PROP DMG ONLY
ENV RDWY FACTORS: NONE HIT FIXED OBJ 4WAY 0030/0070/0440 0030/0071/0439 8039/0010/1320 KING OF PRUSSIA RD VEH: 1 AUTOMOBILE TRAVELING NORTH IN LEFT TURN LANE TURNING LEFT ALC TEST: 99 VEH EVENTS: HIT CURB DVR ACTIONS: IMPROPER/CARELESS TURN											
8	2015010866	23 01/24/2015	SAT 20:28	STREET LT	ICE PATCH	SNOW	0	0	0	2	PROP DMG ONLY
ENV RDWY FACTORS: OTHER WEATHER CONDITIONS ANGLE 4WAY 0030/0070/0440 0030/0071/0439 8039/0010/1320 KING OF PRUSSIA RD VEH: 1 SUV TRAVELING NORTH IN RIGHT LANE GOING STRAIGHT VEH EVENTS: HIT UNIT 02 DVR ACTIONS: SUDDEN SLOWING / STOPPING VEH: 2 AUTOMOBILE TRAVELING EAST IN RIGHT LANE GOING STRAIGHT VEH EVENTS: STRUCK BY UNIT 01 DVR ACTIONS: NO CONTRIBUTING ACTION											
9	2015052147	23 04/22/2015	WED 14:59	DAYLIGHT	DRY	CLEAR	0	0	0	2	PROP DMG ONLY
ENV RDWY FACTORS: NONE ANGLE 4WAY 0030/0070/0440 0030/0071/0439 8039/0010/1320 KING OF PRUSSIA RD VEH: 1 SUV TRAVELING WEST IN RIGHT LANE GOING STRAIGHT VEH EVENTS: HIT UNIT 02 DVR ACTIONS: TOO FAST FOR CONDITIONS VEH: 2 SMALL TRUCK TRAVELING NORTH IN LEFT TURN LANE TURNING LEFT VEH EVENTS: STRUCK BY UNIT 01 DVR ACTIONS: NO CONTRIBUTING ACTION											

KING OF PRUSSIA RD IN RADNOR TWP IN DELAWARE CO LOG 17381-06



Sorted by County, Route, Segment, Offset

USER ID/QUERY ID:

jporemba/ 0020160526038

Date Range: 1/1/2011 to 12/31/2015

Area of Interest: Imported Crash Numbers

CRN	CO DATE	DAY TIME	LIGHTING	ROAD SURF	WEATHER	FAT	INJ	PED	VEH	MAX SEVERITY
10	2015058902	23 05/21/2015	THR 12:04	DAYLIGHT	WET	RAIN	0	0	0 2	PROP DMG ONLY
ENV RDWY FACTORS: NONE 4WAY 0030/0070/0440 0030/0071/0439 8039/0010/1320 KING OF PRUSSIA RD VEH: 1 AUTOMOBILE TRAVELING EAST IN RIGHT LANE GOING STRAIGHT VEH EVENTS: STRUCK BY UNIT 02 DVR ACTIONS: NO CONTRIBUTING ACTION VEH: 2 AUTOMOBILE TRAVELING NORTH IN RIGHT LANE GOING STRAIGHT VEH EVENTS: HIT UNIT 01 DVR ACTIONS: RUNNING RED LIGHT										
11	2011003801	23 01/04/2011	TUE 06:48	DAYLIGHT	DRY	CLEAR	0	0	0 2	PROP DMG ONLY
ENV RDWY FACTORS: NONE Y-INT 1021/0060/0000 KING OF PRUSSIA RD VEH: 1 AUTOMOBILE TRAVELING SOUTH IN RIGHT LANE GOING STRAIGHT VEH EVENTS: HIT UNIT 02 DVR ACTIONS: RUNNING RED LIGHT VEH: 2 AUTOMOBILE TRAVELING NORTH IN RIGHT LANE GOING STRAIGHT VEH EVENTS: STRUCK BY UNIT 01 DVR ACTIONS: NO CONTRIBUTING ACTION										
12	2011036602	23 03/29/2011	TUE 08:15	DAYLIGHT	DRY	CLEAR	0	0	0 2	PROP DMG ONLY
ENV RDWY FACTORS: NONE Y-INT 1021/0060/0000 KING OF PRUSSIA RD VEH: 1 AUTOMOBILE TRAVELING NORTH IN RIGHT LANE GOING STRAIGHT VEH EVENTS: HIT UNIT 02 DVR ACTIONS: OTHER IMPROPER DRIV ACTIONS VEH: 2 VAN TRAVELING NORTH IN RIGHT LANE STOPPED IN TRAFFIC LANE VEH EVENTS: STRUCK BY UNIT 01 DVR ACTIONS: NO CONTRIBUTING ACTION										
13	2011071073	23 07/14/2011	THR 14:54	DAYLIGHT	DRY	CLEAR	0	0	0 2	PROP DMG ONLY
ENV RDWY FACTORS: NONE Y-INT 1021/0060/0000 KING OF PRUSSIA RD VEH: 1 SUV TRAVELING SOUTH IN RIGHT LANE GOING STRAIGHT VEH EVENTS: STRUCK BY UNIT 02 DVR ACTIONS: RUNNING RED LIGHT VEH: 2 SUV TRAVELING WEST IN LEFT OF TRAFFICWAY GOING STRAIGHT VEH EVENTS: HIT UNIT 01 DVR ACTIONS: NO CONTRIBUTING ACTION										
14	2011131693	23 12/14/2011	WED 17:14	STREET LT	DRY	CLEAR	0	1	1 1	MODERATE INJURY
ENV RDWY FACTORS: NONE T-INT 1021/0060/0000 KING OF PRUSSIA RD VEH: 1 SUV TRAVELING SOUTH IN OTHER FWD MOVING LANE TURNING LEFT VEH EVENTS: HIT UNIT 02 DVR ACTIONS: IMPROPER/CARELESS TURN VEH: 2 VEH EVENTS: STRUCK BY UNIT 01										

KING OF PRUSSIA RD IN RADNOR TWP IN DELAWARE CO LOG 17381-06



Sorted by County, Route, Segment, Offset

USER ID/QUERY ID:

jporemba/ 0020160526038

Date Range: 1/1/2011 to 12/31/2015

Area of Interest: Imported Crash Numbers

CRN	CO DATE	DAY TIME	LIGHTING	ROAD SURF	WEATHER	FAT	INJ	PED	VEH	MAX SEVERITY
15	2014049230	23 05/14/2014	WED 14:24	DAYLIGHT	DRY	CLEAR	0	0	0 2	PROP DMG ONLY
ENV RDWY FACTORS: NONE ANGLE T-INT 1021/0060/0000 KING OF PRUSSIA RD ----- VEH: 1 AUTOMOBILE TRAVELING SOUTH IN RIGHT LANE GOING STRAIGHT VEH EVENTS: HIT UNIT 02 DVR ACTIONS: UNKNOWN ----- VEH: 2 AUTOMOBILE TRAVELING SOUTH IN LEFT TURN LANE TURNING LEFT VEH EVENTS: STRUCK BY UNIT 01 DVR ACTIONS: UNKNOWN										
16	2014081381	23 08/21/2014	THR 11:59	DAYLIGHT	DRY	CLEAR	0	0	0 2	PROP DMG ONLY
ENV RDWY FACTORS: NONE ANGLE T-INT 1021/0060/0000 KING OF PRUSSIA RD ----- VEH: 1 SUV TRAVELING SOUTH IN RIGHT LANE GOING STRAIGHT VEH EVENTS: HIT UNIT 02 DVR ACTIONS: RUNNING RED LIGHT ----- VEH: 2 SUV TRAVELING SOUTH IN RIGHT LANE GOING STRAIGHT VEH EVENTS: STRUCK BY UNIT 01 DVR ACTIONS: NO CONTRIBUTING ACTION										
17	2014107874	23 10/28/2014	TUE 13:09	DAYLIGHT	DRY	CLEAR	0	2	0 2	UNK SEVERITY
ENV RDWY FACTORS: NONE ANGLE 4WAY 1021/0060/0000 KING OF PRUSSIA RD ----- VEH: 1 SUV TRAVELING EAST IN RIGHT LANE TURNING LEFT VEH EVENTS: HIT UNIT 02 DVR ACTIONS: IMPROPER/CARELESS TURN ----- VEH: 2 AUTOMOBILE TRAVELING WEST IN RIGHT LANE GOING STRAIGHT VEH EVENTS: STRUCK BY UNIT 01 DVR ACTIONS: NO CONTRIBUTING ACTION										
18	2015053380	23 05/01/2015	FRI 01:06	STREET LT	DRY	CLEAR	0	0	0 1	PROP DMG ONLY
ENV RDWY FACTORS: NONE HIT FIXED OBJ OTHR 1021/0060/0000 KING OF PRUSSIA RD ----- VEH: 1 LARGE TRUCK TRAVELING WEST IN RIGHT LANE GOING STRAIGHT VEH EVENTS: HIT OTHER FIXED OBJECT DVR ACTIONS: FAILURE TO RESPOND TO TCD OTHER IMPROPER DRIV ACTIONS										
19	2011029232	23 03/08/2011	TUE 11:11	DAYLIGHT	DRY	CLEAR	0	0	0 2	PROP DMG ONLY
ENV RDWY FACTORS: NONE SAME DIR SIDESW MIDB KING OF PRUSSIA RD ----- VEH: 1 AUTOMOBILE TRAVELING SOUTH IN RIGHT LANE PASSING/OVERTAKING VEH VEH EVENTS: HIT UNIT 02 DVR ACTIONS: CARELESS PASS OR LANE CHANGE OVER/UNDER COMPENSATE CURVE DRIVER INEXPERIENCED										
20	2011072359	23 07/14/2011	THR 16:30	DAYLIGHT	DRY	CLEAR	0	1	0 2	UNK SEVERITY
ENV RDWY FACTORS: NONE SAME DIR SIDESW MIDB KING OF PRUSSIA RD ----- VEH: 1 AUTOMOBILE TRAVELING SOUTH IN RIGHT LANE SLOWING OR STOPPING IN LANE VEH EVENTS: HIT UNIT 02 DVR ACTIONS: SUDDEN SLOWING / STOPPING TURNING FROM WRONG LANE ----- VEH: 2 MOTORCYCLE TRAVELING SOUTH IN RIGHT TURN LANE PASSING/OVERTAKING VEH VEH EVENTS: STRUCK BY UNIT 01 DVR ACTIONS: CARELESS PASS OR LANE CHANGE PASSING IN NO PASSING ZONE										

KING OF PRUSSIA RD IN RADNOR TWP IN DELAWARE CO LOG 17381-06



Sorted by County, Route, Segment, Offset

USER ID/QUERY ID:

Date Range: 1/1/2011 to 12/31/2015

jporemba/ 0020160526038

Area of Interest: Imported Crash Numbers

CRN	CO DATE	DAY TIME	LIGHTING	ROAD SURF	WEATHER	FAT	INJ	PED	VEH	MAX SEVERITY
21	2011129477	23 12/13/2011	TUE 15:15	DAYLIGHT	DRY	CLEAR	0	1	1 1	MODERATE INJURY
ENV RDWY FACTORS: NONE MIDB KING OF PRUSSIA RD VEH: 1 VEH EVENTS: HIT UNIT 02										
VEH: 2 SUV TRAVELING NORTH IN RIGHT LANE AVOIDING VEH EVENTS: STRUCK BY UNIT 01 DVR ACTIONS: NO CONTRIBUTING ACTION										
22	2012011367	23 01/24/2012	TUE 08:01	DAYLIGHT	DRY	CLEAR	0	1	0 1	MODERATE INJURY
ENV RDWY FACTORS: NONE MIDB KING OF PRUSSIA RD VEH: 1 SUV TRAVELING NORTH IN RIGHT OF TRAFFICWAY GOING STRAIGHT VEH EVENTS: HIT CONCRETE / LONGIT BARRIER OVERTURN/ROLL OVER DVR ACTIONS: OTHER IMPROPER DRIV ACTIONS										
23	2012014289	23 02/02/2012	THR 14:45	DAYLIGHT	DRY	CLEAR	0	1	0 2	UNK SEVERITY
ENV RDWY FACTORS: NONE MIDB KING OF PRUSSIA RD VEH: 1 SUV TRAVELING WEST IN RIGHT LANE TURNING LEFT VEH EVENTS: STRUCK BY UNIT 02 OVERTURN/ROLL OVER DVR ACTIONS: IMPROPER ENTRANCE TO HIGHWAY										
VEH: 2 AUTOMOBILE TRAVELING NORTH IN RIGHT LANE GOING STRAIGHT VEH EVENTS: HIT UNIT 01 DVR ACTIONS: NO CONTRIBUTING ACTION										
24	2012032834	23 03/29/2012	THR 19:11	DUSK	DRY	CLEAR	0	0	0 2	PROP DMG ONLY
ENV RDWY FACTORS: NONE MIDB KING OF PRUSSIA RD VEH: 1 AUTOMOBILE TRAVELING WEST IN RIGHT LANE AVOIDING VEH EVENTS: HIT UNIT 02 DVR ACTIONS: DRIVING WRONG SIDE OF ROAD SPEEDING										
VEH: 2 AUTOMOBILE TRAVELING EAST IN RIGHT LANE GOING STRAIGHT VEH EVENTS: STRUCK BY UNIT 01 DVR ACTIONS: NO CONTRIBUTING ACTION										
25	2012054410	23 05/31/2012	THR 15:03	DAYLIGHT	DRY	CLEAR	0	0	0 2	PROP DMG ONLY
ENV RDWY FACTORS: NONE MIDB KING OF PRUSSIA RD VEH: 1 AUTOMOBILE TRAVELING EAST IN RIGHT LANE TURNING LEFT VEH EVENTS: STRUCK BY UNIT 02 DVR ACTIONS: PROCEED W/O CLEARANCE										
VEH: 2 SUV TRAVELING NORTH IN RIGHT LANE GOING STRAIGHT VEH EVENTS: HIT UNIT 01 DVR ACTIONS: NO CONTRIBUTING ACTION										
26	2012060181	23 06/13/2012	WED 02:30	STREET LT	WET	RAIN	0	0	0 1	PROP DMG ONLY
ENV RDWY FACTORS: DEER IN ROADWAY MIDB KING OF PRUSSIA RD VEH: 1 AUTOMOBILE TRAVELING SOUTH IN RIGHT LANE NEGOTIATING CURVE - LEFT VEH EVENTS: HIT OTHER FIXED OBJECT HIT TREE OR SHRUBBERY DVR ACTIONS: TOO FAST FOR CONDITIONS										

KING OF PRUSSIA RD IN RADNOR TWP IN DELAWARE CO LOG 17381-06



Sorted by County, Route, Segment, Offset

USER ID/QUERY ID:

jporemba/ 0020160526038

Date Range: 1/1/2011 to 12/31/2015

Area of Interest: Imported Crash Numbers

CRN	CO DATE	DAY TIME	LIGHTING	ROAD SURF	WEATHER	FAT	INJ	PED	VEH	MAX SEVERITY
27	2012132089	23 12/29/2012	SAT 11:15	DAYLIGHT	SNOW	SNOW	0	0	0 1	PROP DMG ONLY
ENV RDWY FACTORS: SLIPPERY ROAD (ICE/SNOW) HIT FIXED OBJ MIDB KING OF PRUSSIA RD VEH: 1 SMALL TRUCK TRAVELING SOUTH IN ONCOMING TRAFFIC LANE NEGOTIATING CURVE - LEFT VEH EVENTS: HIT EMBANKMENT DVR ACTIONS: TOO FAST FOR CONDITIONS										
28	2013030700	23 03/13/2013	WED 22:05	STREET LT	DRY	CLEAR	0	1	1 1	MODERATE INJURY
ENV RDWY FACTORS: NONE PEDESTRIAN MIDB KING OF PRUSSIA RD VEH: 1 SUV TRAVELING SOUTH IN OTHER FWD MOVING LANE TURNING LEFT VEH EVENTS: HIT UNIT 02 DVR ACTIONS: IMPROPER/CARELESS TURN VEH: 2 VEH EVENTS: STRUCK BY UNIT 01										
29	2014073177	23 07/22/2014	TUE 09:30	DAYLIGHT	DRY	CLEAR	0	0	0 1	PROP DMG ONLY
ENV RDWY FACTORS: NONE HIT FIXED OBJ MIDB KING OF PRUSSIA RD VEH: 1 LARGE TRUCK TRAVELING NORTH IN RIGHT LANE GOING STRAIGHT VEH EVENTS: HIT BRIDGE RAIL DVR ACTIONS: DRIVER WAS DISTRACTED										
30	2014097519	23 09/20/2014	SAT 16:45	DAYLIGHT	DRY	CLEAR	0	0	0 2	PROP DMG ONLY
ENV RDWY FACTORS: NONE ANGLE MIDB KING OF PRUSSIA RD VEH: 1 AUTOMOBILE TRAVELING NORTH IN OTHER MAKING A U-TURN VEH EVENTS: HIT UNIT 02 DVR ACTIONS: MAKING ILLEGAL U-TURN VEH: 2 AUTOMOBILE TRAVELING NORTH IN RIGHT LANE NEGOTIATING CURVE - LEFT VEH EVENTS: STRUCK BY UNIT 01 DVR ACTIONS: NO CONTRIBUTING ACTION										
31	2014109294	23 11/02/2014	SUN 16:25	DAYLIGHT	DRY	CLEAR	0	1	1 1	UNK SEVERITY
ENV RDWY FACTORS: NONE PEDESTRIAN MIDB KING OF PRUSSIA RD VEH: 1 AUTOMOBILE TRAVELING NORTH IN RIGHT LANE GOING STRAIGHT VEH EVENTS: HIT UNIT 02 DVR ACTIONS: DRIVER WAS DISTRACTED VEH: 2 VEH EVENTS: STRUCK BY UNIT 01										
32	2014119647	23 11/20/2014	THR 06:02	DAWN	DRY	CLEAR	0	0	0 1	PROP DMG ONLY
ENV RDWY FACTORS: NONE HIT FIXED OBJ MIDB KING OF PRUSSIA RD VEH: 1 LARGE TRUCK TRAVELING WEST IN RIGHT LANE GOING STRAIGHT VEH EVENTS: HIT OTHER FIXED OBJECT DVR ACTIONS: FAILURE TO RESPOND TO TCD										

KING OF PRUSSIA RD IN RADNOR TWP IN DELAWARE CO LOG 17381-06



Sorted by County, Route, Segment, Offset

USER ID/QUERY ID:

Date Range: 1/1/2011 to 12/31/2015

jporemba/ 0020160526038

Area of Interest: Imported Crash Numbers

CRN	CO DATE	DAY TIME	LIGHTING	ROAD SURF	WEATHER	FAT	INJ	PED	VEH	MAX SEVERITY
33	2015019503	23 02/14/2015	SAT 22:48	DARK	SNOW	SNOW	0	0	0 1	PROP DMG ONLY
ENV RDWY FACTORS: WINDY CONDITIONS SLIPPERY ROAD (ICE/SNOW) HIT FIXED OBJ MIDB KING OF PRUSSIA RD VEH: 1 AUTOMOBILE TRAVELING SOUTH IN RIGHT LANE NEGOTIATING CURVE - RIGHT VEH EVENTS: HIT FENCE OR WALL DVR ACTIONS: OVER/UNDER COMPENSATE CURVE TOO FAST FOR CONDITIONS										
34	2015060932	23 06/09/2015	TUE 12:05	DAYLIGHT	DRY	CLEAR	0	1	0 3	UNK SEVERITY
ENV RDWY FACTORS: NONE ANGLE MIDB KING OF PRUSSIA RD VEH: 1 SUV TRAVELING NORTH IN RIGHT LANE NEGOTIATING CURVE - RIGHT VEH EVENTS: HIT UNIT 02 DVR ACTIONS: OTHER IMPROPER DRIV ACTIONS VEH: 2 AUTOMOBILE TRAVELING NORTH IN LEFT LANE STOPPED IN TRAFFIC LANE VEH EVENTS: STRUCK BY UNIT 01 HIT UNIT 03 DVR ACTIONS: NO CONTRIBUTING ACTION VEH: 3 AUTOMOBILE TRAVELING NORTH IN LEFT TURN LANE TURNING LEFT VEH EVENTS: STRUCK BY UNIT 02 DVR ACTIONS: NO CONTRIBUTING ACTION										
35	2015113575	23 11/03/2015	TUE 08:43	DAYLIGHT	DRY	CLEAR	0	1	1 1	UNK SEVERITY
ENV RDWY FACTORS: NONE PEDESTRIAN MIDB KING OF PRUSSIA RD VEH: 1 AUTOMOBILE TRAVELING SOUTH IN RIGHT LANE TURNING LEFT VEH EVENTS: HIT UNIT 02 DVR ACTIONS: DRIVER WAS DISTRACTED VEH: 2 VEH EVENTS: STRUCK BY UNIT 01										

KING OF PRUSSIA RD IN RADNOR TWP IN DELAWARE CO LOG 17381-06

Sorted by County, Route, Segment, Offset

NOTES:

- 1 The data available in this application is dynamic and should be used with care. Please take note of the following data alerts:
- 2 2016 crash records are incomplete
Data for the current year, 2016, is not fully represented in CDART. Crashes will be added for this year as they are made available to the Department. Include this year in queries with caution.
- 3 Complete data years
Complete records of reportable crashes are available in CDART for the following years : 1997 - 2015

REPORT PARAMETERS:

Query ID: [0020160526038](#)

User ID: jporemba

Area of Interest: Imported Crash Numbers

Date Range: 1/1/2011 to 12/31/2015

Criteria:

KING OF PRUSSIA RD IN RADNOR TWP IN DELAWARE CO LOG 17381-06



USER ID/QUERY ID:
jporombal_0020160526038

Date Range: 1/1/2011 to 12/31/2015
Area of Interest: Imported Crash Numbers

MONTH OF YEAR

	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	OCT	NOV	DEC
CRASHES	5	2	5	1	4	3	3	1	2	2	3	4
PCT	14%	6%	14%	3%	11%	9%	9%	3%	6%	6%	9%	11%
	35	100%										

DAY OF WEEK

	SUN	TUE	WED	THR	FRI	SAT
CRASHES	2	10	7	9	3	4
PCT	6%	29%	20%	26%	9%	11%
	35	100%				

HOUR OF DAY

	01	02	03	04	05	06	07	08	09	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
CRASHES	1	1	1	3	3	3	1	3	1	4	2	2	2	4	2	4	1	1	1	1	1	1	3	35
PCT	3%	3%	3%	9%	9%	9%	3%	9%	3%	11%	6%	6%	6%	11%	6%	11%	3%	3%	3%	3%	3%	3%	9%	100%

YEAR

YEAR	CRASHES	PCT
2011	9	26%
2012	7	20%
2013	2	6%
2014	10	29%
2015	7	20%
TOTAL	35	100%

COLLISION TYPE

	CRASHES	PCT
ANGLE	12	34%
HIT FIX OBJ	9	26%
REAR END	6	17%
PEDESTRIAN	5	14%
SAME DIR SS	2	6%
HEAD ON	1	3%
TOTAL	35	100%

CRASH SEVERITY LEVEL

	CRASHES	PCT
MODERATE	4	11%
UNK SEVERITY	8	23%
PDO	23	66%
TOTAL	35	100%

SEVERITY COUNT

	PERSONS
FATALITIES	0
MAJOR	0
MODERATE	4
MINOR	0
UNK SEVERITY	10
UNK IF INJURED	0

DRIVER ACTIONS

	ACTIONS	PCT
NO CONTRIBUTING ACTION	27	38%
TOO FAST FOR CONDITION	6	8%
DRIVER WAS DISTRACTED	5	7%
OTHER IMPROPER DRIVING	5	7%
IMPROPER/CARELESS TURN	4	6%
RUNNING RED LIGHT	4	6%
CARELESS PASS/LN CHNG	2	3%
FAILURE TO RESPOND TCD	2	3%
OVER/UNDER COMP CURVE	2	3%
SPEEDING	2	3%
SUDDEN SLOWING/STOP	2	3%
UNKNOWN	2	3%
OTHERS	8	11%
TOTAL	71	100%

VEHICLE TYPE

	VEHICLES	PCT
AUTOMOBILE	37	60%
SUV	16	26%
SMALL TRUCK	3	5%
LARGE TRUCK	3	5%
VAN	2	3%
MOTORCYCLE	1	2%
TOTAL	62	100%

ROAD CONDITION

	CRASHES	PCT
DRY	28	80%
SNOW	3	9%
WET	3	9%
ICE PATCH	1	3%
TOTAL	35	100%

ILLUMINATION

	CRASHES	PCT
DAYLIGHT	23	66%
STREET LIGHTS	8	23%
DAWN	2	6%
DARK	1	3%
DUSK	1	3%
TOTAL	35	100%

WEATHER

	CRASHES	PCT
CLEAR	28	80%
SNOW	4	11%
RAIN	3	9%
TOTAL	35	100%

ENVIR/ROADWAY FACTORS

	FACTORS	PCT
NONE	30	81%
SLIPPERY ICE/SNOW	3	8%
OTHER WEATHER COND	2	5%
DEER IN ROADWAY	1	3%
WINDY CONDITIONS	1	3%
TOTAL	37	100%

CDART - CRASH SUMMARY REPORT (09-06)

NOTES:

- 1 The data available in this application is dynamic and should be used with care. Please take note of the following data alerts:
- 2 2016 crash records are incomplete
Data for the current year, 2016, is not fully represented in CDART. Crashes will be added for this year as they are made available to the Department. Include this year in queries with caution.
- 3 Complete data years
Complete records of reportable crashes are available in CDART for the following years : 1997 - 2015

REPORT PARAMETERS:

Query ID: [0020160526038](#)

User ID: jporemba

Area of Interest: Imported Crash Numbers

Date Range: 1/1/2011 to 12/31/2015

Criteria:

SR 1021 AT SR 30 IN RADNOR TWP IN DELAWARE CO LOG 17381-07



Sorted by County, Route, Segment, Offset

Date Range: 1/1/2011 to 12/31/2015

Area of Interest:

(In County 23 On State Route 0030(P) Between Segment 0050 Offset 2604 and Segment 0060 Offset 100) or (In County 23 On State Route 1021(P) Between Segment 0050 Offset 159 and Segment 0050 Offset 359)
 (In County 23 On State Route 0030(S) Between Segment 0051 Offset 100) or (In County 23 On State Route 1021(P) Between Segment 0050 Offset 159 and Segment 0050 Offset 359)

USER ID/QUERY ID:
 jporemba / 0020160526039

DIST	CO	COUNTY	ROUTE	BEG SEG	END SEG	BEG OFF	END OFF	LENGTH	TOTAL CRASHES	SELECT CRASHES	SELECT ATAL COUNT	SELECT RATIO	SELECT INJ COUNT	SELECT CONCENTRATION (PER 1000 FT)	AVG ADT	SELECT RASH RATE
06	23	DELAWARE	0030	0050	0060	2681	0060	98	28	28	0	100.0%	12	285.7	9960	82.99
06	23	DELAWARE	0030	0061	0061	0	100	100	25	25	0	100.0%	11	250.0	8918	81.10
06	23	DELAWARE	1021	0050	0050	259	259	0	24	24	0	100.0%	9	1.0	10258	

IMPORTANT: This traffic engineering and safety study is confidential pursuant to 75 Pa.

C.S. §3754 and 23 U.S.C. §409 and may not be disclosed or used in litigation without written permission from PennDOT.

Print Date: 5/26/2016

Page 1 of 2

SR 1021 AT SR 30 IN RADNOR TWP IN DELAWARE CO LOG 17381-07

NOTES:

- 1 The data available in this application is dynamic and should be used with care. Please take note of the following data alerts:
- 2 2016 crash records are incomplete. Data for the current year, 2016, is not fully represented in CDART. Crashes will be added for this year as they are made available to the Department. Include this year in queries with caution.
Complete data years
Complete records of reportable crashes are available in CDART for the following years : 1997 - 2015
- 3

QUERY PARAMETERS:

Note: This report includes data for state roads only

Query ID: [0020160526039](#)

User ID: jporemba

Min Crashes: 5 Crashes

Cluster:

Tolerance: 1000 ft

Max Gap: 0 ft

Min Ratio: 0 %

Area of Interest: (In County 23 On State Route 0030(P) Between Segment 0050 Offset 2604 and Segment 0060 Offset 100) or (In County 23 On State Route 0030(S) Between Segment 0051 Offset 2604 and Segment 0061 Offset 100) or (In County 23 On State Route 1021(P) Between Segment 0050 Offset 159 and Segment 0050 Offset 359)

Date: 1/1/2011 to 12/31/2015

Criteria:

STATE_ROAD

SR 1021 AT SR 30 IN RADNOR TWP IN DELAWARE CO LOG 17381-07



Sorted by County, Route, Segment, Offset

USER ID/QUERY ID:

jporemba/ 0020160526039

Date Range: 1/1/2011 to 12/31/2015

Area of (In County 23 On State Route 0030(P) Between Segment 0050 Offset 2604 and Segment 0060 Offset 100) or

Interest: (In County 23 On State Route 0030(S) Between Segment 0051 Offset 2604 and Segment 0061 Offset 100) or

(In County 23 On State Route 1021(P) Between Segment 0050 Offset 159 and Segment 0050 Offset 359)

CRN	CO DATE	DAY TIME	LIGHTING	ROAD SURF	WEATHER	FAT	INJ	PED	VEH	MAX SEVERITY	
1	2014100608	23 10/09/2014	THR 17:01	DAYLIGHT	DRY	CLEAR	0	0	0	2	PROP DMG ONLY
ENV RDWY FACTORS: NONE REAR-END MIDB 0030/0050/2681 ----- VEH: 1 AUTOMOBILE TRAVELING EAST IN LEFT LANE GOING STRAIGHT VEH EVENTS: HIT UNIT 02 DVR ACTIONS: TAILGATING OTHER IMPROPER DRIV ACTIONS ----- VEH: 2 SUV TRAVELING EAST IN LEFT LANE SLOWING OR STOPPING IN LANE VEH EVENTS: STRUCK BY UNIT 01 DVR ACTIONS: NO CONTRIBUTING ACTION											
2	2014062065	23 06/17/2014	TUE 17:38	DAYLIGHT	DRY	CLEAR	0	2	0	2	UNK SEVERITY
ENV RDWY FACTORS: NONE REAR-END MIDB 0030/0050/2682 ----- VEH: 1 SUV TRAVELING EAST IN LEFT LANE GOING STRAIGHT VEH EVENTS: HIT UNIT 02 DVR ACTIONS: OTHER IMPROPER DRIV ACTIONS ----- VEH: 2 AUTOMOBILE TRAVELING EAST IN LEFT LANE GOING STRAIGHT VEH EVENTS: STRUCK BY UNIT 01 DVR ACTIONS: NO CONTRIBUTING ACTION											
3	2014078169	23 08/11/2014	MON 21:41	STREET LT	DRY	CLEAR	0	0	0	2	PROP DMG ONLY
ENV RDWY FACTORS: NONE REAR-END MIDB 0030/0050/2695 ----- VEH: 1 AUTOMOBILE TRAVELING EAST IN LEFT LANE GOING STRAIGHT VEH EVENTS: HIT UNIT 02 DVR ACTIONS: DRIVER WAS DISTRACTED ----- VEH: 2 SMALL TRUCK TRAVELING EAST IN LEFT LANE STOPPED IN TRAFFIC LANE VEH EVENTS: STRUCK BY UNIT 01 DVR ACTIONS: NO CONTRIBUTING ACTION											
4	2011019718	23 02/10/2011	THR 12:32	DAYLIGHT	DRY	CLEAR	0	0	0	2	PROP DMG ONLY
ENV RDWY FACTORS: GLARE ANGLE 4WAY 0030/0060/0000 0030/0061/0000 1021/0050/0259 ----- VEH: 1 LARGE TRUCK TRAVELING EAST IN LEFT LANE GOING STRAIGHT VEH EVENTS: HIT UNIT 02 DVR ACTIONS: RUNNING RED LIGHT ----- VEH: 2 SMALL TRUCK TRAVELING NORTH IN LEFT TURN LANE TURNING LEFT VEH EVENTS: STRUCK BY UNIT 01 DVR ACTIONS: NO CONTRIBUTING ACTION											
5	2011036761	23 04/01/2011	FRI 18:50	DAYLIGHT	DRY	CLEAR	0	1	0	2	UNK SEVERITY
ENV RDWY FACTORS: NONE REAR-END 4WAY 0030/0060/0000 0030/0061/0000 1021/0050/0259 ----- VEH: 1 AUTOMOBILE TRAVELING WEST IN LEFT TURN LANE GOING STRAIGHT ALC TEST: 13 VEH EVENTS: HIT UNIT 02 HIT CURB HIT ROADWAY EQUIPMENT DVR ACTIONS: OTHER IMPROPER DRIV ACTIONS RUNNING RED LIGHT FAILURE TO RESPOND TO TCD ----- VEH: 2 AUTOMOBILE TRAVELING WEST IN LEFT TURN LANE STOPPED IN TRAFFIC LANE VEH EVENTS: STRUCK BY UNIT 01 DVR ACTIONS: NO CONTRIBUTING ACTION											

SR 1021 AT SR 30 IN RADNOR TWP IN DELAWARE CO LOG 17381-07



Sorted by County, Route, Segment, Offset

USER ID/QUERY ID:

jporemba/ 0020160526039

Date Range: 1/1/2011 to 12/31/2015

Area of (In County 23 On State Route 0030(P) Between Segment 0050 Offset 2604 and Segment 0060 Offset 100) or

Interest: (In County 23 On State Route 0030(S) Between Segment 0051 Offset 2604 and Segment 0061 Offset 100) or

(In County 23 On State Route 1021(P) Between Segment 0050 Offset 159 and Segment 0050 Offset 359)

CRN	CO DATE	DAY TIME	LIGHTING	ROAD SURF	WEATHER	FAT	INJ	PED	VEH	MAX SEVERITY
6	2011050003	23 05/14/2011	SAT 00:50	STREET LT	DRY	CLEAR	0	0	0 1	PROP DMG ONLY
ENV RDWY FACTORS: NONE 4WAY 0030/0060/0000 0030/0061/0000 1021/0050/0259 VEH: 1 AUTOMOBILE TRAVELING WEST IN LEFT TURN LANE TURNING LEFT VEH EVENTS: HIT CURB HIT OTHER FIXED OBJECT DVR ACTIONS: SPEEDING										
7	2011091662	23 09/09/2011	FRI 20:10	STREET LT	DRY	CLEAR	0	3	0 2	UNK SEVERITY
ENV RDWY FACTORS: NONE 4WAY 0030/0060/0000 0030/0061/0000 1021/0050/0259 VEH: 1 AUTOMOBILE TRAVELING EAST IN LEFT TURN LANE TURNING LEFT VEH EVENTS: STRUCK BY UNIT 02 DVR ACTIONS: IMPROPER/CARELESS TURN VEH: 2 AUTOMOBILE TRAVELING WEST IN LEFT LANE GOING STRAIGHT VEH EVENTS: HIT UNIT 01 DVR ACTIONS: NO CONTRIBUTING ACTION										
8	2012003024	23 01/02/2012	MON 12:14	DAYLIGHT	DRY	CLEAR	0	1	0 2	UNK SEVERITY
ENV RDWY FACTORS: NONE 4WAY 0030/0060/0000 0030/0061/0000 1021/0050/0259 VEH: 1 AUTOMOBILE TRAVELING WEST IN LEFT LANE SLOWING OR STOPPING IN LANE VEH EVENTS: HIT UNIT 02 DVR ACTIONS: TAILGATING VEH: 2 AUTOMOBILE TRAVELING WEST IN LEFT LANE STOPPED IN TRAFFIC LANE VEH EVENTS: STRUCK BY UNIT 01 DVR ACTIONS: NO CONTRIBUTING ACTION										
9	2012032841	23 03/29/2012	THR 18:25	DAYLIGHT	DRY	CLEAR	0	1	0 2	UNK SEVERITY
ENV RDWY FACTORS: NONE 4WAY 0030/0060/0000 0030/0061/0000 1021/0050/0259 VEH: 1 AUTOMOBILE TRAVELING SOUTH IN LEFT LANE TURNING LEFT VEH EVENTS: HIT UNIT 02 DVR ACTIONS: IMPROPER/CARELESS TURN DRIVER WAS DISTRACTED VEH: 2 SUV TRAVELING NORTH IN LEFT LANE GOING STRAIGHT VEH EVENTS: STRUCK BY UNIT 01 DVR ACTIONS: NO CONTRIBUTING ACTION										
10	2012067566	23 07/03/2012	TUE 07:01	DAYLIGHT	DRY	CLEAR	0	1	0 2	UNK SEVERITY
ENV RDWY FACTORS: NONE 4WAY 0030/0060/0000 0030/0061/0000 1021/0050/0259 VEH: 1 VAN TRAVELING SOUTH IN ONCOMING TRAFFIC LANE TURNING LEFT VEH EVENTS: STRUCK BY UNIT 02 DVR ACTIONS: IMPROPER/CARELESS TURN VEH: 2 AUTOMOBILE TRAVELING NORTH IN RIGHT LANE GOING STRAIGHT VEH EVENTS: HIT UNIT 01 DVR ACTIONS: NO CONTRIBUTING ACTION										

SR 1021 AT SR 30 IN RADNOR TWP IN DELAWARE CO LOG 17381-07



Sorted by County, Route, Segment, Offset

USER ID/QUERY ID:

jporemba/ 0020160526039

Date Range: 1/1/2011 to 12/31/2015

Area of (In County 23 On State Route 0030(P) Between Segment 0050 Offset 2604 and Segment 0060 Offset 100) or

Interest: (In County 23 On State Route 0030(S) Between Segment 0051 Offset 2604 and Segment 0061 Offset 100) or

(In County 23 On State Route 1021(P) Between Segment 0050 Offset 159 and Segment 0050 Offset 359)

CRN	CO DATE	DAY TIME	LIGHTING	ROAD SURF	WEATHER	FAT	INJ	PED	VEH	MAX SEVERITY
11	2012087179	23 08/22/2012	WED 11:58	DAYLIGHT	DRY	CLEAR	0	0	0 2	PROP DMG ONLY
ENV RDWY FACTORS: NONE 4WAY 0030/0060/0000 0030/0061/0000 1021/0050/0259 VEH: 1 AUTOMOBILE TRAVELING WEST IN LEFT TURN LANE TURNING LEFT VEH EVENTS: STRUCK BY UNIT 02 DVR ACTIONS: IMPROPER/CARELESS TURN VEH: 2 AUTOMOBILE TRAVELING EAST IN RIGHT LANE GOING STRAIGHT VEH EVENTS: HIT UNIT 01 DVR ACTIONS: NO CONTRIBUTING ACTION										
12	2013034250	23 03/26/2013	TUE 13:04	DAYLIGHT	DRY	CLEAR	0	0	0 2	PROP DMG ONLY
ENV RDWY FACTORS: NONE 4WAY 0030/0060/0000 0030/0061/0000 1021/0050/0259 VEH: 1 AUTOMOBILE TRAVELING EAST IN RIGHT LANE GOING STRAIGHT VEH EVENTS: HIT UNIT 02 DVR ACTIONS: RUNNING RED LIGHT VEH: 2 SMALL TRUCK TRAVELING SOUTH IN RIGHT LANE GOING STRAIGHT VEH EVENTS: STRUCK BY UNIT 01 DVR ACTIONS: NO CONTRIBUTING ACTION										
13	2013052453	23 05/10/2013	FRI 07:15	DAYLIGHT	DRY	CLEAR	0	0	0 1	PROP DMG ONLY
ENV RDWY FACTORS: NONE 4WAY 0030/0060/0000 0030/0061/0000 1021/0050/0259 VEH: 1 SUV TRAVELING WEST IN RIGHT TURN LANE TURNING RIGHT VEH EVENTS: HIT CURB HIT TREE OR SHRUBBERY DVR ACTIONS: AFFECTED BY PHYSICAL COND IMPROPER/CARELESS TURN										
14	2013052446	23 05/21/2013	TUE 22:56	STREET LT	DRY	CLEAR	0	0	0 2	PROP DMG ONLY
ENV RDWY FACTORS: NONE 4WAY 0030/0060/0000 0030/0061/0000 1021/0050/0259 VEH: 1 SUV TRAVELING WEST IN LEFT TURN LANE TURNING LEFT VEH EVENTS: STRUCK BY UNIT 02 DVR ACTIONS: IMPROPER/CARELESS TURN VEH: 2 AUTOMOBILE TRAVELING EAST IN RIGHT LANE GOING STRAIGHT VEH EVENTS: HIT UNIT 01 DVR ACTIONS: NO CONTRIBUTING ACTION										
15	2013085980	23 08/13/2013	TUE 07:45	DAYLIGHT	WET	RAIN	0	0	0 2	PROP DMG ONLY
ENV RDWY FACTORS: NONE 4WAY 0030/0060/0000 0030/0061/0000 1021/0050/0259 VEH: 1 AUTOMOBILE TRAVELING EAST IN LEFT LANE GOING STRAIGHT VEH EVENTS: HIT UNIT 02 DVR ACTIONS: TOO FAST FOR CONDITIONS VEH: 2 AUTOMOBILE TRAVELING EAST IN LEFT LANE GOING STRAIGHT VEH EVENTS: STRUCK BY UNIT 01 DVR ACTIONS: NO CONTRIBUTING ACTION										

SR 1021 AT SR 30 IN RADNOR TWP IN DELAWARE CO LOG 17381-07



Sorted by County, Route, Segment, Offset

USER ID/QUERY ID:

jporemba/ 0020160526039

Date Range: 1/1/2011 to 12/31/2015

Area of (In County 23 On State Route 0030(P) Between Segment 0050 Offset 2604 and Segment 0060 Offset 100) or

Interest: (In County 23 On State Route 0030(S) Between Segment 0051 Offset 2604 and Segment 0061 Offset 100) or

(In County 23 On State Route 1021(P) Between Segment 0050 Offset 159 and Segment 0050 Offset 359)

CRN	CO DATE	DAY TIME	LIGHTING	ROAD SURF	WEATHER	FAT	INJ	PED	VEH	MAX SEVERITY	
16	2013091740	23 09/10/2013	TUE 07:18	DAYLIGHT	DRY	CLEAR	0	0	0	2	PROP DMG ONLY
ENV RDWY FACTORS: NONE											
4WAY 0030/0060/0000 0030/0061/0000 1021/0050/0259											
VEH: 1 VAN TRAVELING SOUTH IN LEFT TURN LANE TURNING LEFT											
VEH EVENTS: HIT UNIT 02											
DVR ACTIONS: IMPROPER/CARELESS TURN											
VEH: 2 SUV TRAVELING EAST IN RIGHT TURN LANE GOING STRAIGHT											
VEH EVENTS: STRUCK BY UNIT 01 HIT UTILITY POLE HIT TREE OR SHRUBBERY											
DVR ACTIONS: DRIVER INEXPERIENCED TOO FAST FOR CONDITIONS											
17	2013102797	23 10/06/2013	SUN 17:04	DAYLIGHT	DRY	CLEAR	0	0	0	2	PROP DMG ONLY
ENV RDWY FACTORS: NONE											
4WAY 0030/0060/0000 0030/0061/0000 1021/0050/0259											
VEH: 1 AUTOMOBILE TRAVELING SOUTH IN LEFT TURN LANE TURNING LEFT											
VEH EVENTS: STRUCK BY UNIT 02											
DVR ACTIONS: RUNNING RED LIGHT PROCEED W/O CLEARANCE AFFECTED BY PHYSICAL COND											
VEH: 2 SUV TRAVELING WEST IN RIGHT LANE GOING STRAIGHT											
VEH EVENTS: HIT UNIT 01											
DVR ACTIONS: NO CONTRIBUTING ACTION											
18	2014035918	23 03/26/2014	WED 14:09	DAYLIGHT	DRY	CLEAR	0	0	0	2	PROP DMG ONLY
ENV RDWY FACTORS: NONE											
4WAY 0030/0060/0000 0030/0061/0000 1021/0050/0259											
VEH: 1 SUV TRAVELING EAST IN LEFT TURN LANE TURNING LEFT											
VEH EVENTS: HIT UNIT 02											
DVR ACTIONS: IMPROPER/CARELESS TURN DRIVER WAS DISTRACTED											
VEH: 2 AUTOMOBILE TRAVELING NORTH IN RIGHT LANE GOING STRAIGHT											
VEH EVENTS: STRUCK BY UNIT 01											
DVR ACTIONS: NO CONTRIBUTING ACTION											
19	2014057160	23 05/28/2014	WED 20:34	STREET LT	DRY	CLEAR	0	0	0	2	PROP DMG ONLY
ENV RDWY FACTORS: NONE											
4WAY 0030/0060/0000 0030/0061/0000 1021/0050/0259											
VEH: 1 AUTOMOBILE TRAVELING SOUTH IN RIGHT LANE GOING STRAIGHT											
VEH EVENTS: HIT UNIT 02											
DVR ACTIONS: RUNNING RED LIGHT DRIVER WAS DISTRACTED											
VEH: 2 VAN TRAVELING EAST IN RIGHT LANE GOING STRAIGHT											
VEH EVENTS: STRUCK BY UNIT 01											
DVR ACTIONS: DRIVER WAS DISTRACTED											
20	2015007025	23 12/19/2014	FRI 11:59	DAYLIGHT	DRY	CLEAR	0	0	0	3	PROP DMG ONLY
ENV RDWY FACTORS: NONE											
T-INT 0030/0060/0000 0030/0061/0000 1021/0050/0259											
VEH: 1 AUTOMOBILE TRAVELING EAST IN RIGHT LANE GOING STRAIGHT											
VEH EVENTS: HIT UNIT 02											
DVR ACTIONS: TOO FAST FOR CONDITIONS											
VEH: 2 AUTOMOBILE TRAVELING EAST IN RIGHT LANE GOING STRAIGHT											
VEH EVENTS: STRUCK BY UNIT 01 HIT UNIT 03											
DVR ACTIONS: NO CONTRIBUTING ACTION											
VEH: 3 AUTOMOBILE TRAVELING EAST IN RIGHT LANE STOPPED IN TRAFFIC LANE											
VEH EVENTS: STRUCK BY UNIT 02											
DVR ACTIONS: NO CONTRIBUTING ACTION											

SR 1021 AT SR 30 IN RADNOR TWP IN DELAWARE CO LOG 17381-07



Sorted by County, Route, Segment, Offset

USER ID/QUERY ID:

jporemba/ 0020160526039

Date Range: 1/1/2011 to 12/31/2015

Area of (In County 23 On State Route 0030(P) Between Segment 0050 Offset 2604 and Segment 0060 Offset 100) or

Interest: (In County 23 On State Route 0030(S) Between Segment 0051 Offset 2604 and Segment 0061 Offset 100) or

(In County 23 On State Route 1021(P) Between Segment 0050 Offset 159 and Segment 0050 Offset 359)

CRN	CO DATE	DAY TIME	LIGHTING	ROAD SURF	WEATHER	FAT	INJ	PED	VEH	MAX SEVERITY	
21	2014130128	23 12/23/2014	TUE 21:26	STREET LT	WET	RAIN	0	0	0	2	UNK IF INJURED
ENV RDWY FACTORS: NONE REAR-END 4WAY 0030/0060/0000 0030/0061/0000 1021/0050/0259 ----- VEH: 1 AUTOMOBILE TRAVELING EAST IN LEFT LANE GOING STRAIGHT VEH EVENTS: HIT UNIT 02 DVR ACTIONS: SUDDEN SLOWING / STOPPING ----- VEH: 2 AUTOMOBILE TRAVELING EAST IN LEFT LANE SLOWING OR STOPPING IN LANE VEH EVENTS: STRUCK BY UNIT 01 DVR ACTIONS: SUDDEN SLOWING / STOPPING											
22	2015039120	23 03/16/2015	MON 23:01	STREET LT	DRY	CLEAR	0	0	0	2	PROP DMG ONLY
ENV RDWY FACTORS: NONE HEAD-ON 4WAY 0030/0060/0000 0030/0061/0000 1021/0050/0259 ----- VEH: 1 SUV TRAVELING EAST IN LEFT LANE GOING STRAIGHT VEH EVENTS: HIT UNIT 02 DVR ACTIONS: RUNNING RED LIGHT AFFECTED BY PHYSICAL COND ----- VEH: 2 SUV TRAVELING SOUTH IN LEFT TURN LANE TURNING LEFT VEH EVENTS: STRUCK BY UNIT 01 DVR ACTIONS: NO CONTRIBUTING ACTION											
23	2015039127	23 03/16/2015	MON 23:01	STREET LT	DRY	CLEAR	0	0	0	2	PROP DMG ONLY
ENV RDWY FACTORS: NONE HEAD-ON 4WAY 0030/0060/0000 0030/0061/0000 1021/0050/0259 ----- VEH: 1 SUV TRAVELING EAST IN LEFT LANE GOING STRAIGHT VEH EVENTS: HIT UNIT 02 DVR ACTIONS: RUNNING RED LIGHT ----- VEH: 2 SUV TRAVELING SOUTH IN ONCOMING TRAFFIC LANE TURNING LEFT VEH EVENTS: STRUCK BY UNIT 01 DVR ACTIONS: NO CONTRIBUTING ACTION											
24	2015102027	23 10/05/2015	MON 11:40	DAYLIGHT	DRY	CLEAR	0	1	0	3	UNK SEVERITY
ENV RDWY FACTORS: NONE REAR-END 4WAY 0030/0060/0000 0030/0061/0000 1021/0050/0259 ----- VEH: 1 SUV TRAVELING WEST IN RIGHT LANE GOING STRAIGHT VEH EVENTS: HIT UNIT 02 DVR ACTIONS: DRIVER WAS DISTRACTED ----- VEH: 2 AUTOMOBILE TRAVELING WEST IN RIGHT LANE SLOWING OR STOPPING IN LANE VEH EVENTS: STRUCK BY UNIT 01 HIT UNIT 03 DVR ACTIONS: UNKNOWN ----- VEH: 3 AUTOMOBILE TRAVELING WEST IN RIGHT LANE GOING STRAIGHT VEH EVENTS: STRUCK BY UNIT 02 DVR ACTIONS: NO CONTRIBUTING ACTION											
25	2015115891	23 11/07/2015	SAT 19:47	STREET LT	DRY	CLEAR	0	0	0	2	PROP DMG ONLY
ENV RDWY FACTORS: NONE HEAD-ON 4WAY 0030/0060/0000 0030/0061/0000 1021/0050/0259 ----- VEH: 1 SMALL TRUCK TRAVELING SOUTH IN LEFT TURN LANE TURNING LEFT VEH EVENTS: HIT UNIT 02 DVR ACTIONS: IMPROPER/CARELESS TURN ----- VEH: 2 VAN TRAVELING NORTH IN RIGHT LANE GOING STRAIGHT VEH EVENTS: STRUCK BY UNIT 01 DVR ACTIONS: IMPROPER/CARELESS TURN											

SR 1021 AT SR 30 IN RADNOR TWP IN DELAWARE CO LOG 17381-07



Sorted by County, Route, Segment, Offset

USER ID/QUERY ID:

jporemba/ 0020160526039

Date Range: 1/1/2011 to 12/31/2015

Area of (In County 23 On State Route 0030(P) Between Segment 0050 Offset 2604 and Segment 0060 Offset 100) or

Interest: (In County 23 On State Route 0030(S) Between Segment 0051 Offset 2604 and Segment 0061 Offset 100) or

(In County 23 On State Route 1021(P) Between Segment 0050 Offset 159 and Segment 0050 Offset 359)

CRN	CO DATE	DAY TIME	LIGHTING	ROAD SURF	WEATHER	FAT	INJ	PED	VEH	MAX SEVERITY
26	2015124064	23 11/24/2015	TUE 20:03	STREET LT	DRY	CLEAR	0	0	0 2	PROP DMG ONLY
ENV RDWY FACTORS: NONE 4WAY 0030/0060/0000 0030/0061/0000 1021/0050/0259 VEH: 1 AUTOMOBILE TRAVELING SOUTH IN LEFT TURN LANE MAKING A U-TURN VEH EVENTS: STRUCK BY UNIT 02 DVR ACTIONS: IMPROPER/CARELESS TURN VEH: 2 AUTOMOBILE TRAVELING EAST IN LEFT LANE GOING STRAIGHT VEH EVENTS: HIT UNIT 01 DVR ACTIONS: NO CONTRIBUTING ACTION										
27	2015127441	23 11/24/2015	TUE 17:47	STREET LT	DRY	CLEAR	0	1	0 2	MINOR INJURY
ENV RDWY FACTORS: NONE 4WAY 0030/0060/0000 0030/0061/0000 1021/0050/0259 VEH: 1 AUTOMOBILE TRAVELING WEST IN RIGHT TURN LANE GOING STRAIGHT VEH EVENTS: HIT UNIT 02 DVR ACTIONS: OTHER IMPROPER DRIV ACTIONS VEH: 2 AUTOMOBILE TRAVELING WEST IN OTHER FWD MOVING LANE GOING STRAIGHT VEH EVENTS: STRUCK BY UNIT 01 DVR ACTIONS: NO CONTRIBUTING ACTION										
28	2013044282	23 04/18/2013	THR 17:01	DAYLIGHT	DRY	CLEAR	0	1	0 4	MINOR INJURY
ENV RDWY FACTORS: NONE MIDB 0030/0060/0075 VEH: 1 AUTOMOBILE TRAVELING EAST IN RIGHT LANE GOING STRAIGHT VEH EVENTS: HIT UNIT 02 DVR ACTIONS: TOO FAST FOR CONDITIONS VEH: 2 AUTOMOBILE TRAVELING EAST IN RIGHT LANE STOPPED IN TRAFFIC LANE VEH EVENTS: STRUCK BY UNIT 01 HIT UNIT 03 DVR ACTIONS: NO CONTRIBUTING ACTION VEH: 3 AUTOMOBILE TRAVELING EAST IN RIGHT LANE STOPPED IN TRAFFIC LANE VEH EVENTS: STRUCK BY UNIT 02 HIT UNIT 04 DVR ACTIONS: NO CONTRIBUTING ACTION VEH: 4 SUV TRAVELING EAST IN RIGHT LANE STOPPED IN TRAFFIC LANE VEH EVENTS: STRUCK BY UNIT 03 DVR ACTIONS: NO CONTRIBUTING ACTION										
29	2015082601	23 08/12/2015	WED 11:25	DAYLIGHT	DRY	CLEAR	0	2	0 2	UNK SEVERITY
ENV RDWY FACTORS: NONE MIDB 0030/0061/0100 VEH: 1 SUV TRAVELING WEST IN LEFT LANE GOING STRAIGHT VEH EVENTS: STRUCK BY UNIT 02 DVR ACTIONS: OTHER IMPROPER DRIV ACTIONS VEH: 2 SUV TRAVELING WEST IN LEFT LANE SLOWING OR STOPPING IN LANE VEH EVENTS: HIT UNIT 01 DVR ACTIONS: NO CONTRIBUTING ACTION										

SR 1021 AT SR 30 IN RADNOR TWP IN DELAWARE CO LOG 17381-07

Sorted by County, Route, Segment, Offset

NOTES:

- 1 The data available in this application is dynamic and should be used with care. Please take note of the following data alerts:
- 2 2016 crash records are incomplete
Data for the current year, 2016, is not fully represented in CDART. Crashes will be added for this year as they are made available to the Department. Include this year in queries with caution.
- 3 Complete data years
Complete records of reportable crashes are available in CDART for the following years : 1997 - 2015

REPORT PARAMETERS:

Query ID: [0020160526039](#)

User ID: jporemba

Area of Interest: (In County 23 On State Route 0030(P) Between Segment 0050 Offset 2604 and Segment 0060 Offset 100) or (In County 23 On State Route 0030(S) Between Segment 0051 Offset 2604 and Segment 0061 Offset 100) or (In County 23 On State Route 1021(P) Between Segment 0050 Offset 159 and Segment 0050 Offset 359)

Date Range: 1/1/2011 to 12/31/2015

Criteria:

SR 1021 AT SR 30 IN RADNOR TWP IN DELAWARE CO LOG 17381-07



USER ID/QUERY ID:
jporambar_0020160526039

Date Range: 1/1/2011 to 12/31/2015
 Area of Interest: (In County 23 On State Route 0030(P) Between Segment 0050 Offset 2604 and Segment 0060 Offset 100) or (In County 23 On State Route 0030(S) Between Segment 0051 Offset 2604 and Segment 0061 Offset 100) or (In County 23 On State Route 1021(P) Between Segment 0050 Offset 159 and Segment 0050 Offset 359)

MONTH OF YEAR

	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	OCT	NOV	DEC
CRASHES	1	1	5	2	4	1	1	4	2	3	3	2
PCT	3%	3%	17%	7%	14%	3%	3%	14%	7%	10%	10%	7%

DAY OF WEEK

	SUN	MON	TUE	WED	THUR	FRI	SAT
CRASHES	1	5	9	4	4	4	2
PCT	3%	17%	31%	14%	14%	14%	7%

HOUR OF DAY

	00	07	11	12	13	14	17	18	19	20	21	22	23
CRASHES	1	4	4	2	1	1	5	2	1	3	2	1	2
PCT	3%	14%	14%	7%	3%	3%	17%	7%	3%	10%	7%	3%	7%

YEAR

YEAR	CRASHES	PCT
2011	4	14%
2012	4	14%
2013	7	24%
2014	7	24%
2015	7	24%
TOTAL	29	100%

COLLISION TYPE

	CRASHES	PCT
ANGLE	12	41%
REAR END	11	38%
HEAD ON	4	14%
HIT FIX OBJ	2	7%
TOTAL	29	100%

CRASH SEVERITY LEVEL

	CRASHES	PCT
MINOR	2	7%
UNK SEVERITY	8	28%
UNK IF INJURED	1	3%
PDO	18	62%
TOTAL	29	100%

SEVERITY COUNT

	PERSONS
FATALITIES	0
MAJOR	0
MODERATE	0
MINOR	2
UNK SEVERITY	12
UNK IF INJURED	2

DRIVER ACTIONS

	ACTIONS	PCT
NO CONTRIBUTING ACTION	26	37%
IMPROPER/CARELESS TURN	11	15%
RUNNING RED LIGHT	7	10%
DRIVER WAS DISTRACTED	6	8%
OTHER IMPROPER DRIVING	5	7%
TOO FAST FOR CONDITION	4	6%
AFFECTED PHYSICAL COND	3	4%
SUDDEN SLOWING/STOP	2	3%
TAILGATING	2	3%
DRIVER INEXPERIENCED	1	1%
FAILURE TO RESPOND TCD	1	1%
PROCEED W/O CLEARANCE	1	1%
OTHERS	2	3%
TOTAL	71	100%

VEHICLE TYPE

	VEHICLES	PCT
AUTOMOBILE	35	58%
SUV	16	27%
SMALL TRUCK	4	7%
VAN	4	7%
LARGE TRUCK	1	2%
TOTAL	60	100%

ROAD CONDITION

	CRASHES	PCT
DRY	27	93%
WET	2	7%
TOTAL	29	100%

ILLUMINATION

	CRASHES	PCT
DAYLIGHT	18	62%
STREET LIGHTS	11	38%
TOTAL	29	100%

WEATHER

	CRASHES	PCT
CLEAR	27	93%
RAIN	2	7%
TOTAL	29	100%

ENVIR/ROADWAY FACTORS

	FACTORS	PCT
NONE	28	97%
GLARE	1	3%
TOTAL	29	100%

CDART - CRASH SUMMARY REPORT (09-06)

NOTES:

- 1 The data available in this application is dynamic and should be used with care. Please take note of the following data alerts:
- 2 2016 crash records are incomplete
Data for the current year, 2016, is not fully represented in CDART. Crashes will be added for this year as they are made available to the Department. Include this year in queries with caution.
- 3 Complete data years
Complete records of reportable crashes are available in CDART for the following years : 1997 - 2015

REPORT PARAMETERS:

Query ID: [0020160526039](#)
User ID: jporemba
Area of Interest: (In County 23 On State Route 0030(P) Between Segment 0050 Offset 2604 and Segment 0060 Offset 100) or (In County 23 On State Route 0030(S) Between Segment 0051 Offset 2604 and Segment 0061 Offset 100) or (In County 23 On State Route 1021(P) Between Segment 0050 Offset 159 and Segment 0050 Offset 359)
Date Range: 1/1/2011 to 12/31/2015
Criteria:

SR 1021 ATSR 1038 IN RADNOR TWP IN DELAWARE CO LOG 17381-01

NOTES:

- 1 The data available in this application is dynamic and should be used with care. Please take note of the following data alerts:
- 2 2016 crash records are incomplete. Data for the current year, 2016, is not fully represented in CDART. Crashes will be added for this year as they are made available to the Department. Include this year in queries with caution.
- 3 Complete data years
Complete records of reportable crashes are available in CDART for the following years : 1997 - 2015

QUERY PARAMETERS:

Note: This report includes data for state roads only

Query ID: [002016052602Z](#)

User ID: jporemba

Min Crashes: 5 Crashes

Cluster:

Tolerance: 1000 ft

Max Gap: 0 ft

Min Ratio: 0 %

Area of Interest: (In County 23 On State Route 1021(P) Between Segment 0060 Offset 1041 and Segment 0060 Offset 1321) or (In County 23 On State Route 1038(P) Between Segment 0010 Offset 0 and Segment 0010 Offset 195)

Date: 1/1/2011 to 12/31/2015

Criteria:

STATE_ROAD

Summary of Crash Data
 Non-Reportable Crashes 2011-2015
 Provided by Radnor Police Department

ID	CRASH DATE	CRASH DAY OF WEEK	CRASH LOCATION	CRASH TIME	CRASH TYPE	CRASH YEAR	EPDO	TOTAL VEHICLES INVOLVED
120004604	4/17/2012	tuesday	King of Prussia Road and Randor-Chester Road	5:37 PM	Same Direction - Rear End	2012	PDO	2
120007396	6/22/2012	friday	King of Prussia Road and Randor-Chester Road	7:57 AM	Same Direction - Side Swipe	2012	PDO	2
120009390	7/20/2012	friday	King of Prussia Road and Randor-Chester Road	8:41 AM	Other	2012	PDO	-
120015299	12/21/2012	friday	King of Prussia Road and Randor-Chester Road	5:20 PM	Same Direction - Side Swipe	2012	PDO	2
130001341	1/29/2013	tuesday	King of Prussia Road and Randor-Chester Road	7:11 PM	Angle	2013	PDO	2
130005524	4/30/2013	tuesday	King of Prussia Road and Randor-Chester Road	10:49 AM	Same Direction - Side Swipe	2013	PDO	2
140002296	2/17/2014	monday	King of Prussia Road and Randor-Chester Road	11:13 AM	Angle	2014	PDO	2
140014295	11/5/2014	wednesday	King of Prussia Road and Randor-Chester Road	4:25 PM	Same Direction - Rear End	2014	PDO	2
120002825	3/7/2012	wednesday	King of Prussia Road and Matsonford Road	5:09 PM	Angle	2012	PDO	2
120004603	4/17/2012	tuesday	King of Prussia Road and Matsonford Road	1:06 PM	Same Direction - Side Swipe	2012	PDO	2
120004815	4/23/2012	monday	King of Prussia Road and Matsonford Road	11:01 AM	Same Direction - Rear End	2012	PDO	2
130010609	8/15/2013	thursday	King of Prussia Road and Matsonford Road	12:54 PM	Same Direction - Rear End	2013	PDO	2
130012191	9/14/2013	saturday	King of Prussia Road and Matsonford Road	2:31 PM	Fixed Object	2013	PDO	1
140005031	4/15/2014	tuesday	King of Prussia Road and Matsonford Road	5:21 PM	Same Direction - Rear End	2014	PDO	2
140005468	4/25/2014	friday	King of Prussia Road and Matsonford Road	8:29 PM	Angle	2014	PDO	2
140005545	4/27/2014	sunday	King of Prussia Road and Matsonford Road	4:54 PM	Same Direction - Rear End	2014	PDO	2
140010198	8/8/2014	friday	King of Prussia Road and Matsonford Road	5:21 PM	Same Direction - Rear End	2014	PDO	2
140014571	11/12/2014	wednesday	King of Prussia Road and Matsonford Road	8:07 AM	Same Direction - Rear End	2014	PDO	2
140015227	11/26/2014	wednesday	King of Prussia Road and Matsonford Road	4:11 PM	Same Direction - Side Swipe	2014	PDO	2
140016297	12/23/2014	tuesday	King of Prussia Road and Matsonford Road	3:43 PM	Same Direction - Rear End	2014	PDO	2
150000748	1/19/2015	monday	King of Prussia Road and Matsonford Road	2:07 PM	Angle	2015	PDO	2
150002479	2/26/2015	thursday	King of Prussia Road and Matsonford Road	5:59 PM	Same Direction - Rear End	2015	PDO	2
150013829	10/14/2015	wednesday	King of Prussia Road and Matsonford Road	3:15 PM	Same Direction - Rear End	2015	PDO	2
150016829	12/16/2015	wednesday	King of Prussia Road and Matsonford Road	1:29 PM	Same Direction - Rear End	2015	PDO	2
110010448	10/3/2011	monday	King of Prussia Road and Lancaster Ave	5:36 PM	Same Direction - Rear End	2011	PDO	2
110010774	10/13/2011	thursday	King of Prussia Road and Lancaster Ave	9:01 AM	Same Direction - Side Swipe	2011	PDO	2
110011440	10/28/2011	friday	King of Prussia Road and Lancaster Ave	8:47 AM	Same Direction - Side Swipe	2011	PDO	2
110011737	10/3/2011	thursday	King of Prussia Road and Lancaster Ave	2:44 PM	Same Direction - Rear End	2011	PDO	2
110013591	12/24/2011	saturday	King of Prussia Road and Lancaster Ave	3:15 PM	Same Direction - Side Swipe	2011	PDO	2
120000690	1/18/2012	wednesday	King of Prussia Road and Lancaster Ave	2:55 PM	Same Direction - Rear End	2012	PDO	2
120001850	2/14/2012	tuesday	King of Prussia Road and Lancaster Ave	8:28 AM	Same Direction - Rear End	2012	PDO	2
120003830	3/28/2012	wednesday	King of Prussia Road and Lancaster Ave	12:35 PM	Same Direction - Side Swipe	2012	PDO	2
120005827	5/16/2012	wednesday	King of Prussia Road and Lancaster Ave	6:12 PM	Same Direction - Side Swipe	2012	PDO	2
120007197	6/17/2012	sunday	King of Prussia Road and Lancaster Ave	1:54 PM	Angle	2012	PDO	2
120009974	8/23/2012	thursday	King of Prussia Road and Lancaster Ave	6:53 AM	Same Direction - Rear End	2012	PDO	2
120011465	9/25/2012	tuesday	King of Prussia Road and Lancaster Ave	6:04 PM	Same Direction - Rear End	2012	PDO	2
120012119	10/10/2012	wednesday	King of Prussia Road and Lancaster Ave	8:21 PM	Same Direction - Side Swipe	2012	PDO	2
120014203	11/26/2012	monday	King of Prussia Road and Lancaster Ave	3:03 PM	Same Direction - Rear End	2012	PDO	2
130001591	2/2/2013	saturday	King of Prussia Road and Lancaster Ave	5:00 PM	Same Direction - Rear End	2013	PDO	2
130003216	3/10/2013	sunday	King of Prussia Road and Lancaster Ave	11:00 AM	Same Direction - Rear End	2013	PDO	2
130004699	4/12/2013	friday	King of Prussia Road and Lancaster Ave	7:57 AM	Same Direction - Rear End	2013	PDO	2
130005420	4/27/2013	saturday	King of Prussia Road and Lancaster Ave	4:50 PM	Same Direction - Side Swipe	2013	PDO	2
130012350	9/17/2013	tuesday	King of Prussia Road and Lancaster Ave	2:35 PM	Same Direction - Rear End	2013	PDO	2
130012642	9/23/2013	monday	King of Prussia Road and Lancaster Ave	7:29 AM	Same Direction - Rear End	2013	PDO	2
130013745	10/13/2013	sunday	King of Prussia Road and Lancaster Ave	2:45 PM	Same Direction - Rear End	2013	PDO	2
130015296	11/14/2013	thursday	King of Prussia Road and Lancaster Ave	2:15 PM	Same Direction - Rear End	2013	PDO	2
140001681	2/5/2014	wednesday	King of Prussia Road and Lancaster Ave	11:46 AM	Same Direction - Rear End	2014	PDO	2
140002731	2/25/2014	tuesday	King of Prussia Road and Lancaster Ave	9:41 PM	Same Direction - Rear End	2014	PDO	2
140002732	2/25/2014	tuesday	King of Prussia Road and Lancaster Ave	9:32 PM	Same Direction - Side Swipe	2014	PDO	2
140003332	3/11/2014	tuesday	King of Prussia Road and Lancaster Ave	12:40 PM	Same Direction - Side Swipe	2014	PDO	2
140005014	4/15/2014	tuesday	King of Prussia Road and Lancaster Ave	10:40 AM	Same Direction - Rear End	2014	PDO	2
140006210	5/12/2014	monday	King of Prussia Road and Lancaster Ave	8:03 AM	Same Direction - Rear End	2014	PDO	2
140006265	5/13/2014	tuesday	King of Prussia Road and Lancaster Ave	12:25 PM	Same Direction - Side Swipe	2014	PDO	2
140008858	7/10/2014	thursday	King of Prussia Road and Lancaster Ave	12:00 PM	Same Direction - Rear End	2014	PDO	2
140008859	7/10/2014	thursday	King of Prussia Road and Lancaster Ave	12:05 PM	Same Direction - Rear End	2014	PDO	2
140011757	9/11/2014	thursday	King of Prussia Road and Lancaster Ave	8:17 AM	Same Direction - Rear End	2014	PDO	2
140012035	9/17/2014	wednesday	King of Prussia Road and Lancaster Ave	11:26 AM	Same Direction - Rear End	2014	PDO	2
140013587	10/21/2014	tuesday	King of Prussia Road and Lancaster Ave	4:10 PM	Same Direction - Side Swipe	2014	PDO	2
140014332	11/6/2014	thursday	King of Prussia Road and Lancaster Ave	7:15 PM	Same Direction - Rear End	2014	PDO	2
140016012	12/16/2014	tuesday	King of Prussia Road and Lancaster Ave	2:15 PM	Same Direction - Rear End	2014	PDO	2
150003342	3/16/2015	monday	King of Prussia Road and Lancaster Ave	7:32 AM	Same Direction - Rear End	2015	PDO	2
150005953	5/5/2015	tuesday	King of Prussia Road and Lancaster Ave	2:53 PM	Same Direction - Rear End	2015	PDO	2
150008261	6/22/2015	monday	King of Prussia Road and Lancaster Ave	8:20 AM	Same Direction - Rear End	2015	PDO	2
150009413	7/16/2015	thursday	King of Prussia Road and Lancaster Ave	5:57 PM	Same Direction - Side Swipe	2015	PDO	2
150013320	10/3/2015	saturday	King of Prussia Road and Lancaster Ave	10:54 PM	Same Direction - Rear End	2015	PDO	2
150013336	10/4/2015	sunday	King of Prussia Road and Lancaster Ave	1:10 PM	Same Direction - Side Swipe	2015	PDO	3
150013866	10/15/2015	thursday	King of Prussia Road and Lancaster Ave	2:15 PM	Same Direction - Rear End	2015	PDO	2
150014308	10/24/2015	saturday	King of Prussia Road and Lancaster Ave	12:53 PM	Same Direction - Rear End	2015	PDO	2
150014876	11/5/2015	thursday	King of Prussia Road and Lancaster Ave	2:04 PM	Same Direction - Rear End	2015	PDO	2
150015723	11/21/2015	wednesday	King of Prussia Road and Lancaster Ave	2:40 AM	Same Direction - Rear End	2015	PDO	2
150016944	12/18/2015	friday	King of Prussia Road and Lancaster Ave	3:40 PM	Same Direction - Side Swipe	2015	PDO	2

Correctable Crashes

Rolling 12 Month Total

King of Prussia Road & Matsonford Road (SR 1038)

Date	Type
4/1/2011	Angle
10/13/2011	Angle
3/7/2012	Angle
9/12/2012	Head On
4/25/2014	Angle
1/19/2015	Angle

King of Prussia Road & Radnor Chester Road (SR 1021)

Date	Type
1/4/2011	Angle
7/14/2011	Angle
2/16/2012	Angle
1/29/2013	Angle
2/17/2014	Angle
5/14/2014	Angle
8/21/2014	Angle
10/28/2014	Angle
9/3/2015	Head On
9/18/2015	Angle

Lancaster Avenue (SR 0030) & King of Prussia Road/I-476 NB Off Ramp

Date	Type
6/17/2012	Angle
12/8/2014	Angle
1/24/2015	Angle
4/22/2015	Angle
5/21/2015	Angle

Lancaster Avenue (SR 0030) & I-476 NB On Ramp/Hillside Circle

Date	Type
1/1/2011	Angle
2/26/2011	Angle
11/11/2011	Head On
2/13/2012	Angle
12/8/2012	Angle
6/6/2013	Head On
3/12/2013	Angle
9/7/2013	Angle
10/3/2013	Angle
11/15/2013	Head On
12/2/2014	Angle
10/10/2015	Angle

Lancaster Avenue (SR 0030) & Radnor Chester Road (SR 1021)

Date	Type
2/10/2011	Angle
9/9/2011	Head On
3/29/2012	Angle
7/3/2012	Angle
8/22/2012	Angle
3/26/2013	Angle
5/21/2013	Angle
9/10/2013	Angle
10/6/2013	Angle
3/26/2013	Angle
5/28/2014	Angle
3/16/2015	Head On
11/7/2015	Head On
11/24/2015	Angle
11/24/2015	Angle

February 1, 2018 (revised 2/6/18)

UPHS1504

Radnor Township
Attn: Mr. Robert Zienkowski
301 Iven Ave.
Wayne, PA 19087

**RE: PRELIMINARY LAND DEVELOPMENT APPLICATION – ORDINANCE REQUIRING A LIST OF LEVEL OF SERVICE C IMPROVEMENTS
PENN MEDICINE AT RADNOR
RADNOR TOWNSHIP, DELAWARE COUNTY, PENNSYLVANIA**

Dear Mr. Zienkowski:

To this point we have been requesting a waiver from the Subdivision and Land Development Ordinance (SALDO) §255-20.B(5)(d)[6] which states:

[a]

All streets and/or intersections showing a Level of Service below C shall be considered deficient, and specific recommendations for the elimination of these problems shall be listed. This listing of recommended improvements shall include, but not be limited to, the following elements: internal circulation design, site access location and design, external street and intersection design and improvements and traffic signal installation and operation, including signal timing and transit-design improvements.

[b]

Existing and/or future public transportation service shall also be addressed. A listing of all actions to be undertaken to increase present public transportation usage and improve service, if applicable, shall be included.

[c]

The listing of recommended improvements for both streets and transit shall include, for each improvement, the party responsible for the improvement, the cost and funding of the improvement and the completion date for the improvement.


Based on discussions with Amy Kaminski, PE, the Township Traffic Engineer, we believe we can provide this information and therefore no longer require this waiver. Below is the list of improvements that elevate the level of service of the study intersections to a Level of Service C, along with the costs, and the party responsible:

Intersection	Work Necessary to Achieve LOS C	Responsible Party	Order of Magnitude Cost	Funding Source	Notes
<i>King of Prussia Road & Matsonford Road (SR 1038)</i>	Add 1 NB through lane on King of Prussia Road	PennDOT	\$1,800,000	unknown/not funded	
<i>King of Prussia Road & Radnor Chester Road (SR 1021)</i>	Add 1 NB through lane on King of Prussia Road /Add 1 EB left turn lane to Radnor-Chester Road	PennDOT	\$2,600,000	unknown/not funded	
<i>King of Prussia Road & SEPTA Station Driveway</i>	Add 1 NB through lane on King of Prussia Road	Radnor	\$800,000	unknown/not funded	
<i>King of Prussia Road & Existing Raider Road/Site Driveway</i>	Add 1 NB through lane on King of Prussia Road	Penn Medicine	\$800,000	private funds	
<i>Lancaster Avenue (SR 0030) & King of Prussia Road/I-476 NB Off Ramp</i>	Add 1 NB through lane on I-476 NB Off Ramp (for total of 3) /Add 2 NB right turn lanes on I-476 /Add 1 EB left turn lane on Lancaster Avenue /Add 1 EB through lane on Lancaster Avenue /Add 1 SB left turn lane on King of Prussia RoadNB Off Ramp /Add 1 WB through lane on Lancaster Avenue	PennDOT	\$90,000,000	unknown/not funded	includes replacing highway bridges
<i>Lancaster Avenue (SR 0030) & I-476 SB On/Off Ramps</i>	Add 1 WB through lane on Lancaster Ave	PennDOT	\$2,000,000	unknown/not funded	
<i>Lancaster Avenue (SR 0030) & Radnor Chester Road (SR 1021)</i>	Add 1 EB through lane on Lancaster Avenue /Add 1 WB through lane on Lancaster Avenue	PennDOT	\$3,000,000	unknown/not funded	

I thank you in advance for your assistance on this project. Should you have any questions or need additional information please do not hesitate to contact me at (215) 254-7733 or jmarkham@pennoni.com .

Sincerely,

PENNONI ASSOCIATES INC.



James Markham, PE
Regional Transportation Principal
Associate Vice President

cc: Stephen Norcini, PE, Radnor Township
Amy Kaminski, PE, Gilmore & Associates, Inc.
Roger Phillips, PE, Gannett Fleming, Inc.
Pat Dorris, The Trustees of the University of Pennsylvania Health Systems
David Falcone, Saul Ewing Arnstein & Lehr LLP
Mike Kissinger, PE, Pennoni

February 02, 2018

UPHS 1507

Ms. Amy Kaminski PE PTOE
Gilmore & Associates
65 E. Butler Avenue, Suite 100
New Britain, PA 18901

RE: CRASH DATA SUMMARY REPORT, 145 KING OF PRUSSIA ROAD

Dear Amy:

In response to Township comments, Pennoni has prepared a crash data summary under a separate cover for 5 years of historical data and included information regarding non-reportable crashes obtained from the Radnor Township Police Department.

The crash summary includes an evaluation of the correctable reportable and non-reportable crash incidents in a rolling 12 month period at each intersection. The only intersection with 5 or more correctable crashes in a 12 month period is Lancaster Avenue & I-476 NB On-Ramp/Hillside Circle.

The 5 correctable crashes in a 12 month period at Lancaster Avenue & I-476 NB On-Ramp/Hillside Circle involve several different combinations of vehicular movements with 3 of the crashes involved a vehicle running a red light and 1 involving an illegal U-turn. Due to the varied nature of the 5 correctable crashes observed in a 12 month period, there are no intersection improvements recommended to mitigate the crashes. The only recommendation resulting from the evaluation of the crash data is that the existing yellow and all-red times at all study intersections be re-evaluated in accordance to current PennDOT standards. Typically a warranted increase in the yellow change interval or the all red clearance interval can result in a reduction of rear end crashes and could reduce instances of vehicles running red lights.

Attached for your review is the Crash Data Summary Report. Should you have any questions or need additional information please do not hesitate to contact me at (215) 254-7733 or jmarkham@pennoni.com.

Sincerely,

PENNONI



James P. Markham, PE
Associate Vice President

Cc:

Pat Dorris, Penn Medicine
Dave Falcone, Saul Ewing
Mike Kissinger, Pennoni